


## Coaxial Loudspeakers

## TFX0412



- Rear-mounted compression driver with polyimide diaphragm delivers HF signal
- Ferrite magnet assembly acts as a common motor for both low and high frequency coils
- Demodulation ring for reduced distortion
- Waterproof cone coating
- 80° nominal HF coverage

## Frequency Response and Impedance Curves

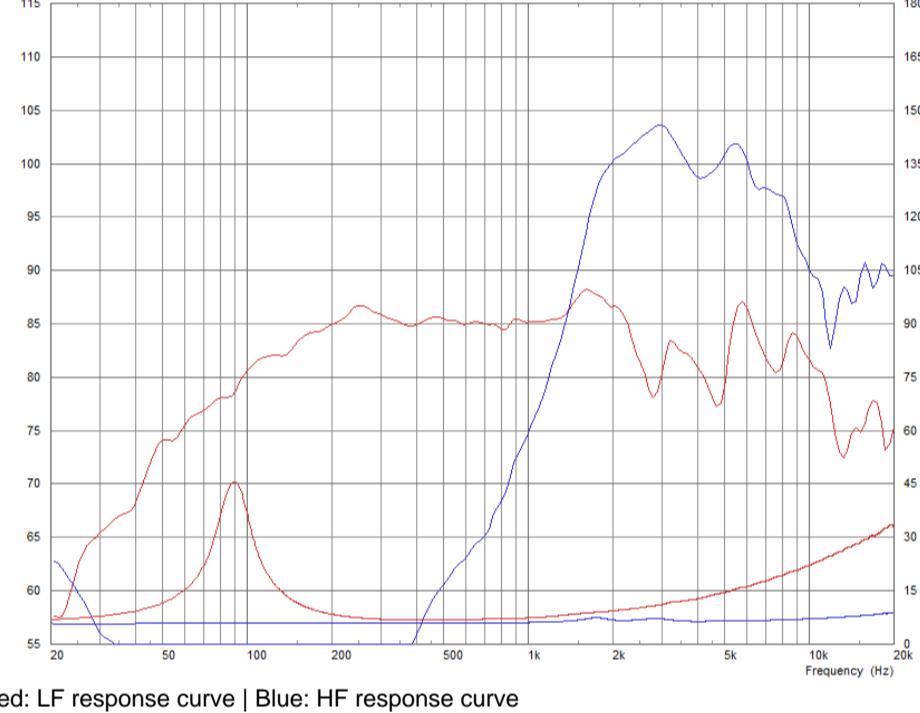

Red: LF response curve | Blue: HF response curve

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

HF power rating: Tested for two hours on plane wave tube using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m in aanechoic environment.

Xmax:  $0.5^*(Hvc-Hg) + 0.25^*Hg$

## General Specifications

Nominal Diameter	100mm / 4in
Power Rating	100W
Continuous power rating	200W
Rated impedance	8
Sensitivity	86dB
Frequency range	90-4500Hz
Chassis type	Pressed steel
Magnet type	Ferrite
Voice coil diameter	32mm / 1.25in
Voice coil material	Copper clad aluminium
Former material	Polyimide
Cone material	Reinforced cellulose, waterproofed with coating
Surround material	Elastomer
Suspension	Single
Xmax	4mm / 0.16in
Gap height (Hg)	6mm / 0.24in
VC winding height (Hvc)	11mm / 0.43in

## Mounting Information

Overall diameter	126mm / 4.96in
Overall depth	74.2mm / 2.9in
Cut-out diameter	102mm / 4.02in
Mounting hole dimensions	5x7mm / 0.2x0.28in
Number of mounting holes	4
Mounting hole PCD	114.4mm / 4.5in
Unit weight	2kg / 4.4lb

## Parameters

Sd	56.75cm <sup>2</sup> / 8.79in <sup>2</sup>
Fs	95Hz
Mms	5.8g / 0.204oz
Qms	5.184
Qes	0.665
Qts	0.589
Re	5.6
Vas	2.18l / 0.077ft <sup>3</sup>
Bi	5.4Tm
Cms	0.478mm/N
Rms	0.674kg/s
Le (at 1kHz)	0.34mH
Xmax	4mm / 0.16in

## Additional HF Specifications

Power rating	15W
Continuous power rating	30W
Rated impedance	8
Sensitivity	107dB
Frequency range	2200-20,000Hz
Recommended min. crossover	2500Hz
r 12dB/oct	
Voice coil diameter	25mm / 1in
Magnet type	Ferrite, common motor
Diaphragm material	Polyimide
Surround material	Polyimide

## Packed Dimensions &amp; Weight

Multi pack qty	16
Multi pack size W x D x H	470mm x 240mm x 205mm / 18.5in x 9.4in x 8.1in
Multi pack weight	35kg / 77lb