WHEELHOUSE 150

The warmth of hemp meets the power and responsiveness of neo in this versatile 12″ speaker. Touch-sensitive and balanced, the Wheelhouse delivers warm, smooth tone throughout the entire spectrum, allowing you to utilize your amp controls to shape your sound. It handles pedals and amp EQ with ease. Go from country to fusion to blues and make it sound like it's right in **your** wheelhouse.

12″ | 150 WATTS
8 Ω

"Today's in-demand session artists and sidemen have to be chameleons. We need to seamlessly blend in stylistically and tonally with whatever type of music is being recorded. This new speaker I helped Eminence develop lets me use my amp and pedals to dial in any tone I'm after, and handles anything I throw at it." – Andy Wood / Session Artist / Touring Professional

SPECIFICATION

Nominal Basket Diameter	12″, 305 mm
Nominal Impedance*	8 Ω
Power Rating*	150 W
Resonance (Fs)	82 Hz
Usable Frequency Range	80 Hz – 3.8 kHz
Sensitivity*	101.4 dB
DC Resistance (Re)	7.5 Ω
Qts	0.43
Magnet Weight	11 oz.
Gap Height	0.38″, 9.5 mm
Voice Coil Diameter	2.5″, 63.5 mm

MOUNTING INFORMATION

Enclosure Type	
Closed Back	Acceptable
Open Back	Acceptable
Driver Volume Displaced	0.06 cu.ft., 1.8 liters
Overall Diameter	12.17″, 309.1 mm
Baffle Hole Diameter	11.13″, 282.7 mm
Depth	6.25″, 158.8 mm
Front Sealing Gasket	Yes
Rear Sealing Gasket	No
Mounting Holes Diameter	0.24″, 6.1 mm
Mounting Holes B.C.D.	11.75″, 298.5 mm
Net Weight	6.6 lbs , 3.0 kg
Shipping Weight	8.7 lbs , 3.95 kg

MATERIALS OF CONSTRUCTION

Edge wound aluminum voice coil
Polyimide former
Neodymium magnet
Vented core
Pressed steel basket
Hemp cone
Paper cone edge
Treated paper dust cap

FREQUENCY RESPONSE & IMPEDANCE CURVE*
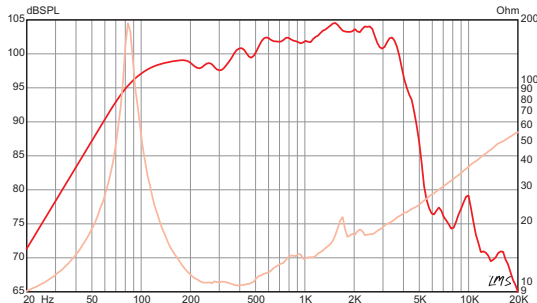
*   See footnotes on page 2 for information regarding usable frequency range, nominal impedance, power rating and sensitivity.

EMINENCE
The Art and Science of Sound

From design and manufacturing to the stage or studio. Once you've experienced the performance of Eminence, you'll never accept anything else.

MISSION STATEMENT

Eminence is dedicated to providing the best Quality, Value and Service to meet our customers' needs.

FOOTNOTES

* Please consult www.eminence.com for specifications of models with alternative impedances.

** Multiple units exceed published ratings evaluated under EIA 426A specification while tested in a free-air, non-temperature-controlled environment.

*** The average output across the usable frequency range when applying 1W/1m into the nominal impedance. i.e: 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2 ft. x 2 ft. baffle is built into the wall with the speaker mounted flush against a steel ring for minimum diffraction | Carver PM-120 amplifier | 2700 cu. ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

**** BETA 8CX, 10CX, and 12CX are coaxial speakers with tweeter sold separately. Published usable frequency response contingent upon use of ASD:1001 HF Driver.

***** Multiple units exceeded published ratings evaluated under EIA-426A or AES specification while mounted on Eminence's H290, H290S, or H2EA horn in a non-temperature-controlled environment.

******The average on axis output across the entire usable frequency range when applying 1W/1m into the nominal impedance, i.e. 2.83V/8Ω, 4V/16Ω. Eminence response curves are measured under the following conditions: All speakers are tested at 1W/1m using a variety of test set-ups for the appropriate impedance | LMS using 0.25" supplied microphone (software calibrated) mounted 1m from wall/baffle | 2ft x 2ft baffle is built into the wall with horn front mounted | Carver PM-120 amplifier | 2700 cu.ft. chamber with fiberglass on all six surfaces (three with custom-made wedges).

Prices, specifications and product cosmetics are subject to change without notice.

EMINENCE SPEAKER LLC

838 Mulberry Pike, Eminence, KY 40019

DESIGNED AND
ASSEMBLED IN THE USA

Follow us:

EMINENCE.COM   f   Instagram   twitter   YouTube