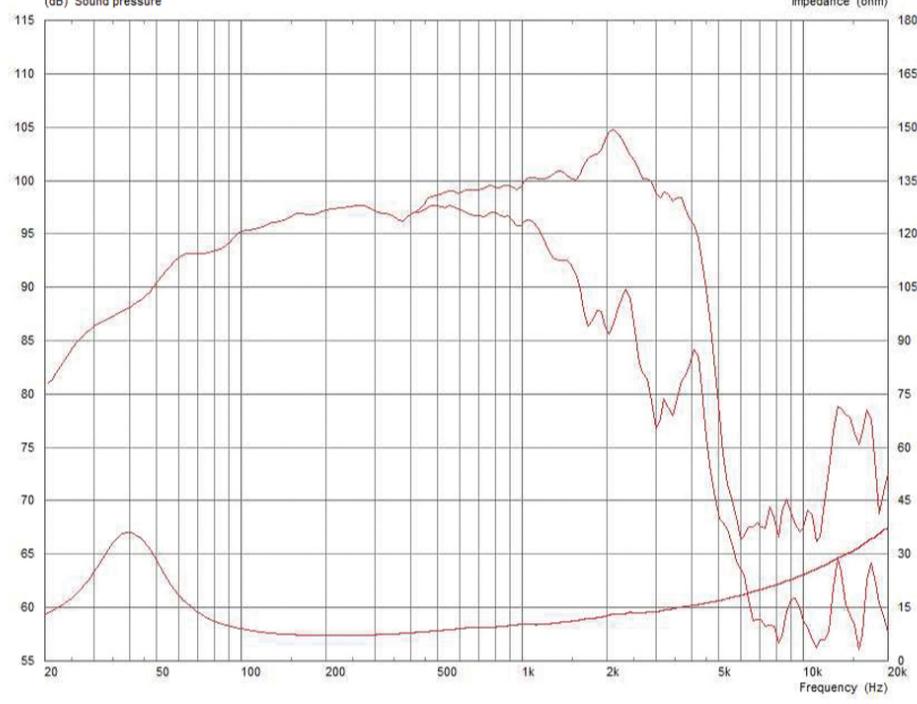


**FTR15-3070C**

- Full gap flux saturation for increased BL and reduced distortion
- Glass loaded paper cone with weather-resistant impregnation
- Airflow vented magnet assembly for dynamic heat dispersion

**Frequency Response and Impedance Curves**

Topmost curve: Frequency response on axis | Secondary curve: Frequency response at 45° off axis

**Power rating:** Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m in 2 anechoic environment.

**Parameters:** Measured after unit subjected to pre-conditioning signal.

Xmax:  $0.5 \times (H_{vc} - H_g) + 0.25 \times H_g$

**General Specifications**

Nominal Diameter	381mm / 15in
Power Rating	400W
Continuous power rating	800W
EIA power rating	500W
Rated impedance	8
Sensitivity	99dB
Frequency range	40-4000Hz
Chassis type	Cast aluminium
Magnet type	Ferrite
Magnet weight	2.3kg / 81oz
Voice coil diameter	75mm / 3in
Voice coil material	Round copper
Former material	Glass fibre
Cone material	Glass loaded paper (weather-resistant)
Surround material	Cloth-sealed
Suspension	Single
Xmax	5.5mm / 0.22in
Gap height (Hg)	10mm / 0.39in
VC winding height (Hvc)	16mm / 0.63in

**Mounting Information**

Overall diameter	385mm / 15.16in
Overall depth	158mm / 6.2in
Cut-out diameter	351mm / 13.82in
Mounting hole dimensions	10x7mm / 0.39x0.27in
Number of mounting holes	8
Mounting hole PCD	365-375mm / 14.37-14.76in
Unit weight	6.3kg / 13.8lb

**Parameters**

Sd	855.30cm <sup>2</sup> / 132.57in <sup>2</sup>
Fs	41.40Hz
Mms	81.73g / 2.88oz
Qms	3.510
Qes	0.429
Qts	0.382
Re	6.07
Vas	187.62l / 6.63ft <sup>3</sup>
Bi	17.33Tm
Cms	0.18mm/N
Rms	6.05kg/s
Le (at 1kHz)	0.59mH
Xmax	5.5mm / 0.22in

**Packed Dimensions & Weight**

Single pack size W x D x H	435mm x 435mm x 200mm / 17.1in x 17.1in x 7.9in
Single pack weight	7.7kg / 17.0lb
Multi pack qty	36
Multi pack size W x D x H	1210mm x 1050mm x 980mm / 47.6in x 41.3in x 35.4in
Multi pack weight	260kg / 570lb