



285-2000 Bass medium drive unit– 70W / 101dB / 8Ω

SPECIFICATIONS

Efficiency: 101dB
Frequency response:
 45Hz-7KHz
Impedance : 8Ω
Power max. RMS: 70W


Suspension: 3 paper pleats
Linear excursion: 8mm
Magnet Alnico: 3.5 Kg
Magnetic field: 2.1 T
Diameter HP: 290/307mm
Frame thickness:
 Alu 8mm
Diameter fixation: 24mm
Diameter drilling holes:
 280mm
Depth HP: 180mm

Fs : 45Hz
Re : 6.5Ω
Qts : 0.2
Qe : 0.22
Qm : 6
Vas : 200 L
Bl : 12
Cms : 0.6
Mms : 18.5 g
Sd : 471 cm²


EAN Code: 0660042796790

Dimensions & Weight
PRODUCT
 Ø 307 x H 180mm
 7.5 Kg


Dimensions (LxHxP) & Weight
PACKAGING
 305 x 310 x 225mm
 8.25 Kg

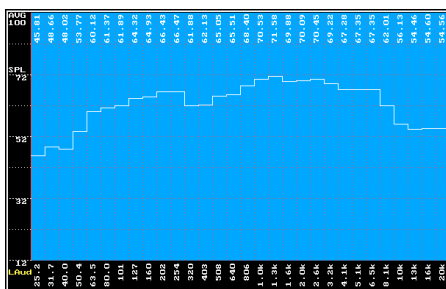


Frequency response in 1/3 octave

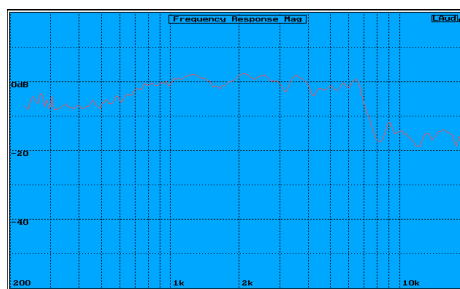

Frequency response 200 Hz to 20 kHz in the axis

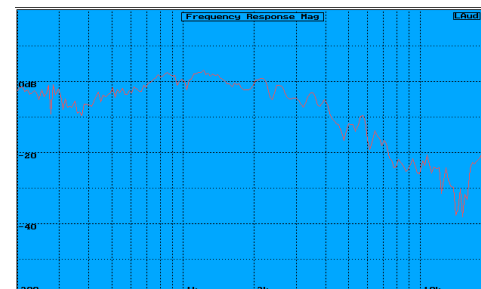

Frequency response 200 Hz to 20 kHz at 30°

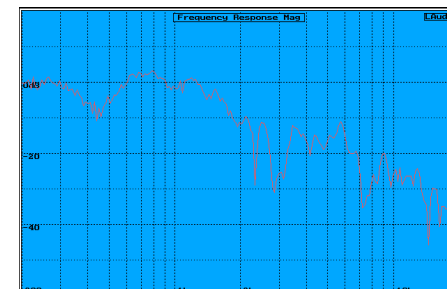

Frequency response 200 Hz to 20 kHz at 60°

The new team, with the affectionate but rigorous of old, endowed with an invaluable knowledge to make, continuous assistance hold up very high the banner of the "HIGH FRENCH FIDELITE". In the line of famous T 215 rtf 64, reference impossible to circumvent of years 50-80, we work to perpetuate and make evolve this standard of quality of sound reproduction. Loudspeakers SUPRAVOX are divided into 3 ranges, the series Classic (ferrite), the series 2000 (Alnico) and the series EXC (electro magnet) ..

Each loudspeakers is measured one by one, provided with its sheet of Thiele and Small parameters. According to those, they are matched to give you 2 loudspeakers works absolutely in the same way.

2000 Series

Driver units SUPRAVOX series 2000 are been driven by engine alnico.

On the basis of 285 GMF, we adopted the same engine as 215-2000. That enables us to obtain a low register even faster.

With weaker Qt and a more important efficiency, it is the low medium ideal in the active multichannel installations. It is the ideal driver unit for a low register horn.

