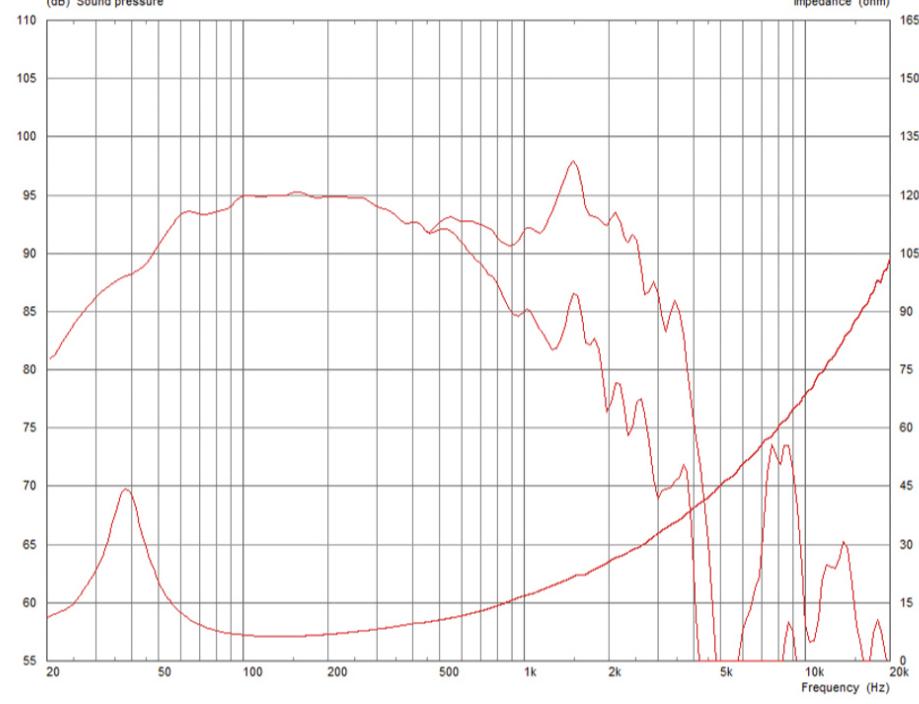


**FTR18-4080HDX**

- Glass loaded paper cone with weather-resistant impregnation
- Optimised double suspension
- Airflow vented magnet assembly for dynamic heat dispersion

**Frequency Response and Impedance Curves**

Topmost curve: Frequency response on axis | Secondary curve: Frequency response at 45° off axis

**Power rating:** Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

**Continuous power rating:** Defined as 3dB greater than the AES rating.

**Sensitivity:** Measured on axis at 1W, 1m in 2 anechoic environment.

**Parameters:** Measured after unit subjected to pre-conditioning signal.

**Xmax:**  $0.5^*(Hvc-Hg) + 0.25^*Hg$

**General Specifications**

Nominal Diameter	457mm / 18in
Power Rating	1000W
Continuous power rating	2000W
Rated impedance	8
Sensitivity	95dB
Frequency range	30-2500Hz
Chassis type	Cast aluminium
Magnet type	Ferrite
Magnet weight	3.1kg / 110oz
Voice coil diameter	100mm / 4in
Voice coil material	Round copper
Former material	Glass fibre
Cone material	Glass loaded paper (weather-resistant)
Surround material	Cloth-sealed
Suspension	Double
Xmax	10.1mm / 0.4in
Gap height (Hg)	9.5mm / 0.37in
VC winding height (Hvc)	25mm / 0.99in

**Mounting Information**

Overall diameter	452mm / 17.8in
Overall depth	205mm / 8.1in
Cut-out diameter	416mm / 16.38in
Mounting hole dimensions	10x7mm / 0.4x0.27in
Number of mounting holes	8
Mounting hole PCD	429-440mm / 16.89-17.32in
Unit weight	9.8kg / 21.6lb

**Parameters**

Sd	1134.12cm <sup>2</sup> / 175.79in <sup>2</sup>
Fs	39.20Hz
Mms	171.75g / 6.06oz
Qms	5.387
Qes	0.466
Qts	0.429
Re	5.00
Vas	174.88l / 6.18ft <sup>3</sup>
Bi	21.29Tm
Cms	0.10mm/N
Rms	7.85kg/s
Le (at 1kHz)	1.79mH
Xmax	10.1mm / 0.4in

**Packed Dimensions & Weight**

Single pack size W x D x H	500mm x 500mm x 240mm / 19.7in x 19.7in x 9.4in
Single pack weight	11.6kg / 25.6lb
Multi pack qty	24
Multi pack size W x D x H	1210mm x 1050mm x 980mm / 47.6in x 41.3in x 35.4in
Multi pack weight	278kg / 608lb