

Model No.: FSL-1220R02-08

Product Line: Tymphany

Rev: 1


Last Update: 2017-04-25 14:32:09

## Product Description

This 12 inch 8 ohm speaker features a FEA optimized ferrite magnet motor, a 2 inch high-temperature voice coil, the yoke with vent can cool magnet system, and a high strength stamped steel frame. The multi-roll surround and spider have been optimized to reduce distortion over the excursion range of this transducer.




## Mechanical Drawing

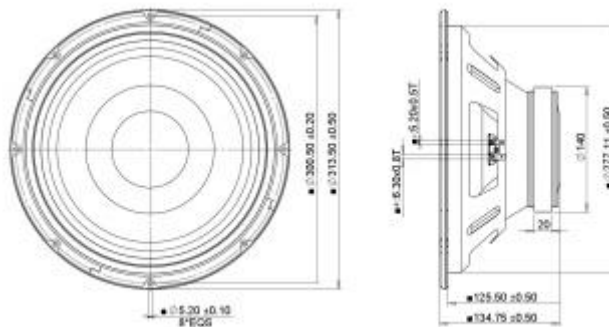

## Specifications

DC Resistance	Rvc	Ohms	5.76	5.0%	Energy Bandwidth Product	EBP	(1/Qes)*fs	
Minimum Impedance	Zmin	Ohms	7.73	7.5%	Moving Mass	Mms	g	46.2
Voice Coil Inductance	Le	mH	0.66		Suspension Compliance	Cms	um/N	122.2
Resonant Frequency	Fs	Hz	66.97	15%	Effective Cone diameter	D	cm	26.3
Mechanical Q Factor	Qms		4.76		Effective Piston Area	Sd	cm^2	543.3
Electrical Q Factor	Qes	0.58			Effective Volume	Vas	L	51.43
Total Q Factor	Qts		0.51		Motor Force Factor	BL	Tm	13.96
Ratio Fs/Qts	F	Fs/Qts	130.54		Motor Efficiency Factor	ß	(T*M^2)/Ohms	33.8
Half Space Sensitivity @2.83V	db@2.83V/1M	dB	96.28	+/- 1.0db	Voice coil former Material	VCfm		KSV
Half Space Sensitivity @1W/1M	db@1W/1M	dB	96.1	+/- 1.0db	Voice coil inner diameter	VCd	mm	50.5
Gap Height	Gh	mm	8		Rated Noise Power	P	W	250
Maximum Linear Excursion	Xmax	mm	2.4		Test Spectrum Bandwidth	60Hz-600Hz		
Ferrofluid Type	FF				Driver Size	Inch	12 in	
Driver Mass	Kg	3.8						

## Frequency and Impedance Response

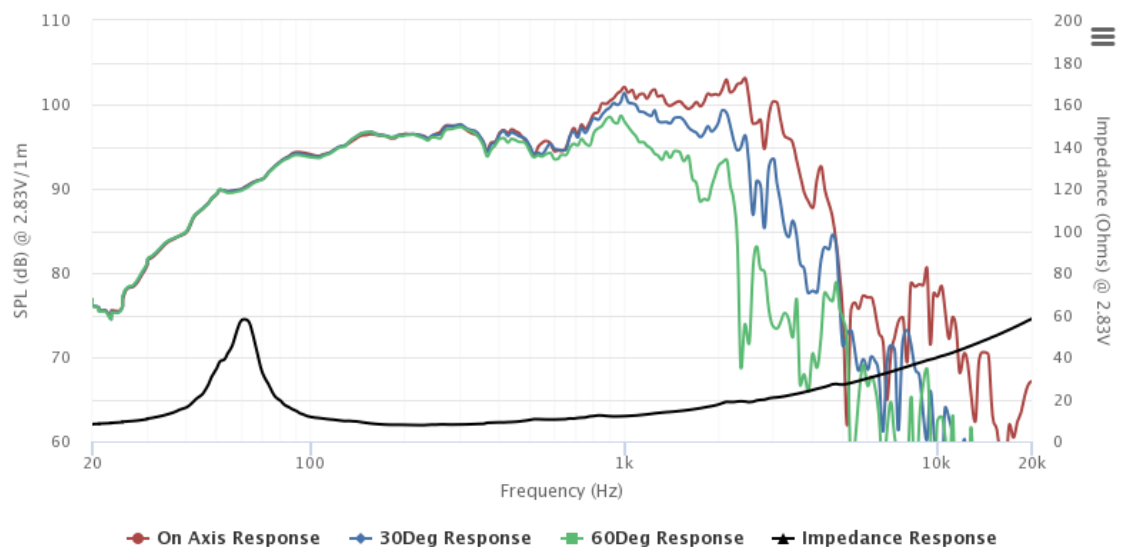

Highcharts.com