


## AN3510



- Square chassis profile for close coupling
- Rigid aluminium cone
- Half roll elastomer surround
- Weatherproof

## Frequency Response and Impedance curves

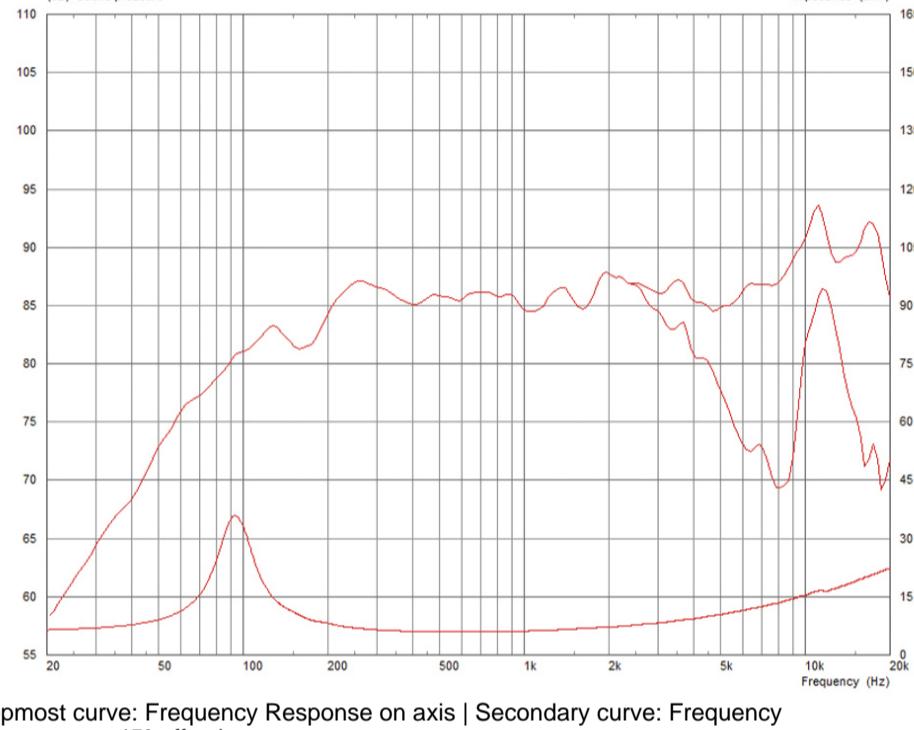

Topmost curve: Frequency Response on axis | Secondary curve: Frequency Response at 45° off axis

Power rating: Tested for two hours using a continuous, band-limited pink noise signal as per AES standard. Power calculated on minimum impedance. Loudspeaker tested in free air.

Continuous power rating: Defined as 3dB greater than the AES rating.

Sensitivity: Measured on axis at 1W, 1m in 2 anechoic environment.

Xmax:  $0.5 \times (H_{vc} - H_g) + 0.25 \times H_g$

Parameters: Measured after unit subjected to pre-conditioning signal.

## General Specifications

Nominal Diameter	88mm / 3.5in
Power Rating	35W
Continuous power rating	70W
Rated impedance	8
Sensitivity	87dB
Frequency range	98-18,500Hz
Chassis type	Glass reinforced ABS
Magnet type	Neodymium
Voice coil diameter	25mm / 1in
Former material	Polyimide
Cone material	Aluminium
Surround material	Elastomer
Suspension	Single
Xmax	2.25mm / 0.09in
Gap height (Hg)	4mm / 0.14in
VC winding height (Hvc)	6.5mm / 0.23in
Additional impedances	16

## Mounting Information

Overall size	89.3x89.3mm / 3.52x3.52in
Overall depth	50mm / 2in
Cut-out diameter	78.8mm / 3.1in
Fitting	4 x M4 holes
Mounting hole PCD	104mm / 4.1in
Unit weight	0.16kg / 0.35lb

## Parameters

Sd	38.45cm <sup>2</sup> / 5.9in <sup>2</sup>
Fs	113.4Hz
Mms	3.76g / 0.13oz
Qms	5.093
Qes	0.740
Qts	0.646
Re	5.73
Vas	1.87l / 0.07ft <sup>3</sup>
Bi	4.56Tm
Cms	0.52mm/N
Rms	0.53kg/s
Le (at 1kHz)	0.14mH
Xmax	2.25mm / 0.09in

## Packed Dimensions &amp; Weight

Single pack size W x D x H	115mm x 115mm x 70mm / 4.5in x 4.5in x 2.8in
Single pack weight	250g / 0.6lb
Multi pack qty	72
Multi pack size W x D x H	460mm x 635mm x 455mm / 18.1in x 25in x 17.9in
Multi pack weight	15kg / 33lb