

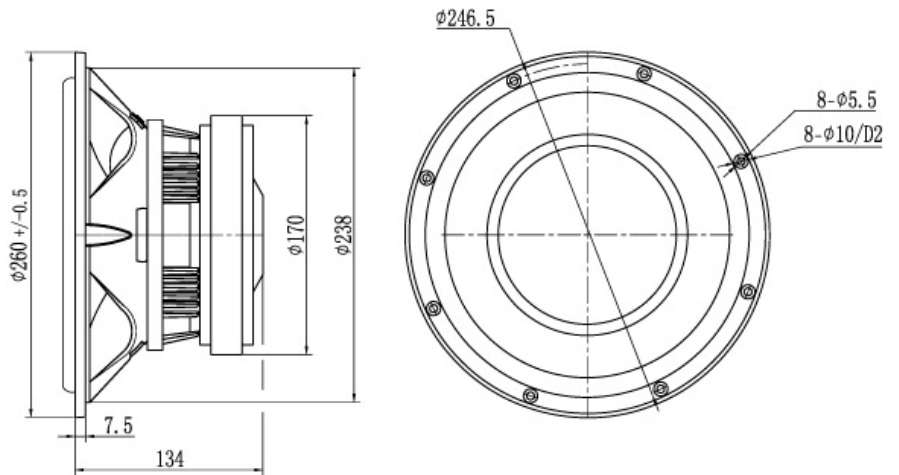


AC-250SW Woofer

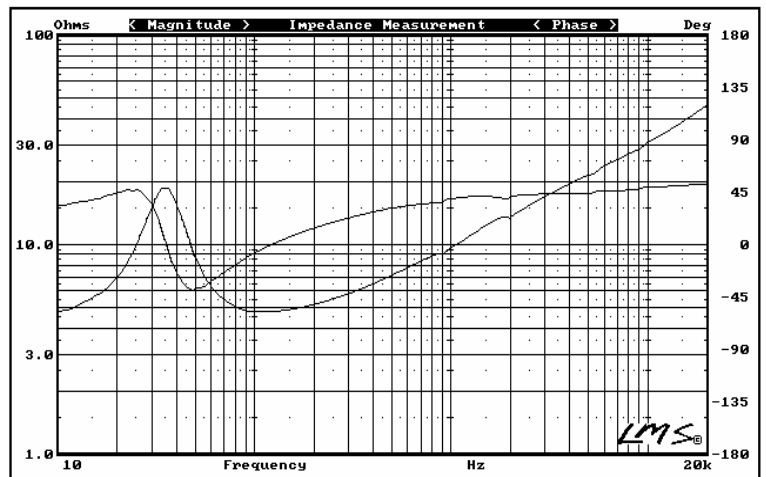

| | | | |
|----------------------------------|--------|----------|-----------------|
| Nominal power | P | 180 | W |
| Sensitivity 1W/1m | SPL | 88 | dB |
| Nominal impedance | Z | 4 | Ω |
| Frequency range | - | 35~2500 | Hz |
| Resonance frequency | F0 | 35 | Hz |
| DC resistance | Re | 3.6 | Ω |
| Mechanical quality factor | Qms | 2.35 | - |
| Electrical quality factor | Qes | 0.56 | - |
| Total quality factor | Qts | 0.45 | - |
| Equivalent volume of air | Vas | 42 | L |
| Moving mass | Mms | 101 | g |
| Effective piston area | S | 330 | cm ² |
| Mechanical suspension compliance | Cms | 2.7 | mm/N |
| BL product | BL | 10.1 | N/A |
| Flux density | B | 0.81 | T |
| Voice coil diameter | Φ | 65 | mm |
| Voice coil height | H | 20 | mm |
| Voice coil inductance | Lbm | 0.84 | mH |
| Linear excursion | Xmax | ±8 | mm |
| Magnet diameter | Φ | 170 | mm |
| Magnet height | H | 22 | mm |
| Frame | - | Aluminum | - |
| Net weight | M | 5.50 | kg |
| Outer dimensions | Φ | 260 | mm |
| Cutout dimensions | Φ | 242 | mm |
| Flange thickness | T | 7.5 | mm |
| Overall depth | D | 134 | mm |

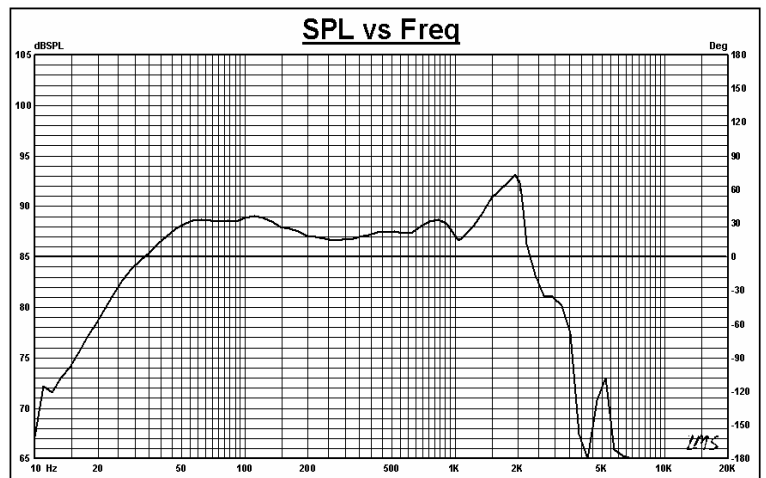

JINLANG AUDIO CO.,LTD.

NO.1 XIANQIAO ST., BEIGUAN RD., PENGLAI, CHINA

E-MAIL: aurumcantus@aurumcantus.com TEL: ++86-535-5643369 FAX: ++86-535-5610809