



## 285 GMF Bass medium drive unit – 70W / 99dB / 8Ω

### SPECIFICATIONS

**Efficiency:** 99dB  
**Frequency response:**  
 40Hz-7KHz  
**Impedance:** 8Ω  
**Power max. RMS:** 70W

**Suspension:** 3 paper pleats  
**Linear excursion:** 8mm  
**Magnet diameter:** 120mm  
**Magnetic field:** 1.4 T  
**Diameter HP:** 290/307mm  
**Frame thickness:**  
 Alu 8mm  
**Diameter fixation:** 294mm  
**Diameter drilling holes:**  
 280mm  
**Depth HP:** 128mm

**Fs :** 47Hz  
**Re :** 6.5Ω  
**Qts :** 0.38  
**Qe :** 0.39  
**Qm :** 8  
**Vas :** 150 L  
**Bl :** 10.7  
**Cms :** 0.6  
**Mms :** 20 g  
**Sd :** 471 cm<sup>2</sup>

**EAN Code:** 0660042796738

**Dimensions & Weight**  
**PRODUCT**  
 Ø 307 x H 128mm  
 3.5 Kg

**Dimensions (LxHxP) & Weight**  
**PACKAGING**  
 305 x 310 x 225 mm  
 3.9 Kg



The new team, with the affectionate but rigorous of old, endowed with an invaluable knowledge to make, continuous assistance hold up very high the banner of the "HIGH FRENCH FIDELITE". In the line of famous T 215 rtf 64, reference impossible to circumvent of years 50-80, we work to perpetuate and make evolve this standard of quality of sound reproduction. Loudspeakers SUPRAVOX are divided into 3 ranges, the series Classic (ferrite), the series 2000 (Alnico) and the series EXC (electro magnet) ..


Each loudspeakers is measured one by one, provided with its sheet of Thiele and Small parameters. According to those, they are matched to give you 2 loudspeakers works absolutely in the same way.

### Classic series


Its objective, to maintain the philosophy of SUPRAVOX ,full range driver units and high efficiency. We work still to widen the useful bandwidth for a highest efficiency possible, while unceasingly improving the definition, the quality and the linearity. Diameter 135 to 380 mm, the audiophile can satisfy its passion.

This high efficiency drive unit offer a very fast low register to you and pleasant listening. Ideal listening with an amplifier of low power (tube or transistor) of approximately 10W, it supports also stronger powers for a use out of low register boxes. In open baffle, it will reinforce, with the same degree of accuracy of reproduction the 215 rtf, to add a low register reinforcement to him and to ensure a comfortable and balanced listening.


In column TQWT it will emphasize all the smoothness of your preferred listenings. In RJ box, bass reflex or symmetrical, it will be a low register of accompaniment of most precise. This driver unit could be coupled with an 1 inch driver + horn.

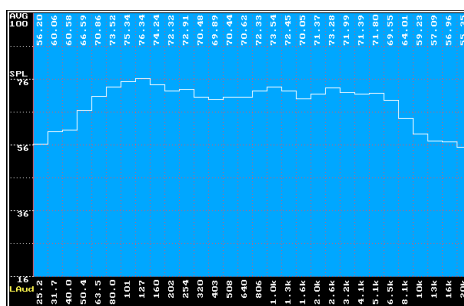


Frequency response in 1/3 octave

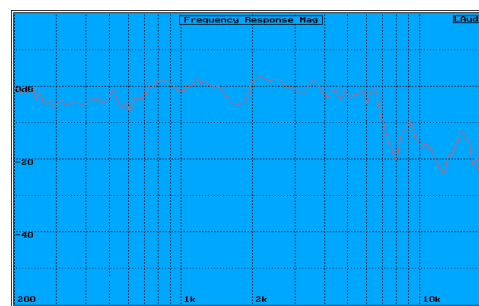

Frequency response 200 Hz to 20 kHz in the axis

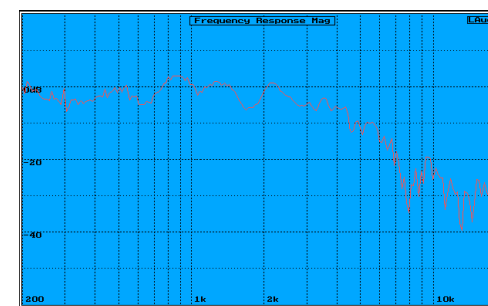

Frequency response 200 Hz to 20 kHz at 30°

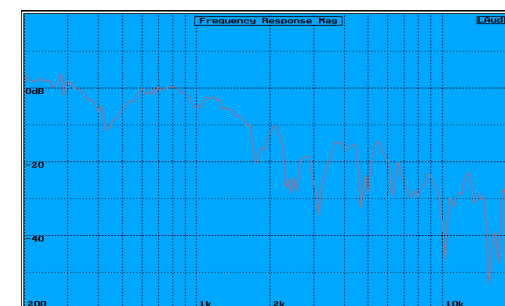

Frequency response 200 Hz to 20 kHz at 60°

