




ELEVATION CV-12 MECHANICAL ARRANGEMENT

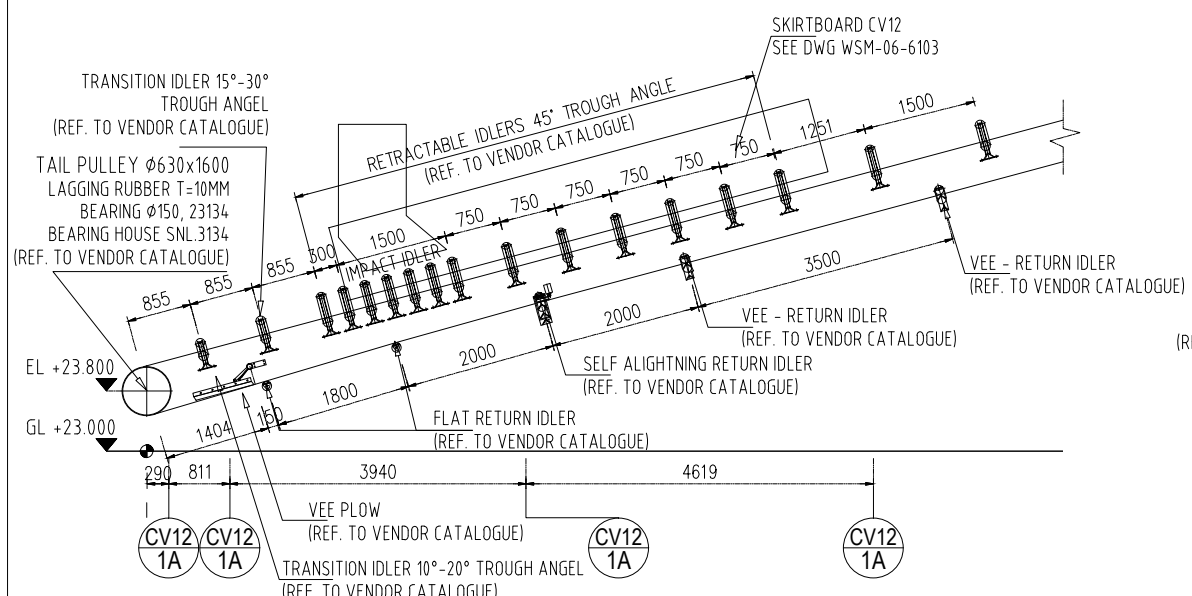


DETAIL 1

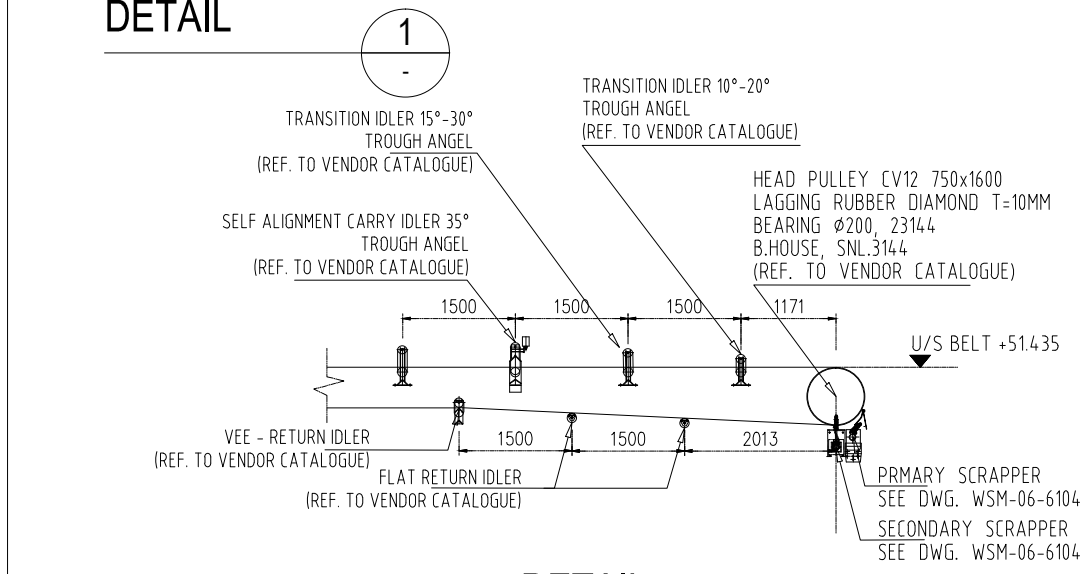

DETAIL 2

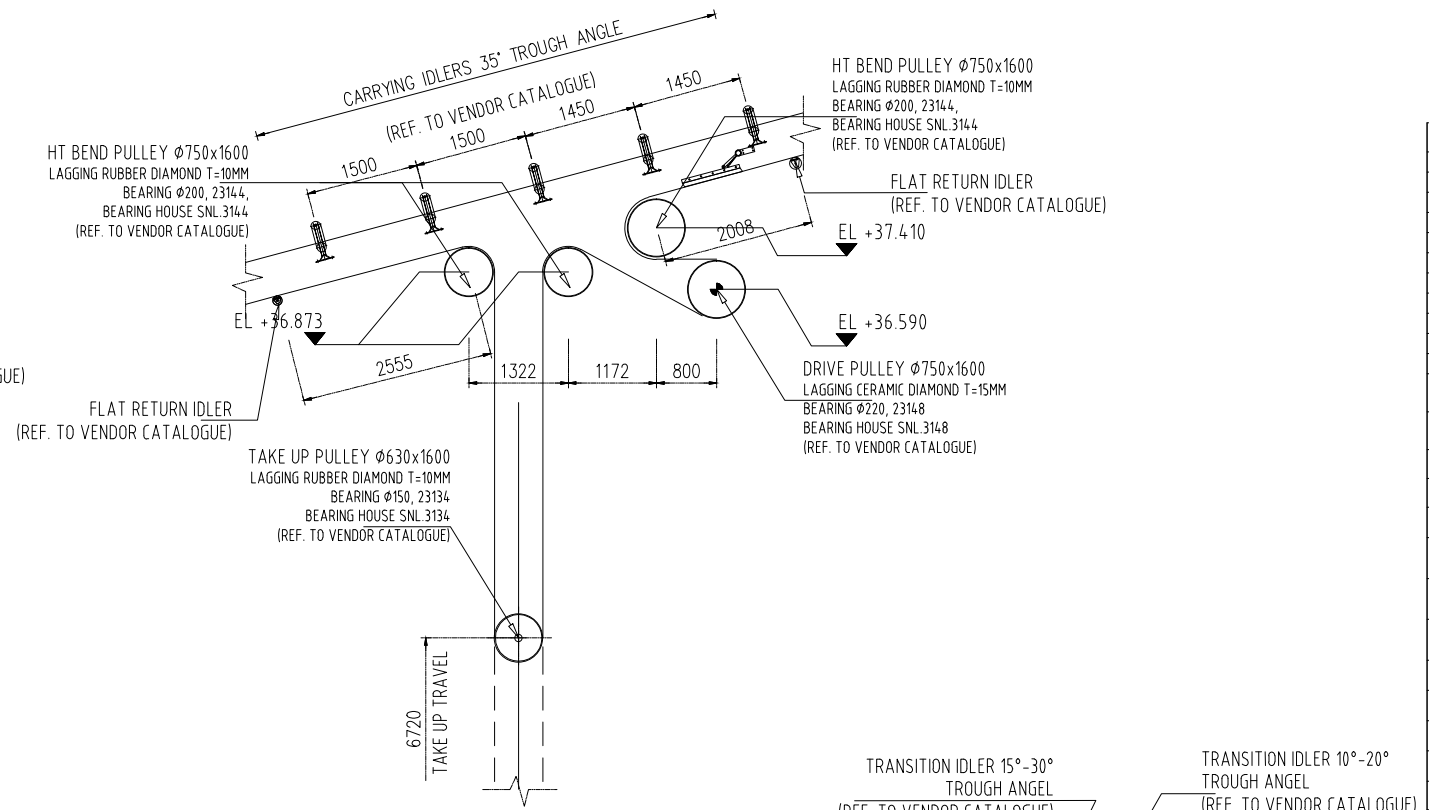

DETAIL 3

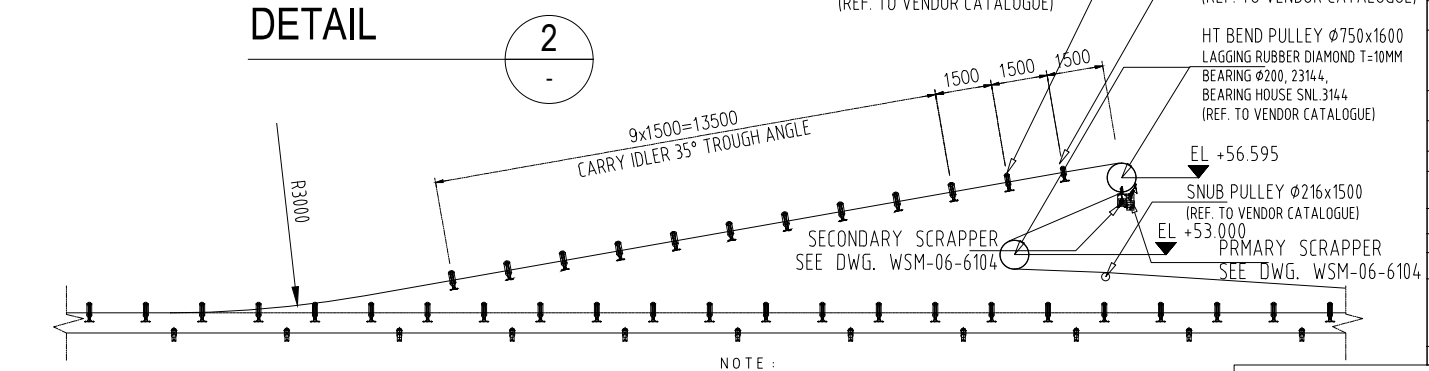

DETAIL 4

- NOTE :
- 1. ALL DIMENSION IN MILLIMETER (MM) UNLESS NOTE OTHERWISE.
 - 2. UNLESS OTHERWISE SPECIFIED WELDING SHOULD BE PERFORMED ACCORDING TO THE FOLLOWING FILLET WELD PLATE THICKNESS MORE THAN 12MM
 - 3. UNLESS OTHERWISE SPECIFIED BREAK ALL SHARP EDGES LINE CHAMFER
 - 4. ALL BOLT/NUT USED 8.8 GALVANIZE MATERIAL TYPE
 - 5. STR MATERIAL SS-400 UNLESS NOTE OTHERWISE

AS BUILD DRAWING

SPECIFICATION	
EQUIPMENT NO.	CV12
BELT WIDTH (mm)	1400
MATERIAL HANDLED	COAL
BULK DENSITY (Kg/m ³)	850
NOMINAL/DESIGN CAPACITY (TPH) Max.	2000/2200
ALONG BELT LINE LENGTH C/C (mm)	385335
HOR. CENTER DISTANCE (mm)	383000
LIFT (mm)	27260
INCLINATION(DEGREE)	15°
LUMP SIZE (mm) - MAX	-50
BELT SPEED (m/s)	4.24 m/s
MOTOR	1x500 kW, 3P, 380V, 1500 RPM 50Hz IP55
GEAR BOX	FLENDER BEVEL HELICAL GEAR SIZE 830H13, ±1% 14 C/W HOLD BACK & FAN COOL OR APPROVED EQUAL
INPUT COUPLING (MOTOR TO GEAR BOX)	FLENDER A 315
COUPLING TO PULLEY DRIVE	N/A
BELT	1400mm WIDE, EP 200 x 4 PLYES 10mm x 5mm COVER THICKNESS, GRADE 1" COVER
DRIVE PULLEY	Ø750mm x 1600mm (FACE WIDTH) W/ RUBBER LAGGING 10mm THK, BEARING 2314, B. HOUSE C/C 2100, SNL 3144 QTY. 1 Nos
TRIPPER/HEAD/HT BEND PULLEY	Ø750mm x 1600mm (FACE WIDTH) W/ RUBBER LAGGING 10mm THK, BEARING 2314, B. HOUSE C/C 2100, SNL 3144 QTY. 4 Nos
TAIL/TAKEUP/LT BEND PULLEY	Ø630mm x 1600mm (FACE WIDTH) W/ RUBBER LAGGING 10mm THK, BEARING 2313, B. HOUSE C/C 2100, SNL 3134 QTY. 4 Nos
CARRYING IDLER (35°)	3 x Ø127 ROLLER INLINE, 35° TROUGHING, 6305 BRGS 1500 MM SPACING QTY. 263 Nos
RETRACTABLE IDLER (45°)	3 x Ø127 ROLLER INLINE, 45° TROUGHING, 6305 BRGS 750 MM SPACING QTY. 8 Nos
CARRYING TRANSITION IDLER (15°-30°)	3 x Ø127 ROLLER INLINE, 15°-30° TROUGHING, 6305 BRGS 1500 MM SPACING QTY. 3 Nos
CARRYING TRANSITION IDLER (10°-20°)	3 x Ø127 ROLLER INLINE, 10°-20° TROUGHING, 6305 BRGS 1500 MM SPACING QTY. 3 Nos
IMPACT IDLER (RETRACTABLE IDLER)	3 x Ø127 ROLL, 35° TROUGHING, 6305 BRGS Ø300mm SPACING QTY. 6 Nos
SELF ALIGNING CARRY IDLER (S.A.C.II)	3 x Ø127 ROLLER INLINE, 35° TROUGHING, 6305 BRGS 1500 MM SPACING QTY. 1 Nos
RETURN IDLER	Ø127 VEE ROLL INLINE 10° TROUGHING, 6305 BRGS Ø3000 MM SPACING QTY. 136 Nos
SELF ALIGNING RETURN IDLER (S.A.R.I)	Ø127 SINGLE ROLLER FLAT, 6305 BRGS 3000 MM SPACING QTY. 1 Nos
SKIRT BOARD WITH END CURTAIN ASSY.	6 1/4" MS PLT W/ 12 1/4" CERAMIC LINER MINIMUM Ø 5.3M LENGTH AT FEEDING POINT
TAKE-UP TYPE & TRAVEL	VERTICAL GRAVITY /9000 MM
DISCHARGE CHUTE	6 THK MS PLT W/ 25 1/4" CERAMIC LINER AT MATERIAL SLIDING AND IMPACT AREAS Ø 6 THK AT OTHER AREA
DEFLECTOR PLATE	8 THK MS PLT W/ 25 1/4" CERAMIC LINER Ø 3 MANUALLY ADJUSTED
INTERNAL SCRAPER/Y-PLW	DOUBLE BLADED RUBBER
EXTERNAL SCRAPER	2 NO. PRIMARY TYPE & 2 NO. SECONDARY TYPE MAKE BELLE BANE OR EQUAL
SAFETY SWITCHES WITH BRACKET	2 NO. 2 NC TYPE (RAMSEY OR SCHNEIDER) QTY. 4 Nos -PULL CHORD SWITCHES QTY. 3 Nos -BELT WAY SWITCHES QTY. 1 No -ZERO SPEED SWITCH QTY. 1 No -START WARNING SIREN QTY. 6 No
PAINTING - STRUCTURE	AS PER TECHNICAL SPECIFICATION



0	AS BUILD DRAWING	MHA	17.02.2013	SCH	SCH	WSM-01-6500	CV12 MECHANICAL ARRANGEMENT
REV	DESCRIPTION	BY	DATE	CHK	APPROVED	DRAWING NUMBER	TITLE
REVISION							REFERENCE



PT. NUSA TAMBANG PRATAMA
Plaza Mutiara 21st floor, suite 2102
Jl. Lingkar Mega Kuningan Kav E 1-2, No. 1-2
Jakarta 12950 Indonesia
Telephone +62 (021) 5794 8846 Facsimile +62 (021) 5794 8836

COPYRIGHT: The design and engineering content shown on this drawing remains the property of PT. NUSA TAMBANG PRATAMA, and may not be copied in any way without prior written approval from the company.

DISCIPLINE	SIGNATURE	DATE
DRAWN BY	MHA	17.02.2013
CHECKED BY	SCH	17.02.2013
DESIGN ENGR	SCH	17.02.2013
ENG MGR APP	SCH	17.02.2013
PTNTP APPROVAL	HER	17.02.2013
CLIENT APPROVAL	-	-

PT. NUSA TAMBANG PRATAMA ASAM-ASAM COAL MINE WEST MULIA CPP & OLC CV12 BELT PROFILE			SCALE: UNO N.O.S	A1	WSM-01-6501 CAD FILE WSM016501.DWG
--	--	--	---------------------	----	---------------------------------------