


Rail Clamps Type BSZ



PINTSCH BUBENZER
is certified according to
DIN EN ISO 9001:2000

H

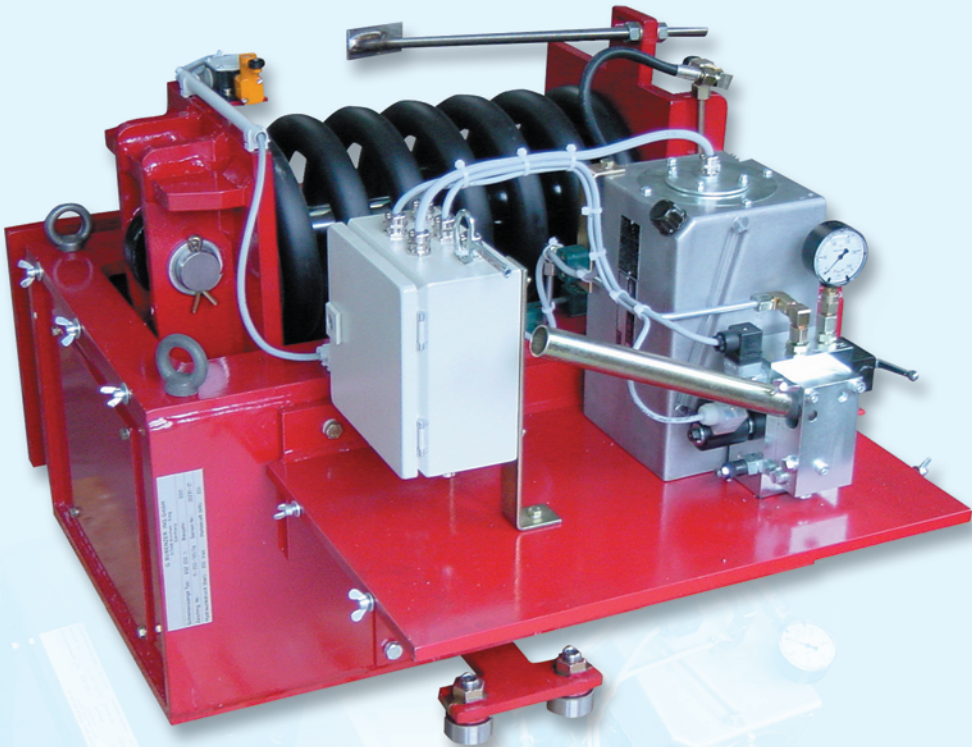

Safe



Tried and Trusted



High Performance



Robust



Easy Maintenance


Description BSZ



Main Features

Rail clamp spring applied
Apply time: Stepless adjustable 3-12 seconds
Rail clamp hydraulically released
Manual pump for emergency release
Integrated hydraulic power unit, ready piped and wired to terminal box
Limit switch release control, mechanical or proximity type
Connection by flange on end face (BSZ/II)
Connection by flange on top (BSZ/III)
Static applications
Holding forces 100-400 kN
Lateral compensation ± 10 mm

Ordering Example

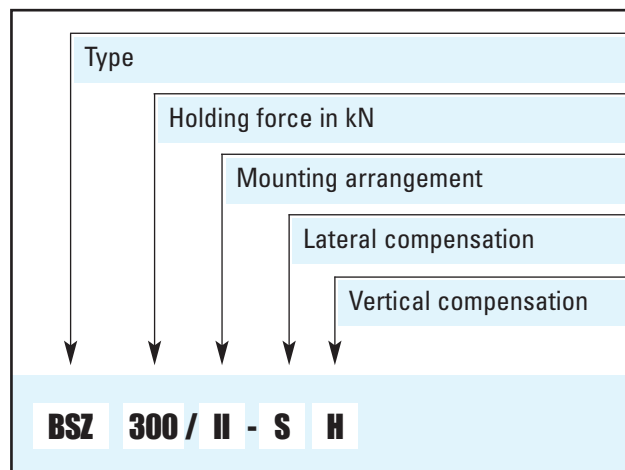

Options

Special mounting dimensions
Holding forces up to 1000 kN
Lateral compensation ± 25 mm
Vertical compensation ± 25 mm
Buffer connection
Rail sweeper
Operation of several rail clamps by one hydraulic power unit
Enclosures of stainless steel

Applications

As storm brake on all rail mounted equipment, such as cranes, stackers, reclaimers etc. Particularly when the rail is mounted above dock level or a rail channel is provided.

Operating Restrictions

Rail clamps of this range are tested both mechanically and hydraulically and are set to nominal force. This setting can only be changed by the manufacturer. Operating conditions other than described in this brochure require the manufacturer's approval and may influence the function of the rail clamp and its components.
--



Please Note

We supply a detailed operating manual with every order. Nevertheless, we would point out that rail clamps are only as safe as the servicing and maintenance performed while they are in operation. The guarantee for the correct functioning of our rail clamps is therefore only valid if the user adheres to the German DIN standard 15019 part 1, table 5. Do not use rail clamps as dynamic brakes.



PINTSCH BUBENZER Service

This includes the installation and commissioning on site by PINTSCH BUBENZER service engineers, if desired. Drawings as DWG/DXF files for your engineering department are available upon request.


Rail Clamp BSZ/II

Dimensions and technical data



Rev. 11-03

Connection in combination with a flange on the end face

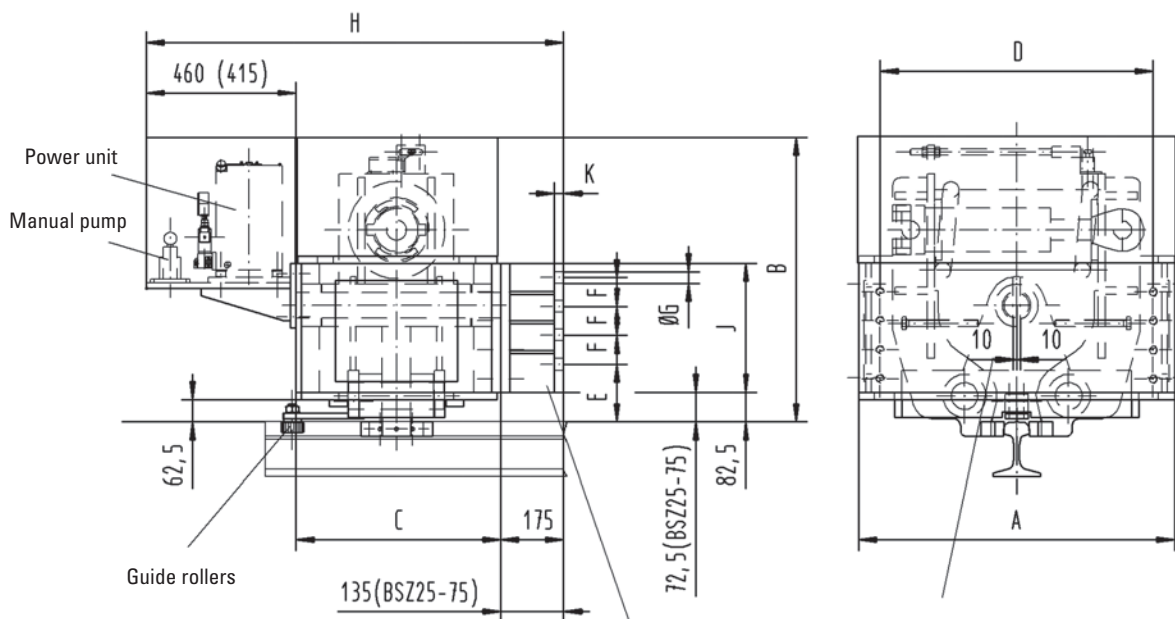

Lateral compensation ± 10 mm

Dimensions D,E,F,G,n and J
by customer data or by table

n = Quantity of fixing holes

Type	Holding force	All dimensions in mm Alterations reserved without notice										
	kN	A	B	C	D	E	F	G	H	J	n	K
BSZ 25/II	25	650	745	295	500	120	105	17	820	305	6	15
BSZ 50/II	50	650	745	295	500	120	105	21	820	305	6	20
BSZ 75/II	75	650	745	295	500	120	105	21	820	305	6	20
BSZ 80/II	80	690	755	470	500	132,5	100	21	1060	415	8	25
BSZ 100/II	100	690	755	470	500	132,5	100	26	1060	415	8	25
BSZ 120/II	120	690	755	470	500	132,5	100	26	1060	415	8	25
BSZ 140/II	140	690	755	470	500	132,5	100	30	1060	415	8	25
BSZ 150/II	150	880	790	575	800	120	90	30	1170	358	8	25
BSZ 200/II	200	880	790	575	800	120	90	33	1210	358	8	25
BSZ 250/II	250	880	790	575	800	120	90	33	1210	358	8	25
BSZ 300/II	300	880	790	575	800	120	90	33	1210	358	8	25
BSZ 400/II	400	880	790	575	800	120	90	33	1210	358	8	25


Rail Clamp BSZ/II-SH

Dimensions and technical data



Rev. 11-03

Connection in combination with a flange on the end face

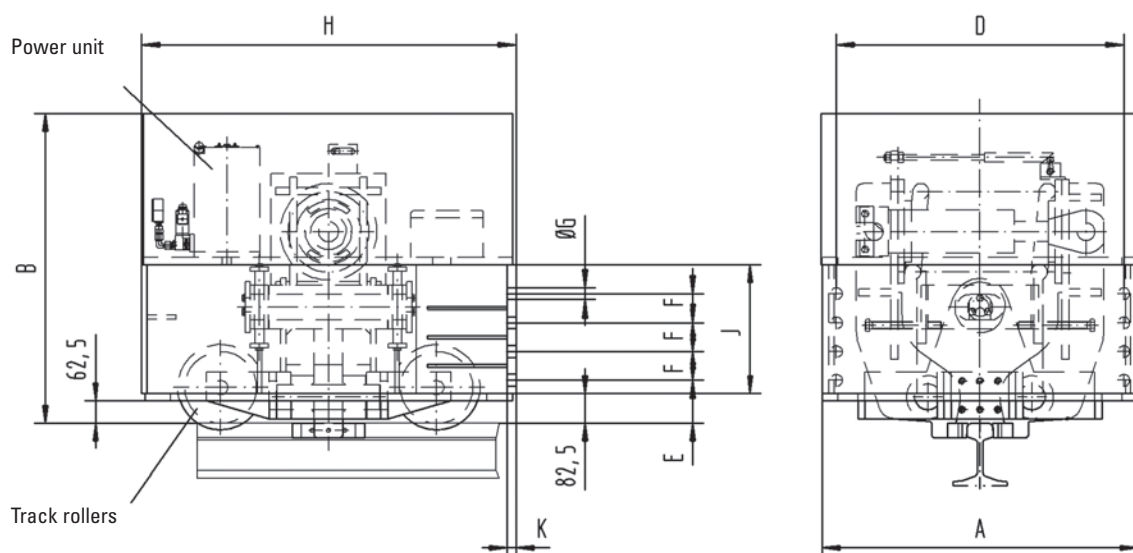

Vertical compensation ± 25 mm
Lateral compensation ± 25 mm

Dimensions D,E,F,G,n and J
by customer data or by table

m = ca. weight in kg
n = Quantity of fixing holes

Type	Holding force	All dimensions in mm Alterations reserved without notice										
	kN	A	B	D	E	F	G	H	J	n	K	m
BSZ 80/II	80	880	865	800	120	80	26	1040	368	8	25	780
BSZ 100/II	100	880	865	800	120	80	26	1040	368	8	25	820
BSZ 120/II	120	880	865	800	120	80	30	1040	368	8	25	830
BSZ 140/II	140	880	865	800	120	80	30	1040	368	8	25	830
BSZ 150/II	150	880	865	800	120	90	33	1040	368	8	25	1000
BSZ 200/II	200	880	865	800	120	90	33	1040	368	8	25	1060
BSZ 250/II	250	880	865	800	120	90	33	1040	368	8	25	1060
BSZ 300/II	300	880	865	800	120	90	33	1040	368	8	25	1060
BSZ 400/II	400	880	865	800	120	90	33	1040	368	8	25	1100


Rail Clamp BSZ/III

Dimensions and technical data



Rev. 05-08

Connection in combination with a flange on top

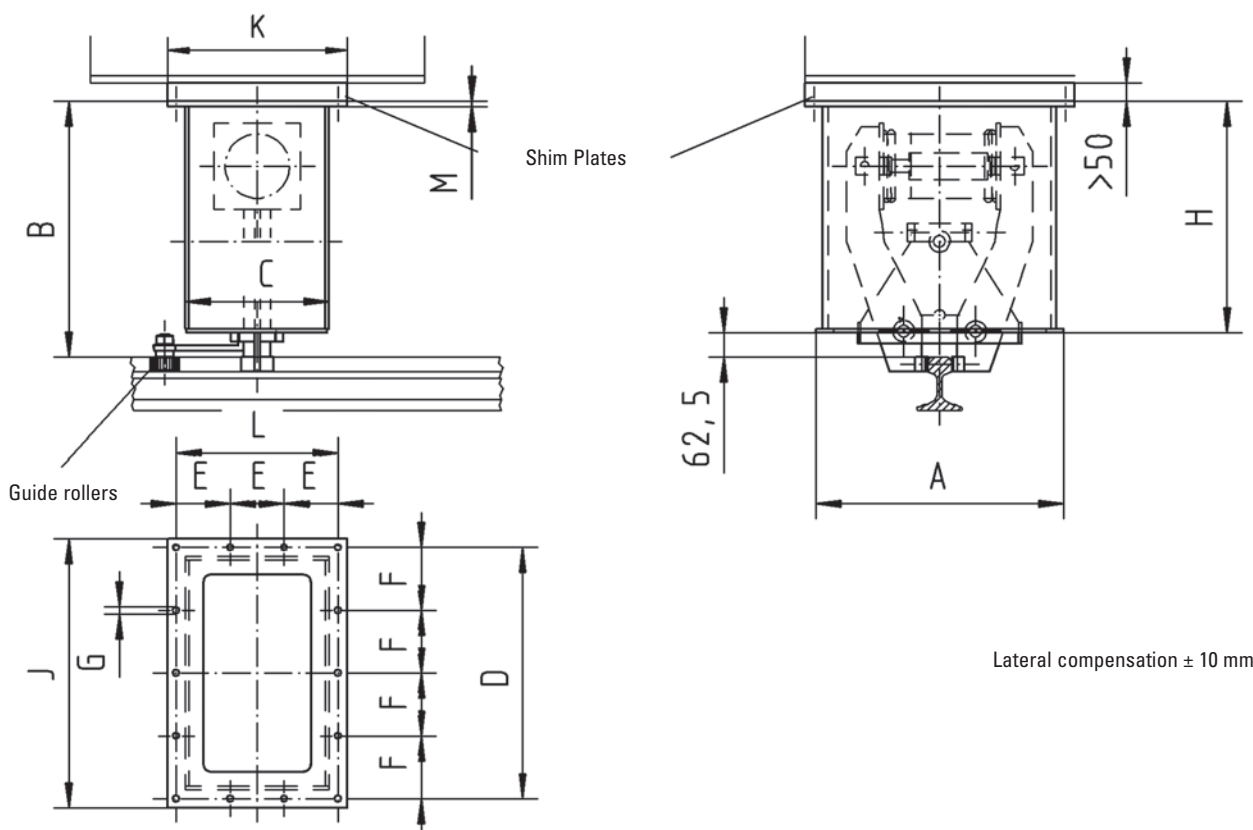

Lateral compensation ± 10 mm

Type	Holding force	All dimensions in mm Alterations reserved without notice											
	kN	A	B	C	D	E	F	G	H	J	K	L	M
BSZ 25/III	25	620	698	390	700	150	175	22	635	750	500	450	20
BSZ 50/III	50	620	698	390	700	150	175	22	635	750	500	450	20
BSZ 75/III	75	620	698	390	700	150	175	22	635	750	500	450	20
BSZ 80/III	80	600	750	600	660	100	110	26	687	720	660	600	20
BSZ 100/III	100	600	750	600	660	100	110	26	687	720	660	600	20
BSZ 120/III	120	600	750	600	660	100	110	26	687	720	660	600	25
BSZ 140/III	140	600	750	600	660	100	110	26	687	720	660	600	25
BSZ 150/III	150	890	716	720	950	162	190	26	760	1040	900	810	30
BSZ 200/III	200	890	716	720	950	162	190	26	760	1040	900	810	30
BSZ 250/III	250	890	716	720	950	162	190	26	760	1040	900	810	30
BSZ 300/III	300	890	716	720	950	162	190	26	760	1040	900	810	30
BSZ 400/III	400	890	716	720	950	162	190	26	760	1040	900	810	30


Rail Clamp BSZ

Hydraulic diagram



Rev. 09-02

Q:	4,25 l/min (50 Hz) 5,1 l/min (60 Hz)
p:	250 bar (50Hz) 210 bar (60Hz)
P:	1,1 kW (50 Hz) 1,3 kW (60Hz)
Control voltage:	24 V DC 110 V AC 230 V AC
Supply voltage:	360-440 V AC (50Hz) 380-480 V AC (60Hz)
Tank capacity:	5 Litres

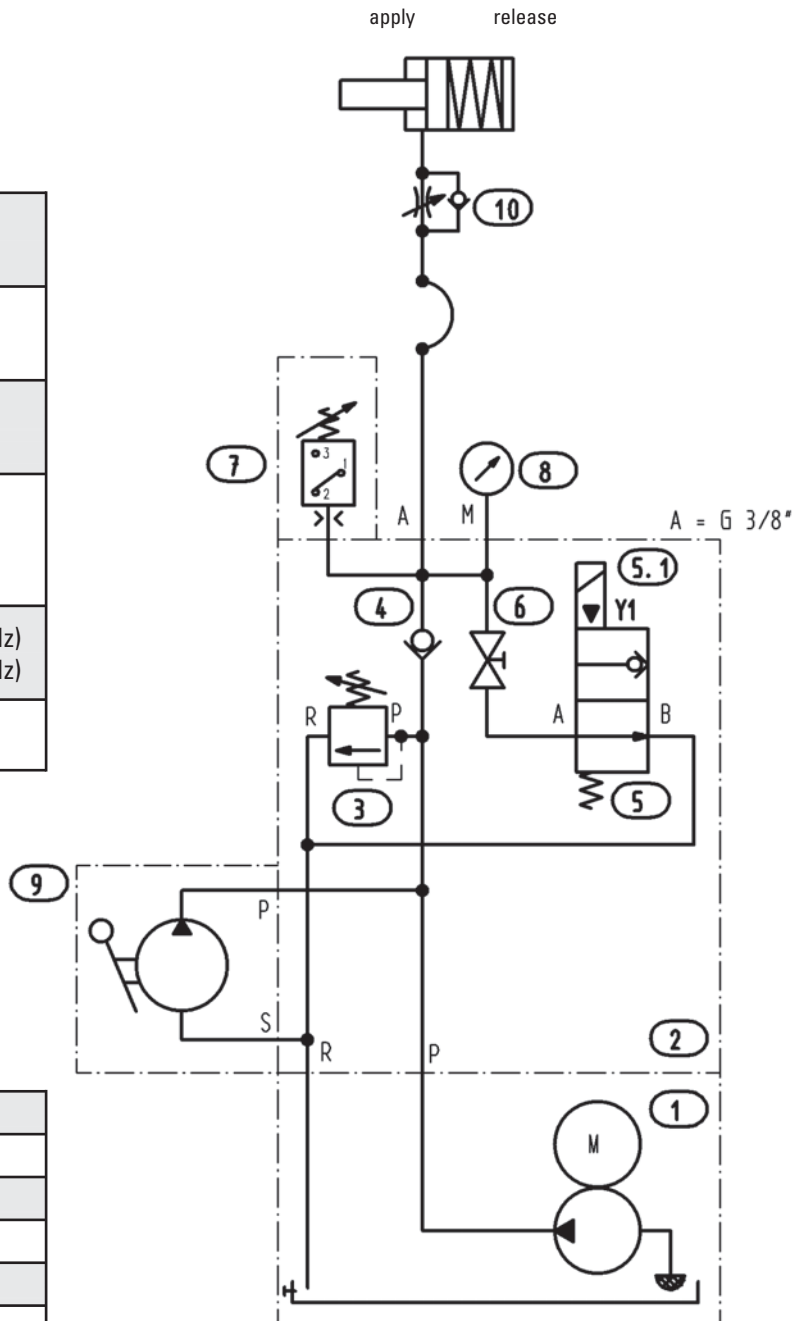

Pos	Qty	Designation
1	1	Hydraulic power unit
2	1	Manifold block
3	1	Pressure valve
4	1	Check valve
5	1	2/2 valve
5.1	1	Plug
6	1	Cock
7	1	Pressure switch
8	1	Pressure gauge
9	1	Manual pump
10	1	Throttle check valve


Alterations reserved without notice

Rail Clamp BSZ

Electric diagram



Rev. 09-02

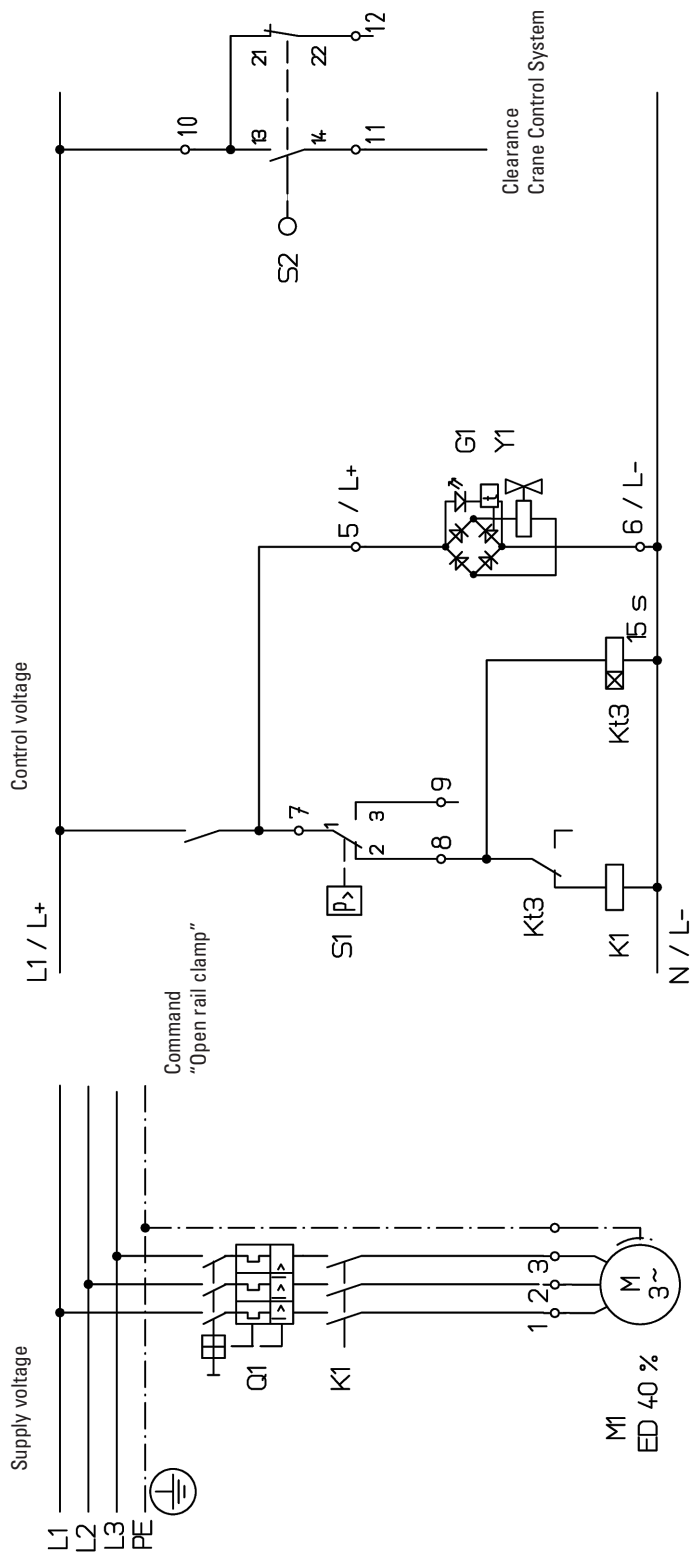

PINTSCH BUBENZER scope of supply	
M1	Hydraulic motor 3 Ph, ED = 40%
Y1	Solenoid valve
G1	Plug
S1	Pressure switch
S2	Limit switch release control

Alterations reserved without notice





Rail Clamp BSZ

Mounting and rail arrangements



Rev. 09-02



Mounting arrangements buffer and rail sweeper

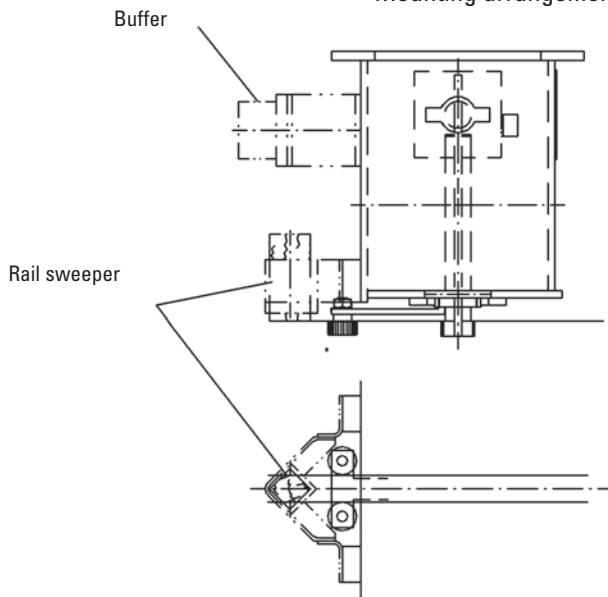

In case of order please indicate buffer dimensions and buffer force


Mounting arrangements hydraulic power unit

Top

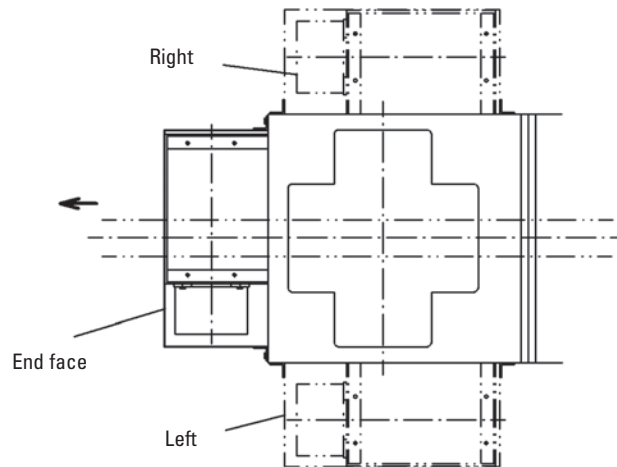


Rail arrangement

Rail below dock level

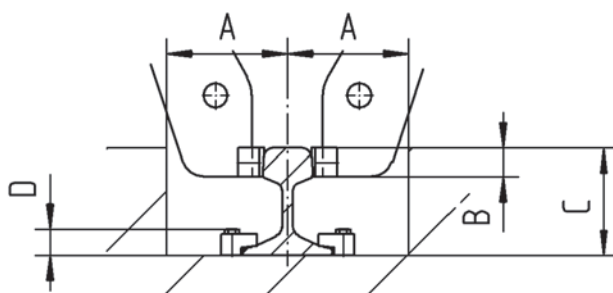

Rail above dock level

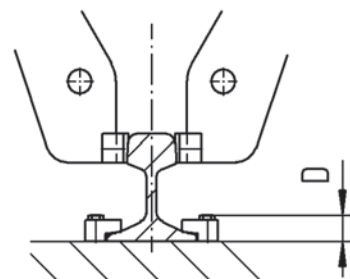

In case of order please indicate dimensions A, B, C and D.

Alterations reserved without notice