

TECHNICAL DATA SHEET



Ref. Number : 154/BI/SE-09/IX/2026
User : PT. ARUTMIN INDONESIA Site Kintap
Manufacturer : PT. BANDO INDONESIA
Belt Specification : 1400 x EP-800 / 4P x 10.0mm x 5.0mm x 616 Mtr
Cover Rubber : GRADE - M

Brand	: BANDO
Cover Rubber	: GRADE - M
Carcass	: Polyester – Nylon


1. Table of Belt Size

Belt width (mm)	Number of Ply	Cover thickness		Code of carcass	Cover grade	Belt length (Mtrs)
		Top (mm)	Bottom (mm)			
1400	4	10.0	5.0	EP-800 / 4P	GRADE - M	616

2. Table of Estimated Drum Size

B e l t		Estimated / drum				
Thickness (mm)	Weight (kg/mtr)	Length (Mtrs)	Number of Drum	Diameter (mtr)	Gross Weight (ton)	Volume (m³)
20.20	30.83	308.0	2	3.08	10.63	15.14

3. Construction of Belt

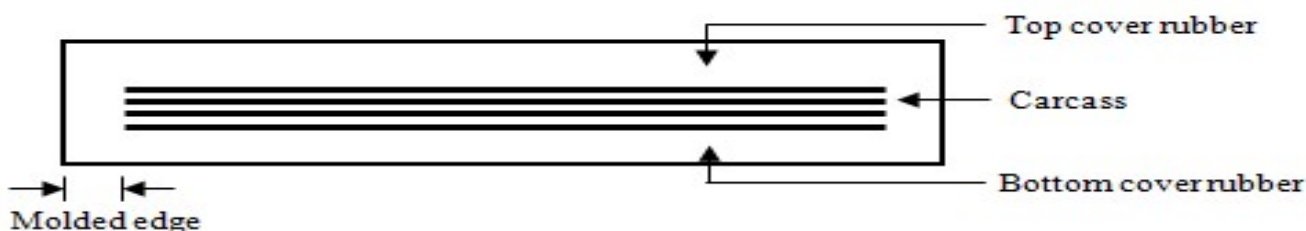

4. Standard Value

The test results should meet the following standard value

The testing methods of Belting are in conformity with : JIS K 6322 – 2018

A. Tension Test of Carcass

Code of carcass	Tensile strength (kgf/cm)	Elongation at 10% of specified tensile strength	Elongation at Break
EP-800 / 4P	more than 800	Less than 4 %	More than 10 %

B. Cover Rubber Test

Test Item			Unit	Performance of cover rubber
Tensile Test	Before Aging	Tensile strength	kgf/cm ²	≥ 250
		Elongation	%	≥ 450
	After * Aging	Change rate of Tensile strength	%	± 25
		Change rate of Elongation	%	± 25
Abrasion test	Abrasion loss		mm ³	≤ 120

* Condition of aging test is as described under : Temperature 70 ± 1°C, Time 168 Hours

C. Adhesion Test

Mean value in kgf/25mm

Top cover rubber to ply	more than 8
Ply to ply	more than 9
Ply to bottom cover rubber	more than 8

Ilham Alamsyah
Sales Engineering

Sutiyo Bin Ali
SE. Manager