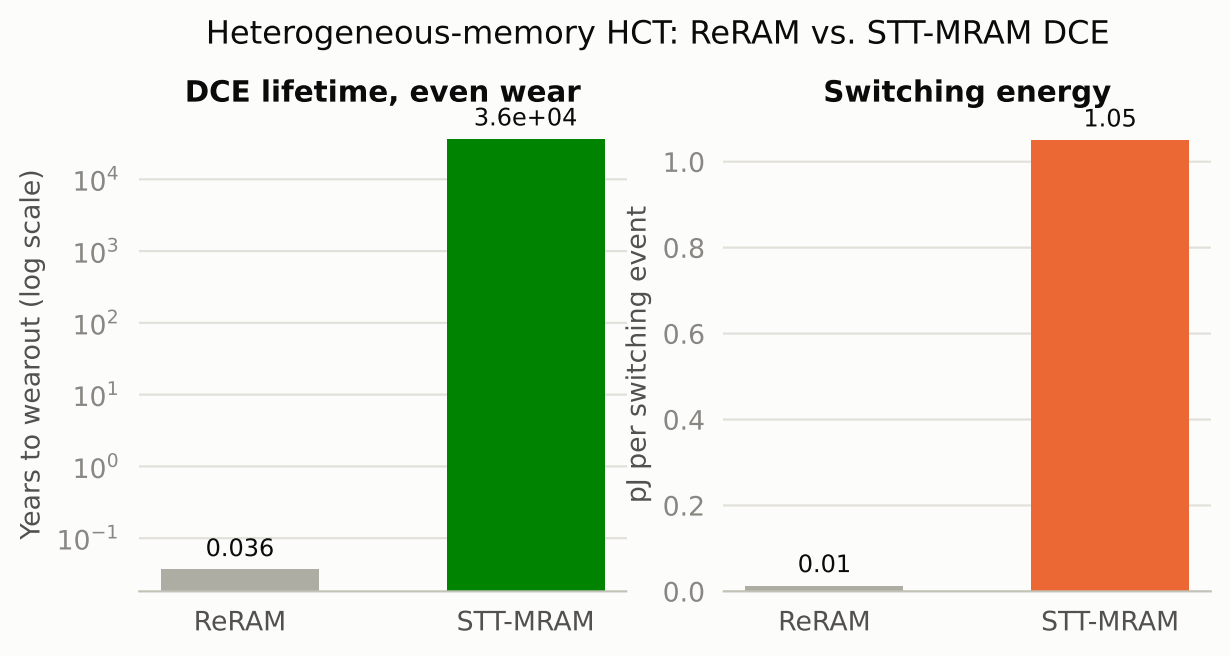
Heterogeneous-memory HCT: ReRAM vs. STT-MRAM DCE
DCE lifetime, even wear
Years to wearout (log scale)
3.6e+04
0.036
ReRAM
STT-MRAM
Switching energy
pJ per switching event
1.05
0.01
ReRAM
STT-MRAM