



Eidgenössische Technische Hochschule Zürich  
Swiss Federal Institute of Technology Zurich

# **Supervisory Control and Data Acquisition system of the n2EDM experiment**

Master Thesis

Konstantin Nesterov

Monday 25<sup>th</sup> November, 2019

Advisors: Prof. Dr. K. S. Kirch, Dr. J. Krempel

Department of Physics, ETH Zürich

---

## Abstract

Just as nowadays no serious experiment can be built and conducted by a single person, the experiment itself cannot consist of a single tool. The n2EDM experiment aims to achieve an ambitious goal: to measure the electric dipole moment of neutron with a new level of precision. Such challenging project demands the need for the complex and well-connected system. This thesis intends to describe the development of new and improvement of existing components, such as:

- **COM handler** — an adapter translating the POSIX pipes to the TCP/IP connections. Almost every node in the system is connected with others through it.
- **Sequencer** — a software node orchestrating other nodes. It follows the user-generated script allowing one to describe the reproducible behaviour of the whole DAQ system with a human-readable set of commands.
- **Proxy for the remote magnetometers** — a smart bridge between the pool of the remote magnetometers and a standard TCP/IP interface of the COM handler.
- **Surrounding field compensation system** — a system for active stabilisation of the magnetic field. It uses the a set of controlled coils to minimise the fluctuations of the magnetic field in the area of the experiment.

These pieces are essential for the n2EDM experiment to function, so the aim was to make them error-resistant, extendable and easy to support for the future developers.

---

# Contents

---

<b>Contents</b>	<b>ii</b>
<b>1 Introduction</b>	<b>1</b>
<b>2 The n2EDM experiment</b>	<b>4</b>
<b>3 The n2EDM DAQ system</b>	<b>8</b>
3.1 Command Distributor . . . . .	10
3.2 Dispatcher . . . . .	10
3.3 Run & Cycle Manager . . . . .	11
3.4 Data Storage . . . . .	11
3.5 Timing Infrastructure . . . . .	11
3.6 COM Handler . . . . .	12
3.7 Sequencer . . . . .	12
<b>4 Features</b>	<b>13</b>
4.1 Support of the FOR loop . . . . .	13
4.2 Improvement of the REQUEST command . . . . .	15
4.3 Support of the REPLYTO command . . . . .	17
<b>Bibliography</b>	<b>21</b>

## Chapter 1

---

# Introduction

---

Out of S. Okubo's effect  
At high temperature  
A fur coat is sewed for the Universe  
Shaped for its crooked figure

---

A. D. Sakharov [17]

We interact with matter every day. Even you, the reader, are probably made out of matter! However, antimatter is so rare that it is considered to cost a few hundred millions Swiss francs per gram [5], making it the most expensive substance in the universe. Why does such a stunning difference in the abundance exist?

First step to solving this problem is to define what are the required conditions that would allow the disbalance to evolve. Those conditions [7] were described [17] by Andrei Sakharov in 1967:

- Violation of baryon number conservation
- C- and CP-symmetry violation
- Processes take place far from thermal equilibrium

Let's take a look at the CP-symmetry and prove that a non-zero electric dipole moment of an elementary particle would indeed break it. We would select neutron as a particle of choice.

The neutron in the ground state has spin of  $I = 1/2$  and can be characterised completely by a single quantum number of a spin projection  $m_I = \pm 1/2$ . We can write down a Hamiltonian [10] of this neutron in external electric and magnetic fields  $\vec{E}$  and  $\vec{B}$ :

---


$$\mathcal{H} = -\frac{d_n \vec{I} \cdot \vec{E} + \mu_n \vec{I} \cdot \vec{B}}{I} \quad (1.1)$$

with  $d_n$  and  $\mu_n$  being the electric and magnetic moments of the neutron [11].

It does not make sense to discuss the potential violation of the symmetries before we define them. Fundamental symmetries are blended into the fabric of our Universe by providing sufficient conditions [14] for the conservation laws. In our analysis we would consider three symmetries of the Standard Model:  $C$ ,  $P$  and  $T$ .

- (C)harge — replaces every particle with its antiparticle:  $q \rightarrow -q$
- (P)arity — inverts the physical space:  $\vec{r} \rightarrow -\vec{r}$
- (T)ime — turns the time back:  $t \rightarrow -t$

How would the  $P$  and  $T$  inversions affect [7] the Hamiltonian from Eq. 1.1?

Parity transformation only act on a polar vector of the electric field:  $\vec{E} \rightarrow -\vec{E}$ , both  $\vec{B}$  and  $\vec{I}$  are conserved. This brings us to

$$P\mathcal{H} = -\frac{d_n \vec{I} \cdot (-\vec{E}) + \mu_n \vec{I} \cdot \vec{B}}{I} \neq \mathcal{H} \quad (1.2)$$

Time reversal would affect only axial vectors  $\vec{B}$  and  $\vec{I}$ :  $\vec{B} \rightarrow -\vec{B}$ ,  $\vec{I} \rightarrow -\vec{I}$ , the field  $\vec{E}$  is left as is:

$$T\mathcal{H} = -\frac{d_n (-\vec{I}) \cdot \vec{E} + \mu_n (-\vec{I}) \cdot (-\vec{B})}{I} \neq \mathcal{H} \quad (1.3)$$

Assuming that the  $CPT$  invariance [18] is conserved, we derive the violation of a  $CP$ -symmetry, which provides us motivation to measure the EDM of the neutron.

*"Wait a minute,"* could have said an attentive reader at this point. *"Does not Standard Model predict a non-zero EDM of the neutron already? I am still not convinced why would you want to conduct this experiment."*

And an attentive reader would have had a completely fair point! Indeed, Standard Model predicts [12] the following:

$$d_n \approx 2 \cdot 10^{-32} \text{ e} \cdot \text{cm} \quad (1.4)$$

However, we would still like to measure  $d_n$  for the reasons listed below:

- The only way to prove the theory is to check it experimentally. So far no one has measured  $d_n$  with a precision close to the predicted value

- The result that can be achieved by using Standard Model is too weak to explain the baryogenesis [7], yet baryogenesis has clearly happened
- If we go beyond Standard Model to find a mechanism, through which the Universe as we know it could have been formed, we need to cut off theories that do not agree with experimental data. This is something that this experiment does perfectly: on the Fig. 11 one can see all theoretical models that the measurement of the neutron EDM has ruled out, allowing the scientists to focus on more prominent theories.



Figure 11: Measurement history of the neutron EDM [10]

Hopefully these reasons would convince even the most demanding reader in the need to conduct the  $n2\text{EDM}$  experiment. But what is  $n2\text{EDM}$  exactly? We will try to explain that in the next chapter.

## Chapter 2

---

# The n2EDM experiment

---

Knowledge is power and our knowledge of the physical property that can be measured to show the violation of the  $CP$ -symmetry is an important first step in solving the riddle of the baryogenesis. Now we just need to get our hands dirty with some experimental data. It will be obtained over the course of the n2EDM experiment currently being built at PSI (Paul Scherrer Institute, Villigen, Switzerland).

*What will be measured?* Electric dipole moment of the neutron. The neutrons were chosen for the following reasons:

- They are electrically neutral<sup>1</sup>, which means that they would not be dragged by the electric field  $\vec{E}$
- There are nuclear reactions that allow to produce them efficiently, like fission or spallation (which is already available in PSI and will be used)
- They can be cooled down to become UCNs (ultracold neutrons)

*What are ultracold neutrons and why do we like them?* We call [8] a neutron ultracold when it has a kinetic energy  $E_{kin} \leq 300$  neV. Such low energy brings the following experimental benefits:

- Ease of collection, since the neutrons would behave similar to ping-pong balls, bouncing from the surface of a neutron vessel.
- Possibility to store [21] the neutrons up to their lifetime of  $\approx 886$  s [20].
- Weakening of a so-called  $\vec{v} \times \vec{E}$  effect [16], which arises from the coupling of a particle spin  $\vec{I}$  itself with an electric field  $\vec{E}$ . This would bring the effective Hamiltonian closer to one mentioned in Eq. 1.1.

---

<sup>1</sup>Which is quite important for an experiment based in Switzerland

What precision do we expect? By using only the Standard Model it is possible to get an estimation [12] of the neutron EDM at the following level:

$$d_n \approx 2 \cdot 10^{-32} e \cdot \text{cm} \quad (2.1)$$

The **n2EDM** experiment is conceptually following the footsteps of the results obtained by the **nEDM** collaboration. By analysing the data obtained at ILL, Grenoble it was possible to achieve [15] an impressive record of  $d_n$  precision:

$$|d_n| < 3.6 \cdot 10^{-26} e \cdot \text{cm} \text{ (95\% CL)}. \quad (2.2)$$

This leaves us with 6 more orders of magnitude to go. The n2EDM experiment aims to cut this number to five, improving [2] the precision tenfold.

What method will be used? Same as in the original nEDM experiment, Ramsey method of the time separated oscillating fields.

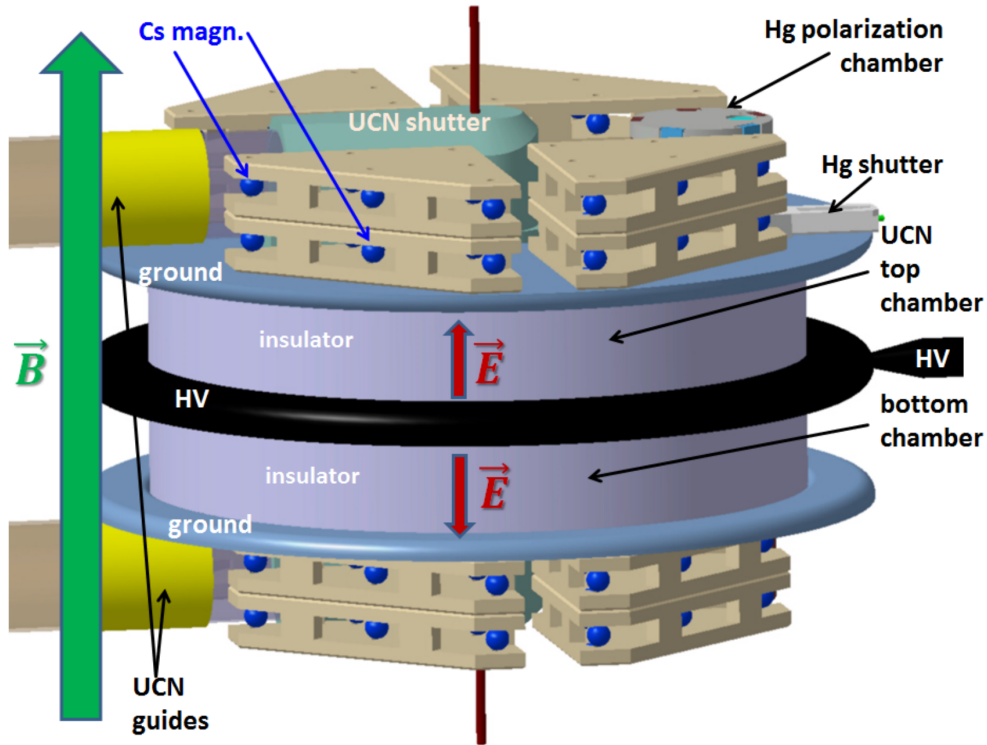


Figure 21: Double chamber design [2].

One can see that the precession chamber pictured in the Fig. 21 features fields  $\vec{E}$  and  $\vec{B}$  that are codirectional in one chamber and contradirectional in another. In both chambers the neutron can be described with the Hamiltonian from Eq. 1.1. Let's take a look at its Larmor precession.



In the case of the **codirectional** fields we can write

$$h\nu_{\uparrow\uparrow} = -2 (\mu_n B_{\uparrow\uparrow} + d_n E_{\uparrow\uparrow}) . \quad (2.3)$$

If the fields are **contradirectional** we will get

$$h\nu_{\uparrow\downarrow} = -2 (\mu_n B_{\uparrow\downarrow} - d_n E_{\uparrow\downarrow}) . \quad (2.4)$$

By combining Eq. 2.3 and Eq. 2.4 we can express the neutron electric dipole moment  $d_n$  through the fields  $E$  and  $B$ , magnetic moment  $\mu_n$  and Larmor frequencies  $\nu_{\uparrow\uparrow}$  and  $\nu_{\uparrow\downarrow}$  as

$$d_n = \frac{h (\nu_{\uparrow\downarrow} - \nu_{\uparrow\uparrow}) - 2\mu_n (B_{\uparrow\uparrow} - B_{\uparrow\downarrow})}{2 (E_{\uparrow\uparrow} + E_{\uparrow\downarrow})} . \quad (2.5)$$

*Why is the double chamber design important?* The idea of a double chamber pioneered [1] in 1980. The biggest improvement that it brings is the ability to measure the Larmor frequency for the codirectional and the contradirectional cases **simultaneously**. This feature allows to strongly reduce [2] any time dependent systematic effects.

*How does n2EDM look like schematically?* You can see it on the Fig. 22.

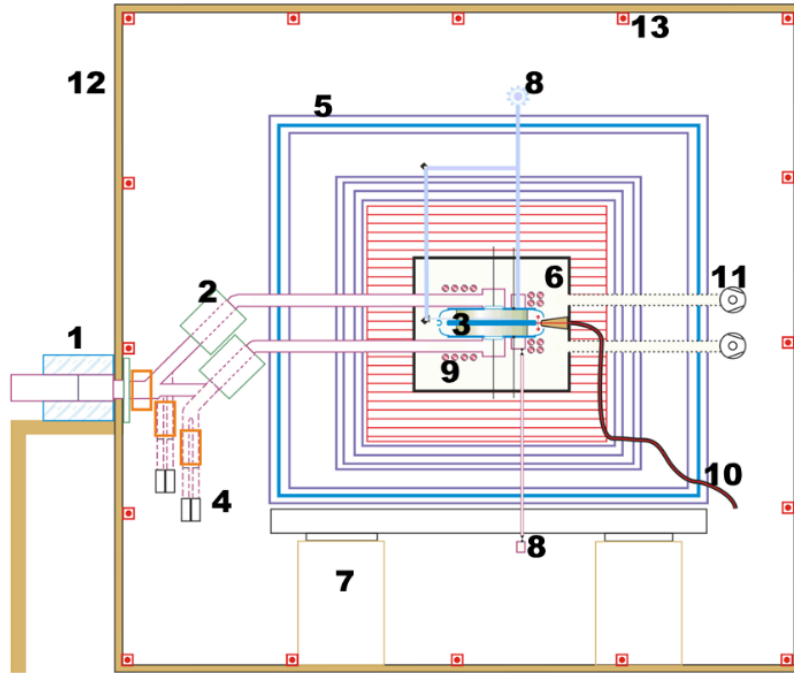


Figure 22: Schema of the experimental setup [2].

It features [2] the following:

- 
1. A 5 T superconductive polarizer magnet to align the spin of UCNs before they enter precession chambers
  2. Switches to control the filling and emptying of the UCN chambers
  3. Two precession chambers, portrayed in details on Fig. 21
  4. Four spin projection detectors — for every chamber we count amount of neutrons with spins up and down
  5. Magnetically shielded room to protect the storage chambers and the vacuum vessel from the external magnetic fields
  6. The vacuum vessel
  7. Four granite pillars supporting an *Al* plate
  8. The *Hg* magnetometer to measure the average magnetic fields
  9. The *Cs* magnetometer to measure the gradients of the magnetic field
  10. A high voltage cable
  11. The molecular pumps generating vacuum in the vacuum vessel
  12. Insulation shell, thermally stabilized by air-conditioning (not shown)
  13. Surrounding field compensation (SFC) system is designed to actively minimise the magnetic perturbations of the environment



**Figure 23:** Recent photo of the n2EDM experiment.

## Chapter 3

---

# The n2EDM DAQ system

---

In order to measure the neutron EDM and question the theoretical predictions mentioned in the Chapter 1 it is not enough to do a single cycle of the experimental setup from the Chapter 2. Everything comes at a price and pushing the limits of precision is not an exception. The analysis [16] of the previous nEDM experiment was based on data collected between 1998 and 2002, with each data-taking run lasting about 1–2 days. Thus a solid and performant data acquisition and control (DAQ) system is strongly needed.

*Why cannot we just reuse the DAQ from nEDM?* Apart from an experimental setup containing new modules and equipment there are [3] other reasons for us to consider designing a new generation of the DAQ system:

- Complexity of the codebase (one of the projects consisted of approximately 748 332 LabView VIs) was limiting modifications
- Inability to test or debug the DAQ system without the complete experimental environment, including the hardware, being connected. This was blocking data acquisition or the regular shift routine
- No standardisation in connecting various hardware devices to the DAQ, resulting in the code repetition
- Windows operating system lock-in

*What principles is the n2EDM DAQ built on?* The new **n2EDM** DAQ aims to address the main pain points and limitations of the old **nEDM** DAQ by selecting to follow the design ideas listed below:

- **TCP/IP communication:** by relying on the TCP/IP as the transport layer we can guarantee deliverability of messages in the same order as they were sent. By being an industrial standard it also simplifies connection of the new hardware nodes to the system. Not specifically TCP/IP-related bonus is that by optically decoupling our hardware it is possible to automatically provide electrical insulation

- **SCPI syntax:** all commands should be written following a human-readable specification [19]. This would standardise the environment and allow for the simpler debugging
- **Script control:** what can be better than a single SCPI command? Only a human-readable repeatable set of commands, providing an ability to program the behaviour of the experimental setup
- **Modularity:** usage of the small loosely connected independent modules improves robustness and encourages testing. Additionally if modules can be tested without the presence of each other it also becomes simpler to implement the End-to-End (E2E) testing of the whole system with the aim of being able to arbitrary replace physical equipment with its software-only analogs. This brings us closer to an ability to run the n2EDM experiment in a simulation mode
- **Linux based:** apart from being free (both as in “free as a speech” and “free as a beer”) the development ecosystem of Linux provides much more opportunities compared to the Windows one. Even though the recent release [13] of the Windows Subsystem for Linux made the difference less painful, one might still prefer to run the programs directly on Linux with zero overhead

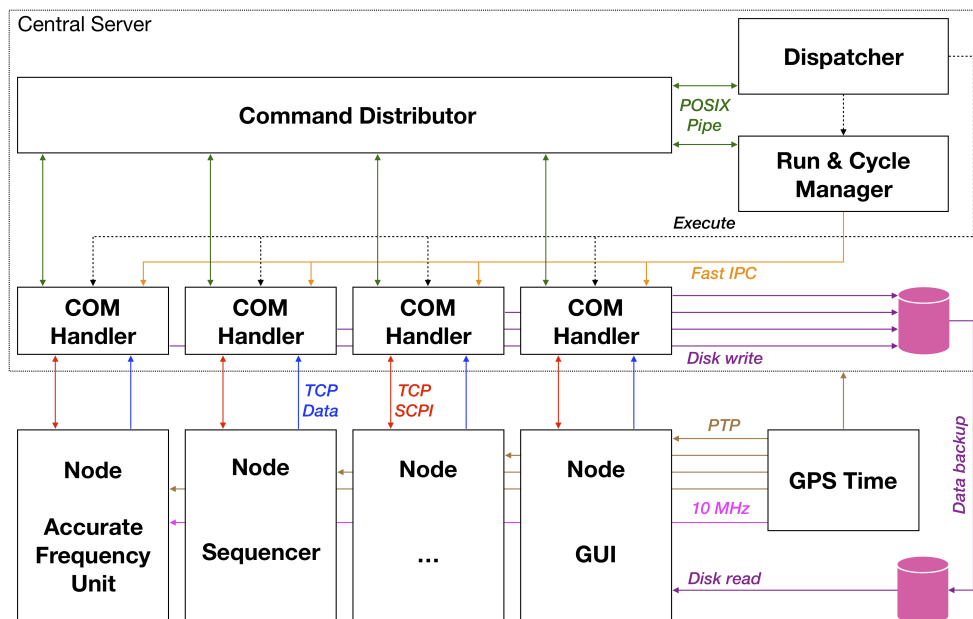


Figure 31: Schematic view of the n2EDM DAQ system. Based on [3].

Let’s take a closer look at some of the core components of the n2EDM DAQ system presented on the Fig. 31.

## 3.1 Command Distributor

<https://gitlab.com/n2edm/n2sim>

The distributor acts like a spinal cord of the system, combining the functions of the message bus and the modules registry. Every node registers itself with the distributor by providing its name, upstream and downstream FIFOs. For example, the GUI node might provide the following information to the distributor:

- **Module name:** GUI
- **Upstream file:** /n2edm/fifos/\_GUI\_upstream
- **Downstream file:** /n2edm/fifos/\_GUI\_downstream

Now another node wants to communicate with the GUI node. To do that it would send GUI:COMMAND to the distributor. Distributor would check whether the module with name GUI has been registered. If this is the case the message would be forwarded to the appropriate FIFO, in our example that would be /n2edm/fifos/\_GUI\_downstream.

Direct communication with the distributor is possible by writing into a hardcoded path /n2edm/\_n2sim\_input. User can simulate the behaviour described above by executing this command:

```
echo "GUI:COMMAND" >> /n2edm/_n2sim_input
```

## 3.2 Dispatcher

<https://gitlab.com/n2edm/n2dispatcher>

The dispatcher provides a generic mechanism for executing commands on the central server. It should be enough to have the distributor and the dispatcher running to boot up every other module located on the same computer. One could imagine the following flow:

1. Content of the repository <https://gitlab.com/n2edm/startscripts> is cloned into the /n2edm/startable folder of the central server
2. Scripts in this folder are made executable
3. Distributor and dispatcher are started
4. User sends n2dispatcher:startch 'runcyclenumber', '' to the distributor
5. Dispatcher executes /n2edm/startable/runcyclenumber and starts the run & cycle manager

Dispatcher is also reachable directly via TCP/IP. A possible scenario could be that the remote node boots up and asks the dispatcher to start a corresponding COM handler. This way this node would become included into the global communication system.

## 3.3 Run & Cycle Manager

<https://gitlab.com/n2edm/runcyclenumber>

This node records and distributes to other nodes information from the UCN source about the run and cycle number. This is needed to be able to store and analyse experimental data. Every node that writes binary data to disk uses this information for the distinguishable file names.

## 3.4 Data Storage

Since it is expected for the n2EDM experiment to generate loads of data it is absolutely necessary to preserve it for the further analysis. Initially data is written to the disk of the central server, however most likely it would not be able to fit the whole volume generated over 5–10 years, thus demanding a secondary larger storage. In order to simplify data management and avoid conflicts of the file versions information from the Run & Cycle Manager is used to transfer the files only after being completed. These static data samples would be distributed further among the partner universities and additional backups. However some nodes, like a GUI node, would need the data accessible in a nearly real-time mode. For that purpose a volatile copy of the most recent files would be provided with the expected delay being below 10 seconds.

## 3.5 Timing Infrastructure

One of the principal positions [3] of the n2EDM experiment is synchronous equidistant data sampling. We introduce a heartbeat sampling rate of 10 Hz meaning that every node must write its current state to the disk every 1/10 second and every node need to do it at the same absolute time as all other nodes. In other words, we want to be able to describe the joint state of the system 10 times per second. This approach helps to study systematic uncertainties, eases the correction of correlations and additionally enables us to represent the state evolution as a (FFT) spectrum or as an Allan deviation to simplify the data analysis.

This requires all nodes to have their time synchronised between each other. We solve it by using a central GPS controlled grandmaster clock which provides time to the nodes via the precision time protocol (PTP). The accuracy

guaranteed by the PTP should be enough for the most tasks, however some systems, like the Accurate Frequency Unit from the Fig. 31 additionally use the dedicated 10 MHz lines to further improve synchronisation veracity.

## 3.6 COM Handler

<https://gitlab.com/n2edm/n2comhandler>

In order to connect the remote nodes to the distributor we need to utilise their TCP/IP endpoint and stitch it together with the corresponding POSIX pipes. COM handler is a smart bridge that does that and additionally provides the following features:

- Auto-registers itself with the distributor
- Buffers the commands if the node is unavailable
- Allows to use the response of the node by other components via generic *REPLYTO* command
- Handles generation of the header and data files by using information from the run & cycle manager

As one can see, the COM handler is one of the essential parts of the n2EDM DAQ system and thus it demands a special attention to the design details.

## 3.7 Sequencer

<https://gitlab.com/n2edm/sequencer>

In order to program the DAQ system one needs a programming language and an environment that supports it. Sequencer provides the latter and aims to support a set of basic coding blocks that is flexible enough to describe arbitrary behaviour of the individual nodes and system as a whole:

- **Conditionals:** IF (...) THEN ... ELSE ... ENDIF
- **Cycles:** FOR (...) DO ... DONE
- **Variables (local value):** SET variable = expression
- **Variables (remote value):** SET variable = REQUEST(...)
- **Direct source manipulation:** (ADD/INSERT/REPLACE/DELETE)LINE
- **Navigation:** LABEL "... " and GOTO "... "
- **Lifecycle management:** SLEEP ...s, PAUSE, RESUME

The list above is non-exhaustive but nevertheless gives an impression of how one can control the n2EDM DAQ system. A more detailed explanation of the role and the capabilities of the sequencer can be found in [9].

## Chapter 4

---

# Features

---

Now that we have an understanding about the way the n2EDM DAQ system is expected to operate we can shift the focus of our discussion to the work that was conducted over the course of this thesis. In this chapter we will explain the way they were designed and implemented, additionally highlighting their capabilities as well as the limitations the future developers and/or users might face.

### 4.1 Support of the FOR loop

*Components affected:* **Sequencer** (Section 3.7).

*Motivation:* While the sequencer is able to execute the pseudo-FOR loop as shown on the Listing 4.1 we would still prefer to have it implemented as a standalone construction for the sake of simplicity and reducing the mental overhead of the users. Additionally the usage of GOTO command is generally considered [6] harmful, leading to the unstructured spaghetti code [4].

```
1 SET i = 0
2 LABEL "FOR_START"
3 IF $i < 5 THEN
4 ...
5 SET i = $i + 1
6 GOTO "FOR_START"
7 ELSE
8 ENDIF
```

**Listing 4.1:** Implementing FOR with GOTO

*Requirements:* We introduce 3 new commands that the sequencer should be able to handle:

- FOR (init; test; iterate) or FOR ((init; test; iterate)). Amount of whitespace characters is arbitrary, round brackets are allowed as a



part of every argument, but amount of ( and ) per argument needs to be balanced. Nested FOR blocks are allowed.

- **init**: an expression that is being executed once to init the state of the loop variable. It follows the semantic of the SET operator, for example `i = 0` is valid.
- **test**: an expression that produces a boolean value when evaluated. We run this check on every iteration, including the first one. Semantically similar to the argument of the IF block, so `$i < 5` is allowed. If the output is `False`, skipping the lines until a `DONE` block is encountered. Otherwise continues execution as usual.
- **iterate**: an expression that is used to modify the loop variable. Gets evaluated at the end of every cycle. It borrows the structure of the SET command, usually using the loop variable itself in a following manner: `i = $i + 1`
- **DO**: contrary to the name it does nothing. If encountered, must have a valid FOR statement in a previous line of the sequence.
- **DONE**: marks the end of the FOR loop. Redirects to the beginning of the loop for the next iteration.

We should be able to replace the Listing 4.1 with the code of the Listing 4.2.

```

1 FOR (i = 0; $i < 5; i = $i + 1)
2 DO
3 ...
4 DONE

```

**Listing 4.2:** Example of the FOR loop

*Implementation details:*

- Contrary to the implementation of the IF/ELSE/ENDIF blocks the FOR loop does not need to be complete all the times. Rather if we encounter FOR we evaluate the FOR.test condition and continue executing or skipping the next lines based on the condition's output until the matching DONE is found
- Current scope of the variables is always global, so one might prefer to use different iteration variables for nested loops to prevent confusing results
- Sequencer supports powerful inline editing/removal of the lines. We do not attempt to prevent cases like GOTO from the loop body or REMOVELINE of FOR while iterating. However the sequencer will always try to find the root of the problem and notify the user about it
- Default strategy for the non-parseable lines is to skip them

## 4.2 Improvement of the REQUEST command

*Components affected:* **Sequencer** (Section 3.7).

*Motivation:* while the core functionality of this feature was provided by [9] the implementation contained a few undesired restrictions:

- At any given moment of time only 1 request could have been pending
- In order to pause the execution while request was in flight, functionality of SLEEP command was used. This would have lead to unexpected results when combining SLEEP, PAUSE, RESUME and REQUEST blocks.
- Without the Feature 4.3 it could have not been tested thoroughly and contained a number of bugs.

*Requirements:* sequencer needs to support the SET `variable = REQUEST(question, format, timeout, default)` instruction with the semantics as described below:

- `question`: required quoted string starting with `:`. Represents the node name and the command that should return the value that we are interested in. Example: `":HV:OUTPUT:VOLTAGE?"`.
- `format`: optional string (%0 if not provided). In case the target node returns multiple comma-separated values this argument in the form of %n selects the n-th element starting with 1. Special case %0 instructs to return the node response as a whole.
- `timeout`: optional int/double (1 if not provided). Maximum amount of seconds the sequencer needs to wait for the answer.
- `default`: optional int/double (0 if not provided). The value used in case the request does not return an answer within the `REQUEST.timeout`.

First step in getting the answer is sending the request itself. Let's discuss how every REQUEST statement should be processed before getting sent to the distributor. `REQUEST(" :HV:OUTPUT:VOLTAGE?", %2, 1, 0)` would serve us as an example:

1. We select the `nodeName` from the `REQUEST.question`, in our case it would be the `:HV`, leaving `:OUTPUT:VOLTAGE?` as a `nodeCommand`
2. We create a quoted `argumentsString` which looks like

```
"sequencerNodeName:RESULT requestId, REQUEST.format"
```

- `sequencerNodeName` is the name with which the sequencer was registered with the distributor, let's assume it is SEQUENCER.
- `requestId` is a unique positive integer used to distinguish the received answers, we would select 17.

## 4.2. Improvement of the REQUEST command

---

In our case `argumentsString` would be `"SEQUENCER:RESULT 17, %2"`

3. We create a final `requestCommand` of the shape

```
nodeName:REPLYTO(argumentsString)nodeCommand
```

or for the example that we have started with

```
HV:REPLYTO("SEQUENCER:RESULT 17, %2"):OUTPUT:VOLTAGE?
```

4. The `requestCommand` is sent to the distributor.

Second step is receiving the answer. To do that, sequencer supports the `RESULT` command. Following the example we expect to receive a string `RESULT 17, remoteValue` and execute `SET variable = remoteValue`. One could notice that the node answer looks like if the `argumentsString` from above would have been used as a template.

Sequencer supports 2 sources of commands, called external and internal. External commands are the one that arrive from the distributor. Internal commands come from a sequence of commands that the sequencer stores in memory. A command can be loaded into this sequence from the external commands, for example with `ADDLINE "..."`. For this feature we are only interested in a subset of commands from both sides:

- **External:**

- `PAUSE`. Pauses the execution of all internal commands until the `RESUME` is received.
- `RESUME`. Resumes the execution of all internal commands if paused by `PAUSE`.
- `RESTART`. New command, removes information about all requests, rewinds the internal sequence to the first line, cancels any blocks introduced by `PAUSE` or `SLEEP`. **Preserves** the state of all variables.
- `SET variable = REQUEST(...)`. Pauses the execution of the internal commands until either an answer is returned or the timeout of the corresponding request was reached, whatever event happens earlier. Sets the variable to the received or default value.

- **Internal:**

- `SLEEP ...s`. Pauses the execution of the internal sequence for a given amount of seconds. Is **not** equal to pausing the sequencer with `PAUSE`.
- `SET variable = REQUEST(...)`. Same logic as if it would have been executed directly from the external source.

*Implementation details:*

- The execution of the internal sequence can be paused independently by multiple events:
  1. PAUSE and reaching the end of the sequence set the internal `isPaused` flag to `True`.
  2. SLEEP sets the `isSleeping` flag to `True` and saves the time at which it should be set back to `False`.
  3. At least 1 pending request is in flight.

The execution continues only in case of none of these blocking conditions being present.

- A somewhat unexpected consequence of sharing the SET logic is that the REQUEST can be also used as part of the Feature 4.1. Both `FOR.init` and `FOR.iterate` can be REQUESTed, making the following line valid:

```
FOR (i = REQUEST(...); $i < 5; i = REQUEST(...))
```

## 4.3 Support of the REPLYTO command

*Components affected:* **COM Handler** (Section 3.6)

*Motivation:* in order to create a truly interconnected DAQ system it is not enough to be able to send SCPI commands to our nodes. We also need to be able to use their responses for a feedback loop of any kind. By implementing this feature on the COM handler level it would be possible to return a response of any node.

*Requirements:* following the contract of the REQUEST Feature 4.2 the COM handler needs to support a `:REPLYTO` command. We would like to achieve a behaviour as described below:

- Only one `:REPLYTO` command can be processed at a time. When it is executed the COM handler should continue accepting commands from the distributor. These commands would be buffered in memory until the pending `:REPLYTO` command completes.
- Given the example from the Feature 4.2

```
HV:REPLYTO("SEQUENCER:RESULT 17, %2"):OUTPUT:VOLTAGE?
```

we will send `OUTPUT:VOLTAGE?` to the node and pause the further execution of the SCPI commands.

- Upon executing the `:REPLYTO` command the COM handler sets a time window based on the integer `scpiResponseTimeoutMs` value from the config file `conf_n2comhandler.cfg`. We have 3 cases to handle:

- If nothing came over the SCPI connection with the node during the waiting interval then it means that :REPLYTO has timed out. We resume the execution of the SCPI commands from the distributor from the next command, if any.
- If a complete message that starts with `:` was received then we assume that the node is trying to communicate with other components of the system. Such message is forwarded to the distributor directly as is and does not influence the :REPLYTO feature flow.
- Otherwise if a complete message was received while we are still within the time window of waiting for response then we consider it to be an answer to the :REPLYTO being in flight.
- If a node answer that does not start with `:` was received outside of the :REPLYTO timeout the COM handler would skip it and print a warning.
- If a complete SCPI response was received in time then our next task is to parse it. A node might decide to return multiple comma-separated values. We split the message into chunks by using the rules below:
  - Message is scanned from left to right
  - Splittable parts are separated by commas `,`
  - Escaped commas `\,` are not separators
  - Commas that appear inside of a string are not separators
  - String starts with a quotation mark `"`
  - String might end with a quotation mark `"`. If there is no closing quotation mark, we consider the string to end at the end of the message. So in `"1,2,3` none of the commas would be a separator
  - Escaped quotation marks `\"` are not considered quotation marks
- After splitting the message we need to extract the correct answerValue by using the format argument, in our example that would be %2
  - %0 means that no splitting is required and answerValue is set to the received message as a whole
  - %n means that answerValue is set to the n-th part of the split message with count starting with 1. If the message contained no separators then %0 and %1 produce the equal output. If the split message contains less than n parts we set answerValue to an empty unquoted string.

- After extracting the `answerValue` we are ready to send back the answer. Let's assume that `answerValue` = 289. Following our example, the COM handler will need to send `:SEQUENCER:RESULT 17, 289` over FIFO to the distributor.

*Implementation details:*

- In the *requirements* above one can often see a combination of words **complete message**. Neither TCP/IP nor FIFO files guarantee that the message sent as one would be received as one. All SCPI messages, such as

- Commands from the distributor
- Answers to the distributor
- Command to the node
- Answers from the node

must use a newline `\n` symbol to indicate the ending of the command. Internally we have 2 string buffers: for the commands from the distributor and the answers from the node. Every received message is placed into a corresponding buffer. On every tick we attempt to select one **complete** message by splitting once on the newline symbol `\n` starting from the beginning of the buffer. In case of success this **complete** message is placed in a corresponding sequence and treated as a SCPI command/answer. The SCPI answers buffer is not cleaned on the `:REQUEST` timeout.

- We consider a SCPI response to be an answer to `:REPLYTO` if it was received during the timeout window. Even though the default value of `scpiResponseTimeoutMs` being 5000 should be enough for the node to return the answer in time, we cannot guarantee it. Thus a very late answer that comes during the execution of the **next** `:REPLYTO` command would be sent as an answer to the distributor.
- Combining both points we might get a very confusing situation:
  1. COM handler executes first `:REPLYTO`
  2. Node sends back `verylonganswer\n`
  3. The answer does not fit in a single package and the COM handler received only `very` and adds it to the answer buffer.
  4. Due to the network error the connection between the node and the COM handler is broken. First `:REPLYTO` times out.
  5. Network connection is reestablished
  6. COM handler executes second `:REPLYTO`

7. Node sends back `shortanswer\n`
8. Depending on the node logic, 2 situations would be possible:
  - Node tries to send the remaining `longanswer\n` first. COM handler would have an answer buffer `verylonganswer\n` and send it as a result of the second `:REPLYTO`. The received message `shortanswer\n` would be appended to the buffer and depending on timing either ignored or sent as a reply to the third `:REPLYTO`
  - Node skips the `longanswer\n` and decides to respond only with `shortanswer\n`. COM handler would have an answer buffer `veryshortanswer\n` and return it as a result of the second `:REPLYTO`.

One can see that with a lot of requests and slow nodes that might become an issue, thus the COM handler would print a warning if its queue of the pending SCPI commands has more than one item.

---

## Bibliography

---

- [1] I. S. Altarev, Yu V. Borisov, A. B. Brandin, A. I. Egorov, V. F. Ezhov, S. N. Ivanov, V. M. Lobashov, V. A. Nazarenko, G. D. Porsev, V. L. Ryabov, A. P. Serebrov, and R. R. Taldaev. A search for the electric dipole moment of the neutron using ultracold neutrons. *Nuclear Physics, Section A*, 341(2):269–283, 1980. doi:[10.1016/0375-9474\(80\)90313-9](https://doi.org/10.1016/0375-9474(80)90313-9).
- [2] I.S. Altarev, Yu.V. Borisov, A.B. Brandin, A.I. Egorov, V.F. Ezhov, S.N. Ivanov, V.M. Lobashov, V.A. Nazarenko, G.D. Porsev, V.L. Ryabov, A.P. Serebrov, and R.R. Taldaev. A search for the electric dipole moment of the neutron using ultracold neutrons. *Nuclear Physics A*, 341(2):269–283, jun 1980. URL: <http://arxiv.org/abs/1811.02340><https://linkinghub.elsevier.com/retrieve/pii/0375947480903139>, arXiv:1811.02340, doi:[10.1016/0375-9474\(80\)90313-9](https://doi.org/10.1016/0375-9474(80)90313-9).
- [3] Georg Bison, Jochen Krempel, Dieter Ries, Romain Virost, and Jacek Zejma. N2EDMDAQTD — second neutron electric dipole moment experiment data acquisition technical design report v0.9. Technical report, 2018.
- [4] David Cram and Paul Hedley. Pronouns and procedural meaning: The relevance of spaghetti code and paranoid delusion. *Oxford University Working Papers in Linguistics, Philology and Phonetics*, 10:187–210, 2005. URL: <https://www.ling-phil.ox.ac.uk/files/owp2005.pdf#page=187>.
- [5] Alvaro de Rújula and Rolf Landua. Antimatter Questions & Answers, 2001. URL: <https://archive.ph/20080421220420/http://livefromcern.web.cern.ch/livefromcern/antimatter/FAQ1.html>.
- [6] Edsger Wybe Dijkstra. Go-to statement considered harmful. *Communications of the ACM*, 11(3):147–148, 1968. URL: <http://www.cs.utexas.edu/users/EWD/ewd02xx/EWD215.PDF>.



- 
- [7] Dirk Dubbers and Michael G. Schmidt. The neutron and its role in cosmology and particle physics. *Reviews of Modern Physics*, 83(4), 2011. doi:[10.1103/RevModPhys.83.1111](https://doi.org/10.1103/RevModPhys.83.1111).
- [8] Enrico Fermi. Motion of neutrons in hydrogenous substances. *Ricerca Scientifica*, 7(2):13–52, 1936.
- [9] Elsa Germann. Software development for the Supervisory Control and Data Acquisition system of the n2EDM experiment. *Master Thesis*, ETH Zürich, 2019.
- [10] R. Golub and Steve K. Lamoreaux. Neutron electric-dipole moment, ultracold neutrons and polarized  $^3\text{He}$ . *Physics Reports*, 237(1):1–62, 1994. doi:[10.1016/0370-1573\(94\)90084-1](https://doi.org/10.1016/0370-1573(94)90084-1).
- [11] R. Golub and J. M. Pendlebury. The electric dipole moment of the neutron. *Contemporary Physics*, 13(6):519–558, nov 1972. URL: <http://www.tandfonline.com/doi/abs/10.1080/00107517208228016>, doi:[10.1080/00107517208228016](https://doi.org/10.1080/00107517208228016).
- [12] I. B. Khriplovich and A. R. Zhitnitsky. What is the value of the neutron electric dipole moment in the Kobayashi-Maskawa model? *Physics Letters B*, 109(6):490–492, 1982. doi:[10.1016/0370-2693\(82\)91121-2](https://doi.org/10.1016/0370-2693(82)91121-2).
- [13] Craig Loewen. Announcing WSL 2, 2019. URL: <https://devblogs.microsoft.com/commandline/announcing-wsl-2/>.
- [14] E. Noether. Invariante Variationsprobleme. *Nachrichten von der Gesellschaft der Wissenschaften zu Göttingen, Mathematisch-Physikalische Klasse*, 1918:235–257, 1918. URL: <http://eudml.org/doc/59024>.
- [15] J. M. Pendlebury, S. Afach, N. J. Ayres, C. A. Baker, G. Ban, G. Bison, K. Bodek, M. Burghoff, P. Geltenbort, K. Green, W. C. Griffith, M. van der Grinten, Z. D. Grujić, P. G. Harris, V. Hélaine, P. Iaydjiev, S. N. Ivanov, M. Kasprzak, Y. Kermaidic, K. Kirch, H.-C. Koch, S. Komposch, A. Kozela, J. Krempel, B. Lauss, T. Lefort, Y. Lemièrre, D. J. R. May, M. Musgrave, O. Naviliat-Cuncic, F. M. Piegsa, G. Pignol, P. N. Prashanth, G. Quémener, M. Rawlik, D. Rebreyend, J. D. Richardson, D. Ries, S. Roccia, D. Rozpedzik, A. Schnabel, P. Schmidt-Wellenburg, N. Severijns, D. Shiers, J. A. Thorne, A. Weis, O. J. Winston, E. Wursten, J. Zejma, and G. Zsigmond. Revised experimental upper limit on the electric dipole moment of the neutron. *Physical Review D*, 92(9):092003, nov 2015. URL: <https://link.aps.org/doi/10.1103/PhysRevD.92.092003>, arXiv:[1509.04411](https://arxiv.org/abs/1509.04411), doi:[10.1103/PhysRevD.92.092003](https://doi.org/10.1103/PhysRevD.92.092003).

- 
- [16] J. M. Pendlebury, W. Heil, Yu. Sobolev, P. G. Harris, J. D. Richardson, R. J. Baskin, D. D. Doyle, P. Geltenbort, K. Green, M. G. D. van der Grinten, P. S. Iaydjiev, S. N. Ivanov, D. J. R. May, and K. F. Smith. Geometric-phase-induced false electric dipole moment signals for particles in traps. *Physical Review A*, 70(3):032102, sep 2004. URL: <https://link.aps.org/doi/10.1103/PhysRevA.70.032102>, doi:10.1103/PhysRevA.70.032102.
- [17] D. Sakharov. Violation of  $CP$  invariance,  $C$  asymmetry, and baryon asymmetry of the universe. *Soviet Physics - Uspekhi*, 34(5):392–393, 1991. doi:10.1070/PU1991v034n05ABEH002497.
- [18] Julian Schwinger. The Theory of Quantized Fields. I. *Physical Review*, 82(6):914–927, jun 1951. URL: <https://link.aps.org/doi/10.1103/PhysRev.82.914>, doi:10.1103/PhysRev.82.914.
- [19] SCPI Consortium. *Standard Commands for Programmable Instruments (SCPI)*, volume 1. 1999. URL: <http://www.ivifoundation.org/docs/SCPI-99.PDF>.
- [20] M. Tanabashi, K. Hagiwara, K. Hikasa, K. Nakamura, Y. Sumino, F. Takahashi, J. Tanaka, K. Agashe, G. Aielli, C. Amsler, M. Antonelli, D. M. Asner, H. Baer, Sw. Banerjee, R. M. Barnett, T. Basaglia, C. W. Bauer, J. J. Beatty, V. I. Belousov, J. Beringer, S. Bethke, A. Bettini, H. Bichsel, O. Biebel, K. M. Black, E. Blucher, O. Buchmuller, V. Burkert, M. A. Bychkov, R. N. Cahn, M. Carena, A. Ceccucci, A. Cerri, D. Chakraborty, M.-C. Chen, R. S. Chivukula, G. Cowan, O. Dahl, G. D’Ambrosio, T. Damour, D. de Florian, A. de Gouvêa, T. DeGrand, P. de Jong, G. Dissertori, B. A. Dobrescu, M. D’Onofrio, M. Doser, M. Drees, H. K. Dreiner, D. A. Dwyer, P. Eerola, S. Eidelman, J. Ellis, J. Erler, V. V. Ezhela, W. Fetscher, B. D. Fields, R. Firestone, B. Foster, A. Freitas, H. Gallagher, L. Garren, H.-J. Gerber, G. Gerbier, T. Gershon, Y. Gershtein, T. Gherghetta, A. A. Godizov, M. Goodman, C. Grab, A. V. Gritsan, C. Grojean, D. E. Groom, M. Grünewald, A. Gurtu, T. Gutsche, H. E. Haber, C. Hanhart, S. Hashimoto, Y. Hayato, K. G. Hayes, A. Hebecker, S. Heinemeyer, B. Heltsley, J. J. Hernández-Rey, J. Hisano, A. Höcker, J. Holder, A. Holtkamp, T. Hyodo, K. D. Irwin, K. F. Johnson, M. Kado, M. Karliner, U. F. Katz, S. R. Klein, E. Klempt, R. V. Kowalewski, F. Krauss, M. Kreps, B. Krusche, Yu. V. Kuyanov, Y. Kwon, O. Lahav, J. Laiho, J. Lesgourgues, A. Liddle, Z. Ligeti, C.-J. Lin, C. Lippmann, T. M. Liss, L. Littenberg, K. S. Lugovsky, S. B. Lugovsky, A. Lusiani, Y. Makida, F. Maltoni, T. Mannel, A. V. Manohar, W. J. Marciano, A. D. Martin, A. Masoni, J. Matthews, U.-G. Meißner, D. Milstead, R. E. Mitchell, K. Mönig, P. Molaro, F. Moortgat, M. Moskovic, H. Murayama, M. Narain, P. Nason, S. Navas, M. Neubert, P. Nevski, Y. Nir,

K. A. Olive, S. Pagan Griso, J. Parsons, C. Patrignani, J. A. Peacock, M. Pennington, S. T. Petcov, V. A. Petrov, E. Pianori, A. Piepke, A. Pomarol, A. Quadt, J. Rademacker, G. Raffelt, B. N. Ratcliff, P. Richardson, A. Ringwald, S. Roesler, S. Rolli, A. Romaniouk, L. J. Rosenberg, J. L. Rosner, G. Rybka, R. A. Ryutin, C. T. Sachrajda, Y. Sakai, G. P. Salam, S. Sarkar, F. Sauli, O. Schneider, K. Scholberg, A. J. Schwartz, D. Scott, V. Sharma, S. R. Sharpe, T. Shutt, M. Silari, T. Sjöstrand, P. Skands, T. Skwarnicki, J. G. Smith, G. F. Smoot, S. Spanier, H. Spieler, C. Spiering, A. Stahl, S. L. Stone, T. Sumiyoshi, M. J. Syphers, K. Terashi, J. Terning, U. Thoma, R. S. Thorne, L. Tiator, M. Titov, N. P. Tkachenko, N. A. Törnqvist, D. R. Tovey, G. Valencia, R. Van de Water, N. Varelas, G. Venanzoni, L. Verde, M. G. Vincter, P. Vogel, A. Vogt, S. P. Wakely, W. Walkowiak, C. W. Walter, D. Wands, D. R. Ward, M. O. Wascko, G. Weiglein, D. H. Weinberg, E. J. Weinberg, M. White, L. R. Wiencke, S. Willocq, C. G. Wohl, J. Womersley, C. L. Woody, R. L. Workman, W.-M. Yao, G. P. Zeller, O. V. Zenin, R.-Y. Zhu, S.-L. Zhu, F. Zimmermann, P. A. Zyla, J. Anderson, L. Fuller, V. S. Lugovsky, and P. Schaffner. Review of Particle Physics. *Physical Review D*, 98(3):030001, aug 2018. URL: <https://doi.org/10.1103/PhysRevD.98.030001><https://link.aps.org/doi/10.1103/PhysRevD.98.030001>, doi:10.1103/PhysRevD.98.030001.

- [21] Ya. B. Zeldovich. Storage of cold neutrons. *JETP*, 36(6):1952–1953, 1959.



Eidgenössische Technische Hochschule Zürich  
Swiss Federal Institute of Technology Zurich

## Declaration of originality

The signed declaration of originality is a component of every semester paper, Bachelor's thesis, Master's thesis and any other degree paper undertaken during the course of studies, including the respective electronic versions.

Lecturers may also require a declaration of originality for other written papers compiled for their courses.

---

I hereby confirm that I am the sole author of the written work here enclosed and that I have compiled it in my own words. Parts excepted are corrections of form and content by the supervisor.

**Title of work** (in block letters):

**Authored by** (in block letters):

*For papers written by groups the names of all authors are required.*

**Name(s):**

**First name(s):**


With my signature I confirm that

- I have committed none of the forms of plagiarism described in the '[Citation etiquette](#)' information sheet.
- I have documented all methods, data and processes truthfully.
- I have not manipulated any data.
- I have mentioned all persons who were significant facilitators of the work.

I am aware that the work may be screened electronically for plagiarism.

**Place, date**

**Signature(s)**


*For papers written by groups the names of all authors are required. Their signatures collectively guarantee the entire content of the written paper.*