



A **NORBIT** Company

PRODUCT DOCUMENTATION

I/O interface cards

This PDF is generated automatically from the online documentation and contains the same information. The online version is always the most up to date:

<https://docs.waterlinked.com/io-interface-cards/io-interface-rev2/>


Content last changed 2026-05-15 · f386255

Contents

Revision 2	3
Revision 3	5
Revision 4	7
Revision 6	9

Revision 2

Revision 2

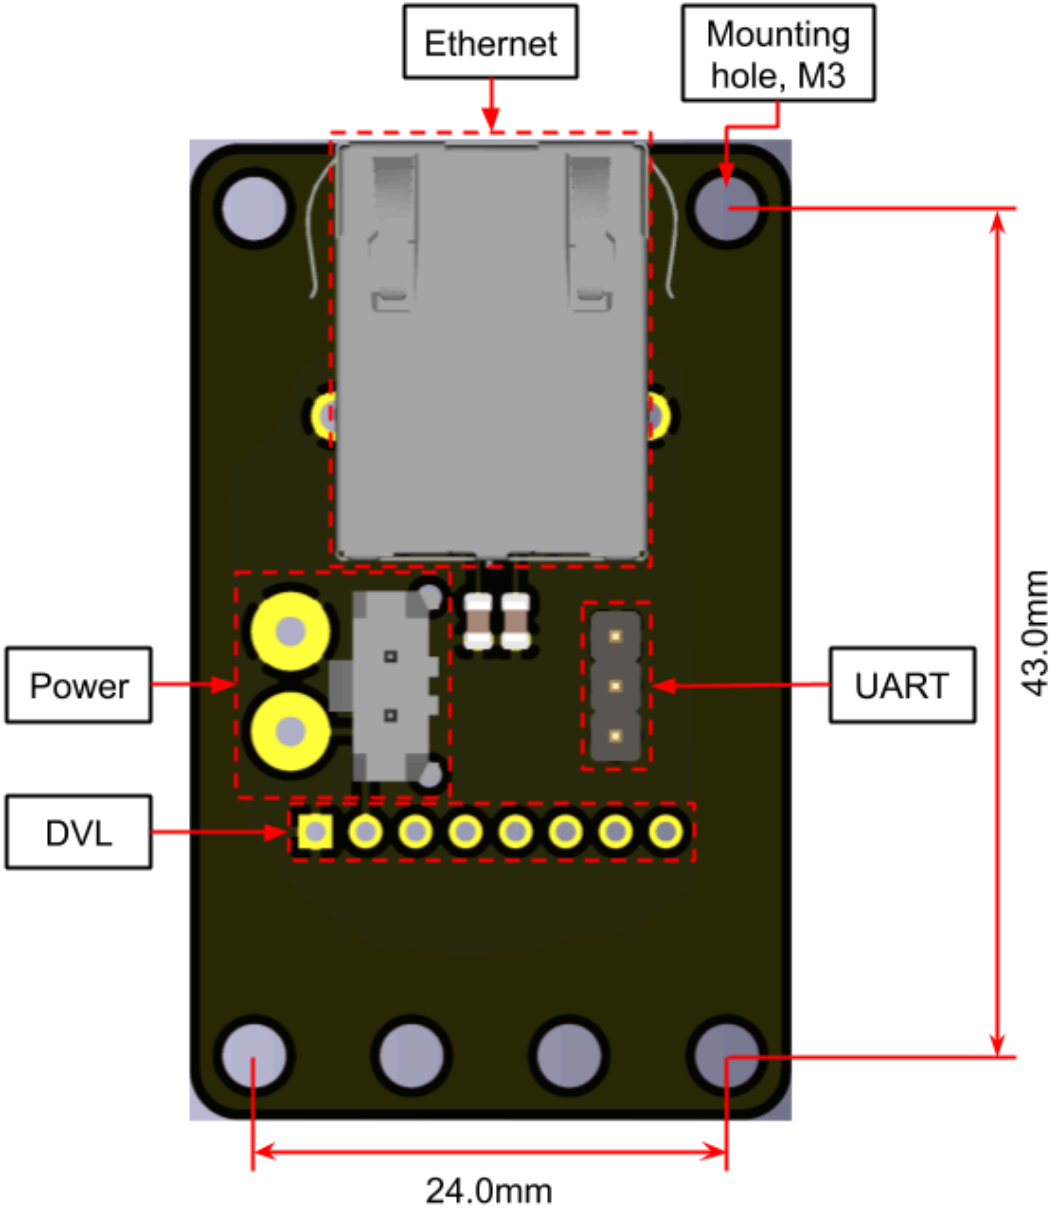

Dimensions: 30.6 mm x 50 x 18.6 mm (Width x Height x Thickness)

Connector	Function	Comment
RJ45 (8P8C)	Ethernet	10/100 BASE-T
3x1 header	Serial	TX, RX, GND
Molex Micro-Fit 3.0	Power	10 - 30 VDC


Connector	Function	Comment
2x Ø1.5mm pads	Alt. power	

 **Note**

The Molex Micro-Fit 3.0 on revision 2 is prone to damage by excessive sideways force. Take care not the yank the power cable when connected.

Revision 3

Revision 3

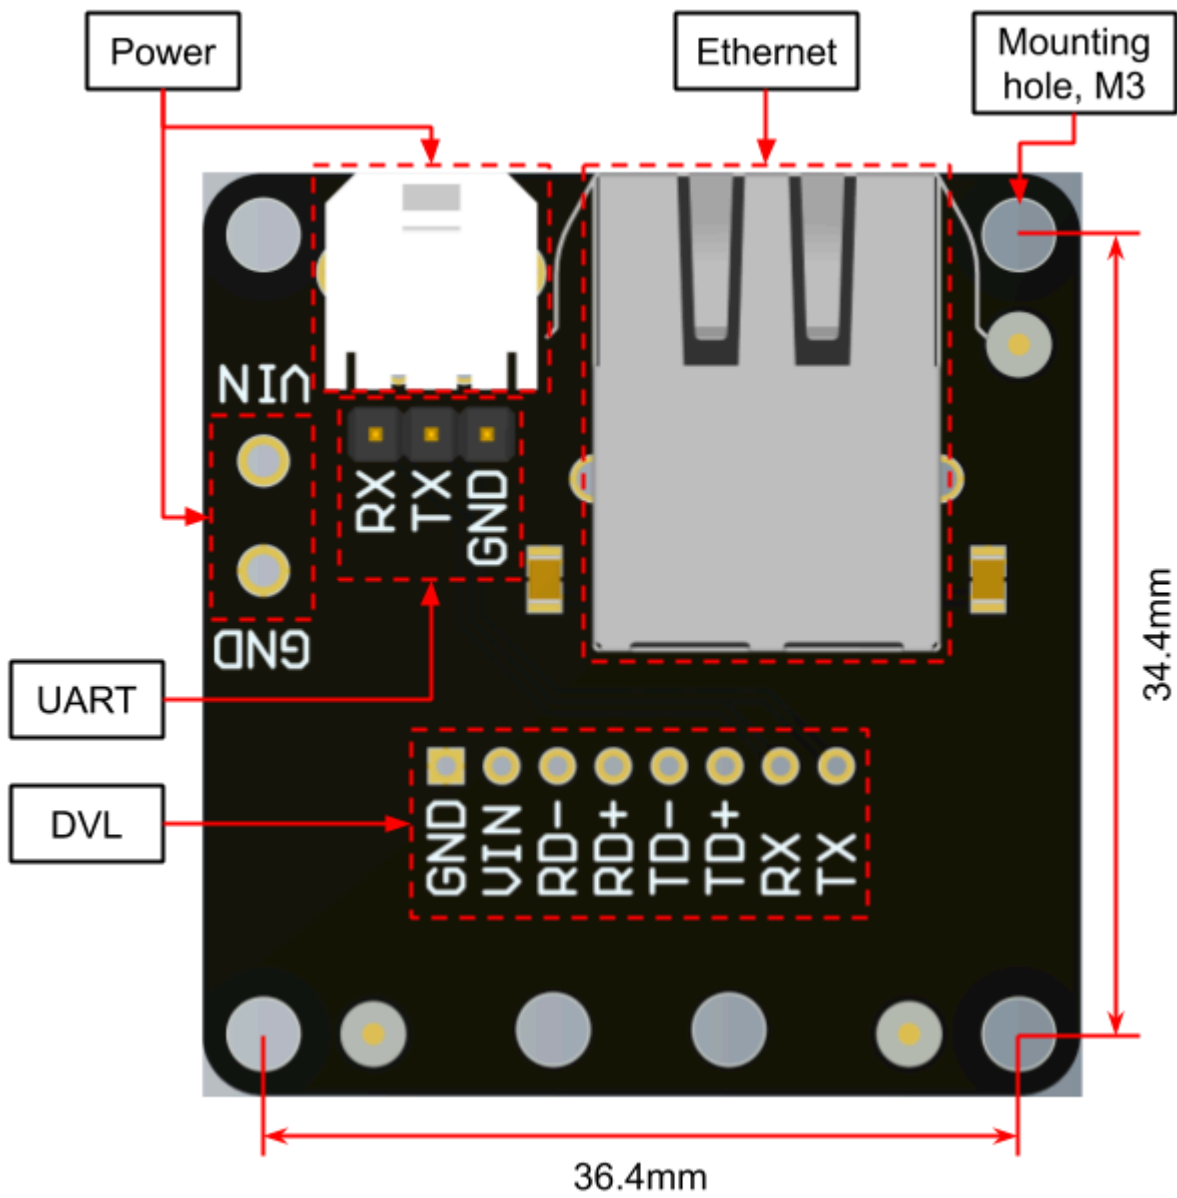

Dimensions: 40 x 42 x 18.6 mm (Width x Height x Thickness)

Connector	Function	Comment
RJ45 (8P8C)	Ethernet	10/100 BASE-T
3x1 header	Serial	TX, RX, GND
Molex Micro-Fit 3.0	Power	10 - 30 VDC

Connector	Function	Comment
2x Ø1.5mm pads	Alt. power	Fits Würth 691137710002


Revision 4

I/O interface

The I/O Interface provides a simple means of connection to Water Linked products. It provides magnetics for the ethernet connection and utilizes the Molex Micro-Fit 3.0 power connector (Part number: 436500204) which is standard for Water Linked products. Female connectors is listed under [Mates with Part\(s\)](#).

There currently exists three revisions of the I/O Interface. Revision 2 and 3 are electrically identical. Revision 4 has an integrated USB-to-UART interface and a micro USB port.

Revision 4

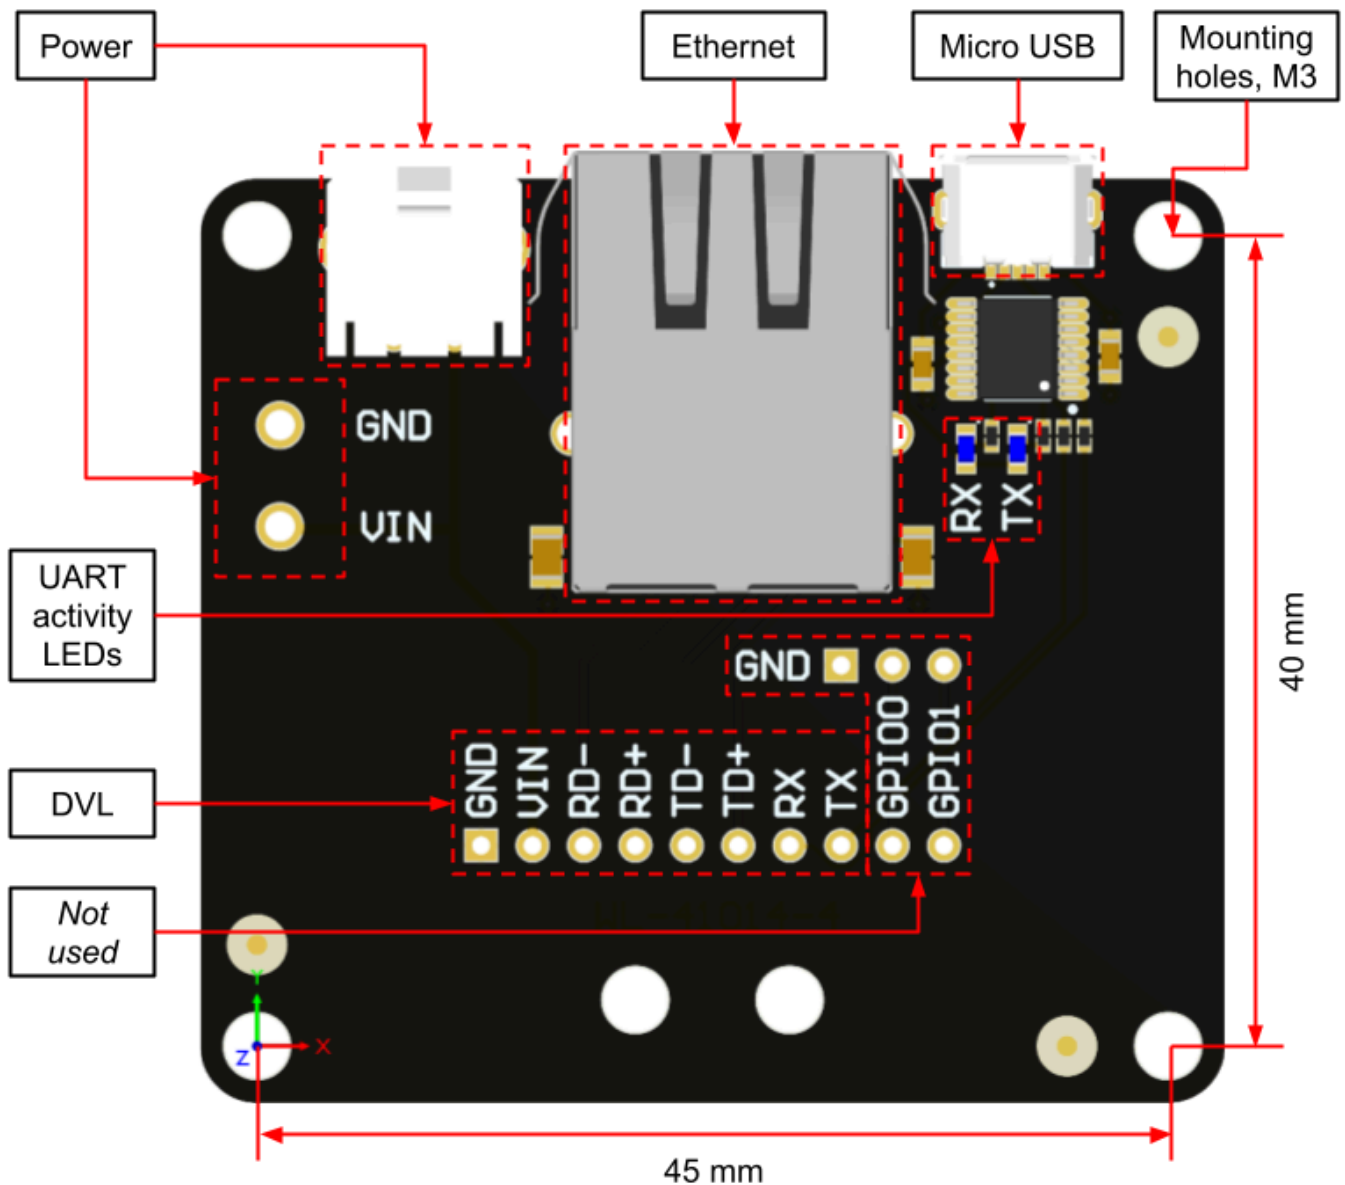

Dimensions: 50.6 x 47 x 18.6 mm (Width x Height x Thickness)

Connector	Function	Comment
RJ45 (8P8C)	Ethernet	10/100 BASE-T
Micro USB	Serial	FTDI based
Molex Micro-Fit 3.0	Power	10 - 30 VDC
2x Ø1.5mm pads	Alt. power	Fits Würth 691137710002

Revision 6

I/O interface


The I/O Interface provides a simple means of connection to Water Linked products. It provides power and connection interfaces for Water Linked sensors during development.

It utilizes the Molex Micro-Fit 3.0 power connector (Part number: 436500228). Female connectors are listed under [Mates with Part\(s\)](#).

There currently exist multiple revisions of the I/O Interface. Revision 2 and 3 are electrically identical. Revision 4 has an integrated USB-to-UART interface and a micro USB port. Revision 6 has upgraded connection options, including screw terminals and RS-232.

I/O interfaces have the part number WL-31014-X, where X is the revision number.

Revision 6

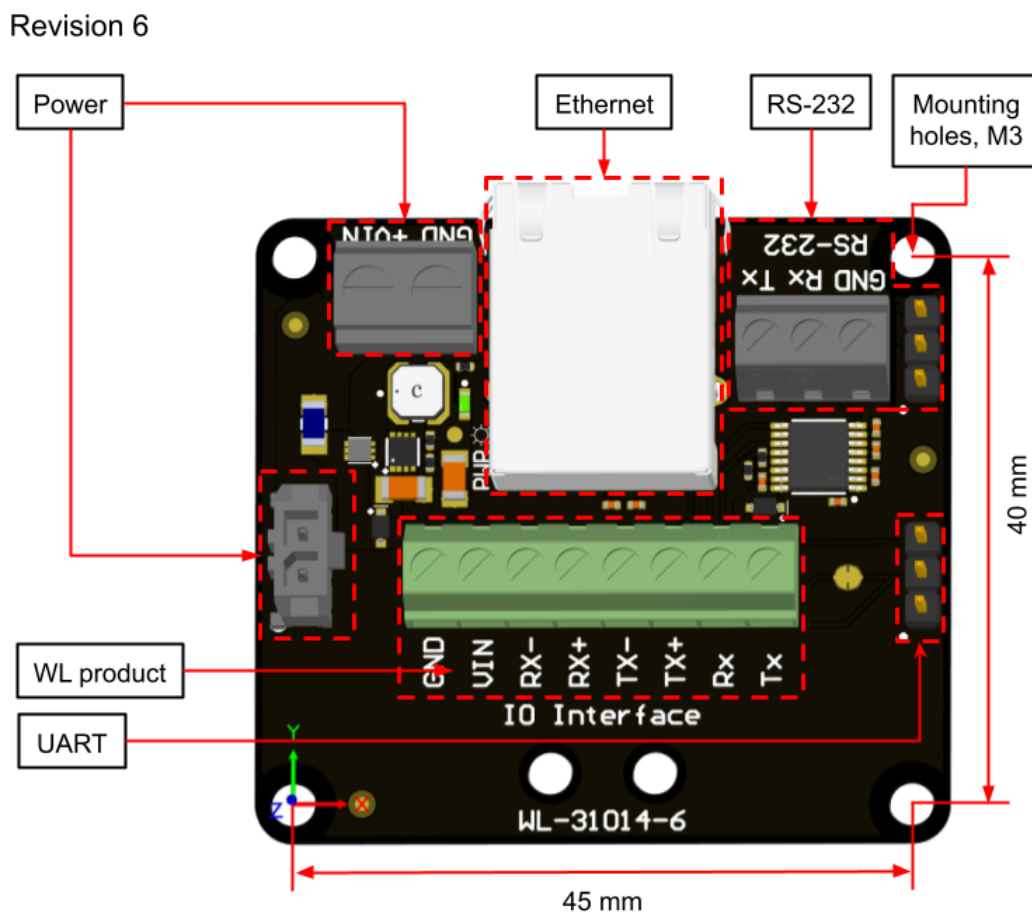

Dimensions: 50.6 x 47 x 18.6 mm (Width x Height x Thickness)

Connector	Function	Comment
RJ45 (8P8C)	Ethernet	10/100 BASE T
Screw Terminal or CONN HEADER VERT 3POS 2.54MM	RS 232	
CONN HEADER VERT 3POS 2.54MM	UART	
Molex Micro Fit 3.0 or 5 mm Screw Terminal	Power	10 to 30 VDC