


Sheet: /MCU/
File: mcu.kicad_sch

Title:


Size: A4
KiCad E.D.A. kicad (6.0.1)

Date:


Rev:
Id: 2/5

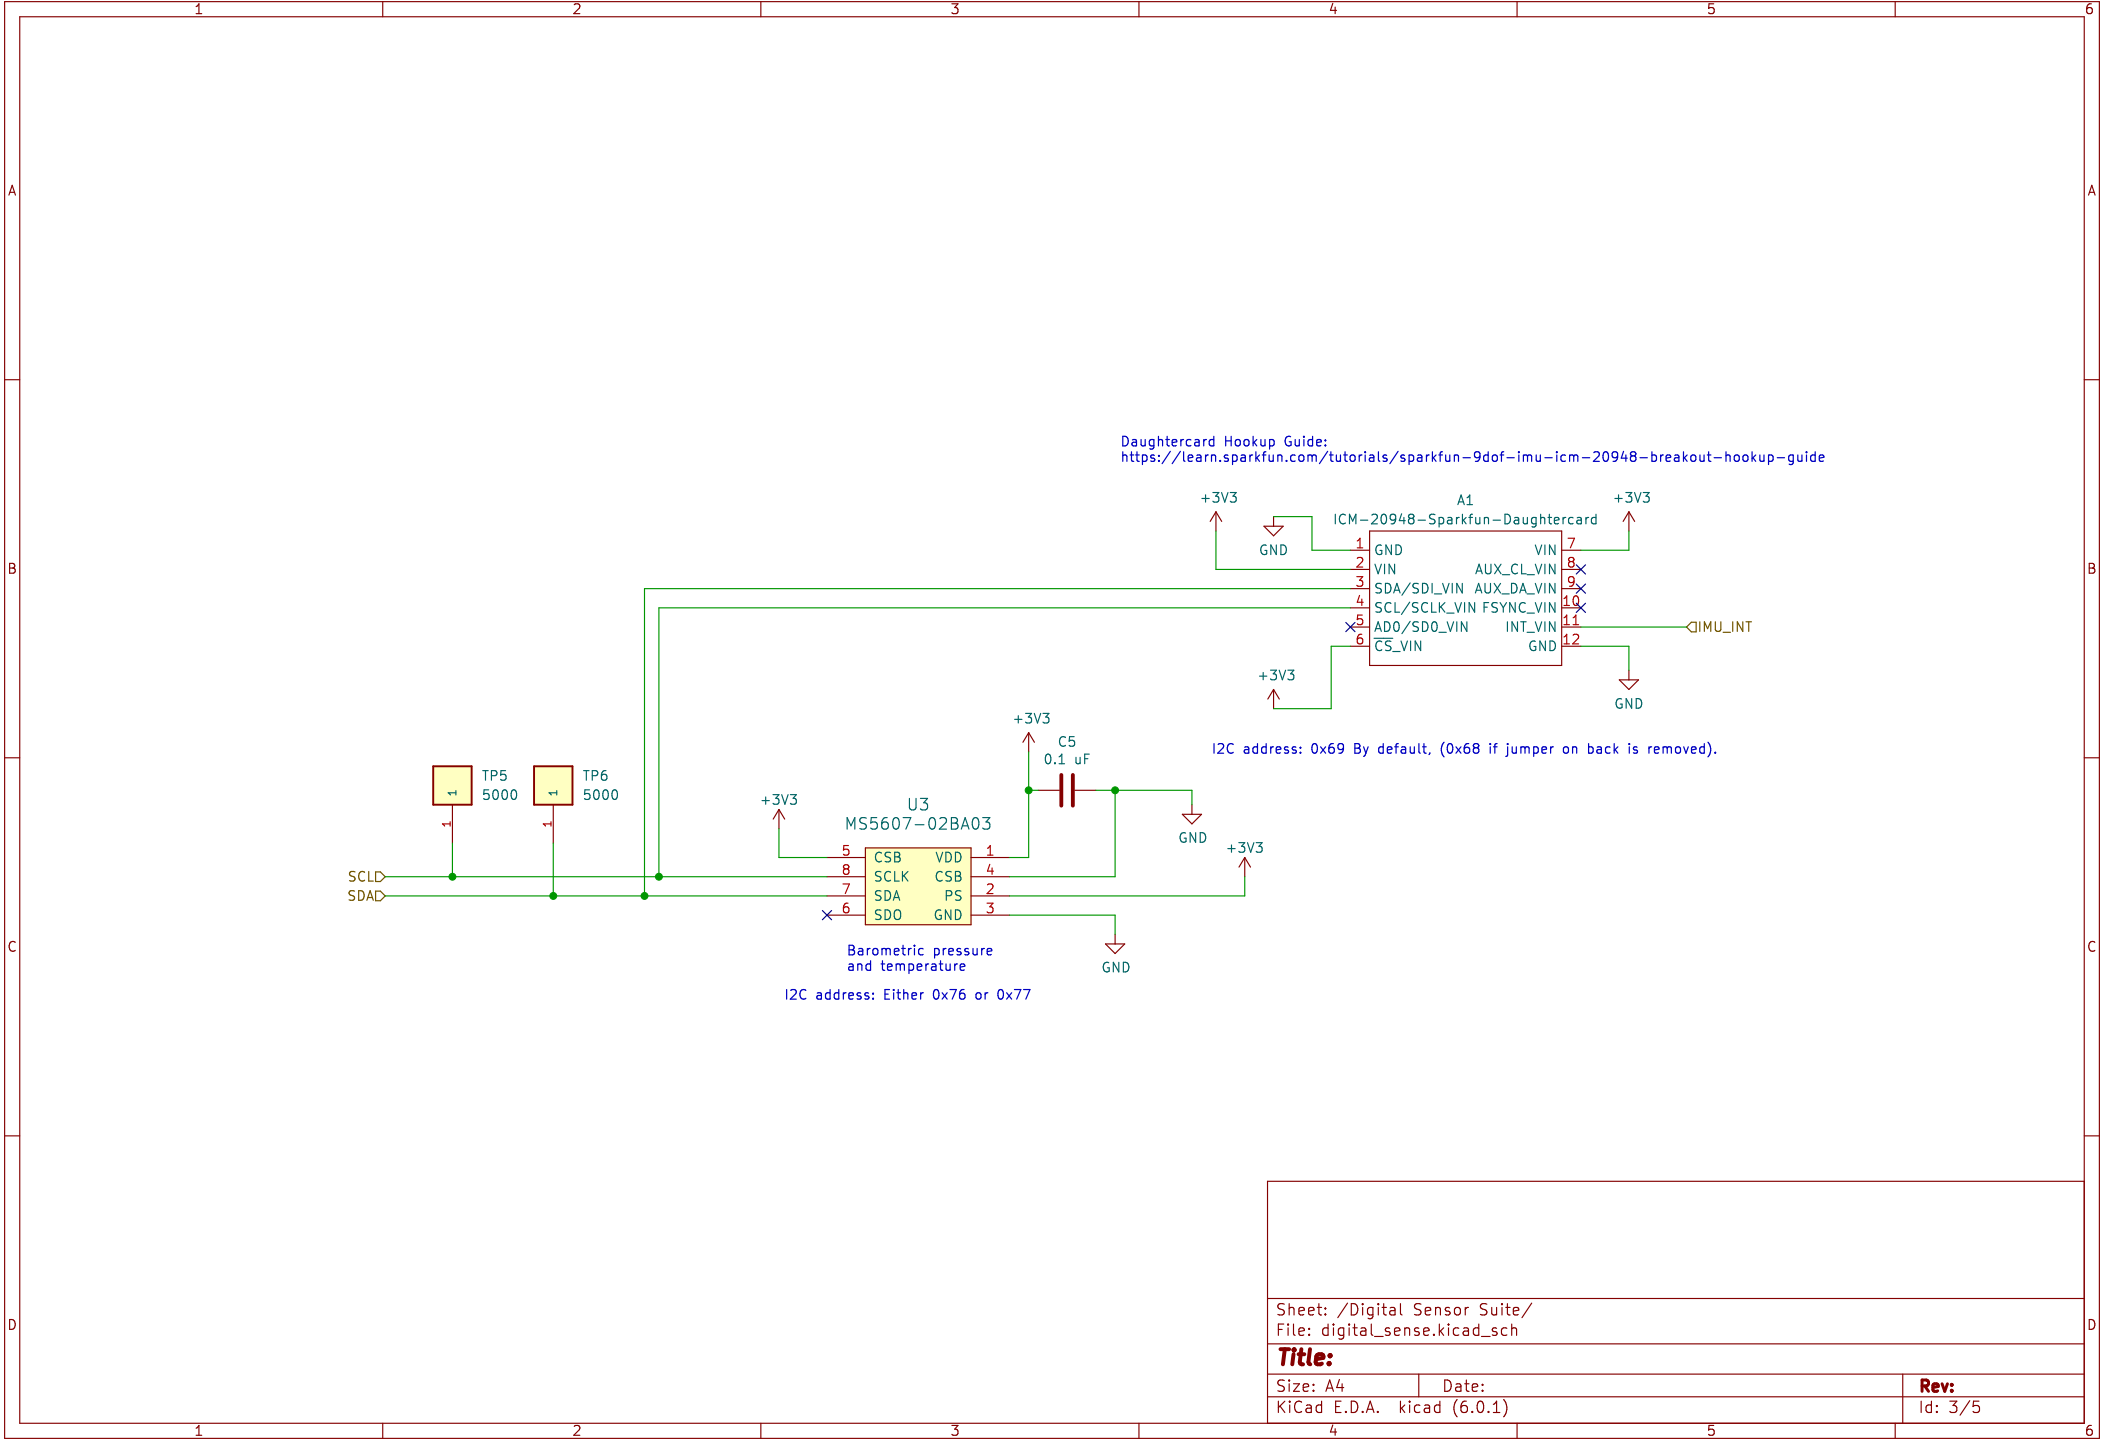




PTs to be used with 15/12V, thermistors to be used with 3.3V
 Reference Application Note for wheatstone bridges:
https://www.ti.com/lit/an/sboa323a/sboa323a.pdf?ts=1668083218662&ref_url=https%253A%252F%252Fwww.google.com%252F
 All TBD Values to be determined once exact sensing requirements of the board's application are determined

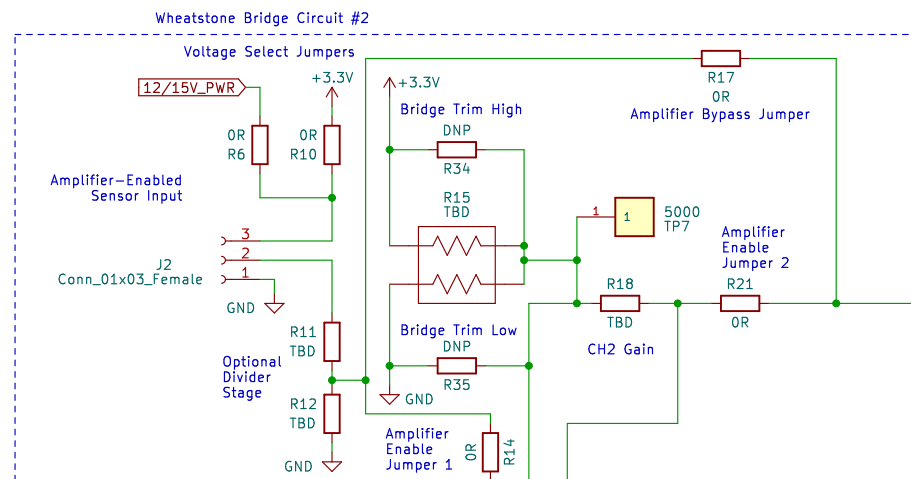

Non-Amplified Sensor Input 1

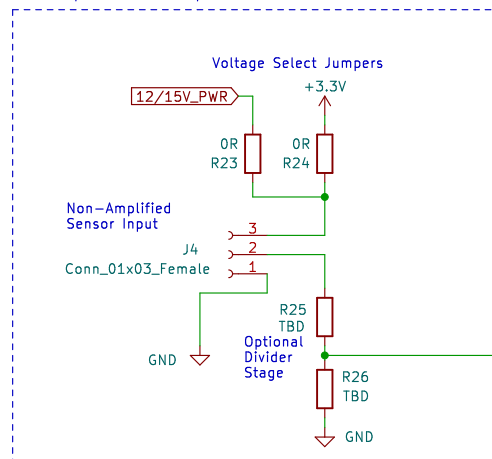

Non-Amplified Sensor Input 2

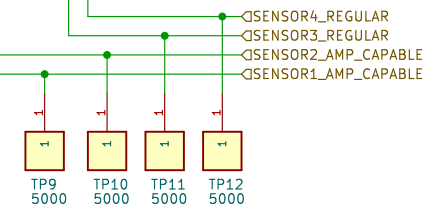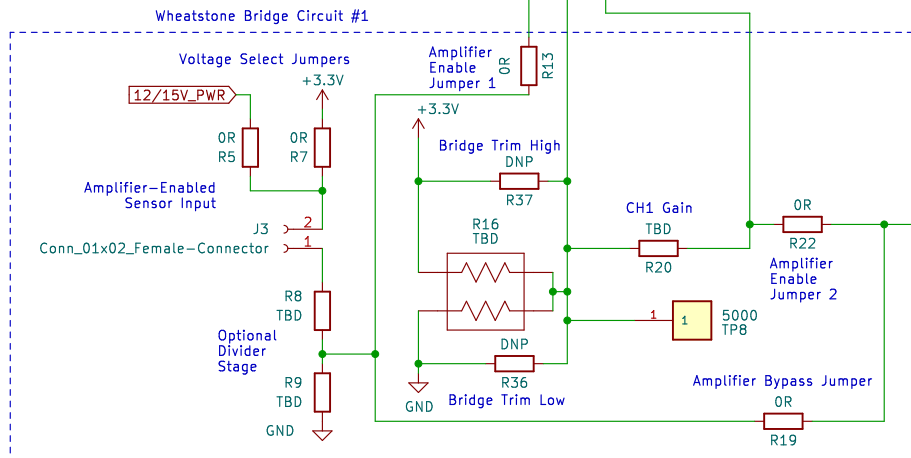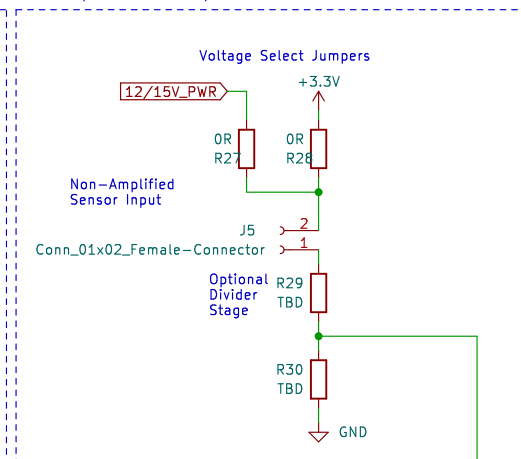

Sheet: /Analog Sensors/
 File: analog.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. kicad (6.0.1)

Rev:

Id: 4/5

