


Sheet: /		
File: sensors.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad (6.0.1)		Id: 1/5

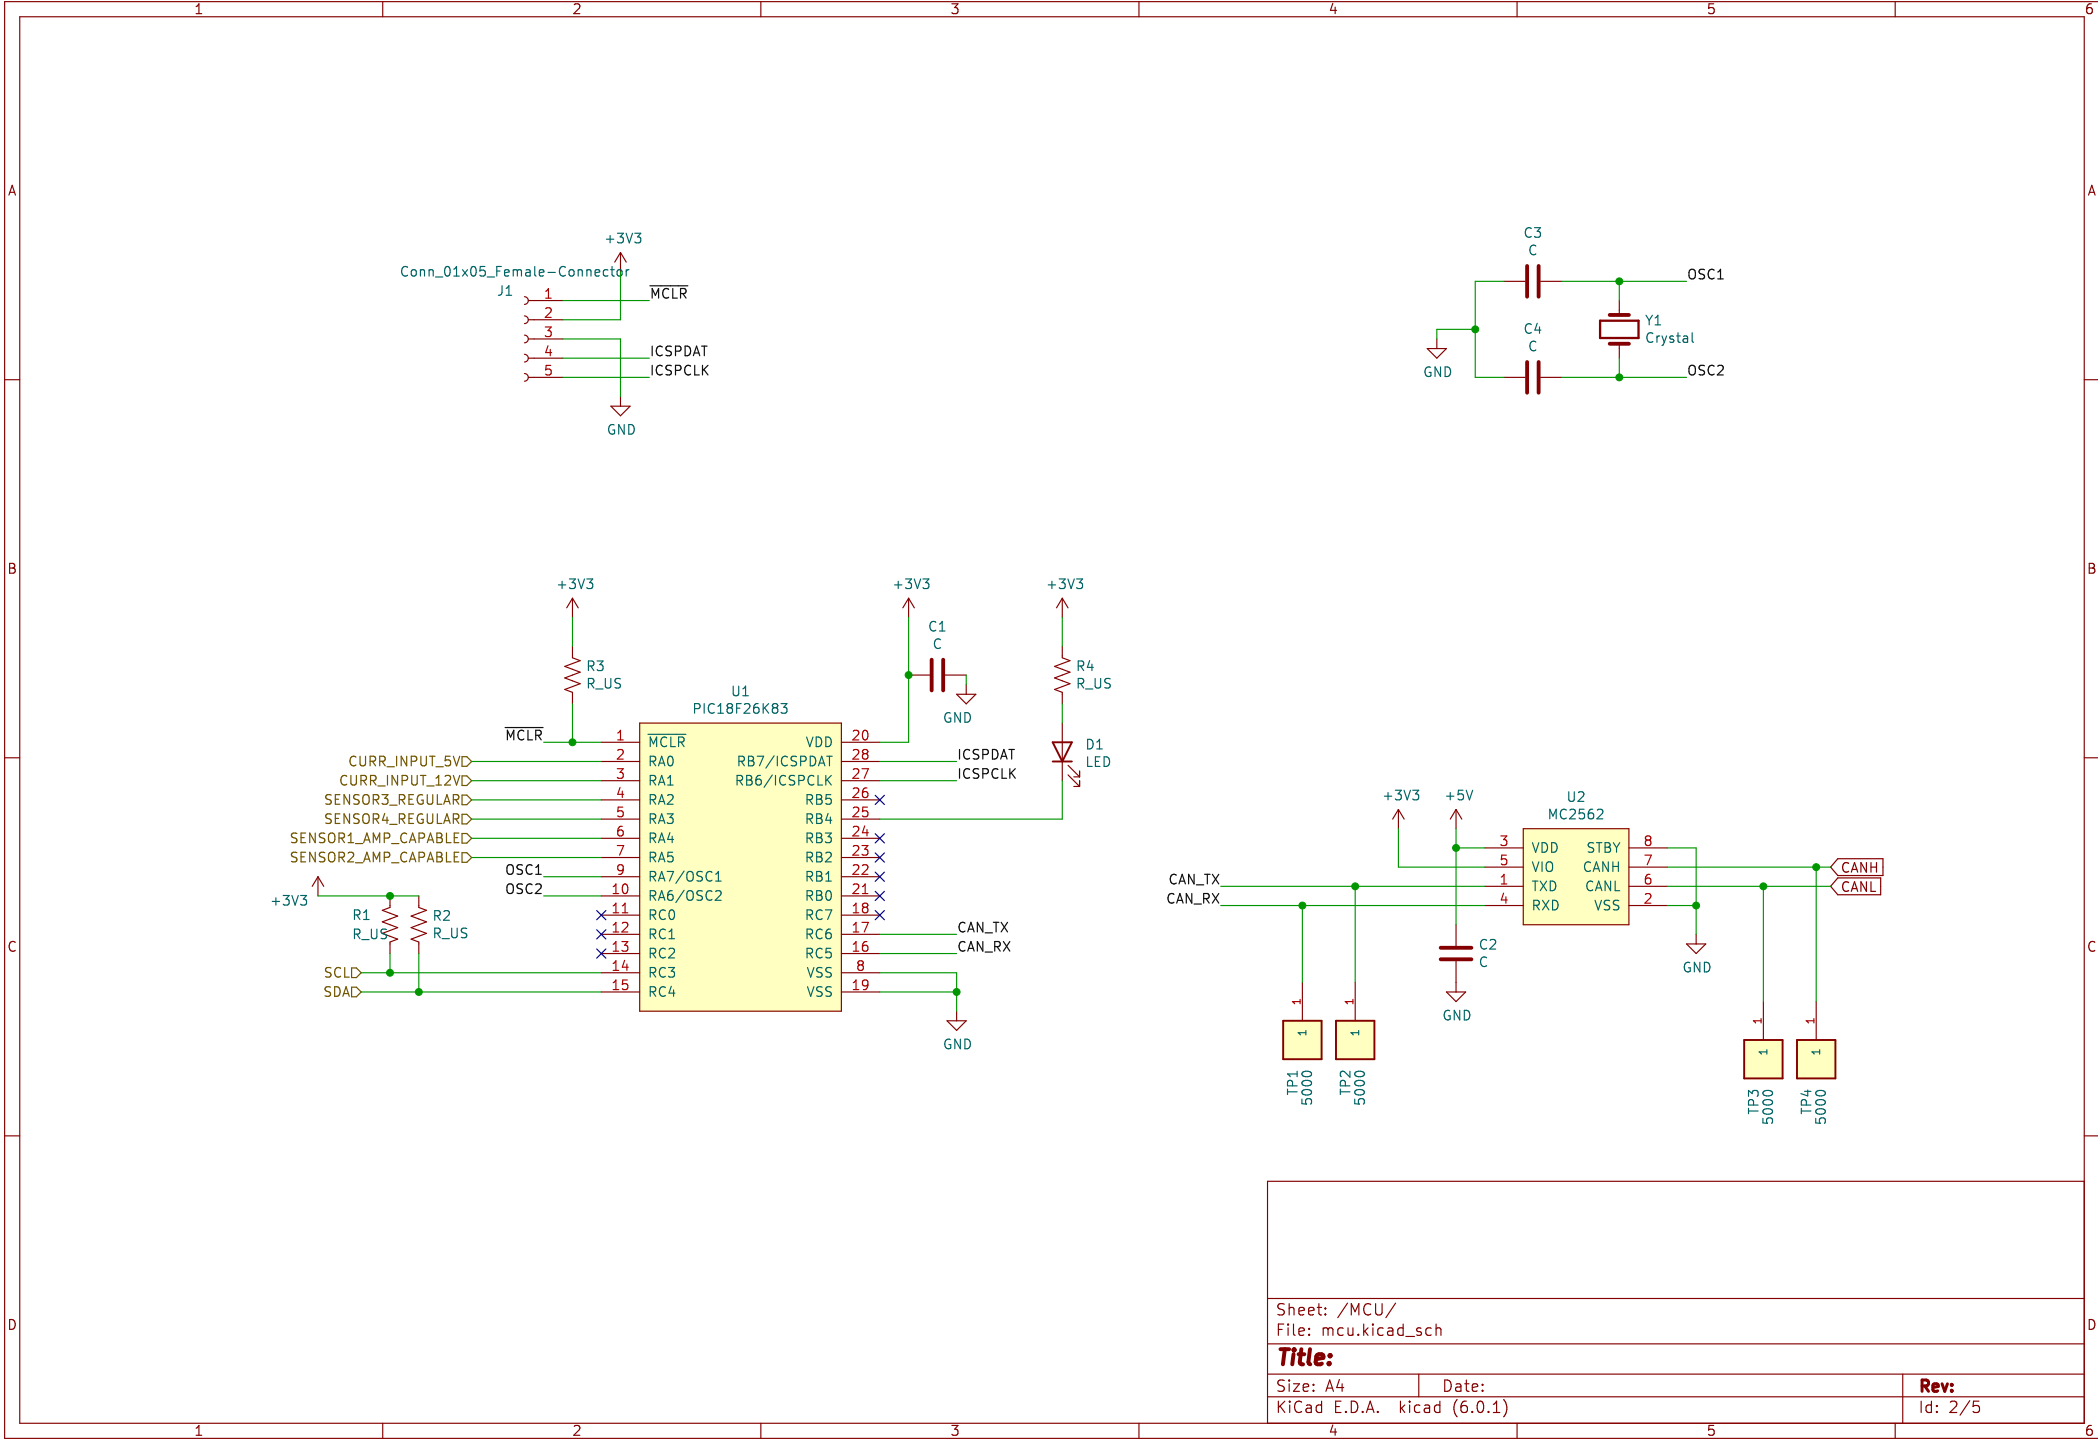


Sheet: /MCU/  
File: mcu.kicad\_sch

**Title:**


Size: A4  
KiCad E.D.A. kicad (6.0.1)

Date:


**Rev:**  
Id: 2/5

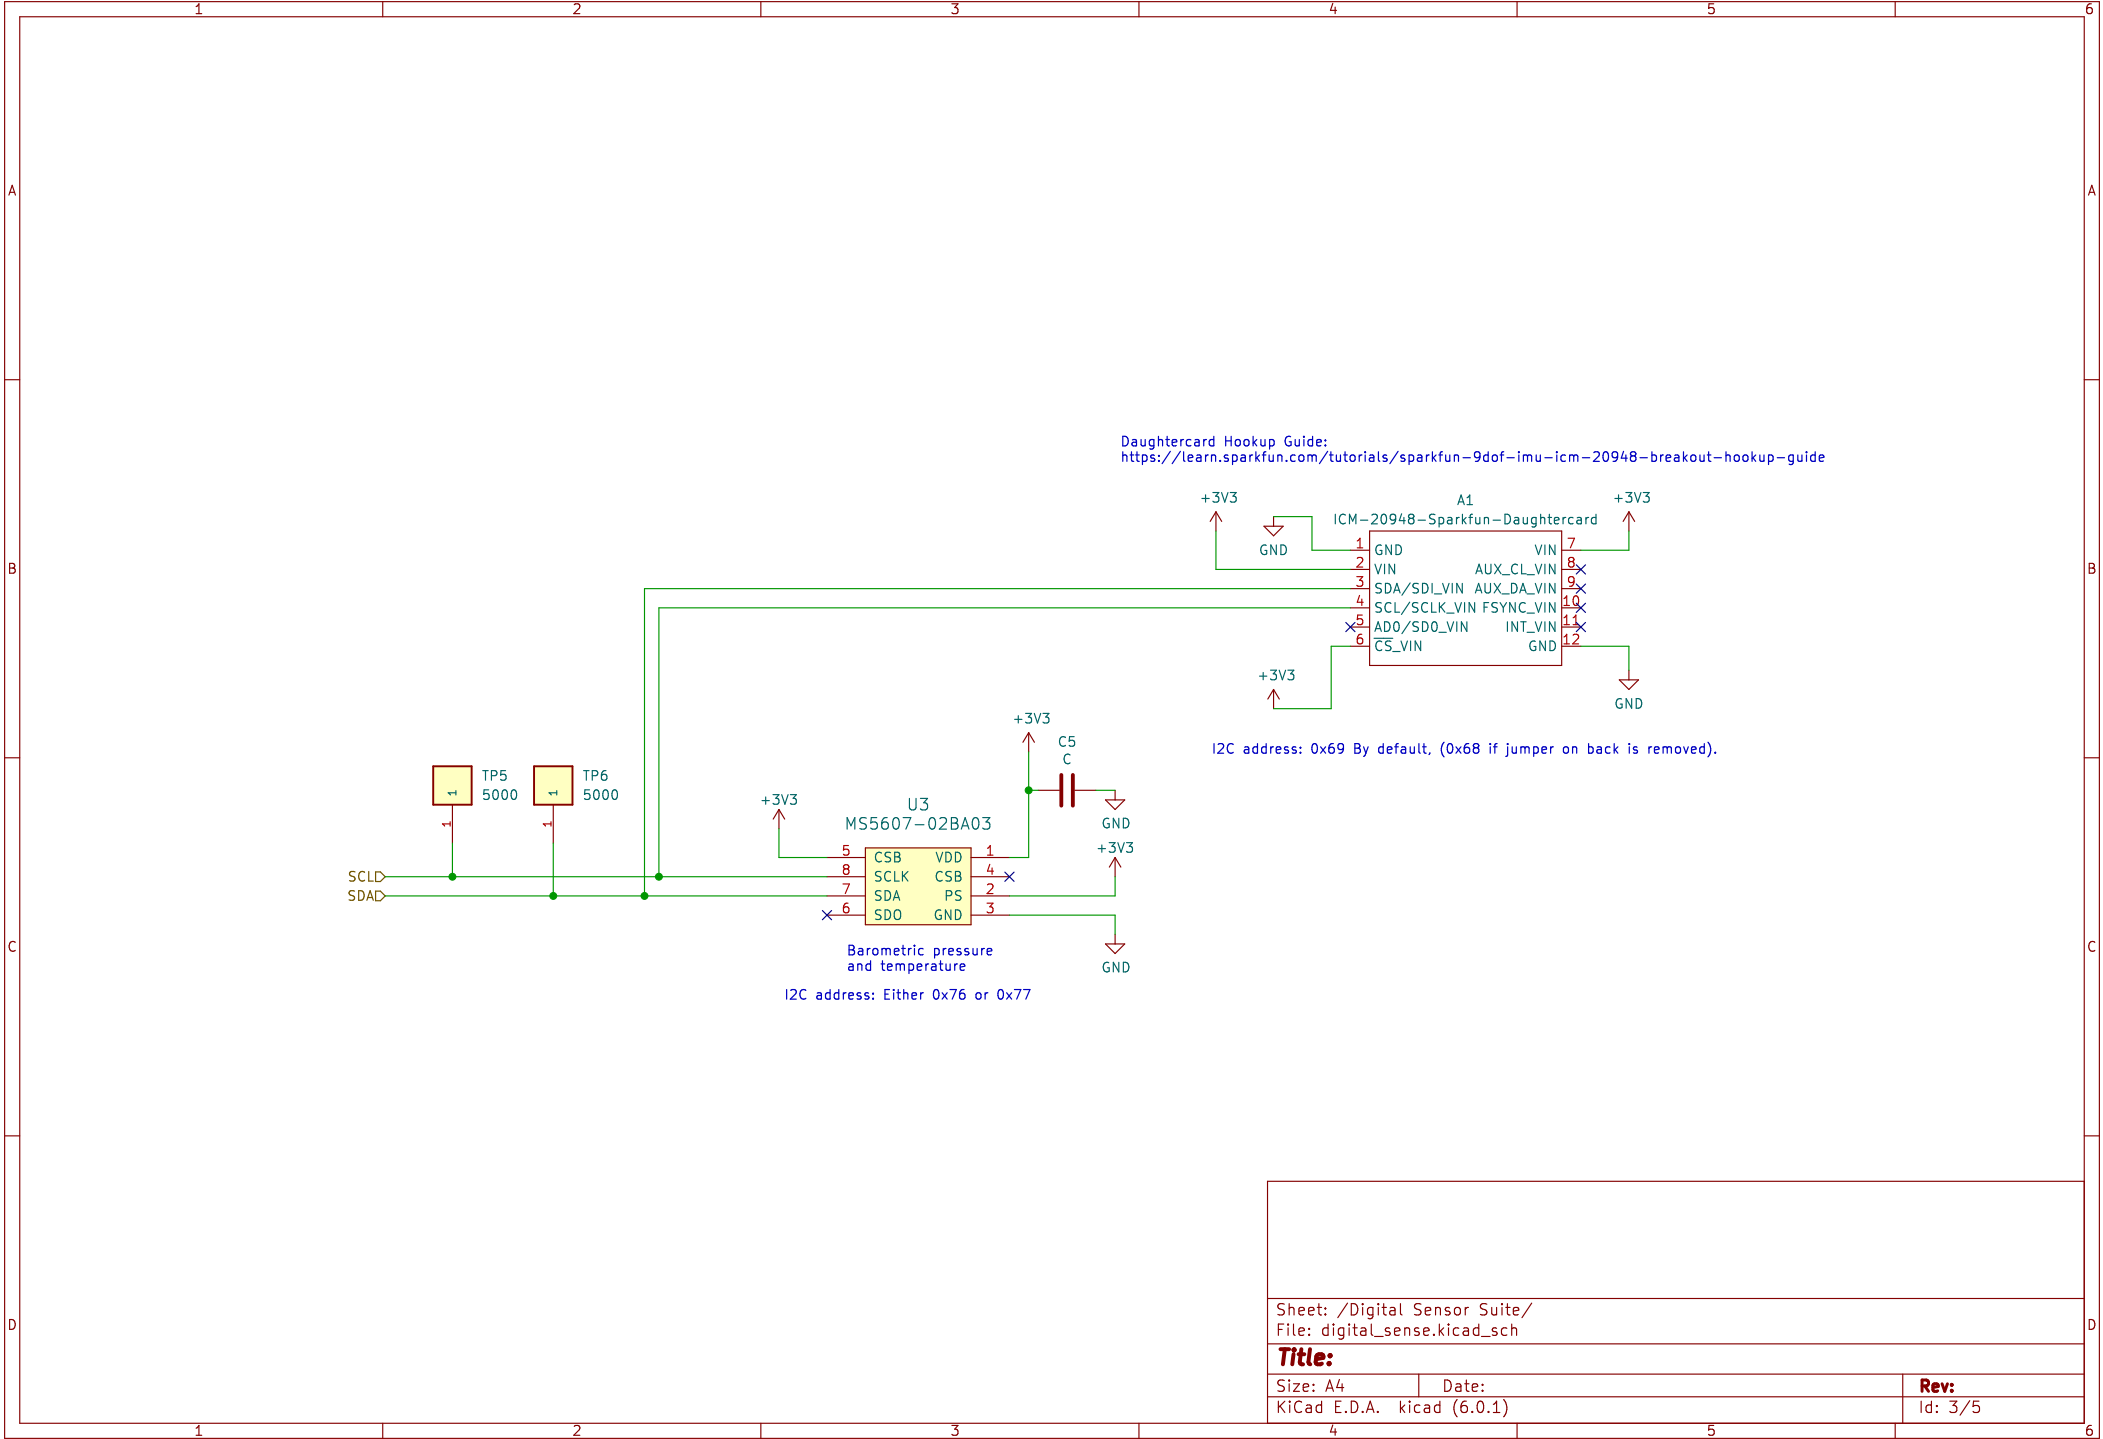




PTs to be used with 15/12V, thermistors to be used with 3.3V  
 Reference Application Note for wheatstone bridges:  
[https://www.ti.com/lit/an/sboa323a/sboa323a.pdf?ts=1668083218662&ref\\_url=https%253A%252F%252Fwww.google.com%252F](https://www.ti.com/lit/an/sboa323a/sboa323a.pdf?ts=1668083218662&ref_url=https%253A%252F%252Fwww.google.com%252F)  
 All TBD Values to be determined once exact sensing requirements of the board's application are determined

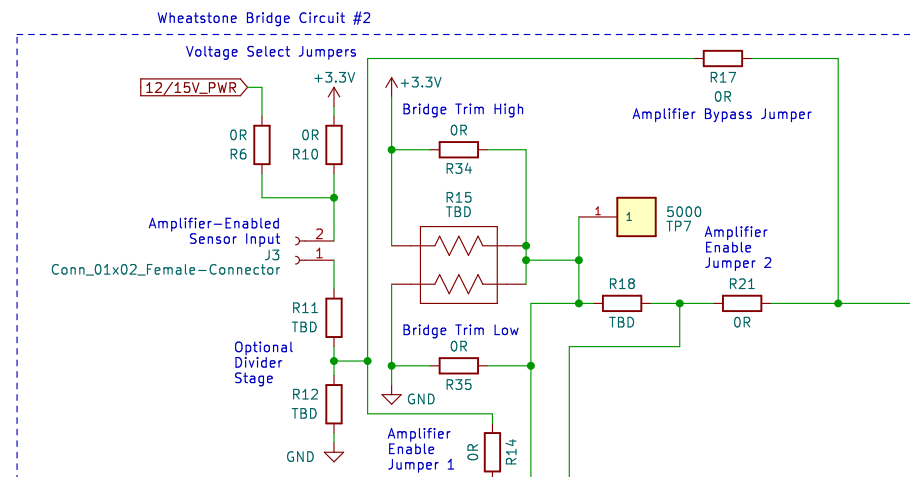

Non-Amplified Sensor Input 1

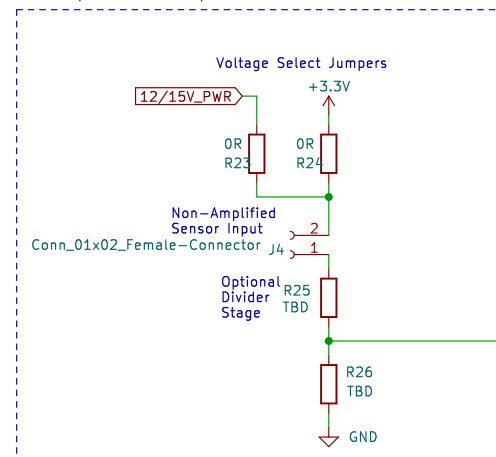

Non-Amplified Sensor Input 2

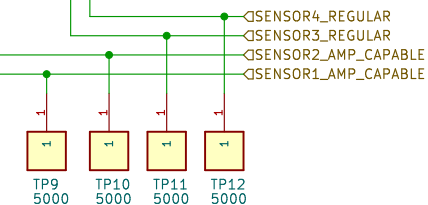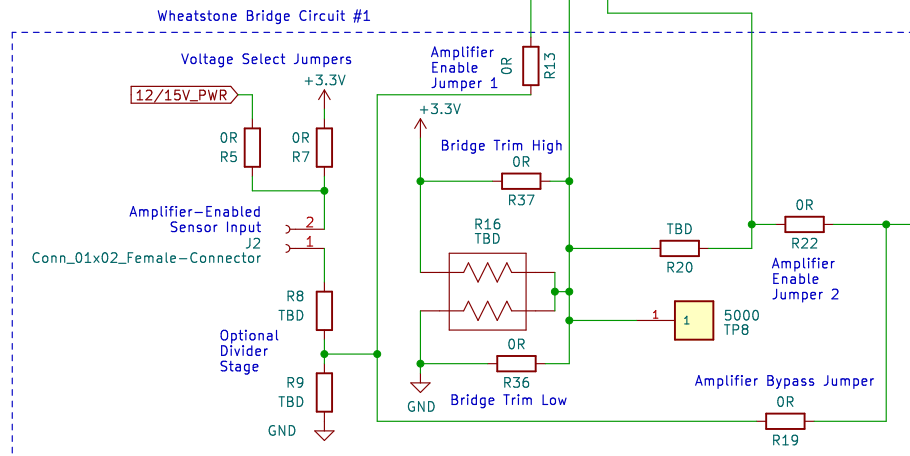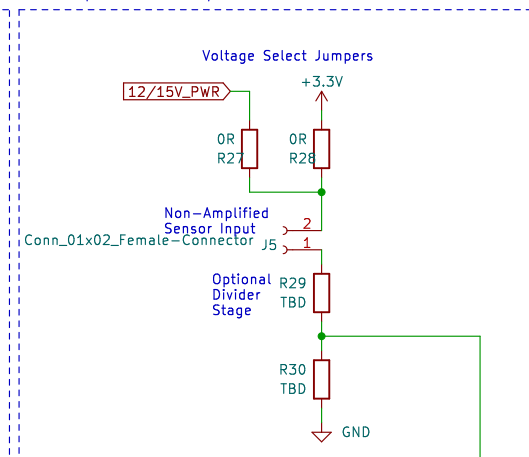

Sheet: /Analog Sensors/ File: analog.kicad_sch			
<b>Title:</b>			
Size: A4	Date:	Rev:	
KiCad E.D.A. kicad (6.0.1)		Id: 4/5	

