
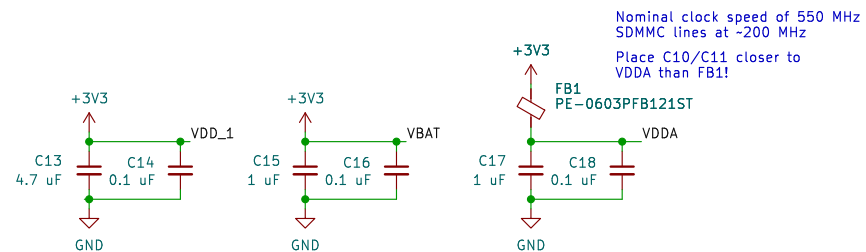



Sheet: /		
File: processor.kicad_sch		
<b>Title:</b>		
Size: A4	Date:	Rev:
KiCad E.D.A. kicad 7.0.7		Id: 1/4

power conn manual (link)

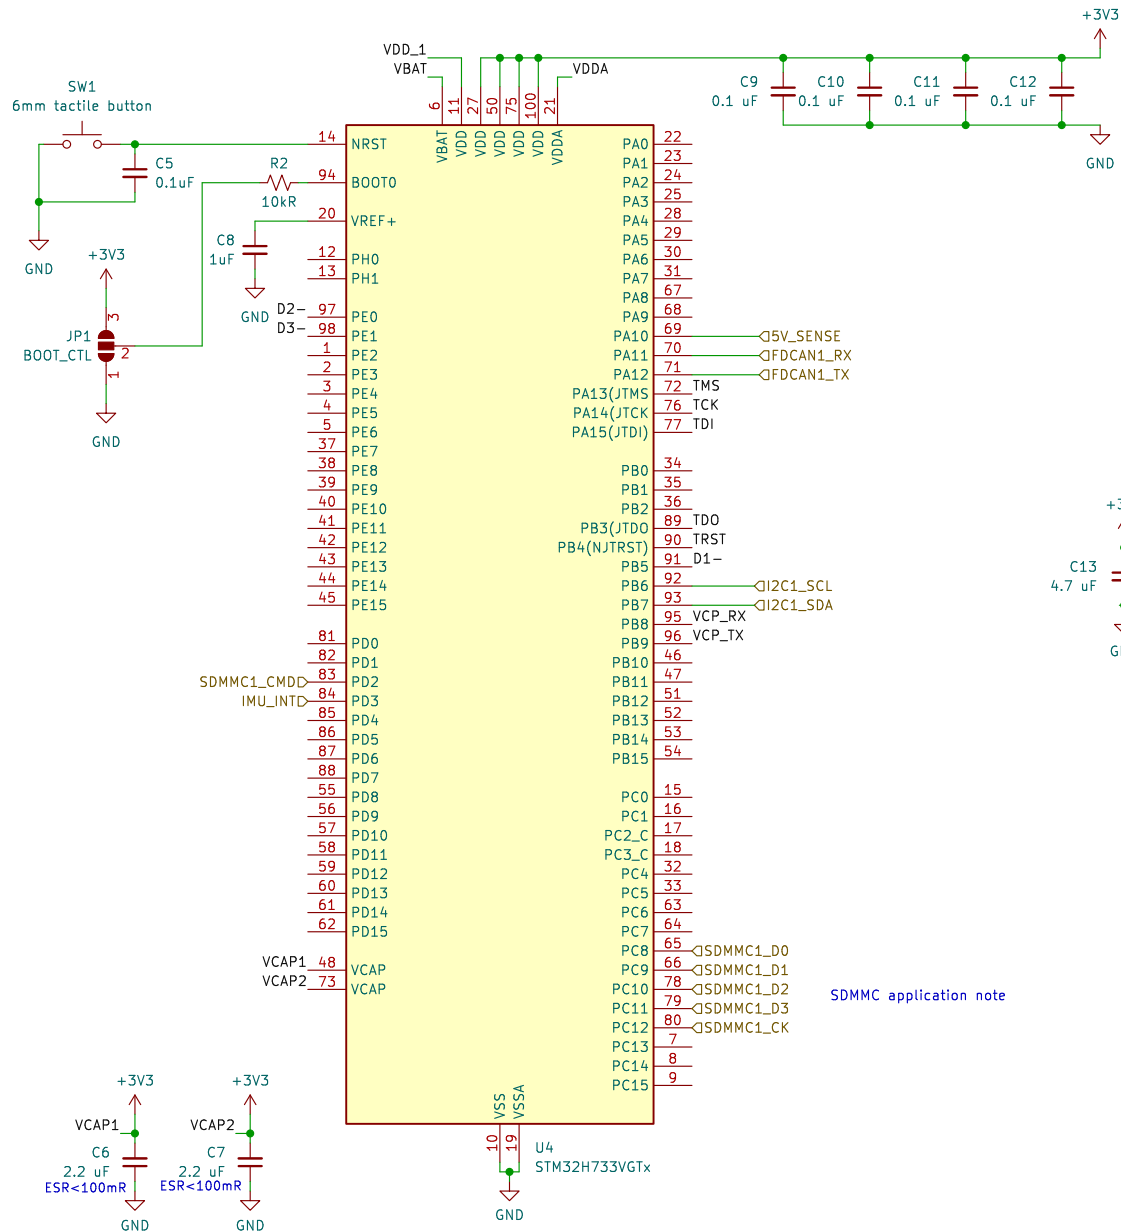

Notes:  
VCP is virtual com port, should be connected to valid UART pins on the chip?  
Pin 9 is "JRCCLK", SWD uses Pin 6 (TCK) for clock signal as far as I can tell


Sheet: /mcu/  
File: mcu.kicad\_sch

Title:

Size: A4  
KiCad E.D.A. kicad 7.0.7

Date:

Rev:  
Id: 2/4

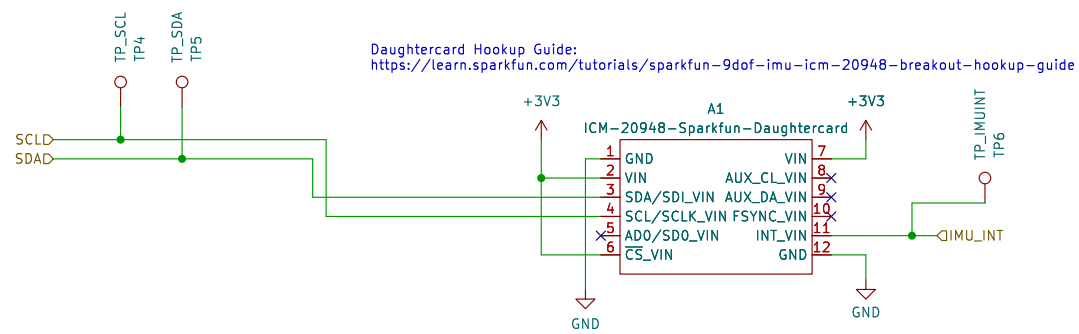

I2C address: 0x69 By default, (0x68 if jumper on back is removed).


Sheet: /imu/  
File: imu.kicad\_sch

**Title:**

Size: A4  
KiCad E.D.A. kicad 7.0.7

Date:

**Rev:**  
Id: 3/4

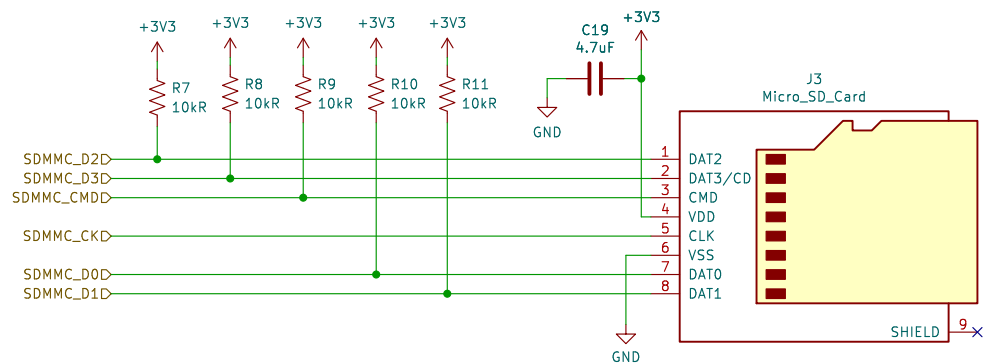

Sheet: /SD Card/  
File: sd\_card.kicad\_sch

**Title:**

Size: A4

Date:

KiCad E.D.A. kicad 7.0.7

**Rev:**

Id: 4/4