


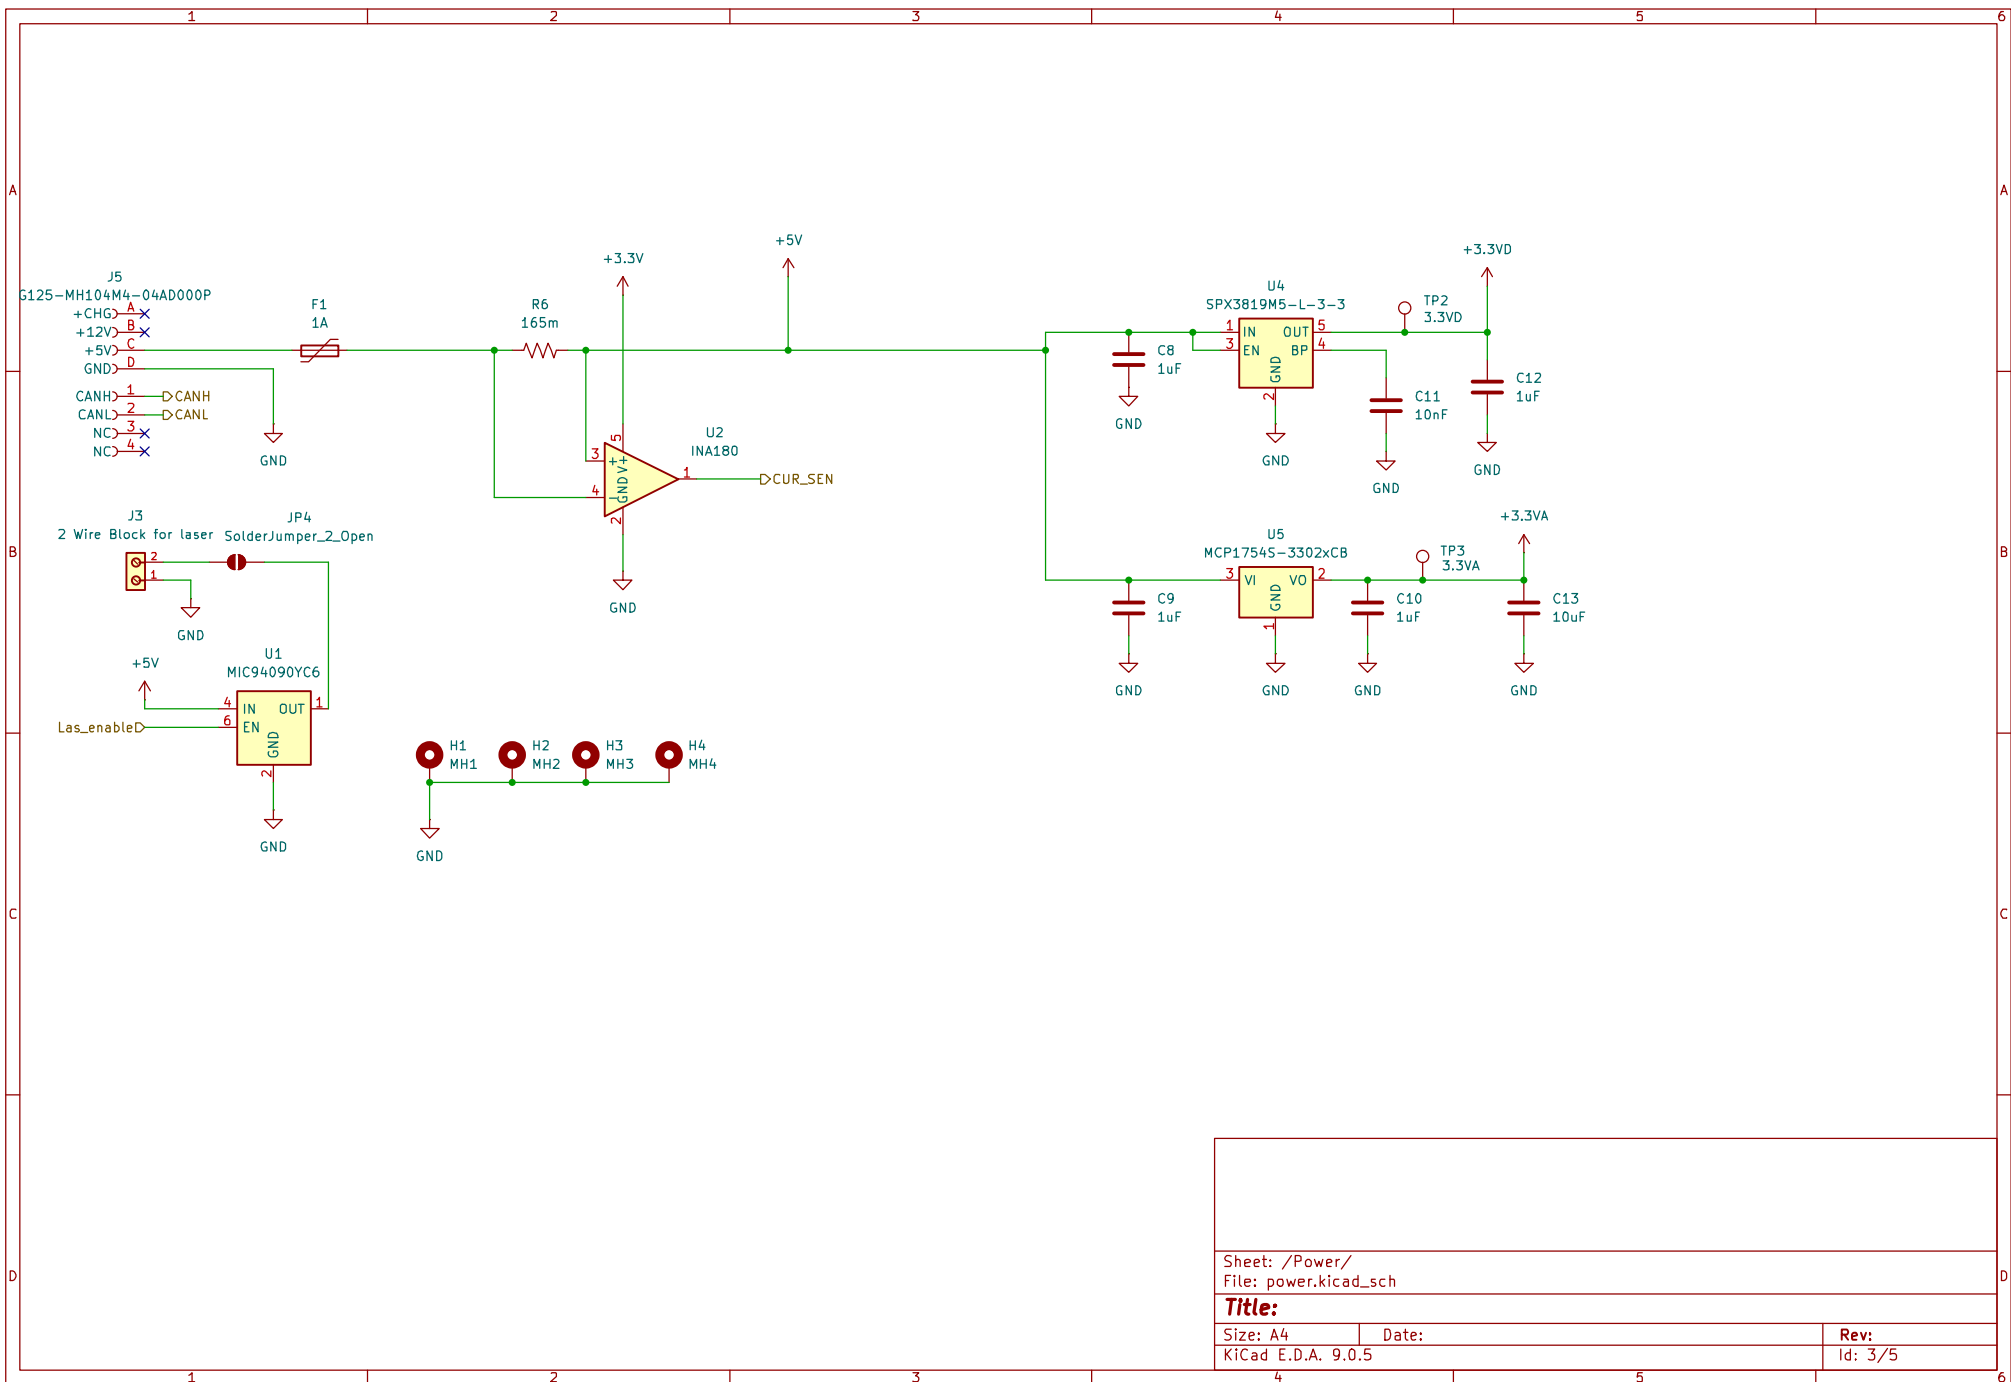

Sheet: /Power/
File: power.kicad_sch


Title:

Size: A4 Date:

KiCad E.D.A. 9.0.5

Rev:

Id: 3/5

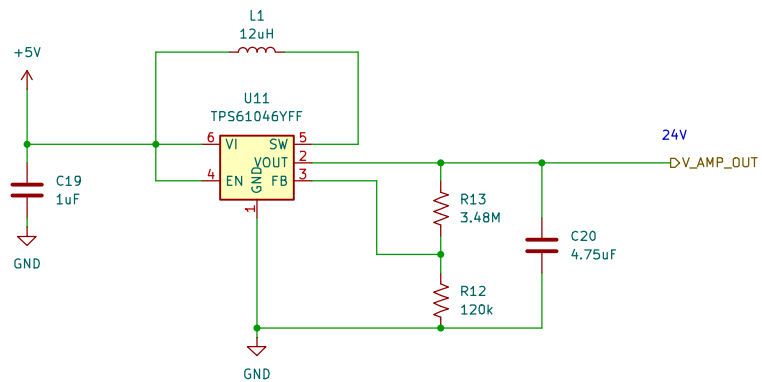

Sheet: /Booster/
File: boost.kicad_sch

Title:


Size: A4
KiCad E.D.A. 9.0.5

Date:

Rev:

Id: 4/5

Reference sheet:
https://ez.analog.com/cfs-filestestfile/___key/communityserver-wikis-components-files/00-00-00-06-97/KWIK_5F00_FAQ-_2D00_-Design-of-an-antiL2D00_aliasing-Sallen_2D00_Key-filter.pdf?_=638128614376877068

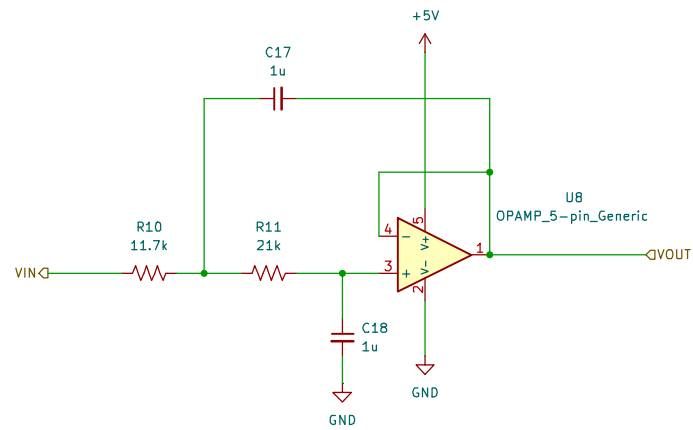

Sheet: /Amplifier/anti-aliasing filter/
File: Filter.kicad_sch


Title:

Size: A4
KiCad E.D.A. 9.0.5

Date:

Rev:

Id: 4/5

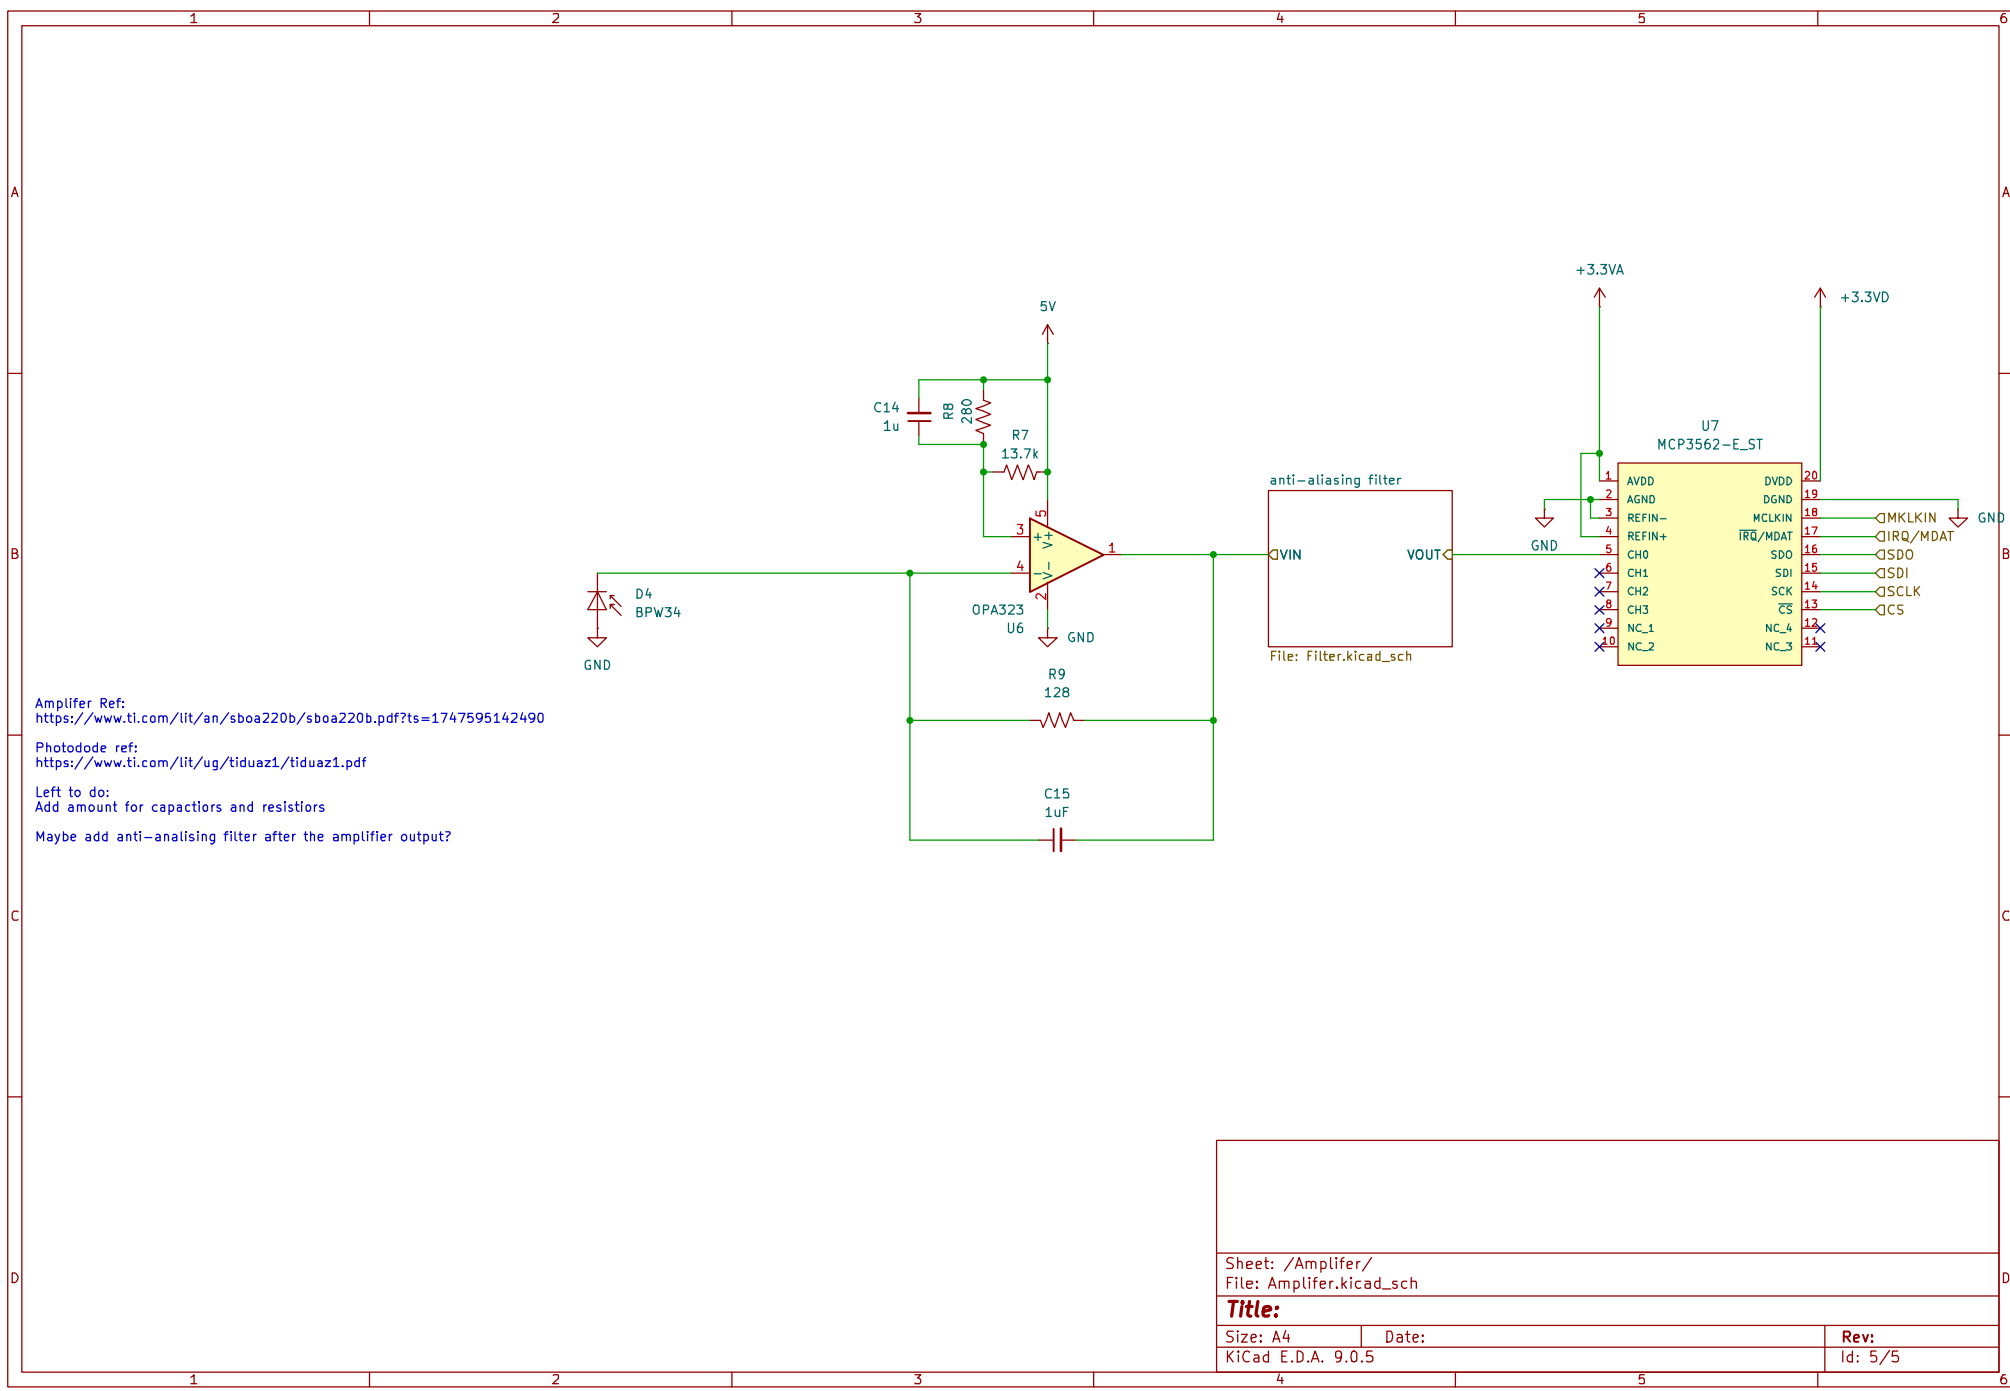

Amplifier Ref:
<https://www.ti.com/lit/an/sboa220b/sboa220b.pdf?ts=1747595142490>

Photodiode ref:
<https://www.ti.com/lit/ug/tiduaz1/tiduaz1.pdf>

Left to do:
Add amount for capacitors and resistors

Maybe add anti-aliasing filter after the amplifier output?

Sheet: /Amplifer/		
File: Amplifer.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 9.0.5		Id: 5/5