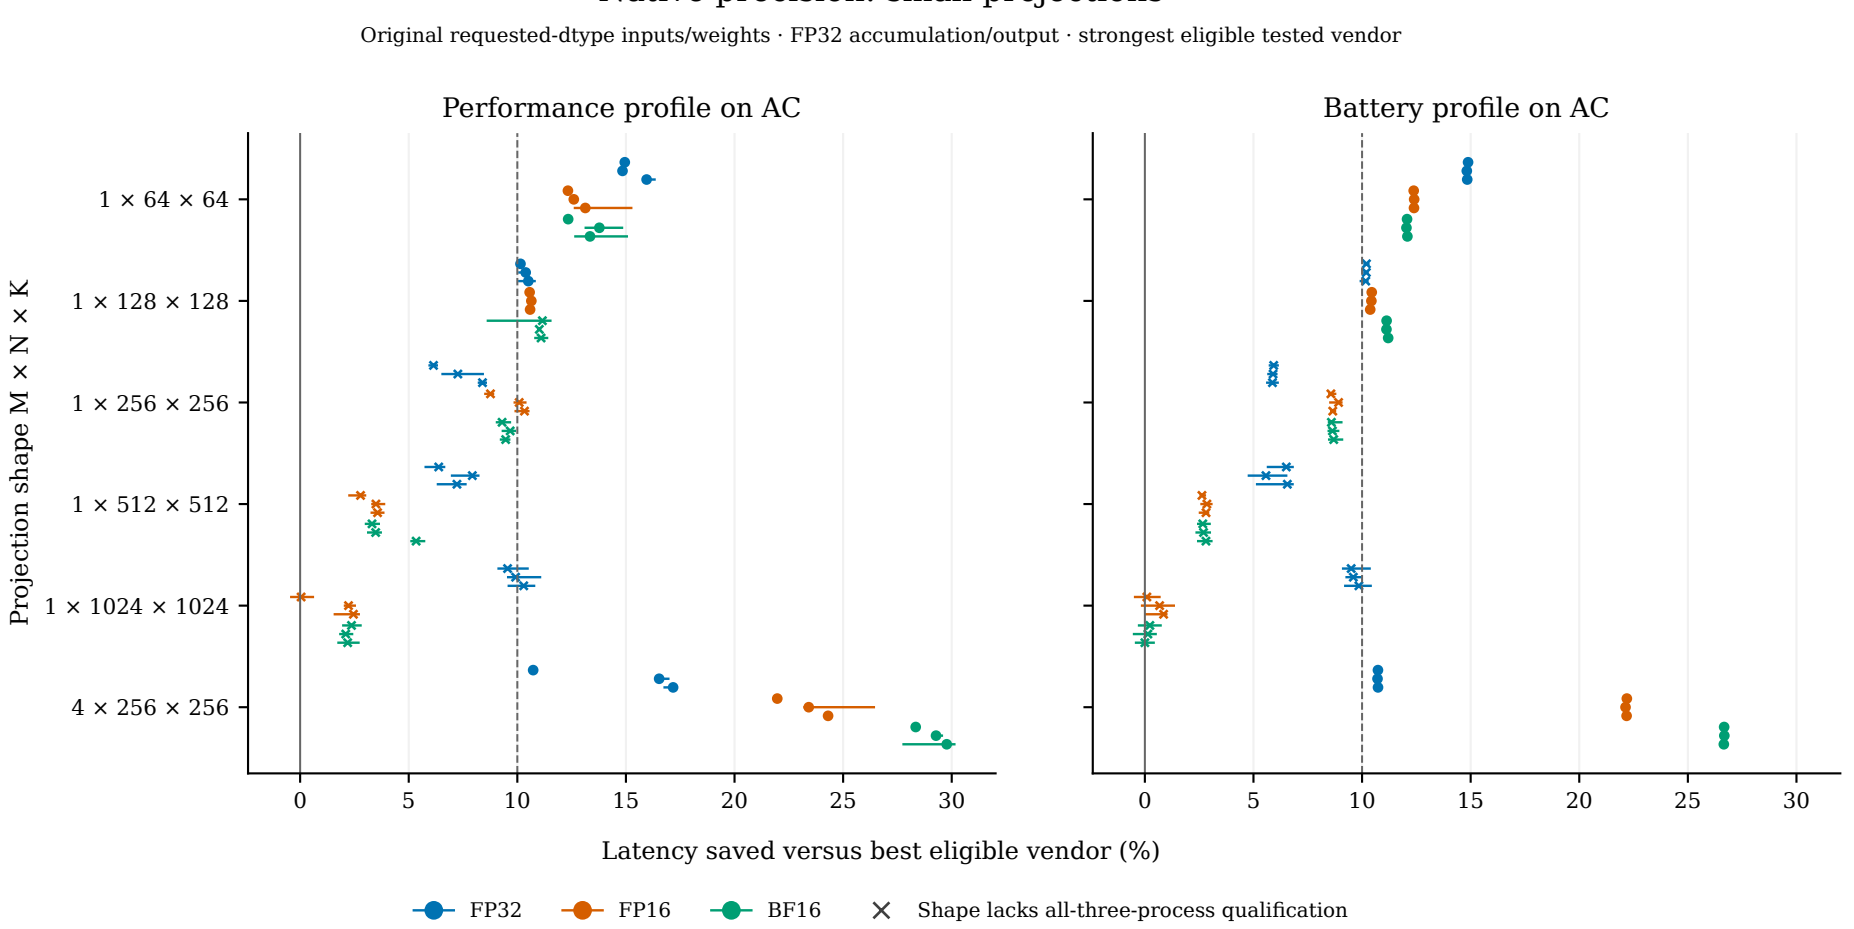
Native precision: small projections
Original requested-dtype inputs/weights · FP32 accumulation/output · strongest eligible tested vendor
Performance profile on AC
Battery profile on AC
Projection shape M × N × K
1 × 64 × 64
1 × 128 × 128
1 × 256 × 256
1 × 512 × 512
1 × 1024 × 1024
4 × 256 × 256
0
5
10
15
20
25
30
Latency saved versus best eligible vendor (%)
FP32
FP16
BF16
Shape lacks all-three-process qualification
Each dot/interval: one process and its paired 95% CI; seeds 971, 977, 983 from top to bottom within each dtype.
Streaming CUDA graphs · stock RTX 3070 Ti Laptop · observed P5 / memory 810 MHz; throttle flags retained in CSV.