

INPUT (RF filter R7/C12 optional: R7 = 0R link, C12 not fitted)



FEEDBACK gain = 1 + R5/R1 = 33.4x (30.5 dB) + BOOTSTRAP

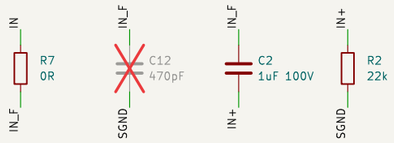


WIRE PADS

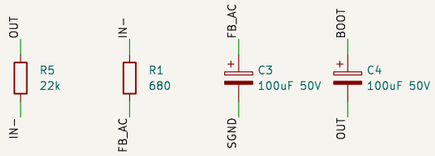

TDA7294 MONO MODULE — Currently Amped — 4-layer, 2 oz Cu, ENIG

All resistors: metal film 1% 0.6 W. All electrolytics: Panasonic FC.




U1 tab is at −V: insulate from heatsink.

STAR POINT: the only SGND–PGND joint (NT1 on the PCB)







MUTE / STANDBY (J8 to +V = play, to SGND = standby)

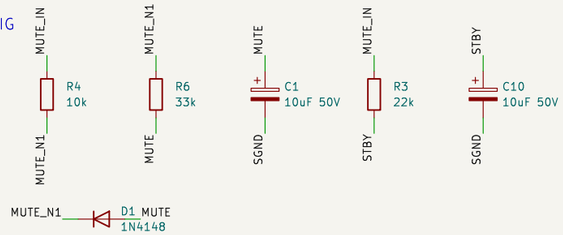

+V RAIL DECOUPLING (local; main reservoir sits in the PSU)

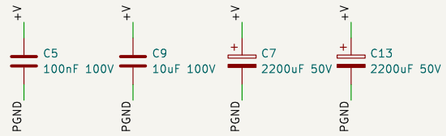

−V RAIL DECOUPLING

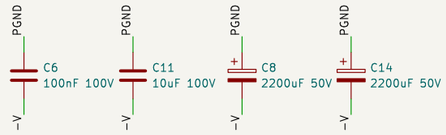



Rails +/−30..35 V idle, 4 ohm load

After the classic French TDA7294 module; 4-layer redesign

Currently Amped

Sheet: /

File: tda7294_mono.kicad_sch

Title: TDA7294 Mono Power Amplifier Module

Size: A3	Date: 2026-10-10	**Rev: 1.0**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1