



**Калининград
Кран**

Опыт и надежность с 2000 года

АРЕНДА ГРУЗОПОДЪЕМНЫХ МЕХАНИЗМОВ И СПЕЦТЕХНИКИ

Полный спектр грузоподъемной техники
для строительных проектов любой сложности



+7(4012) 56-69-34



info@kaliningradkran.ru



kaliningradkran.ru

SOP&G

Проекты перевозок и монтажа
Монтаж тяжеловесного оборудования
Перевозки тяжеловесных грузов
Мобильные и гусеничные краны
СПМТ

Сайт: www.sopig.ru
Эл. адрес: sopig@sopig.ru
Тел: 8-800-250-05-85



ZOOMLION

Mobile Crane Branch Company of Zoomlion Heavy Industry Science and Technology Co., Ltd.
Address: Zoomlion Quantang Industrial Park, Changsha Economic Technological Development Zone, China
www.zoomlion.com vip.zoomlion.com

ZOOMLION

Crawler Crane **QY500W**

Vision
Creates
Future



Vision Creates Future

40 years of product R&D Essence
40 years of professional manufacturing experience
Zoomlion Crawler Crane
Iron shoulders take duties!

As the only high-tech listed company incubated from national research institute, Zoomlion is dominating the crowded crawler crane market by virtue of decades of technology accumulation of research and development on chassis, complete vehicle, structure and electro-hydraulic control and its professional crawler manufacturing base second to none in China. It has created many history records and surpassed dreams one after another. QUY50, QUY70, QUY80, QUY100, QUY130, QUY160, QUY180, QUY200, QUY260, QUY350, QUY400, QUY450, QUY500, QUY650, QUY800, QUY1000, ZCC3200NP..... Zoomlion has been a strong presence and is giving full play to its capabilities at various construction fields around the world.

Innovation is what sustains a brand. And only by continuous improvement can the new generation of comprehensively upgraded Zoomlion crawler cranes strike a pose on the stage and continue its resplendence.

Contents

01 QUY500W Dimension and Main Parameter

Super-lift boom working condition and dimension	01
Super-lift tower jib working condition and dimension	02
Main working performance	03
Introduction for boom and jib frame assembly	04
Overall dimension and weight of main parts	06

02 QUY500W Technical Descriptions


Working condition and boom and jib frame system	13
Mechanism	14
System	14
Safety device	15
Control room	15
Lifting hook	16
Engine cooling start device and hydraulic oil heating device	16
Optional devices	16

03 QUY500W Lifting performance


Boom lifting characteristics curve	17
Light boom lifting characteristic curve	19
Boom + fixed jib lifting characteristic curve	21
Tower jib lifting characteristic curve	27
Super-lift boom lifting characteristic curve	34
Super-lift light boom lifting characteristic curve	36
Super-lift tower jib lifting characteristic curve	38
Boom + heavy fixed jib lifting characteristic curve	48

Overall Dimension and Main Parameter

1. Super-lift boom working condition and dimension

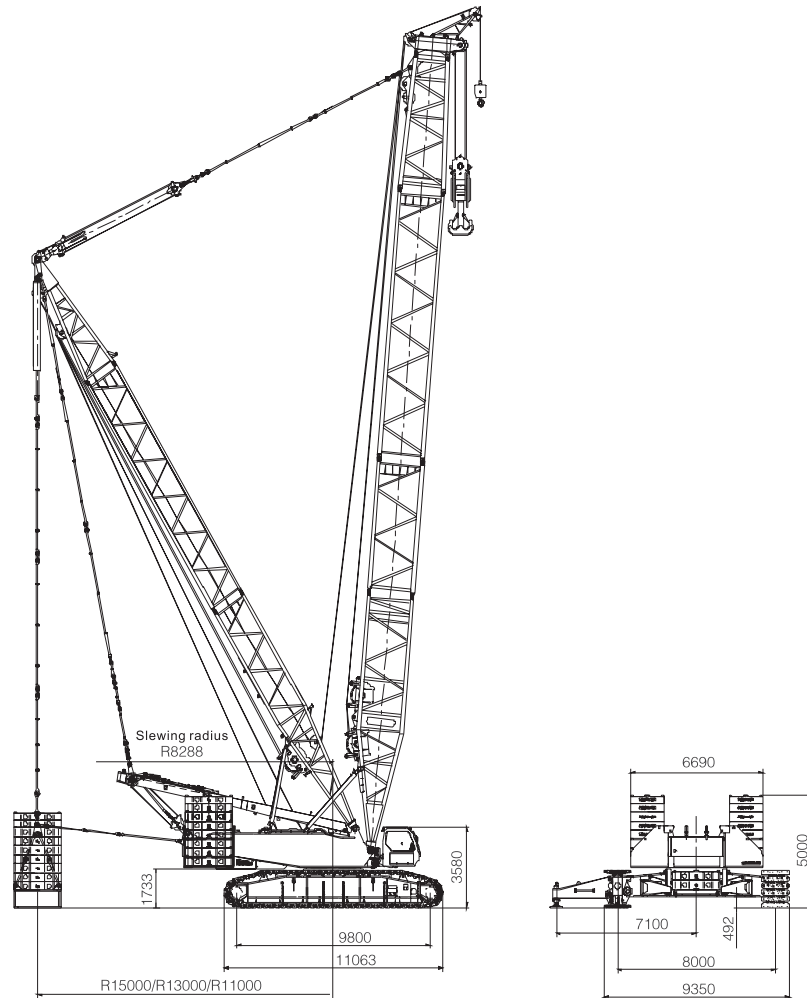


2. Super-lift tower jib working condition and dimension

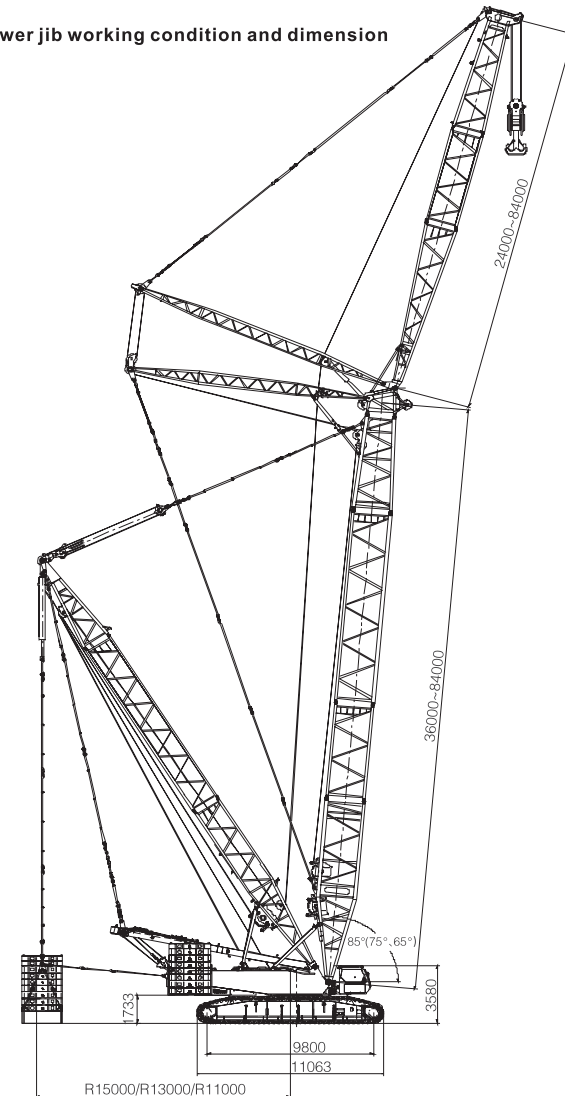

3. Main working performance


Item		Unit	Value	Remark
Maximum lifting weight	Standard	t × m	400 × 6	
	Super-lift	t × m	500 × 9	
Heavy boom	Standard	m	24~84	
	Super-lift	m	36~84	
Light boom	Standard	m	48~102	
	Super-lift	m	78~126	
Self-weight with basic boom		t	370	
Fixed jib length		m	12~36	
Fixed jib maximum lifting capacity of		t	80	
Fixed jib set angle		°	10, 30	
Boom + fixe jib		m	78 + 36	
Boom + heavy fixed jib		m	84 + 12	
Heavy fixed jib maximum lifting capacity		t	110	
Heavy fixed jib maximum set angle		°	15	
Luffing jib length		m	24~84	
Luffing jib maximum lifting capacity	Standard	t	142/14	
	Super-lift	t	225/14	
Boom working angle under luffing jib working condition		°	65、75、85	
Maximum boom + maximum luffing jib	Standard	m	60 + 72	
	Super-lift	m	84 + 84	
Drum single rope speed	Boom lifting	m/min	0~143	
	Jib lifting	m/min	0~143	
	Luffing	m/min	0~2 × 50	
	Jib luffing	m/min	0~122	
	Super-lift luffing	m/min	0~143	
	Goose head lifting	m/min	0~108	
Slewing speed		rpm	0~1.1	
Travel speed		km/h	0~1.6(two wheel driven)/ 0~1(all-wheel driven)	
Grade ability		%	30	
Pressure to the ground		MPa	0.14	
Main machine transportation dimension length × width × height		mm	15490 × 3100 × 3400	Mast included
Engine	Power/running speed	kW/rpm	360/1800	
	Torque/running speed	Nm/rpm	2200/1300	
	Emission standard		T3	
Caterpillar track gauge × ground length ×Caterpillar track plate width		mm	8000 × 9800 × 1350	

4. Introduction for boom and jib frame assembly

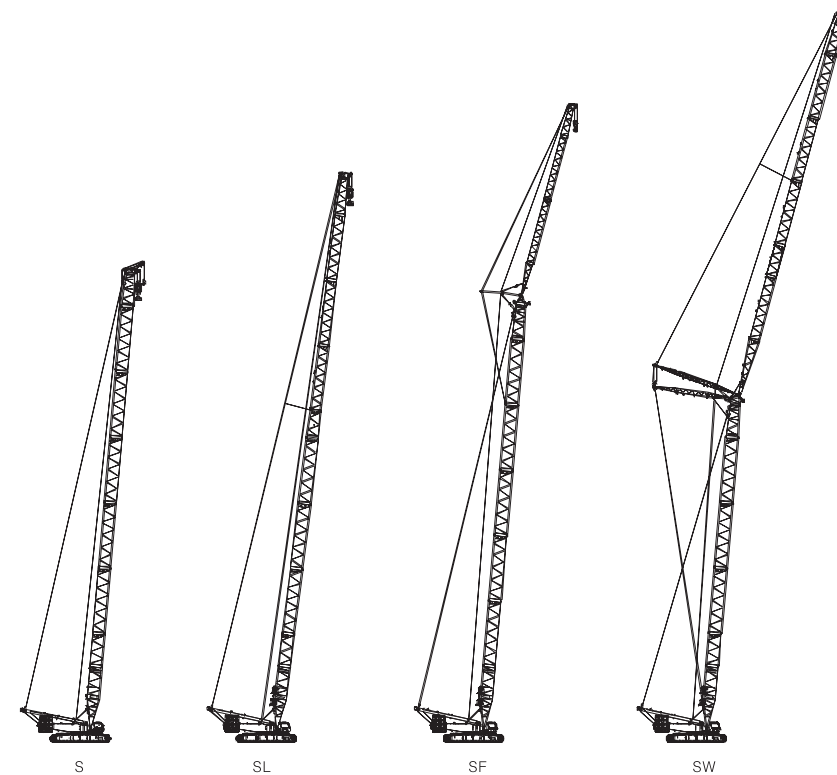


Code	Description	Working parameter
S	Heavy boom	24-84mm
SL	Light boom	48-102mm
SF	Fixed jib	Boom: 30-78mm Jib: 12-38mm
SW	Luffing jib (tower boom section)	Boom: 30-60mm Jib: 24-72mm

Introduction for boom and jib frame assembly

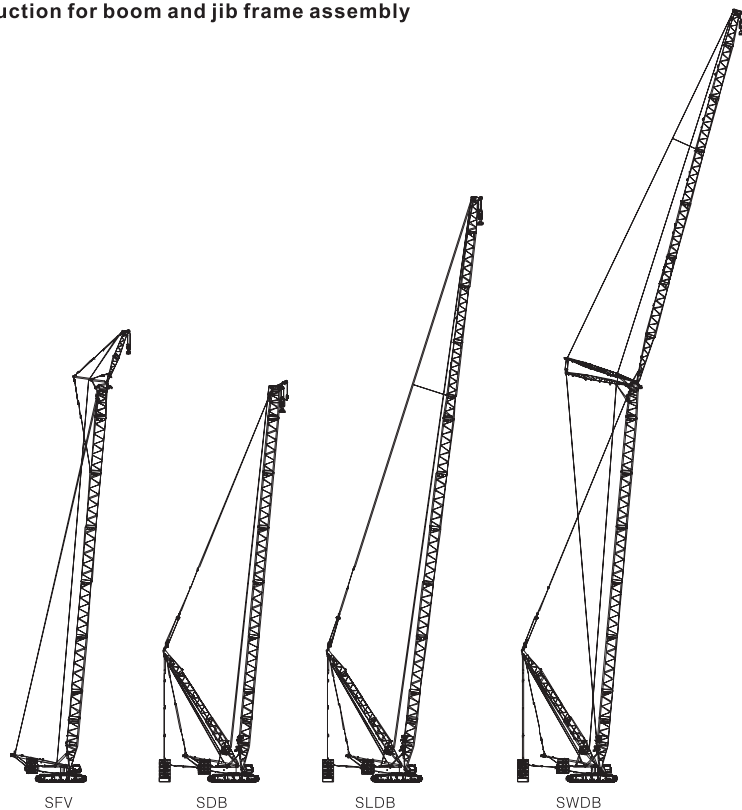


Code	Description	Working parameter
SFV	Heavy fixed jib	Boom:36-84mm Jib:12m
SDB	Super-lift heavy boom	36-84m
SLDB	Super-lift light boom	78-126m
SWDB	Super-lift luffing jib (Super-lift tower boom)	Boom:36-84m Jib:24-84m


5. Overall dimension and weight of the main transportation part

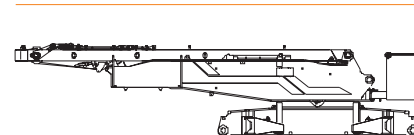


Crane (exclude main and auxiliary winches)	
Length	15490 mm
Width	3100 mm
Height	3400 mm
Weight (include mast)	60.7t
Weight (exclude mast and main luffing winch)	48.4t




Caterpillar track assembly	
Length	11070 mm
Width	1480 mm
Height	1630 mm
Weight	35.1t




Bottom section of boom	
Length	11660mm
Width	3080 mm
Height	2980 mm
Weight (include winch)	16.5t




Top boom section of boom	
Length	6160 mm
Width	2780 mm
Height	2490 mm
Weight	4.4t




Boom 6m	
Length	6180 mm
Width	2780 mm
Height	2520 mm
Weight	3.8t




Boom 12m	
Length	12180 mm
Width	2780 mm
Height	2520 mm
Weight	6.3t




Boom 12m A	
Length	12180 mm
Width	2780 mm
Height	2540 mm
Weight	6.3t




Light transition arm	
Length	5270 mm
Width	2780 mm
Height	2380 mm
Weight	2.5t

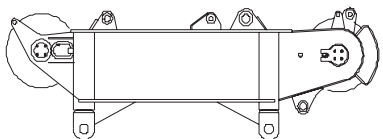

500t tower head	
Length	3220 mm
Width	2430 mm
Height	1100 mm
Weight	3.5t

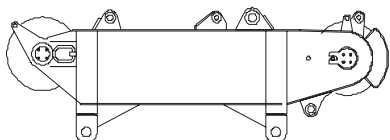


300t tower head	
Length	3220 mm
Width	2430 mm
Height	1100 mm
Weight	2.7t




100t tower head + Bottom section of tower boom section + Front stay bar of tower boom section	
Length	17950 mm
Width	2650 mm
Height	3200 mm
Weight	12.4t




Rear stay bar of tower boom section	
Length	15200 mm
Width	2320 mm
Height	1000 mm
Weight	5.5t




Top section of tower boom section	
Length	8065 mm
Width	2340 mm
Height	2395 mm
Weight	3.5t




Tower boom section 6m	
Length	6140 mm
Width	2340 mm
Height	2100 mm
Weight	1.87t




Tower boom section 12m	
Length	12140 mm
Width	2340 mm
Height	2100 mm
Weight	3.5t




Tower boom section 12m A	
Length	12140 mm
Width	2340 mm
Height	2100 mm
Weight	3.8t




Bottom boom section of super-lift mast	
Length	12210 mm
Width	2650 mm
Height	2840 mm
Weight	14t

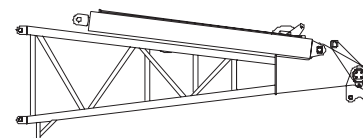


Top section of super-lift mast	
Length	6420 mm
Width	2550 mm
Height	2250 mm
Weight	6.8t




Middle section of super-lift mast	
Length	12140 mm
Width	2340 mm
Height	1930 mm
Weight	4.2t




Connection frame of fixed jib	
Length	1350 mm
Width	1550 mm
Height	1330 mm
Weight	0.33t




Bottom section of fixed jib	
Length	6190 mm
Width	1580 mm
Height	1330 mm
Weight	0.75t




Fixed jib 12m	
Length	12100 mm
Width	1450 mm
Height	1480 mm
Weight	1.25t




Top section of fixed jib	
Length	6450 mm
Width	1450 mm
Height	1800 mm
Weight	1.1t




Stay bar of fixed jib	
Length	7360 mm
Width	1490 mm
Height	660 mm
Weight	0.98t




Bottom section of heavy fixed jib	
Length	6210 mm
Width	1580 mm
Height	1470 mm
Weight	0.75t




Top boom section of heavy fixed jib	
Length	6450 mm
Width	1450 mm
Height	1800 mm
Weight	1.3t




Stay bar of heavy fixed jib	
Length	7360 mm
Width	1490 mm
Height	660 mm
Weight	1.01t




Goose head	
Length	2560 mm
Width	870 mm
Height	1330 mm
Weight	0.22t




400t lifting hook	
Length	1800 mm
Width	916 mm
Height	3062 mm
Weight	7.2t




250t lifting hook	
Length	1800 mm
Width	912 mm
Height	2482 mm
Weight	5.9t




100t lifting hook	
Length	1032 mm
Width	806 mm
Height	1965 mm
Weight	4.1t




50t lifting hook	
Length	700 mm
Width	806 mm
Height	1965 mm
Weight	2.65t




16t lifting hook	
Length	530 mm
Width	530 mm
Height	1155 mm
Weight	0.9t




Counter weight frame	
Length	2200 mm
Width	2625 mm
Height	1890 mm
Weight	5.2t




Crane body loading frame	
Length	2270 mm
Width	2320 mm
Height	780 mm
Weight	1t




Super-lift counter weight bottom frame	
Length	6700 mm
Width	2400 mm
Height	1062 mm
Weight	4.8t




10t counter weight block	
Length	2400 mm
Width	1700 mm
Height	455 mm
Weight	10t




5t counter weight block	
Length	2400 mm
Width	1700 mm
Height	365 mm
Weight	5t

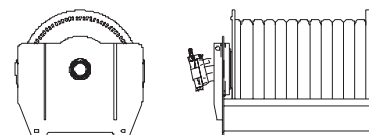


Main lifting winch	
Length	1920 mm
Width	1280 mm
Height	1250 mm
Weight	5.7t



Mast + Main luffing winch	
Length	12475mm
Width	3145 mm
Height	1465 mm
Weight	13t



Auxiliary outrigger	
Length	2985 mm
Width	460 mm
Height	1275 mm
Weight	1.7t



Lifting and lowering tyre	
Length	2340 mm
Width	1560 mm
Height	1055 mm
Weight	0.7t

Technical Descriptions

1. Working condition and boom and jib frame system

Working condition can be divided into two modes of standard working condition and super-lift working condition, and boom and jib frame adopt truss structure. Pipe materials are mainly imported high intensity steel and pulling plate adopts imported high intensity board.

Standard working condition:

Boom working condition
Boom length: 24-84m
Extended section length for boom adjustment: 6m, 12m

Boom length (m)	Middle section of boom	
	6m	12m
24	1	0
30	2	0
36	1	1
42	2	1
48	1	2
54	2	2
60	1	3
66	2	3
72	1	4
78	2	4
84	1	5

Light boom working condition
Light boom length: 48-102m

Light boom length	Middle section of boom		Middle section of tower boom section		
	6m	12m	6m	12mA	12m
48	1	1	1	0	0
54	1	1	2	0	0
60	2	1	2	0	0
66	2	1	1	1	0
72	1	2	1	1	0
78	1	2	2	1	0
84	2	2	2	1	0
90	2	2	1	1	1
96	1	3	1	1	1
102	1	3	2	1	1

Working condition of fixed jib

Working condition of fixed jib
Boom length: 30-78m
Fixed jib length: 12-36m

Extended section length for fixed jib adjustment: 12m

Fixed length (m)	Middle section of fixed jib
	12m
12	0
24	1
36	2

Tower jib working condition
Boom length: 30-60m
Tower jib length: 24-72m
Extended section length for tower jib adjustment: 6m, 12m

Tower jib length (m)	Middle section of tower jib		
	6m	12mA	12m
24	1	0	0
30	2	0	0
36	1	1	0
42	2	1	0
48	1	1	1
54	2	1	1
60	1	1	2
66	2	1	2
72	1	1	3

Heavy fixed jib working condition
Boom length: 72-84m
Heavy fixed jib: 12m

Super-lift working condition

Super-lift boom working condition
Boom length: 36-84m

Boom length (m)	Middle section of boom	
	6m	12m
24	1	0
30	2	0
36	1	1
42	2	1
48	1	2
54	2	2
60	1	3
66	2	3
72	1	4
78	2	4
84	1	5

Super-lift light boom working condition
Light boom length: 78-126m

Light boom length (m)	Middle section of boom		Middle section of lower boom section		
	6m	12m	6m	12mA	12m
78	1	4	0	0	0
84	1	4	1	0	0
90	1	4	2	0	0
96	1	4	1	1	0
102	1	4	2	1	0
108	1	4	1	1	1
114	2	4	1	1	1
120	1	5	1	1	1
126	1	5	2	1	1

Super-lift tower jib working condition
Boom length: 24-84m
Tower jib length: 24-84m

Tower jib length (m)	Middle section of tower jib		
	6m	12mA	12m
24	1	0	0
30	2	0	0
36	1	1	0
42	2	1	0
48	1	1	1
54	2	1	1
60	1	1	2
66	2	1	2
72	1	1	3
78	2	1	3
84	1	1	4

2. Mechanism

Main, auxiliary lifting mechanism:

They consist of variable axial piston hydraulic motor, balance valve, speed reducer, constantly closed brake and steel wire rope, and can be controlled independently of other mechanisms. Steel wire rope is non rotation twisting-resistant rope imported from Germany.

Main and auxiliary lifting winches	Steel wire rope diameter	28mm
	Steel wire rope length	860m
	Single rope pull	158kN

There is synchronous controller when main and auxiliary mechanisms are working synchronously, and maximum single rope speed is 143m/min. Goose head lifting winch of winch 3 is optional, with maximum single rope speed of 108m/min.

Luffing mechanism

Tower luffing and super-lift luffing mechanism consist of imported variable axial piston hydraulic motor, balance valve, speed reducer, constantly closed brake and steel wire rope. Main luffing mechanism consists of imported quantitative and axial piston hydraulic motor, balance valve, speed reducer, constantly closed brake and steel wire rope. Steel wire rope is non rotation twisting-resistant rope imported from Germany.

Main luffing winch	Steel wire rope diameter	28mm
	Steel wire rope length	330m × 2
	Single rope pull	158kN

Tower luffing winch	Steel wire rope diameter	28mm
	Steel wire rope length	700m
	Single rope pull	158kN

Super-lift luffing winch	Steel wire rope diameter	28mm
	Steel wire rope length	950m
	Single rope pull	158kN

Maximum single rope speed of main luffing winch is 2 × 50m/min.
Maximum single rope speed of tower luffing winch is 122m/min.
Maximum single rope speed of super-lift luffing winch is 143m/min.

Swing mechanism

Swing mechanism adopts closed loop double drive double swing mechanism, and consists of constant displacement hydraulic motor, gear reducer, brake, pinion and swing bearing. Swing mechanism can be operated with controllable skidded turn to reduce impact, making it more stable to start braking. Swing bearing adopts three-row-ball type internal joggling slewing bearing, which is with strong bearing capacity and high precision, ensuring a more stable and precise slewing. Continuous speed regulation within 0-1.1 r/min can be realized during swinging.

Traveling mechanism:

It adopts of four-motor four-speed reducer form or four-motor two-reducer form, and all hydraulic motor, speed reducer and balance valve are imported. The two caterpillar tracks are controlled by two sets of control handle respectively, able to travel in a straight line, turn from one side, turn with differential speed, turn from spot and steer with load, and with high flexibility. Travel speed: 0-1.6km/h (two-drive), 0-1km/h(four-drive). Grade ability: 30% Caterpillar track tension: through tensioning oil cylinder, quick, convenient and reliable.

Mast jacking mechanism

It consists of mast, mast jacking oil cylinder and auxiliary system and is used, during crane assembling (or moving to another site), to jack the mast self-leveling position more than 90°, making it more convenient to connect pulling plate, assembling arm frame and mounting caterpillar track assembly.

Operation cabin swinging and luffing mechanism

Operate swinging oil cylinder, operation cabin can turn for 90° from side face of swivel table to front, reducing crane width and being convenient for transportation. Operation cabin luffing is controlled through oil cylinder; operation cabin can face upward 90° when lifting height is high, greatly widening driver's view.

Outrigger jacking mechanism and caterpillar track self-disassembling & assembling mechanism

Outrigger jacking mechanism and caterpillar track self-disassembling & assembling mechanism are wireless remote control systems, which consist of lower outrigger, outrigger oil cylinder, and outrigger valve and caterpillar track driving pin and so on. Outrigger jacking mechanism is main load bearing mechanism during self-disassembling of caterpillar track. Caterpillar track self-disassembling & assembling mechanism performs hoist assembling of Caterpillar track assembly through mast and mast jacking mechanism. Outrigger jacking mechanism and caterpillar track self-disassembling & assembling mechanism can disassemble and assemble caterpillar track assembly on their own without auxiliary host assembling equipments, improving working efficiency and reducing labor intensity and danger due to manual operation.

3. System

Hydraulic system:

It consists of main pump, control valve, hydraulic motor, hydraulic oil cylinder and cooler. Hydraulic system adopts world advanced pump control system, and main elements such as pump, motor and main loop valve are imported from Germany, which are highly efficient, energy saving, highly reliable and with long service life. Main hydraulic pump: variable piston pump with series-wound gear pump, driven by engine. Auxiliary mechanism oil source: variable constant pressure pump. Main control valve: leading electro-hydraulic control valve. Main loop control mode: controlled by pump control system and control handle. Auxiliary mechanism control: solenoid switching valve set, equipped with unloading overflow valve. Outrigger control: electromagnetic manifold valve controlled by electronic control cabinet. Hydraulic oil tank capacity: 1000L. Oil filter: return oil filter, precise filter for controlling oil line. Cooler: aluminum radiator, hydraulic motor driving fan

Electrical appliance system:

24V DC, negative earth, two 195AH accumulators. Electrical appliance of the whole set includes: power supply, engine startup and stop, indicator, annunciator, lighting, air fan, wiper, horn, lifting height limiter, hydraulic oil cooling air fan, digital display, PLC controller, moment limiter system, engine warm-up device and safety device, all of which ensure safety and favorable working environment for the crane.

The complete crane adopts CAN bus technology, which connects engine, PLC controller, moment limiter and digital display effectively and is provided with fault detection and self-diagnosis function, GPS/GPRS global positioning and remote fault diagnosis system.

Dynamical system:

Engine is imported original Benz electronic spark ignition diesel motor with CAN interface. Rated output power: 360kw, 1800r/min. Max. output torque: 2200Nm, 1300r/min. Discharge standard: T3. Fuel oil tank has a big capacity of 700L, which ensures sufficient working time for the engine.

Centralized display system:

10.4 inch big screen touch LCD, provided with Chinese-English switching display, able to display signals of all working conditions collected by PLC controller, including engine running speed, water temperature, fuel oil pressure, hydraulic pump pressure, main motor pressure, crane working condition, air speed at top of arm frame, able to perform real-time supervision on working condition. The system sends out yellow or red alarm when crane is in abnormal working state.

Closed-circuit monitoring system

It monitors steel wire rope winding of winch mechanism such as lifting, main luffing, tower luffing, super-lift luffing, and super-lift counter weight and circumstances around working area.

Centralized lubrication system

It adopts 3 sets (1 for upper crane, 2 for lower crane) of centralized lubrication system, being convenient for maintenance and reducing abrasion of parts.

4. Safety device

Hydraulic system

This crane adopts multiple mechanical, electronic and hydraulic safety and alarm devices to ensure safety application of the machine.

Moment limiter:

It consists of moment display and digital LCD. Alarm indicator gets on and buzzer sends out warning when lifting moment reaches to 90% of rated moment, and crane can stop automatically when lifting moment is close to the rated one to avoid accident of caterpillar track crane due to overload and ensure normal and safety working of the crane. Digital LCD displays following data: Moment rate, Boom angle, Boom length.

Working range
Actual load of lifting hook
Allowed lifting load
Maximum allowed lifting height
Pull value and percentage
Super-lift counter weight value and percentage in use

Overflow valves in hydraulic system:

It can restrain abnormally high pressure in loop to avoid damage of hydraulic oil pump or motor and overload of the system.

Lifting height limiter:

Subassemblies as limit switch and hammer installed on top of working arm are used to avoid excessive hook lifting. When lifting hook rises to a certain height, limit switch sends out signal, electrical system cuts off lifting action of the lifting hook and sends out audible and visual alarm through buzzer and display screen in operation cabin to avoid excessive winding of the lifting hook.

Angle indicator:

Boom angle indicator is set under bottom boom section (that is, right side of operation cabin), and the driver can see boom angle clearly from control room.

Alarm and protection system of boom limit position:

This control system is controlled in two-stage by torque limiter and limit switch and used for alarm and protection when the boom is at limit angle.

Gravity detection device:

It detects gravity of the whole vehicle during travelling and working and displays pressure to the ground to ensure vehicle safety.

Anti-dropping device:

It avoids heavy dropping during lifting.

Anemoscope:

Electronic anemoscope sensor can display real time air speed level on screen for the convenience of caution of hazardous working environment.

Wire rope excessive unwinding protection device:

When wire rope in drum unwinds to the last three rings, protection device sends out signal, electrical system cuts off action of unwinding and lowering hook, and sends out aural and visual alarm through buzzer and indicator from control room.

Anti - tipping device of lifting boom

It is equipped with anti-tipping oil cylinder to make anti-tipping cushion more stable and reliable and to ensure safe and stable operation.

Emergency stop button:

Press this button to stop engine and all actions under emergency.

Three-color warning light:

The warning light has three colors of red, yellow and green and displays loading status simultaneously, that is, green means load rate is lower than 90%, yellow means load rate is between 90% and 102%, and red means load exceeds 102% and machine is in overload state.

Monitoring system:

Camera: monitors winch mechanism and rear part of the crane respectively. Display: monitors images through switching screens with buttons.

Optional remote GPS monitoring system:

It can realize GPS satellite positioning and GPRS data transmission and functions of application status query, statistic and remote fault diagnosis.

5. Operation cabin

It adopts all-steel structure with toughened glass around and laminated glass at top and front window. It is internally equipped with shade assembly, adjustable chair, rain wiper and electrical control handle, moment limiter, digitalized display, all kinds of switch control cabinet assembly, air conditioner, electric air fan, lighting, radio (CD player, mp3 player, vehicle DVD), cigarette lighter and fire extinguisher etc. Operation cabin has an open view and its internal space is wide and comfortable.

6. Lifting hook

All are equipped with turnable lifting hook and anti-dropping device. 400t lifting hook (200t × 2), equipped with 16 pulleys. 250t lifting hook (125t × 2), equipped with 10 pulleys. 100t main lifting hook, equipped with 4 pulleys. 50t main lifting hook, equipped with 2 pulleys. 16t lifting hook: column lifting hook.

7. Engine cold start device and hydraulic oil heating device


Ensure normal working under cold environment.

8. Optional devices

300t tower head
Goose head lifting winch, steel wire rope, luffing frame, lightning protection device

Lifting Performance


1. Boom lifting characteristic curve

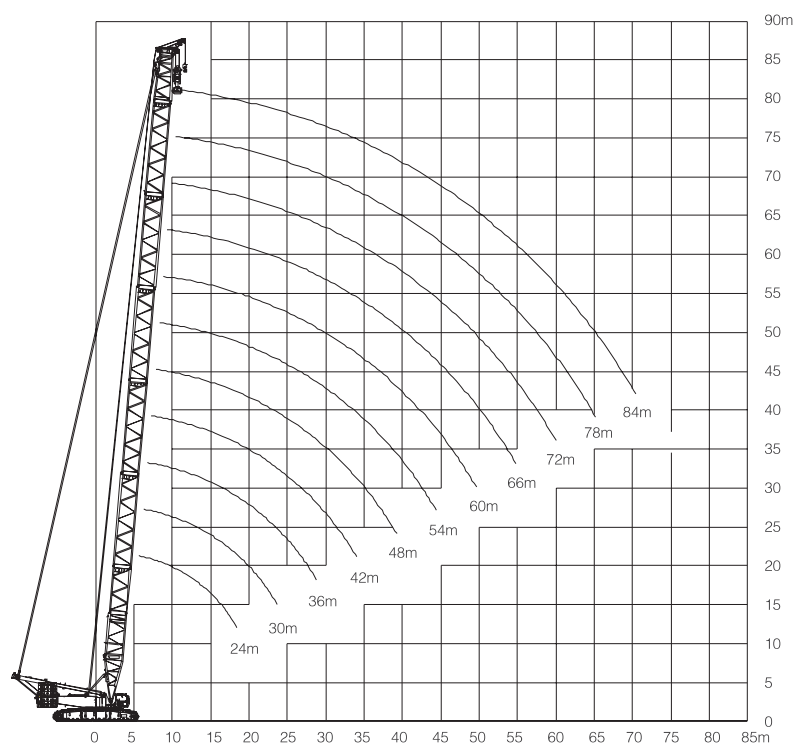

Standard boom lifting capacity table

Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t											
Boom length (m)	24	30	36	42	48	54	60	66	72	78	84
Times	2 × 16	2 × 13	2 × 12	2 × 10	2 × 9	2 × 8	2 × 7	2 × 7	2 × 6	2 × 4	2 × 4
Range(m)											
6	400										
7	361	348	338								
8	314	304	296	288							
9	278	269	263	256	248	235					
10	243	241	236	230	224	218					
11	222	217	217	215	207	200	195	188			
12	192	192	192	192	186	182	177	172	165	124	109
14	162	162	157	154	152	152	152	142	136	121	101
16	133	133	133	128	127	126	124	117	115	116	93
18	111	111	111	111	109	104	103	102	101	99	86
20	98	97	96	93	93	93	91	87	86	83	81
22	86	83	83	81	81	81	79	76	75	74	71
24		73	73	71	71	71	71	69	65	64	61
26		66	66	63	63	63	62.5	61	58	57	53
28			61	57.5	57	55.5	55.5	55	51.5	51	46
30			56	52.5	51	50.5	50.5	50	47.5	46	41
32				48	46.5	46	45.5	45	44	42	37.5
34				43.5	42.5	42.5	42.5	41	40.5	38	34.5
36				40	39	38.5	38	37.5	37	35	30.5
38				36.5	35.5	35.5	35.5	35.5	33.5	32.5	27
40					33	32.5	31.5	30.5	30.5	29	24.5
44						27.5	27	26.5	25.5	23	20
48						23	22.5	21.5	20.5	18.5	16.5
52							20	18	16.5	14.5	13
56								14.5	14	12	10.3
60									11	9	8.3
64									9	7	6
68										6	5
72											4
Wind speed m/s	14.3				12.8				11.1		


2. Light boom lifting characteristic curve

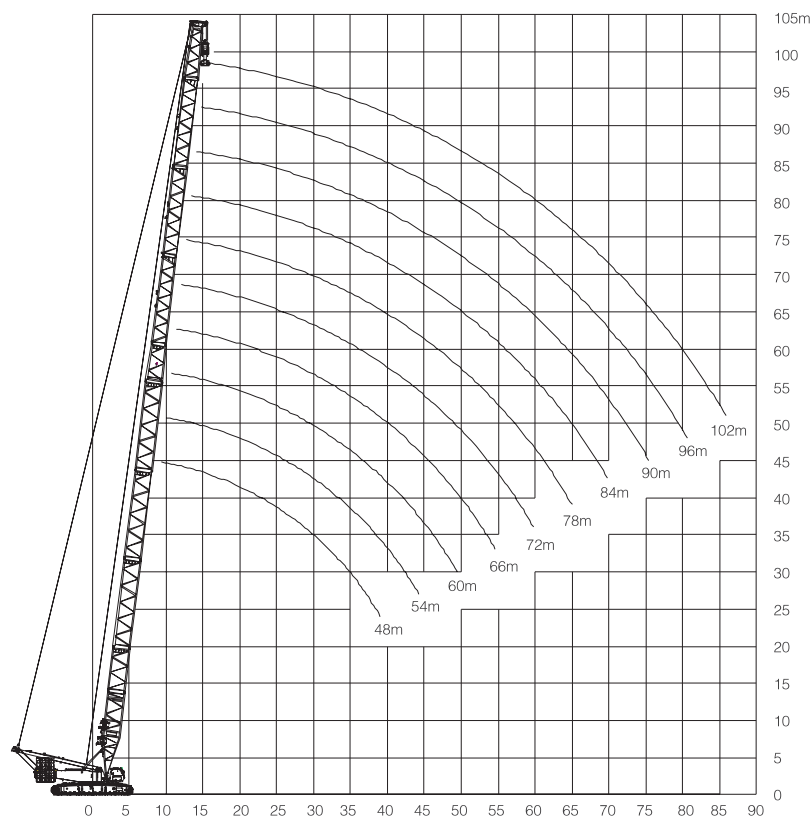

Standard light boom lifting capacity table

Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t										
Boom length (m)	48	54	60	66	72	78	84	90	96	102
Times	2 × 7	2 × 7	2 × 6	2 × 6	10	9	7	6	6	5
Range(m)										
9	207									
10	195	195								
12	170	168	172	154	147	121				
14	140	136	135	130	128	118	102	91		
16	120	113	110	108	108	107	95	87	79	67
18	105	99	93	93	95	92	86	83	75	65
20	92	87	82	79	83	80	78	76	70	61.5
22	81	79	76	71	75	72	69	67	65.5	58.5
24	72	71	69	64	68	66	63	61	58.5	54.5
26	65	64	61	58	62	60	58	56	52	50.5
28	58.5	57.5	55.5	52	56	54.5	52.5	51	47	45
30	53.5	51.5	51	48	51	50	48	47	43	41
32	48	47	46	44	46	45	44	43	40	38
34	45	44	43	41	42	41.5	40.5	39	37	34
36	42	41	40	39	39	38	37	36	34	31
38	39	38	37.5	36	36	35	34	33	31	28
40	36	35.5	35	34	33	32	31	30	29	25
44		31	30	29	28.5	27.5	26.5	26	24	21
48		28	27	26	25	24	22.5	22	20	17
52			24	23	22	21	19.5	19	17	13.5
56				19.5	18.5	18	16.5	16	14	11
60					16.5	16	14.5	13	12	9
64					13.5	13	12	12	10	6.5
68						11	10	10	8.5	5
72							9	8.2	7	4
76								6.8	6	3
80									5	
84									4	
Wind speed m/s	12.8					11.1				

3. Boom + fixed jib lifting characteristic curve

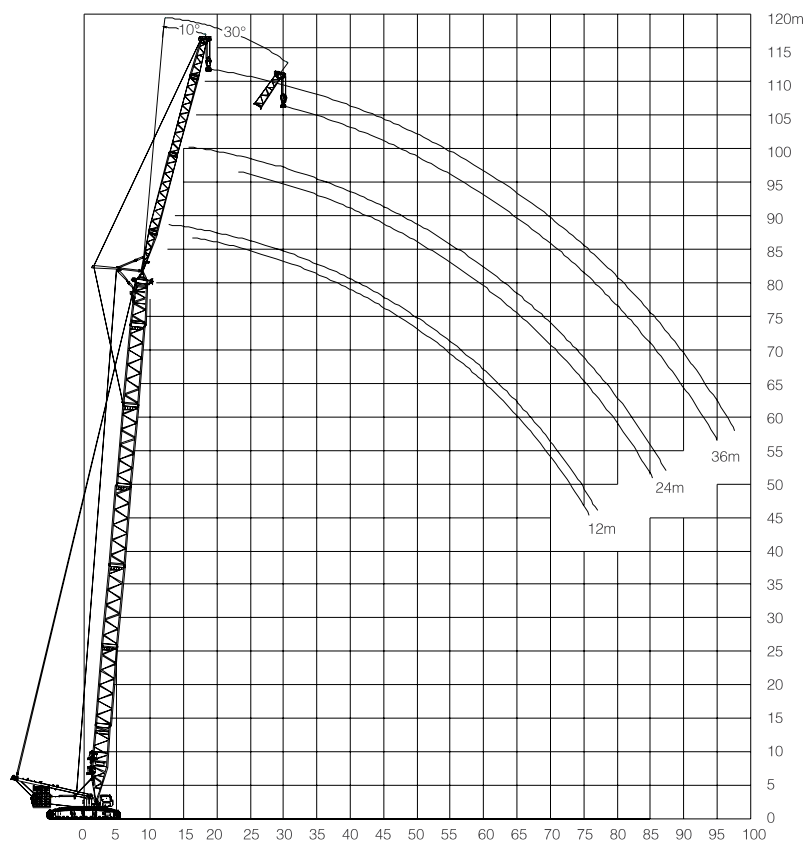

Standard fixed jib lifting capacity table

Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t

Boom length(m)	30						36					
Fixed jib(m)	12		24		36		12		24		36	
Angle	10°	30°	10°	30°	10°	30°	10°	30°	10°	30°	10°	30°
Times	6	3		4	2	2	1	6	3	4	2	2
Range(m)												
10	80						80					
12	80						80					
14	74.5	37	49.1				79.5	37	49.9			
16	69.5	35	45		32.2		73	35.5	46.5		32	
18	62	32.5	41.1		29.2		68	33.5	43		29.5	
20	56.5	30.5	37.3	20.2	26.4		62	31.5	39.6		27.5	
22	51.5	29.5	34.1	19.2	24.8		57	30.5	36.2	19.3	25.4	
24	47.6	27.5	31.3	18.2	23.4		52.5	29.5	33.8	18.3	23.7	
26	44.2	26.5	28.9	17.2	22		49	27.5	31.3	17.5	22.3	
28	41.2	25.5	26.9	16.4	20.8	12	45.7	26.5	29.1	17.3	21	13
30	38.7	24.5	25	15.7	19.3	12	42.9	25.4	27.2	16.2	20	12.3
32	36.6	24	23.6	15.1	18.1	11.2	39.5	24.9	25.6	15.7	18.9	11.8
34	34.5	23.5	22.1	14.5	16.9	10.4	36	24.4	24	15.2	17.8	11.2
36	32.9	23	20.9	14	15.9	10.4	34.3	23.9	22.8	14.7	16.9	10.7
38	31.3	22.5	19.7	13.4	14.9	10.4	32.5	23.4	21.5	14.2	16	10.2
40			18.8	12.9	14.2	9.8	31		20.5	13.7	15.2	9.7
44			17.1	12.1	12.8	8.7			18.7	12.7	13.7	8.8
48			15.7	11.5	11.6	7.9			17.2	12	12.5	8.3
52					10.6	7.4			15.9	11.5	11.4	7.7
56					9.8	7.1					10.5	7.3
60						6.9					9.8	7.1
64											9.2	6.9
Wind speed m/s	14.3											

Standard fixed jib lifting capacity table

Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t

Boom length(m)	42						48					
Fixed jib(m)	12		24		36		12		24		36	
Angle	10°	30°	10°	30°	10°	30°	10°	30°	10°	30°	10°	30°
Times Range(m)	6	3		4	2	2	1	6	3	4	2	2
12	80						80					
14	80	38	51				80		52			
16	76.5	36.5	47.3				80	37.5	47.6			
18	72	34.5	44.4		30.5		74.5	35.5	45.2		30.5	
20	67	33.5	41.4		28.5		70.5	33.5	42.8		29.5	
22	62	31.5	38.4	20.3	26.4		64.5	32.5	40.1	20.3	27.5	
24	57	30.5	35.4	19.3	24.3		57.5	31.5	37.4	19.3	25.4	
26	51.5	29.5	33.5	18.3	23.3		53.5	30.5	34.9	18.3	23.4	
28	46.5	27.4	31.2	17.2	22.2	13	49.5	28.5	33.2	17.3	22.5	
30	43.5	27.4	29.2	16.5	21.2	12.2	44.5	27.4	31.1	17.3	21.5	12
32	41	26.4	27.6	16	20.2	11.7	41	26.9	29.4	16.8	20.6	11.6
34	38.5	25.3	25.9	15.5	19.2	11.2	37.5	26.4	27.7	16.2	19.6	11.2
36	35.5	24.8	24.6	15	18.2	10.7	34.5	25.4	26.3	15.2	18.7	10.7
38	32.5	24.3	23.2	14.4	17.1	10.2	31.5	24.4	24.9	14.2	17.8	10.2
40	30.5	23.8	22.2	14	16.3	9.8	29.5	23.9	23.8	14.2	17.1	10.2
44	26.4	22.7	20.2	13.2	14.7	9.3	25.4	22.8	21.7	13.7	15.6	9.7
48	22.9	21.5	18.6	12.5	13.4	8.7	21.9	21.7	19.9	12.9	14.3	8.7
52			17.2	11.9	12.3	8.2	18.8	20.5	18.2	12.3	13.1	8.1
56			16.1	11.4	11.3	7.7			16.1	11.8	12.1	7.8
60				11	10.5	7.2			14.7	11.3	11.2	7.4
64					9.8	7.1			13.8	10.8	10.5	7.1
68					9.3	6.9					9.8	6.8
72						6.7					9.3	6.5
76											8.7	6.3
Wind speed m/s	14.3						12.8					

Standard fixed jib lifting capacity table

Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t

Boom length(m)	54						60					
Fixed jib(m)	12		24		36		12		24		36	
Angle	10°	30°	10°	30°	10°	30°	10°	30°	10°	30°	10°	30°
Times Range(m)	6	3		4	2	2	1	6	3	4	2	2
12	80						80					
14	80						80					
16	80	37.5	49.5				80	38.5	50.5			
18	78.5	36.5	44.5		30.3		80	36.5	46.5			
20	73.5	34.5	41.5		29.3		75.5	35.5	43.9		29.4	
22	66.5	33.5	38.5	20.3	28.3		68.5	33.5	42.5		28.4	
24	61.5	31.5	35.5	19.3	26.3		60.5	32.5	40.3	20.4	27.4	
26	54.5	30.5	33.5	19.3	24.3		53.5	31.5	38	19.4	25.4	
28	48.5	29.5	30.5	18.3	23		47.5	30.5	35.7	18.4	23.3	
30	44.5	28.5	29.5	17.3	22.4	13	43.5	29.4	34	17.3	22.7	13.2
32	40.5	28	28	16.8	21.8	12.1	39.5	28.4	32.4	16.9	22.2	12.7
34	36.5	27.5	26.4	16.2	21.1	11.2	35.5	27.4	30.7	16.4	21.6	12.2
36	33.5	26.5	24.9	15.7	20.1	11.2	32.5	26.9	29	16	20.8	11.7
38	30.5	25.4	23.4	15.2	19.1	11.2	29.5	26.4	27.3	15.6	20	11.2
40	28.5	24.9	22.4	14.7	18.2	10.7	27.5	25.9	25.7	15.3	19.1	10.7
44	24.4	23.9	20.3	13.7	16.5	9.7	23.4	23.9	22.5	14.5	17.3	9.7
48	20.9	21.4	18.8	13.2	15.1	9.2	19.9	20.3	20.2	13.8	15.4	9.2
52	17.8	18.2	17.8	12.7	13.9	8.7	16.9	16.8	18.4	13.1	14.6	8.8
56	15.3	16.3	16.3	12.2	12.8	8.2	14.3	14.4	15.8	12.6	13.5	8.3
60			14.2	11.7	11.9	7.7	12.3		13.2	12	12.5	7.8
64			12.7		11.1	7.2			11.2	11.4	11.1	7.3
68			11.2		10.2	7.2			9.7	10.9	9.7	7.1
72					9.1	6.7			8.2	10.3	8.7	7
76					8.3	6.1					7.7	6.8
80					7.8	5.9					6.7	6.4
84											5.6	6.3
Wind speed m/s	12.8											

Standard fixed jib lifting capacity table

Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t


Boom length(m)	66						72					
Fixed jib(m)	12		24		36		12		24		36	
Angle	10°	30°	10°	30°	10°	30°	10°	30°	10°	30°	10°	30°
Times Range(m)	6	3		4	2	2	1	8	3	4	2	2
14	80						80					
16	80	38.5	52.5				80					
18	80	37.5	48.5				80	37.5	49.5			
20	78.5	35.5	44.5		29.5		77.5	36.5	45.5		29.4	
22	67.5	34.5	41.5		28.5		67.5	34.5	42.5		28.4	
24	59.5	33.5	38.5	20.4	27.5		58.5	33.5	39.5	20.4	27.4	
26	52.5	32.5	36.5	19.3	26.5		51.5	32.4	37.5	19.4	26.4	
28	47.5	31.5	33.5	18.3	24.5		46.5	31.4	35.5	19.4	25.4	
30	42.5	30.5	31.5	18.3	23.4		41.5	30.4	33.5	18.3	24.4	
32	38.5	29.5	30	17.8	21.9		37.5	29.9	31.5	17.8	22.9	
34	34.5	28.4	28.5	17.3	20.4	12.2	33.5	29.4	29.4	17.3	21.3	12.2
36	31.5	27.9	27.5	16.8	19.4	11.7	31	28.4	28.4	16.8	20.3	11.7
38	28.5	27.4	26.5	16.3	18.3	11.2	28.5	27.4	27.4	16.3	19.3	11.2
40	26.5	26.4	25	15.8	17.3	10.7	26	25.9	25.9	15.8	18.3	10.7
44	22.4	23.4	22.5	14.7	15.8	10.2	21.5	22.4	22.9	14.7	16.8	10.2
48	18.9	19.8	20.4	13.7	14.7	9.7	17.9	18.3	19.8	14.2	15.3	9.7
52	15.8	16.8	17.8	13.2	13.7	8.7	14.8	15.2	16.8	13.7	13.8	9.1
56	13.3	13.7	14.8	12.7	12.7	8.2	11.7	12.7	13.8	13.2	12.7	8.6
60	11.2	10.7	12.2	12.2	11.7	8.1	9.2	10.2	11.2	12.7	11.7	8.1
64	9.2	8.1	10.7	11.7	10.7	7.6	7.6	8	9.2	11.2	10.2	7.6
68	7.2	6.1	9.2	10.2	9.7	7.1	6.1	5.8	7.6	9.2	8.7	7.1
72			7.6	8.9	8.2	7.1	4.6	4.2	6.1	7.1	7.2	7.1
76			6.1	8.2	6.6	7.1			4.6	5.5	5.6	7.1
80			4.6	7.1	5.6	6.6			3.6	4.5	4.6	6.1
84					4.6	5.6				3.8	3.6	4.6
88					3.6	4.9						3.6
92						4.4						
Wind speed m/s	11.1											

Standard fixed jib lifting capacity table

Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t

Boom length(m)	78					
Fixed jib(m)	12		24		36	
Angle	10°	30°	10°	30°	10°	30°
Times Range(m)	6	3	4		2	2
14	76					
16	74.5					
18	73.5	36.8	40			
20	70.5	35.5	39.1		24.5	
22	61	34.4	38.6		24	
24	53.5	33.3	38	20	23.5	
26	47.1	32.3	37.4	19.6	23	
28	41.9	31.4	36.8	19.1	22.6	
30	37.4	30.5	36.2	18.6	22.1	
32	33.8	29.8	34.3	18.1	21.8	11.8
34	30.2	29	32.3	17.6	21.5	11.5
36	27.4	27.5	29.5	17.2	21.2	11.2
38	24.6	26.1	26.7	16.7	20.9	10.8
40	22.3	23.8	24.5	16.3	20.5	10.6
44	18.1	19.4	20.3	15.5	19.5	10.1
48	14.7	15.8	16.8	14.8	17.6	9.6
52	11.9	13.9	13.9	14.1	15	9.2
56	9.5	10.4	11.4	12.9	12.6	8.7
60	7.5	8.2	9.3	10.9	10.4	8.3
64	5.7	6.3	7.5	8.9	8.6	8
68	4.2	4.3	5.9	7.2	6.9	7.6
72	2.8	2.3	4.5	5.6	5.5	7
76			3.3	4.2	4.2	5.8
80			2.3	3	3.1	4.5
84					2.2	3.4
88						2.3
92						
Wind speed m/s	11.1					

4. Tower jib lifting characteristic curve

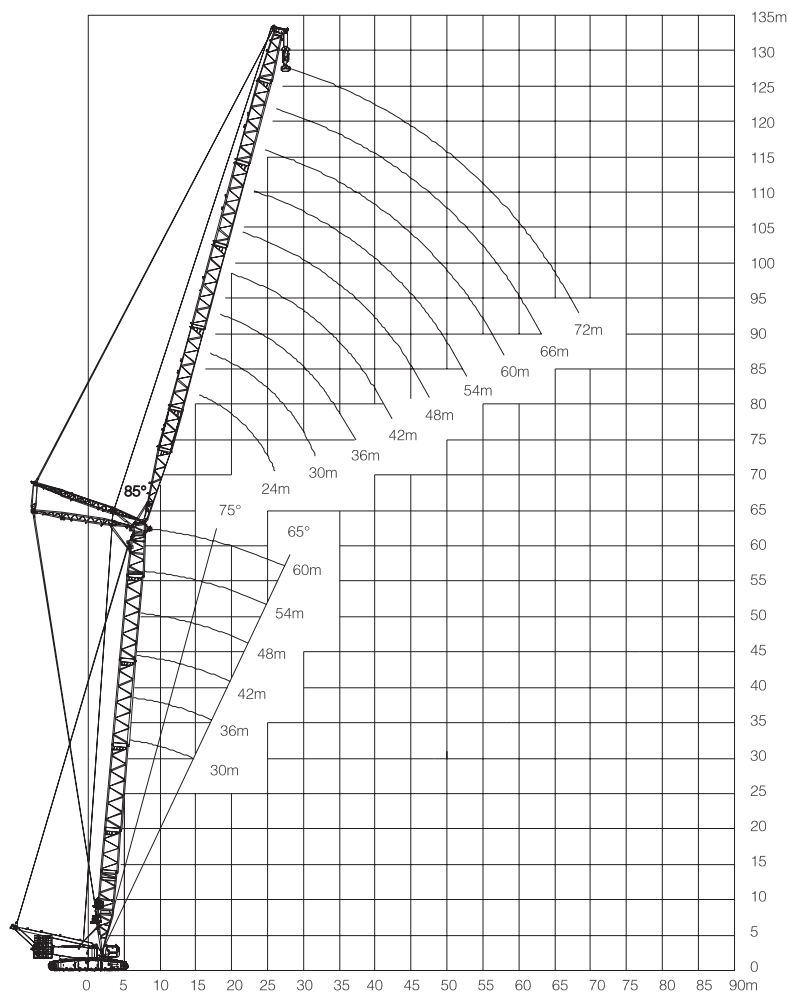

Standard tower jib lifting capacity table

Boom 85° Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t									
Boom length(m) Tower boom length(m) Range(m)	24	30	36	42	48	54	60	66	72
14	142								
16	118	112	108						
18	100	99	95	94					
20	89	88	85.5	83	81				
22	81	80	77.8	75	72.8	71	66		
24	74	73	71	69	66.8	64	61.5	58	
26	67	66	65	63.5	61.5	59	57	54	50
28		60	59.5	58.5	56.6	54.5	53	51.5	49
30		55	54.5	54	52.6	50.5	49.5	47.5	45.5
32		51	50.5	50	49	47	46.2	44.5	42.5
34			46.5	46.5	45.6	44	43	41.5	40
36			43.5	43	42.6	41	40.2	39	37
38			41	40	39.8	38.5	37.8	36.5	34.5
40				37.5	37.2	36	35.5	34	32.5
44					32.5	32	31.2	30.5	29
48					29	28.5	28	27	25.5
52						25.5	25	24	23
56							22.5	21.3	20.5
60							20	19.4	18.2
64								17.5	16.5
68									15
72									13
Wind speed m/s	12.8			11.1					

Standard tower jib lifting capacity table

Boom 85° Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t

Boom length(m) lower boom length (m) Range(m)	36								
	24	30	36	42	48	54	60	66	72
14	130								
16	117	111							
18	99	98	94	90					
20	85	84.5	84	79.5	78				
22	78	77	75	72.5	70.6	69			
24	71	70.2	68	66.5	64.8	62.3	61		
26	65	64.5	62.5	61.5	59.8	57.5	55.4	53	
28		59.5	58	56.5	55	53.3	51.5	49.5	47
30		55	54	52.5	51	49.5	48	46.3	44
32		51	50.2	49	48	46.2	44.8	43.3	41.5
34			46.5	46	45	43.3	41.8	40.3	38.5
36			43	42.8	42	40.5	39.2	37.8	36
38			40.5	40	39.5	38.2	36.8	35.5	33.5
40				37.5	37	36	34.8	33.4	31.5
44				34	32.5	32	31	29.7	28
48					29	28.5	27.5	26.5	24.5
52						25.3	24.5	23.5	22
56							22	21	19.5
60							19.6	18.8	17.5
64								17	15.5
68									14
72									12
Wind speed m/s	12.8		11.1						

Standard tower jib lifting capacity table

Boom 85° Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t

Boom length(m) lower boom length (m) Range(m)	42								
	24	30	36	42	48	54	60	66	72
14	128								
16	116	110							
18	97	97	93						
20	84	83	83	81					
22	75	74	73	72	69	67			
24	69	68	65.5	64	64	62	60		
26	63.5	63	60.5	59	57	57	54	52	
28	58	58	56.5	55	53	51.5	51	48	46
30		54	52.5	51	49	48	46.5	46	43
32		50	49	47.5	46	44.5	43	42	40
34			46	44.5	43	41.5	40	39	37.5
36			43	42	40.5	39	37.5	36.5	35
38			40	39.5	38	37	35.5	34.5	32.5
40				37.5	36	35	33.5	32.5	30.5
44				33.5	32.5	31.5	30	28.5	27
48					29	28	26.8	25.5	23.5
52						25	24	22.5	21
56						22.5	21.5	20	18.5
60							19.3	18	16.5
64								16	14.5
68									13
72									11
Wind speed m/s	11.1						9		

Standard tower jib lifting capacity table

Boom 85° Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t

Boom length(m) lower boom length (m) Range(m)	48								
	24	30	36	42	48	54	60	66	72
16	108								
18	96	94	92						
20	83	82	81	80					
22	73	72	72	71	69				
24	67	66	64	63	61	59	57		
26	62	61	59	57	56.5	55	53	51	
28	56	56.5	55	52	51	50	48	46	44
30		52.5	51	48.5	47.5	46.2	45	43	41
32		49	47.5	45.5	44.5	43	41.5	40	38
34		46	44.5	42.5	42	40.5	39	37.5	36.5
36			42	40	39.5	38	36.5	35.5	34
38			39.5	38	37	35.5	34.5	33	31.5
40				36	35	33.5	32.5	31	29
44				32.5	31.5	30	29	27.5	25.5
48					28	27	26	24.6	22
52						24	23	22	20
56						21.5	20.5	19.5	17.5
60							18.5	17.5	15.5
64								15.5	13.5
68								14	12
72									10
Wind speed m/s	11.1					9			

Standard tower jib lifting capacity table

Boom 85° Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t


Boom length(m) lower boom length (m) Range(m)	54								
	24	30	36	42	48	54	60	66	72
16	106								
18	95	93							
20	82	81	80	78					
22	72	71	71	69	67				
24	64	63	63	62	60	58			
26	59	58	56	56	56	54	52	50	
28	55	54	52	50.5	50	49.5	48	45	42
30		50.5	48.5	47	45.6	44.5	43.5	42	40
32		47.5	45.5	44	42.6	41.5	40	38	35
34		44.5	43	41.5	40	39	37.5	36	34.5
36			40.5	39	37.6	36.5	35	33.5	32.5
38			38	37	35.5	34.5	33	31.5	30
40			36	35	33.5	32.5	31	29.5	28
44				31.2	30	29	27.5	26.5	24
48					27	26	24.5	23.5	20
52						23.2	22	20.7	18
56						20.8	19.5	18.2	16
60							17.5	16	14
64								14.5	12
68								12.8	10
72									8
Wind speed m/s	11.1					9			

Standard tower jib lifting capacity table

Boom 85° Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t

Boom length(m) lower boom length (m) Range(m)	60								
	24	30	36	42	48	54	60	66	72
16	104								
18	94	92							
20	81	80	78						
22	71	70	70	68	66				
24	62.5	62	62	61	59	57			
26	56.5	55.5	55.5	54.5	54.5	52	50		
28	51.5	50.5	49.5	49.5	49.5	46	44	42	
30	46.5	45.5	45.5	44.5	44.5	43	40.5	38	36
32		41	41	40	40.5	39	38	36	33
34		38.5	38	37.5	37	36	36	34.5	30.5
36			35	34.5	33.5	33	33	31	29.5
38			32	31.5	31	31	31	29.5	28.5
40			30	29.5	28.5	28	27.5	27.5	26.5
44				26	25	24.5	24	23.5	22.5
48					21.5	21	20.5	19.5	19
52					18.5	18	17.5	17.5	16.5
56						16	15.5	15.5	14.5
60							13.5	13.5	12.5
64							12	11.5	10.5
68								10	9
72									7.5
76									6
Wind speed m/s	11.1		9						


5. Super-lift boom lifting characteristic curve

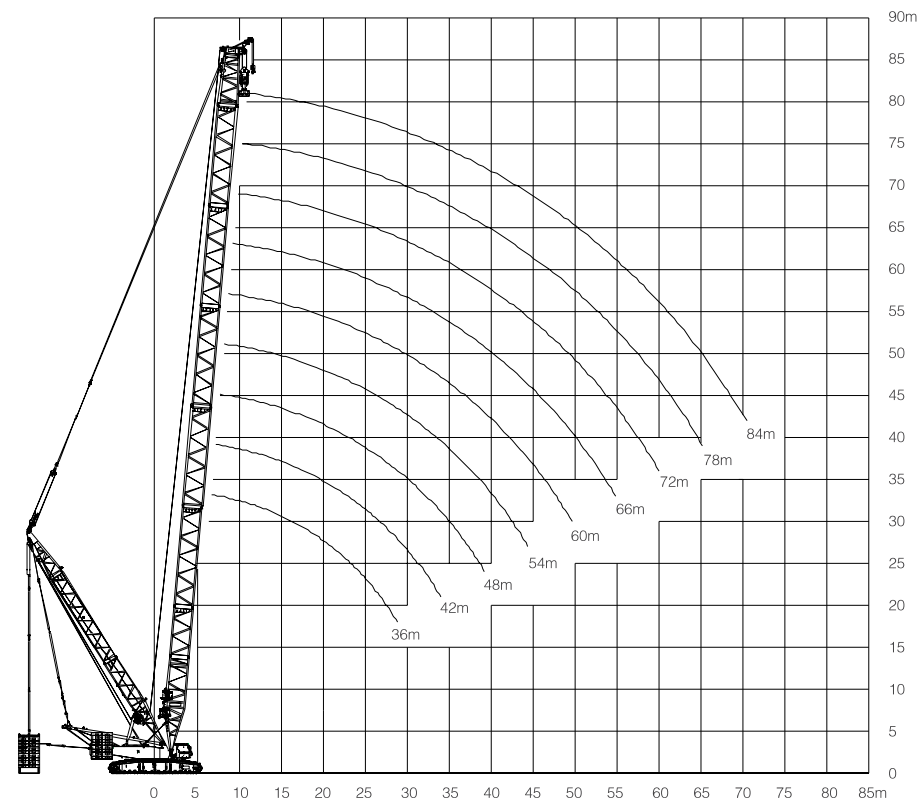

Super-lift boom lifting capacity table

Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t									
Boom length Range(m)	36	42	48	54	60	66	72	78	84
7	500								
8	500	450	412						
9	500	450	412	362					
10	450	450	412	362	315	269			
12	450	450	412	362	315	269	232	201	160
14	398	397	396	362	315	269	232	201	160
16	342	342	341	341	310	269	232	201	158
18	306	305	303	302	290	269	232	201	157
20	270	269	267	267	264	257	232	201	156
22	243	242	242	238	237	234	231	201	155
24	223	222	222	220	215	214	212	201	153
26	203	202	202	202	198	197	195	194	151
28	189	188	187	187	183	182	180	179	148
30	173	172.5	172	172	171	170	169	168	145
32	153	160.5	160	160	159	158	157	156	142
34		148.5	148	148	147	146	145	144	137
36		139	138.5	138.5	138	137	136.5	134	130
38		123	129	129	128	127.5	127	125	124
40			121	121	121	120	119	117	116
44				107	107	106	105	103	102
48				96	95.5	95	94	92	91
52					86	85	84	83	81.5
56						77	76	75.5	73
60							68	68	66
64							63	63	60.5
68								58.5	55.5
72									52
Wind speed m/s	14.3		12.8			11.1			


6. Super-lift light boom lifting characteristic curve

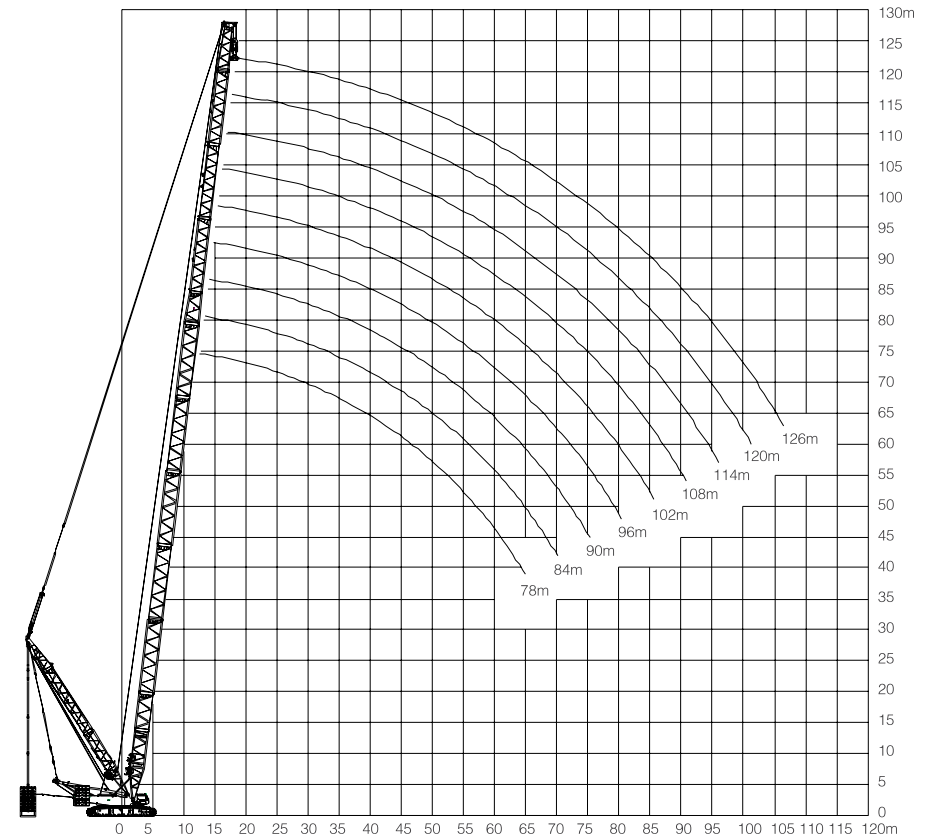

Super-lift boom lifting capacity table

Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t									
Boom length Range(m)	78	84	90	96	102	108	114	120	126
14	207	175	145						
16	207	175	143	125	107				
18	207	175	142	125	106	90.5	78	60	
20	206	175	141	125	105	90.5	77	60	58
22	204	175	138	125	104	89	76	60	58
24	203	172	138	125	102	88	75	60	58
26	196	166	138	125	101	87	74	60	57
28	182	160	135	125	99	85	73	60	57
30	169	158	135	125	98	84	72	60	56
32	155	149	135	125	97	83.5	70.5	60	55
34	143.5	140	135	122	94	81	69.1	60	54
36	131	131	125	122	93	80.5	69.1	60	53.5
38	125	122	120	119	91	78	68.8	60	53
40	117	116	115.5	115	90	77.5	68	60	52
44	105	104.5	104	103.5	86	74.5	68	60	50.5
48	94	93.5	93	92.5	82.5	71.5	64.5	60	49
52	84	84	84	83	79	68.5	59	58	47
56	76	76	76	75	74	65	56.5	56	45.5
60	70	69.5	69.5	69	68.5	62.5	54.5	54	44
64	64.5	64	64	63	63	60	52.5	52	42
68	59	59	59	58.5	58	57	51	50	40.5
72		54.5	54.5	54.5	53.5	53.5	49	48	39
76			50.5	50.5	50	49.5	47	46	37
80				47	46.5	46	45	44	35.5
84				43.5	43	43	41.5	41.5	34.5
88					40.5	40	39	39	33
92						37.5	36.5	36.5	31.5
96							34	34	30.5
Wind speed m/s	11.1			9					

7. Super-lift tower jib lifting characteristic curve

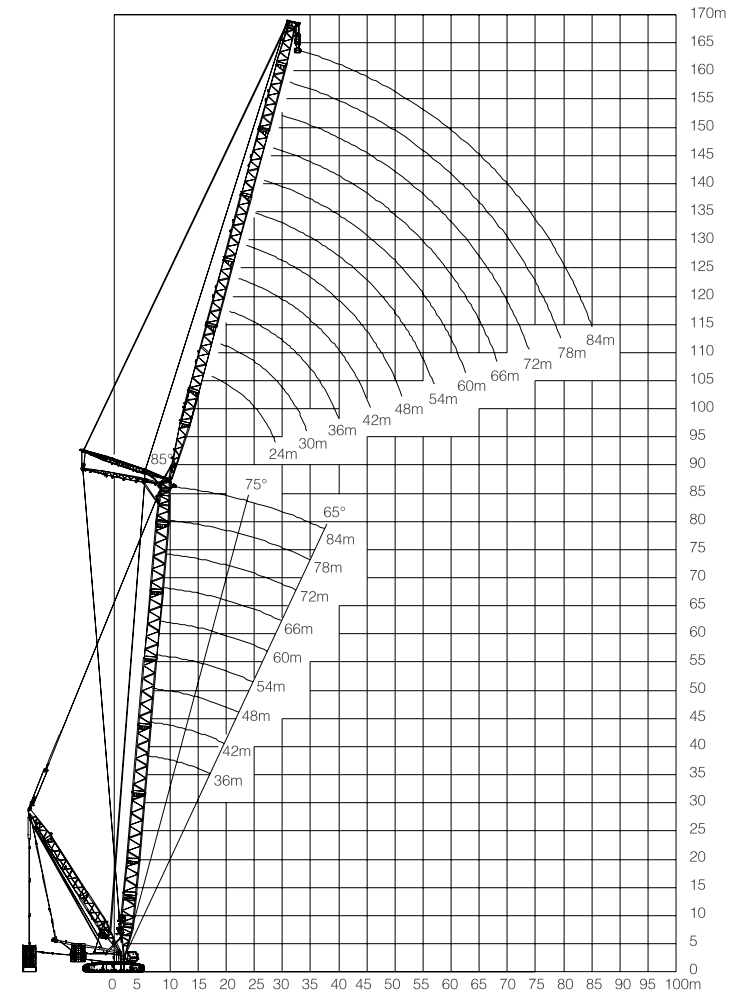

Super-lift tower jib lifting capacity table

Boom 85° Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t

Boom length (m) Jib length (m) Range(m)	36										
	24	30	36	42	48	54	60	66	72	78	84
14	225										
16	225	218									
18	224	215	173								
20	217	205	172	145							
22	198	192	166	145	120						
24	177.5	175.5	158	144	118	100					
26	158	156	150	137	114	99	83				
28	131	142	142	130	110	97	83	68			
30		119.5	130	118	107.5	94	83	68	62.5		
32		112	118.5	109	103	91	82	68	62.5		
34		103.5	111	101	99	87	81	68	61.5	48	40
36			101.5	95	93	83	80	66.5	60.5	47	39.5
38			95.5	88	87	80	79	66	60	47	39
40			88.5	83	82	78	77	64	60	46.5	38.5
44				72	71	72	71.5	62	59	45.5	37.5
48					64	64	63.5	59	56.5	44.5	36.5
52						58	57	55.5	54	43.5	36
56							52	51.5	50.5	43	35.5
60							46.5	45.5	45	42	34.5
64								43	41	39.5	33.5
68								38.5	37	36.5	33
72									33.5	33	31.5
76										30	28
80											25
84											20.5
Wind speed m/s	9.0										

Super-lift tower jib lifting capacity table

Boom 85° Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t

Boom length (m) Jib length (m) Range(m)	42										
	24	30	36	42	48	54	60	66	72	78	84
16	225										
18	220	191									
20	211	184	160	134							
22	201	175	155.5	134	110						
24	175	172	149.5	130	109	91					
26	164	161	141.5	129.5	107	91	78				
28	145	142	129.5	125.5	104	91	78	68			
30		118.5	118	117.5	103	82	78	68	60		
32		111	110.5	109	99	81	77	66	59		
34		103	101	101	96	81	76	64	58.5	46	38
36			95	95	91	79.5	75	62	58	46	37.5
38			88	88	87	78	74.5	61.5	58	46	37
40				82.5	81	74	72.5	60	57.5	45.5	37
44				72	71	69.5	69	58.5	56.5	45.5	36.5
48					63.5	63.5	63	57	55.5	43.5	35.5
52					57.5	57.5	56.5	54.5	54	42.5	35
56						51.5	51	51	50.5	41.5	34.5
60							46	45	45	40.5	33.5
64								42.5	41	38.5	33
68								38	37	36	32.5
72									33.5	33	31
76										30	29
80											26
84											20
Wind speed m/s	9.0										

Super-lift tower jib lifting capacity table

Boom 85° Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t

Boom length (m) Jib length (m) Range(m)	48										
	24	30	36	42	48	54	60	66	72	78	84
16	200										
18	194	168									
20	186	165	144								
22	176	160	141	121							
24	157	154	138	120	101						
26	142	141	133	116	100	83					
28	130	129	129	116	98.5	83	71				
30		117.5	117.5	112	95	82	71	60			
32		110	110	106.5	94	80	70	59	52	44	36
34		102	101	100.5	93	78	70	58.5	52	44	36
36			94.5	92.5	89.5	76	69	58	52	44	36
38			87	87	86	74	69	57.5	52	44	36
40				82	81	71	68	56	52	43	35
44				71.5	71	67	66.5	54.5	51.5	45.5	35
48					63	62	62	53	50	40.5	34
52					57	57	56	52	49	40	33.5
56						51	50.5	50	47	39	32.5
60							45.5	44.5	44.5	38.5	32
64								42	41	37.5	31.5
68								37.5	37	35.5	30.5
72									33	32.5	30
76										30	28.5
80										25.3	25
84											22.5
Wind speed m/s	9.0										

Super-lift tower jib lifting capacity table

Boom 85° Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t

Boom length (m) Jib length (m) Range(m)	54										
	24	30	36	42	48	54	60	66	72	78	84
16	176										
18	171	150									
20	166	146	128								
22	160	142	126	108.5							
24	155	139	123	107	90						
26	141	134	114.5	105	90	76					
28	128.5	128	114	103	90	76	71				
30	117	117	113.5	97	89	75	71	55.5			
32		109	107	96.5	87	74	69.5	55.5	49		
34		100	100	96	85	73	68	55.5	49	39	
36			94	91	83	71	65.5	54.5	48.5	39	33
38			87	87	81	69	63	53.5	48	39	33
40			83	82	78	67.5	62.5	53	47	39	33
44				71	71	64	61	52	45.5	38.5	32.5
48					62.5	60.5	60	50	45	38	31.5
52					56.5	56.5	56	49.5	45	37.5	30.5
56						51	50	46.5	45	36.5	29
60							45	44	44	35.5	27.5
64							42	41.5	40.5	35	27
68								37	36.5	34.5	26.5
72									32.5	32	26
76										30	26
80										26	24
84											22
Wind speed m/s	9.0										

Super-lift tower jib lifting capacity table

Boom 85° Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t

Boom length (m) Jib length (m) Range(m)	60										
	24	30	36	42	48	54	60	66	72	78	84
16	149										
18	149	127									
20	145	127	109								
22	140	124	109	94							
24	135	120	107	93	81						
26	130.5	114	104	92	80	69					
28	126.5	114	101	91	79	69	60				
30	117	110	95	89	78	69	60	49.5			
32		105	94	87	76	68	60	49	45		
34		99	94	85	74.5	67	60	48.5	45	36	
36		91	89.5	83.5	73	66	59	48.5	44.5	35.5	
38			86	82	71.5	65	58	48.5	44	35	29
40			80	79	70	62	57	48	44	35	29
44				71	67	59.5	55	47	43.5	35	29
48				62.5	62.5	58	53.5	47	42.5	35	29
52					55.5	55	51.5	46.5	42	34.5	29
56						49	49	45	41.5	33.5	28
60							44	43	40.5	33	27.5
64							40	39.5	39	32.5	27
68								36.5	36	32	26.5
72									31.5	31.5	26
76									29	29	25.5
80										25	24.5
84											22
Wind speed m/s	9.0										

Super-lift tower jib lifting capacity table

Boom 85° Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t

Boom length (m) Jib length (m) Range(m)	66										
	24	30	36	42	48	54	60	66	72	78	84
18	128.5										
20	125.5	110									
22	121.5	108	95								
24	117.5	104	93	82	71						
26	113.5	101	91	80	71	62					
28	104	98	89	79	70	62	53.5				
30	95	92.5	86	77	69	62	53.5	45			
32		87	82.5	75	67.5	60.5	52.5	45	38		
34		80	79.5	74	66	58.5	51.5	45	38	31	
36			74.5	71	65	57.5	51.5	44.5	38	31	25
38			70	69	64	56.5	51.5	44	38	31	25
40			65	64.5	61.5	55	50.5	43.5	37.5	31	25
44				59	58.5	53	47.5	42.5	37	30.5	25
48				56.5	56.5	51	45	42	36.5	30	25
52					53	49	43.5	42	35.5	30	25
56						46.5	42	41	35	29.5	24.5
60						40	40	39.5	34.5	28.5	24
64							39	38.5	33.5	28	23.5
68								35	32	28	23
72									30.5	28	23
76									27.5	27.5	22.5
80										25	21.5
84											20
88											18.5
Wind speed m/s	9.0										

Super-lift tower jib lifting capacity table

Boom 85° Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t

Boom length (m) Jib length (m) Range(m)	72										
	24	30	36	42	48	54	60	66	72	78	84
18	110										
20	108	95									
22	105	93	82								
24	102	92	81	71							
26	98	89	79	70	61.5						
28	97	86	78	69	61.5	52.5					
30	91.5	84	76	68	60.5	52.5	46.5	39			
32		81.5	74	66.5	60	51.5	46	39	32		
34		79	72	65	58.5	50.5	45.5	39	32	26	21.6
36		70	70	63.5	57	50	45	38.5	32	26	21.2
38		68	68	62	55.5	49.5	44.5	38	32	26	21
40			64	60.5	54.5	48.5	44	37.5	32	26	21
44				56	52	46	42	36.5	32	26	21
48				49.5	48.5	44	40	35.5	32	26	21
52					44.5	42	38	34.5	32	26	21
56						39.5	36.5	33	31.5	25.5	21
60						35	35	31.5	30.5	25	21
64							32.5	30.5	29.5	24.5	21
68								29	28	23.5	21
72								26.5	25.5	22.5	20.5
76									23.5	22	20
80										20	20
84											19
88											17.5
Wind speed m/s	9.0										

Super-lift tower jib lifting capacity table

Boom 85° Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t


Boom length (m) Jib length (m) Range(m)	78										
	24	30	36	42	48	54	60	66	72	78	84
18	96										
20	94	83									
22	91	82	72								
24	88	80	71	63							
26	86	77	69	62	54.5						
28	84	75	68	60.5	53.5	46.5					
30	83	73	66	58.5	52.5	45.5	39				
32		71	64.5	57.5	51.5	45	39	32			
34		69	62.5	56.5	50.5	44.5	39	32	27	22.3	
36		67	61	55	49.5	43.5	39	32	27	21.9	19.1
38		65	58.5	53.5	48.5	42.5	39	32	27	21.5	18.7
40			57	47	47	42	39	32	27	21	18.3
44			49	44	44	40	37	31.5	26	21	17.6
48				42	42	38	34.5	30.5	26	21	17
52					40	36	32.5	29.5	26	21	17
56						34.5	31	28.5	26	21	17
60						30	29.5	27.5	25.5	21	17
64							28.5	26.5	24.5	21	17
68								25	23.5	20.5	17
72								23	22	19.5	17
76									20.5	19	16
80										18.5	16
84											16
88											15
Wind speed m/s	9.0										

Super-lift tower jib lifting capacity table

Boom 85° Super-lift mast 30m Super-lift radius 15m Rear counter weight 140t Crane body loading weight 40t 360° full swinging Unit: t

Boom length (m) Jib length (m) Range(m)	84								
	36	42	48	54	60	66	72	78	84
22	63								
24	62	54.5							
26	62	53.5	47.5						
28	58.5	52.5	46.5	39.5					
30	57.5	51.5	45.5	39.5	33.5				
32	56	50	45	39.5	33				
34	54.5	48.5	44.5	38.5	32.5	27	23.2	20.5	
36	52.5	47.5	43	38	32.5	27	22.5	20.2	16.9
38	50.5	46.5	41.5	37.5	32.5	27	22.2	19.7	16.1
40	45.5	45	40.5	36.5	31.5	27	21.5	19.2	15.4
44	42.5	42.5	39.5	34.5	30.5	26.5	21	18.2	13.9
48		40.5	37	33	29	25.5	21	17.2	12.9
52			35	31.5	27.5	24.5	21	17	12.3
56			30	30	26.5	24	21	17	12
60				28.5	24.5	23.5	20	16	12
64					22	22	19.5	16	12
68						20	18.5	16	12
72						18	17	15	12
76							15.5	14.5	12
80								13.5	11
84								12	11
88									10
Wind speed m/s	9.0								

8. Boom + heavy fixed jib lifting characteristic curve

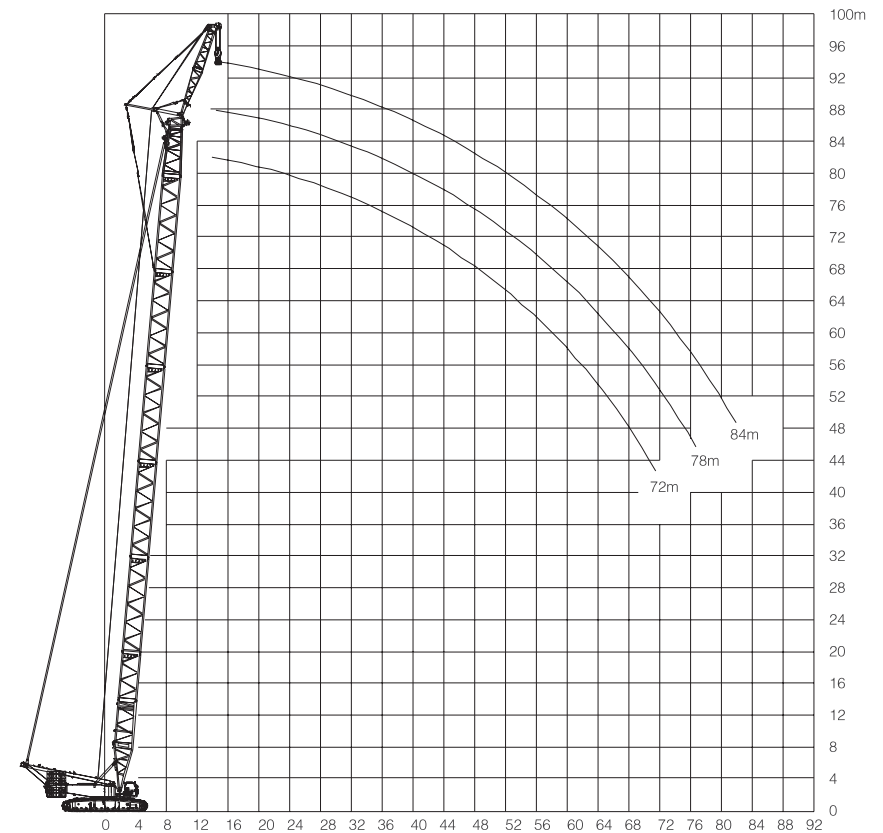

Heavy fixed jib lifting capacity table

Jib length 12m Rear counter weight 160t Crane body loading weight 40t 360° full swinging Unit: t			
Boom length Range(m)	72	78	84
16	110	110	110
18	110	110	110
20	104.5	102	100
22	91.5	90.5	88.5
24	72.5	72	72
26	64.5	64	63.5
28	58	57.5	57
30	52	51.5	51
32	47.5	47	46.5
34	44	43.5	42.5
36	40	39.5	39
38	37	36.5	35.5
40	34	33.5	32.5
44	29	28.5	27.5
48	24.5	24	23
52	21.5	20.5	20
56	18	17.5	17
60	16	15	14.5
64	13.5	13	12.5
68	11.5	11	10.3
72	10	9	8.3
76	8.3	8	7
80		6.5	6
Wind speed m/s	9.0		

Note: pulling plate behind tower jib should not be put on boom, otherwise it will decrease lifting performance and affect on jib lifting when using long boom length. Use auxiliary outrigger at face side for lifting when using 84m boom.

Zoomlion service, beyond your expectation!

One Philosophy: Serve with integrity, and pursue excellence

One Purpose: Customer oriented, create and enhance customers' value

One Objective: Create the best service to satisfy our customers continuously

One Tactic: Customer oriented, flow optimized and innovation value added.

Continuously improve service system, optimize service information platform, improve service efficiency and provide the customers with standard, professional, multiple, diversified and integrated one-stop services.

Four Commitments: All process, round-the-clock, all-round and completely devoted

Five Rules: honest, pro-active, highly efficient, professional and elaborate

Six Standards: standard dressing, standard appearance, standard choice of words, standard behavior, standard tools and standard flow

Service contents:

Provide the customers with services before, during and after sale to meet requirements on repair and maintenance, fittings supply, personnel training and technical inquiries of the customers.

Service sources:

More than 600 trained service engineers are in positions, providing 24-hour round-the-clock technical supports to the customers.

Service vehicle:

- The Company has specially provided service station with more than 300 service vehicles awaiting orders at any moment, which has fully satisfied customers with quick responses. It is arranged as per 2 person/vehicle and GPS system is installed for each service vehicle, which makes it more convenient for the company to make use of service resources reasonably and further speed up responses.
- The Company has provided special emergent service vehicle at the primary and secondary branch companies which can provide regular inspection and maintenance of vehicle for the customers.

Tools configuration:


Each service engineer is provided with common tools and kit; standard tools are provided to more than 120 service stations as per levels; standard vehicle tools are provided for more than 300 service vehicles; and hydraulic system digital tester, hydraulic oil quality detector, material flaw detector and gas protection welding machine are provided for special emergency service vehicle to fasten fault diagnosing and solving speed.

Value added service:

- All process, zero-distance tracking service for key projects;
- Issue special working certificate for operator, provide training for operator all year round and establish operator club;
- Provide regular equipment inspection;
- Perform maintenance for major items;
- Issue international agent training and qualification certification;
- Hold series of activities like providing value added service, giving quick-wear part for free and giving discount.

Service network:

- Zoomlion has set 27 branch companies, 120 service stations, 136 service stations, setting service stations as per 150km distance in developed areas taking service station as the center to strengthen the timeliness of service.
- Zoomlion has set 100 overseas warehouses, storage of fittings more than 300million Yuan, management as supermarket. It has taken the lead in adopting computer network to perform management on the oversea warehouses to meet customers' need for fittings.
- Zoomlion is the first mover in China to have adopted real-time control management system during service to enhance service process monitoring. The uniform service image can enable users to enjoy the standard service of Zoomlion wherever they are.

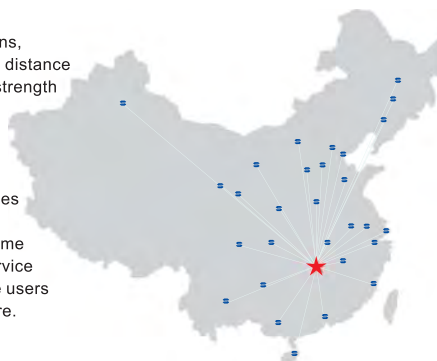

(Note: noted parts only refer to provincial capital cities)



SOP&G

**Проекты перевозок и монтажа
Монтаж тяжеловесного оборудования
Перевозки тяжеловесных грузов
Мобильные и гусеничные краны
СПМТ**

Сайт: www.sopig.ru

Эл. адрес: sopig@sopig.ru

Тел: 8-800-250-05-85

