



**Калининград  
Кран**

Опыт и надежность с 2000 года

## **АРЕНДА ГРУЗОПОДЪЕМНЫХ МЕХАНИЗМОВ И СПЕЦТЕХНИКИ**

Полный спектр грузоподъемной техники  
для строительных проектов любой сложности



+7(4012) 56-69-34



info@kaliningradkran.ru



kaliningradkran.ru

**ZOOMLION**

**Zoomlion Heavy Industry Science & Technology Co.,Ltd.**

**Add: No.677, Lugu Road, Zoomlion Industrial Park, Changsha, Hunan, China, 410205**

Copyright©2020 Zoomlion. All rights reserved. Reproduction and copying of any part of contents is not allowed for any purposes without Zoomlion's approval.



Product specifications are subject to change without notice and obligation. The photographs and/or drawing in this document are for illustrative purposes only. Please consult your local ZOOMLION dealer for more information.  
website:en.zoomlion.com 2020.09.14

# 75 ton capacity ZCC750V



**ZOOMLION**

**40**  
PRODUCTS



VISION CREATES FUTURE

ZOOMLION


CONTENTS

|                                          |         |
|------------------------------------------|---------|
| ZCC750V DIMENSIONS                       | 01      |
| ZCC750V TECHNICAL FEATURE                | 01      |
| ZCC750V BOOM COMBINATION                 | 02      |
| ZCC750V TRANSPORT DIMENSIONS AND WEIGHTS | 03 / 06 |
| ZCC750V TECHNICAL DESCRIPTION            | 07      |
| ZCC750V LIFTING PERFORMANCE              | 08 / 12 |



# DIMENSIONS

Basic machine with undercarriage

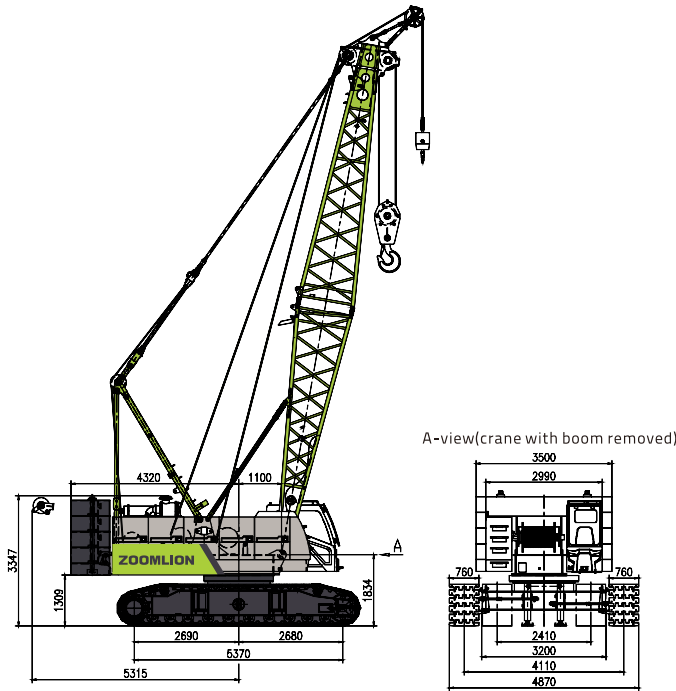

## Operating weight

The operating weight includes the basic machine with crawlers, 2 main winches including wire ropes (230m and 150m) and 58m main boom, consisting of FA-frame, boom foot (6.5m), boom head(6.5m),23.7 t rear counterweight , and 85t hook block.

Total weight ----- approx.64t

## Equipment

Main boom Max. Length ----- 58m  
Fixed jib ----- 7-19m  
Max. combination ----- main boom43 m  
----- fixed jib 19m  
Max. lifting moment ----- 300t,m  
Max. lifting capacity on fixed jib ----- 15t

# TECHNICAL FEATURE

## High working efficiency

- Single rope speed of H1 and H2 reaches 136m/min (the 3<sup>rd</sup> layer).
- The optional free-fall winch helps to improve the efficiency of hoisting.

## Optimization in transport and dismantling


- Tracks are extendible. Max.width of whole machine in transportation is 3.2m,the width can reduce to less 3m after dismantling the tracks.
- The weight of a single counterweight plate shall not exceed 5.1t. A small auxiliary crane can help to finish the assembly.
- Optional vertical outriggers are convenient for the assembly and dismantling of track carrier.

## Driver comfort

- The new cabin design sets new standards in terms of ergonomics and safety. Adjustable crane operator seat,adopts 10.4 inch touch sreen and camera monitor with excellent visibility with perfect all-round vision.


# BOOM COMBINATION

| Code | Operating mode                                            | Boom combination     |
|------|-----------------------------------------------------------|----------------------|
| S    | Main boom                                                 | 13m-58m              |
| SH-1 | main boom+tip boom (primary hook)                         | 13m-58m              |
| SH-2 | main boom+tip boom (auxiliary hook)                       | 13m-58m              |
| SF-1 | Main boom+fixed jib (auxiliary hook,without primary hook) | (28m~43m) + (7m~19m) |
| SF-2 | Main boom+fixed jib (auxiliary hook with primary hook)    | (28m~43m) + (7m~19m) |
| SF-3 | Mian boom +fixed jib (primary)                            | (28m~43m) + (7m~19m) |

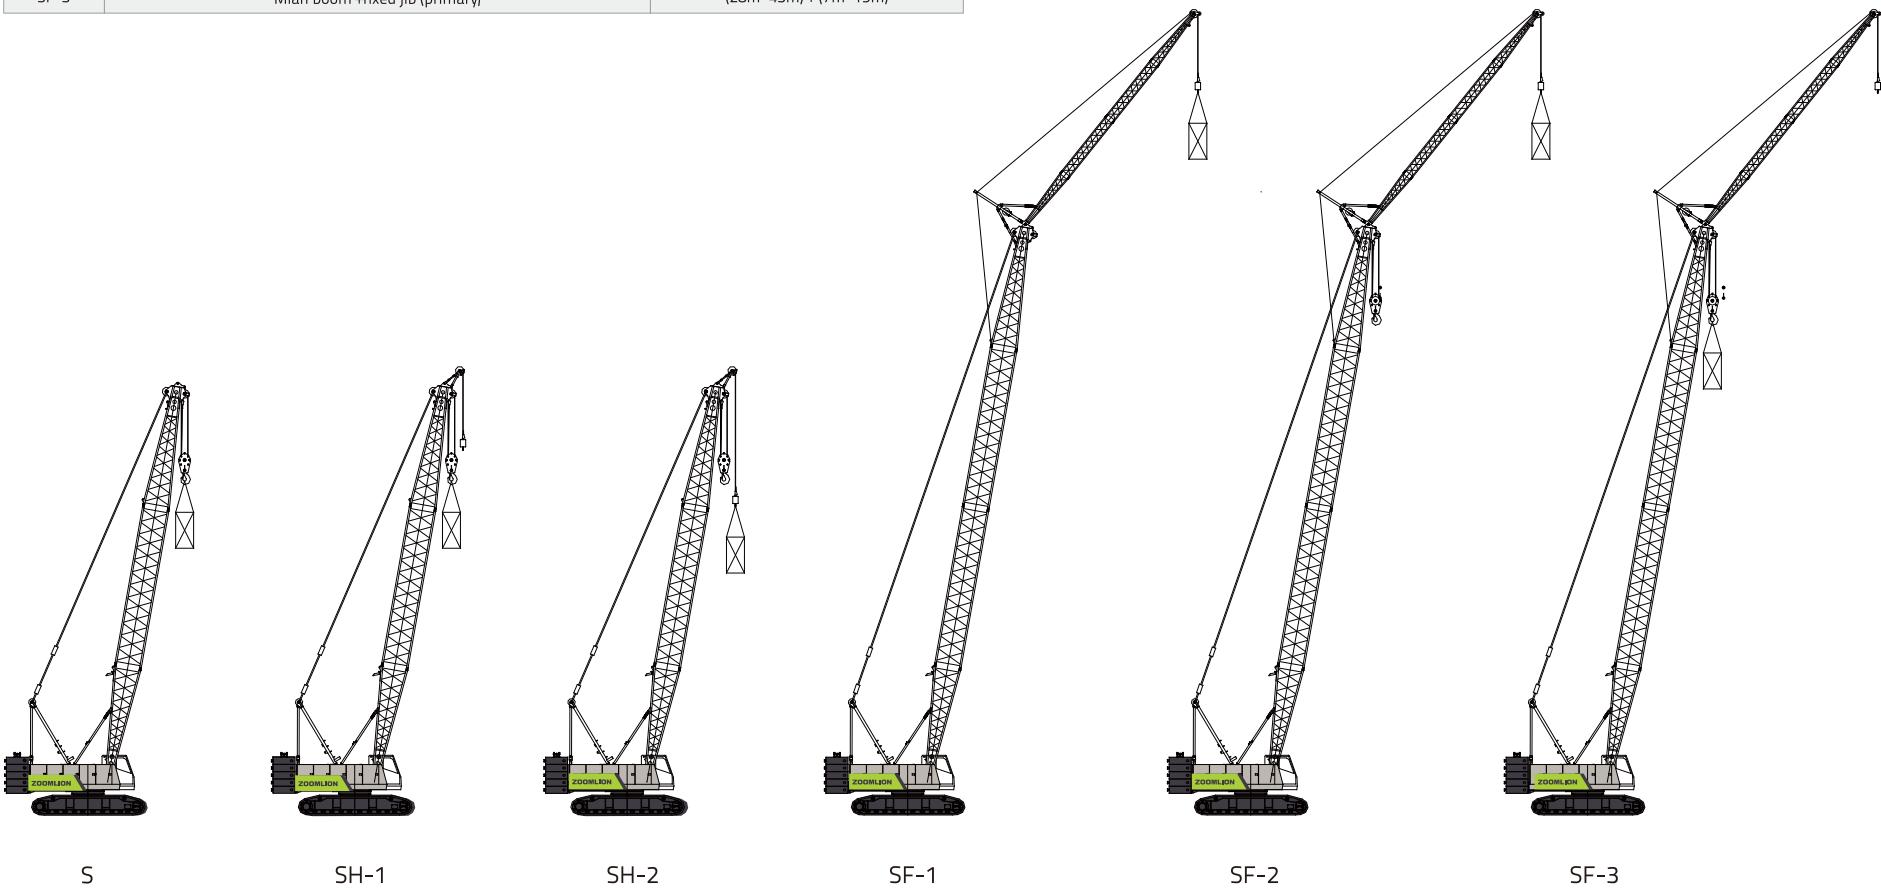





TRANSPORT DIMENSIONS AND WEIGHTS

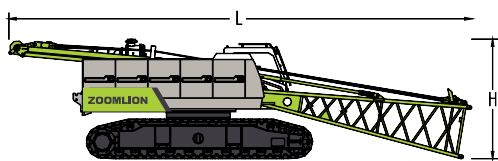


|                                                      |          |
|------------------------------------------------------|----------|
| Basical machine 1 (with pivot section and tracks on) | 1piece*  |
| Length(L)                                            | 13000 mm |
| Width (W)                                            | 3200 mm  |
| Height (H)                                           | 3340 mm  |
| Weight                                               | 38140 kg |

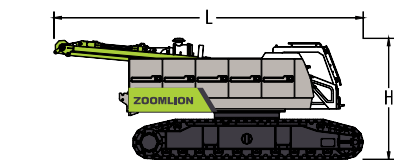


|                                    |          |
|------------------------------------|----------|
| Basical machine 1 (with tracks on) | 1piece*  |
| Length(L)                          | 8450 mm  |
| Width (W)                          | 3200 mm  |
| Height (H)                         | 3350 mm  |
| Weight                             | 37060 kg |



|                                           |          |
|-------------------------------------------|----------|
| Basical machine 3 (with pivot section on) | 1piece*  |
| Length(L)                                 | 13000 mm |
| Width (W)                                 | 2990 mm  |
| Height (H)                                | 2940 mm  |
| Weight                                    | 22320 kg |




|                   |          |
|-------------------|----------|
| Basical machine 4 | 1piece*  |
| Length(L)         | 8000 mm  |
| Width (W)         | 2990 mm  |
| Height (H)        | 2940 mm  |
| Weight            | 21240 kg |




|                    |          |
|--------------------|----------|
| Track carrier assy | 2pieces* |
| Length(L)          | 6255 mm  |
| Width (W)          | 1015 mm  |
| Height (H)         | 1074mm   |
| Weight             | 7900 kg  |


TRANSPORT DIMENSIONS AND WEIGHTS




|                   |         |
|-------------------|---------|
| Couterweight base | 1piece  |
| Length (L)        | 3500 mm |
| Width (W)         | 1000 mm |
| Height (H)        | 560 mm  |
| Weight            | 3300 kg |




|                    |         |
|--------------------|---------|
| Couterweight plate | 4pieces |
| Length (L)         | 3500 mm |
| Width (W)          | 1000 mm |
| Height (H)         | 450 mm  |
| Weight             | 5100 kg |

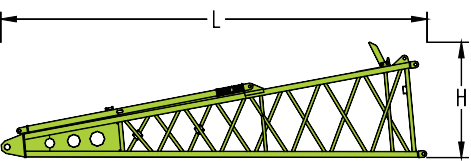

|                         |         |
|-------------------------|---------|
| Main boom pivot section | 1piece* |
| Length (L)              | 6700 mm |
| Width (W)               | 1690 mm |
| Height (H)              | 1800 mm |
| Weight                  | 1080 kg |




|                |         |
|----------------|---------|
| Main boom head | 1piece  |
| Width (W)      | 7130 mm |
| Height (H)     | 1690 mm |
| Weight         | 1630 mm |
|                | 1040 kg |




|                                      |         |
|--------------------------------------|---------|
| Main boom intermediate section of 3m | 1piece* |
| Length (L)                           | 3090 mm |
| Width (W)                            | 1690 mm |
| Height (H)                           | 1500 mm |
| Weight                               | 260 kg  |


TRANSPORT DIMENSIONS AND WEIGHTS




|                                      |         |
|--------------------------------------|---------|
| Main boom intermediate section of 6m | 1piece* |
| Length (L)                           | 6090 mm |
| Width (W)                            | 1690 mm |
| Height (H)                           | 1500 mm |
| Weight                               | 440 kg  |




|                                      |         |
|--------------------------------------|---------|
| Main boom intermediate section of 9m | 4piece* |
| Length (L)                           | 9090 mm |
| Width (W)                            | 1690 mm |
| Height (H)                           | 1500 mm |
| Weight                               | 640 kg  |



|            |         |
|------------|---------|
| Tip boom   | 1piece  |
| Length (L) | 1390 mm |
| Width (W)  | 590 mm  |
| Height (H) | 540 mm  |
| Weight     | 130 kg  |




|                         |         |
|-------------------------|---------|
| Fixed jib pivot section | 1piece* |
| Length (L)              | 3640 mm |
| Width (W)               | 570 mm  |
| Height (H)              | 570 mm  |
| Weight                  | 165 kg  |




|                |         |
|----------------|---------|
| Fixed jib head | 1piece* |
| Length (L)     | 3820 mm |
| Width (W)      | 570 mm  |
| Height (H)     | 570 mm  |
| Weight         | 220 kg  |

TRANSPORT DIMENSIONS AND WEIGHTS



|                                      |          |
|--------------------------------------|----------|
| Fixed jib intermediate section of 4m | 3pieces* |
| Length (L)                           | 4060 mm  |
| Width (W)                            | 570 mm   |
| Height (H)                           | 570 mm   |
| Weight                               | 120 kg   |




|            |         |
|------------|---------|
| FA-frame   | 1piece* |
| Length (L) | 3230 mm |
| Width (W)  | 730 mm  |
| Height (H) | 490 mm  |
| Weight     | 255 kg  |




|                  |         |
|------------------|---------|
| Load hook of 85T | 1piece* |
| Length (L)       | 1800 mm |
| Width (W)        | 670 mm  |
| Height (H)       | 660 mm  |
| Weight           | 1195 kg |



|                  |          |
|------------------|----------|
| Load hook of 55T | 1 piece* |
| Length (L)       | 1770 mm  |
| Width (W)        | 585 mm   |
| Height (H)       | 660 mm   |
| Weight           | 925 kg   |



|                  |          |
|------------------|----------|
| Load hook of 25T | 1 piece* |
| Length (L)       | 1400 mm  |
| Width (W)        | 520 mm   |
| Height (H)       | 660 mm   |
| Weight           | 613 kg   |



|                 |          |
|-----------------|----------|
| Load hook of 9T | 1 piece* |
| Length (L)      | 955 mm   |
| Width (W)       | 350 mm   |
| Height (H)      | 350 mm   |
| Weight          | 265 kg   |

- Notes:
- 1.Components are presented in diagrammatic drawings that are not drawn to scale. Length is a boundary dimension.
  - 2.Weight of packaging is not counted in the weight above, which might be different from the actual weight due to manufacturing error.
  - 3.There might be improvements made on components listed above, resulting modifications in dimensions and weight. Actual products to be delivered shall prevail.
  - 4.Numbers of components marked \* are determined by the actual need.

TECHNICAL DESCRIPTION

Engine

Engine type ---- WEICHAI WP7G270E301  
Rated power ---- 199kW/2000r/min  
Maximum output torque ---- 1200N.m/(1200~1500)r/min  
Oil tank capacity ----- 400L  
Exhaust emissions: China national 3 emissin standareds

Hydraulic system

Hydraulic pump: The main pump, a plunger pump, drives winches and the traveling mechanism. Dual gear pump is used for slewing and heat dissipation.  
Control: pilot proportional control hydraulic system. The motor of hoisting winches is a variable plunger pump. Two cross-shaped hydraulic control levers and a dual foot-operated traveling control valve are used for controlling different executive components.  
Hydraulic oil tank: 520L

Hoisting winch

Both the primary and the secondary hoisting winches are driven by an axial hydraulic variable-displacement piston motor through a built-in planetary reducer. Braking of the spring on winch motor is controlled by the balancing valve. The drum with a double-rope groove guarantees that rope of multiple layers will not intertwine together.

| Main winch                                                                | Aux winch                   |
|---------------------------------------------------------------------------|-----------------------------|
| Line pull ----- Max.8.5T                                                  | Line pull ----- Max.8.5T    |
| Rope diameter ----- 24mm                                                  | Rope diameter ----- 24mm    |
| Rope speed ----- 0-136m/min                                               | Rope speed ----- 0-136m/min |
| Rope length ----- 230m                                                    | Rope length ----- 150m      |
| Both hoisting winches with free-fall function is available for an option. |                             |


Boom winch

The derricking winch is driven by an axial piston motor through a built-in planetary reducer and brakes through the spring on the motor end.  
Cable drum lock: The winch is locked by ratchet wheel and ratchet pawl.Boom winch  
Line pull ----- Max.71KN  
Rope diameter ----- 20mm  
Rope speed ----- 82m/min  
Rope length ----- 130m

Swing

Slewing mechanism is composed of slewing reducer, motor, normally-closed brake, slewing bearing, etc. The superstructure can be rotated for 360°via the slewing ring which is driven by the pinion gear.  
Stepless speed regulation: 2.6r/min


LIFTING PERFORMANCE

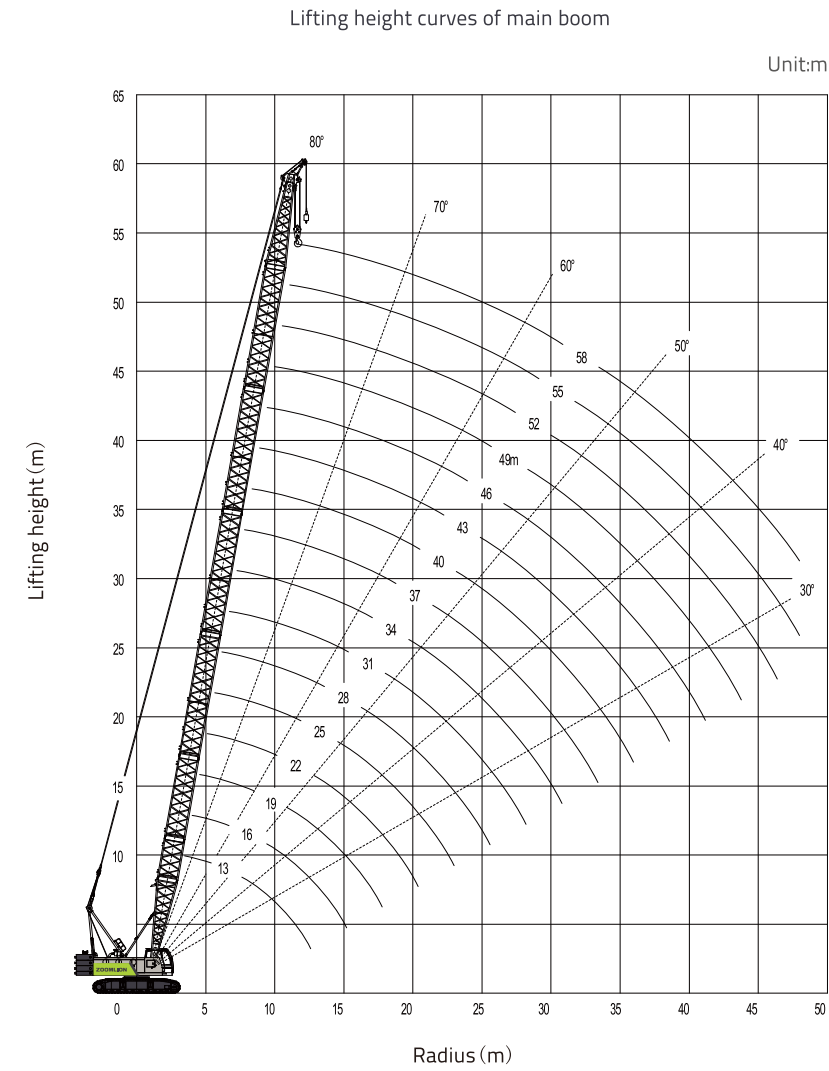

Unit:T


| Radius<br>(m) | Main boom length (m) |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|---------------|----------------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
|               | 13                   | 16   | 19   | 22   | 25   | 28   | 31   | 34   | 37   | 40   | 43   | 46   | 49   | 52   | 55   | 58   |
| 4             | 75                   |      |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 5             | 60                   | 59.9 | 58.3 |      |      |      |      |      |      |      |      |      |      |      |      |      |
| 6             | 45.4                 | 44.9 | 44.8 | 43.8 | 42.8 |      |      |      |      |      |      |      |      |      |      |      |
| 7             | 35.4                 | 35.4 | 35.4 | 35.4 | 34.4 | 33.8 | 33.4 | 27.7 |      |      |      |      |      |      |      |      |
| 8             | 29.3                 | 29.3 | 29.3 | 29.3 | 28.9 | 28.6 | 28   | 23.9 | 27   |      |      |      |      |      |      |      |
| 9             | 25.1                 | 24.8 | 24.8 | 24.5 | 24.5 | 24.4 | 24.4 | 20.9 | 23.5 | 22.9 | 22.5 |      |      |      |      |      |
| 10            | 21.6                 | 21.3 | 21.3 | 21.3 | 21.3 | 21.3 | 21   | 18.3 | 20.3 | 19.9 | 19.7 | 19.4 | 18.7 |      |      |      |
| 11            | 19.1                 | 19.1 | 18.7 | 18.7 | 18.7 | 18.7 | 18.7 | 16.5 | 18.3 | 17.7 | 17.3 | 17.1 | 16.7 | 15.7 |      |      |
| 12            | 17.1                 | 16.7 | 16.7 | 16.7 | 16.7 | 16.7 | 16.5 | 13.4 | 16.3 | 16.1 | 15.7 | 15.5 | 15.1 | 14.5 | 14.1 | 13.9 |
| 14            |                      | 13.9 | 13.8 | 13.5 | 13.5 | 13.5 | 13.5 | 11.2 | 13.1 | 13.1 | 12.9 | 12.5 | 12.3 | 11.9 | 11.8 | 11.5 |
| 16            |                      |      | 11.5 | 11.5 | 11.3 | 11.3 | 11.3 | 9.6  | 10.9 | 10.9 | 10.9 | 10.7 | 10.3 | 10.2 | 10   | 9.7  |
| 18            |                      |      |      | 9.7  | 9.7  | 9.7  | 9.6  | 8.1  | 9.3  | 9.3  | 9.2  | 9.2  | 9    | 8.7  | 8.4  | 8.1  |
| 20            |                      |      |      | 8.6  | 8.5  | 8.4  | 8.4  | 7.1  | 8.1  | 8    | 8    | 7.7  | 7.7  | 7.6  | 7.4  | 7.1  |
| 22            |                      |      |      |      | 7.5  | 7.4  | 7.3  | 6.4  | 7.1  | 7    | 6.9  | 6.8  | 6.8  | 6.6  | 6.4  | 6.2  |
| 24            |                      |      |      |      |      | 6.6  | 6.4  | 5.7  | 6.3  | 6.2  | 6    | 6    | 5.8  | 5.8  | 5.7  | 5.4  |
| 26            |                      |      |      |      |      |      | 5.8  | 5    | 5.5  | 5.4  | 5.4  | 5.3  | 5.2  | 5    | 4.9  | 4.8  |
| 28            |                      |      |      |      |      |      | 5.2  | 4.6  | 5    | 4.9  | 4.8  | 4.7  | 4.6  | 4.4  | 4.4  | 4.2  |
| 30            |                      |      |      |      |      |      |      |      | 4.4  | 4.4  | 4.3  | 4.2  | 4.1  | 3.9  | 3.8  | 3.8  |
| 32            |                      |      |      |      |      |      |      |      | 4.1  | 3.9  | 3.8  | 3.7  | 3.6  | 3.6  | 3.4  | 3.3  |
| 34            |                      |      |      |      |      |      |      |      |      | 3.6  | 3.4  | 3.3  | 3.2  | 3.1  | 3    | 3    |
| 36            |                      |      |      |      |      |      |      |      |      | 3.2  | 3.1  | 3    | 2.9  | 2.8  | 2.7  | 2.6  |
| 38            |                      |      |      |      |      |      |      |      |      |      | 2.8  | 2.7  | 2.6  | 2.5  | 2.4  | 2.3  |
| 40            |                      |      |      |      |      |      |      |      |      |      |      | 2.4  | 2.3  | 2.2  | 2.1  | 2    |
| 42            |                      |      |      |      |      |      |      |      |      |      |      |      | 2.1  | 2    | 1.9  | 1.7  |
| 44            |                      |      |      |      |      |      |      |      |      |      |      |      |      | 1.7  | 1.7  | 1.5  |
| 46            |                      |      |      |      |      |      |      |      |      |      |      |      |      | 1.6  | 1.5  | 1.4  |
| 48            |                      |      |      |      |      |      |      |      |      |      |      |      |      |      | 1.3  | 1.2  |
| 50            |                      |      |      |      |      |      |      |      |      |      |      |      |      |      |      | 1    |

LIFTING PERFORMANCE

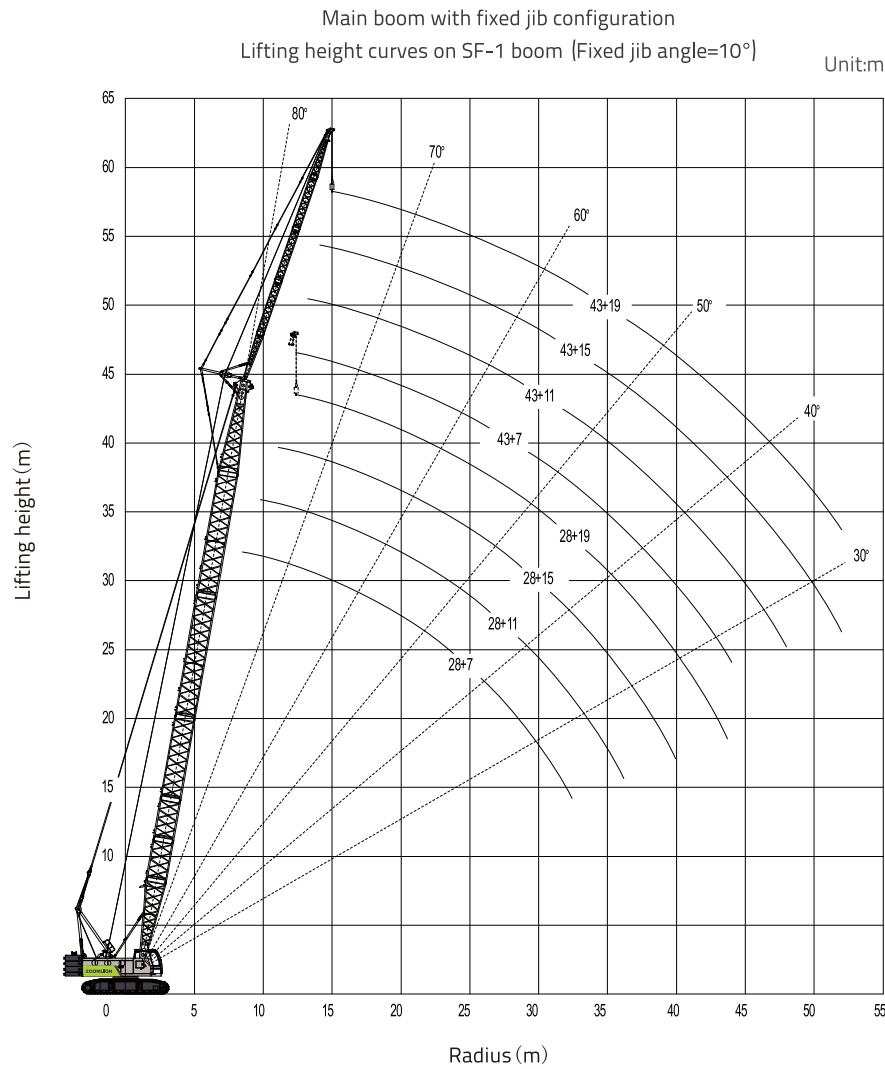

LIFTING PERFORMANCE

Lifting capacity (SF-1 1/3)

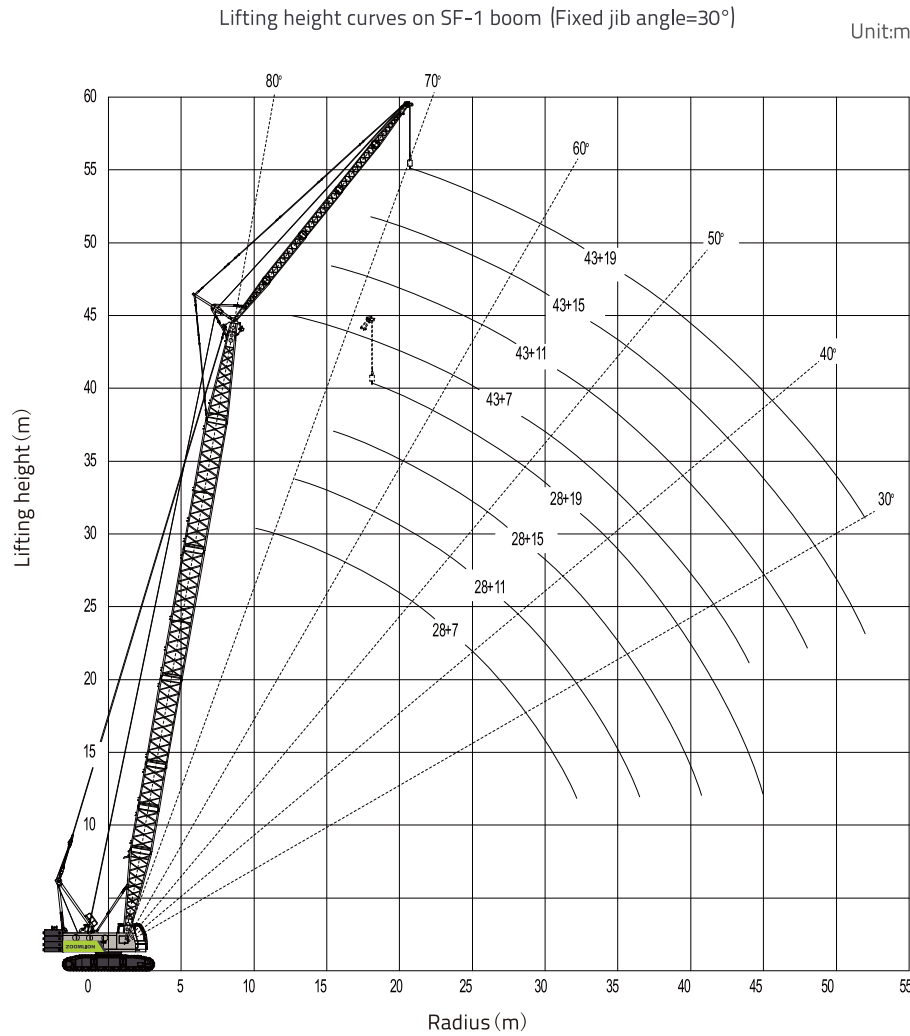

Unit:T

| Main boom length | 28m  |      |      |     |      |     |      |     | 31m  |      |      |     |     |     |     |     |
|------------------|------|------|------|-----|------|-----|------|-----|------|------|------|-----|-----|-----|-----|-----|
| Jib length       | 7m   |      | 11 m |     | 15 m |     | 19 m |     | 7m   |      | 11m  |     | 15m |     | 19m |     |
| Angle            | 10°  | 30°  | 10°  | 30° | 10°  | 30° | 10°  | 30° | 10°  | 30°  | 10°  | 30° | 10° | 30° | 10° | 30° |
| 9                | 15   |      |      |     |      |     |      |     |      |      |      |     |     |     |     |     |
| 10               | 15   |      | 13.8 |     |      |     |      |     | 15   |      |      |     |     |     |     |     |
| 11               | 15   | 14.8 | 13.4 |     |      |     |      |     | 15   |      | 13.3 |     |     |     |     |     |
| 12               | 15   | 14.2 | 13.2 |     | 8.8  |     |      |     | 15   | 14.6 | 13.1 |     | 9   |     |     |     |
| 14               | 13.3 | 13.4 | 12.4 | 9.3 | 8.7  |     | 5.7  |     | 13.1 | 13.3 | 12.6 | 9.4 | 8.6 |     | 5.7 |     |
| 16               | 11.1 | 11.3 | 11.1 | 8.7 | 8.4  | 6.7 | 5.5  |     | 10.9 | 11.1 | 11.1 | 8.9 | 8.3 |     | 5.6 |     |
| 18               | 9.5  | 9.6  | 9.6  | 8.3 | 8    | 6.3 | 5.3  |     | 9.3  | 9.6  | 9.5  | 8.5 | 8.2 | 6.4 | 5.4 |     |
| 20               | 8.1  | 8.2  | 8.2  | 7.9 | 7.7  | 6   | 5.1  | 4.5 | 7.9  | 8.2  | 8.1  | 8.1 | 7.8 | 6.1 | 5.2 | 4.5 |
| 22               | 7.1  | 7.3  | 7.2  | 7.4 | 7.3  | 5.7 | 5    | 4.4 | 6.9  | 7.1  | 7.1  | 7.4 | 7.1 | 5.9 | 5.1 | 4.5 |
| 24               | 6.2  | 6.2  | 6.4  | 6.6 | 6.4  | 5.5 | 4.8  | 4.3 | 6    | 6.2  | 6.2  | 6.4 | 6.2 | 5.6 | 4.9 | 4.4 |
| 26               | 5.5  | 5.6  | 5.6  | 5.7 | 5.7  | 5.3 | 4.7  | 4.2 | 5.4  | 5.5  | 5.5  | 5.7 | 5.6 | 5.4 | 4.8 | 4.3 |
| 28               | 4.9  | 5    | 5.1  | 5.2 | 5.1  | 5.1 | 4.6  | 4   | 4.8  | 4.9  | 4.9  | 5.1 | 5   | 5.2 | 4.7 | 4.1 |
| 30               | 4.4  | 4.5  | 4.5  | 4.6 | 4.6  | 4.8 | 4.5  | 3.9 | 4.3  | 4.4  | 4.4  | 4.6 | 4.5 | 4.7 | 4.5 | 4   |
| 32               |      |      | 4.1  | 4.2 | 4.2  | 4.3 | 4.2  | 3.8 | 3.9  | 3.9  | 4    | 4.1 | 4.1 | 4.2 | 4.1 | 3.9 |
| 34               |      |      | 3.7  | 3.7 | 3.7  | 3.9 | 3.7  | 3.6 | 3.5  | 3.5  | 3.5  | 3.7 | 3.7 | 3.7 | 3.7 | 3.7 |
| 36               |      |      |      |     | 3.3  | 3.5 | 3.5  | 3.5 |      |      | 3.2  | 3.2 | 3.3 | 3.4 | 3.3 | 3.5 |
| 38               |      |      |      |     | 3.1  | 3.1 | 3.1  | 3.2 |      |      |      | 2.9 | 3   | 3   | 3   | 3.2 |
| 40               |      |      |      |     |      |     | 2.8  | 2.9 |      |      |      |     | 2.7 | 2.8 | 2.7 | 2.9 |
| 42               |      |      |      |     |      |     | 2.6  | 2.7 |      |      |      |     |     | 2.5 | 2.5 | 2.6 |
| 44               |      |      |      |     |      |     |      |     |      |      |      |     |     |     | 2.3 | 2.3 |
| 46               |      |      |      |     |      |     |      |     |      |      |      |     |     |     |     | 2.1 |



LIFTING PERFORMANCE

Lifting capacity (SF-1 2/3)

Unit:T

| Main boom length | 34m  |      |      |     |      |     |      |     | 37m  |      |      |     |     |     |     |     |
|------------------|------|------|------|-----|------|-----|------|-----|------|------|------|-----|-----|-----|-----|-----|
| Jib length       | 7m   |      | 11 m |     | 15 m |     | 19 m |     | 7m   |      | 11m  |     | 15m |     | 19m |     |
| Angle            | 10°  | 30°  | 10°  | 30° | 10°  | 30° | 10°  | 30° | 10°  | 30°  | 10°  | 30° | 10° | 30° | 10° | 30° |
| 10               | 15   |      |      |     |      |     |      |     |      |      |      |     |     |     |     |     |
| 11               | 15   |      | 13.7 |     |      |     |      |     | 15   |      |      |     |     |     |     |     |
| 12               | 15   | 14.8 | 13.5 |     |      |     |      |     | 15   |      | 13.8 |     |     |     |     |     |
| 14               | 12.8 | 13.3 | 12.8 |     | 8.5  |     | 5.8  |     | 12.6 | 12.8 | 12.6 |     | 8.5 |     |     |     |
| 16               | 10.9 | 11.1 | 10.9 | 9.1 | 8.7  |     | 5.6  |     | 10.6 | 10.9 | 10.6 | 9.2 | 8.5 |     | 5.7 |     |
| 18               | 9.3  | 9.5  | 9.3  | 8.6 | 8.2  | 6.6 | 5.4  |     | 9.1  | 9.3  | 9.1  | 8.7 | 8.4 | 6.7 | 5.5 |     |
| 20               | 7.9  | 8.1  | 8.1  | 8.2 | 8    | 6.3 | 5.3  | 4.6 | 7.8  | 7.9  | 7.9  | 8.2 | 7.9 | 6.4 | 5.4 | 4.6 |
| 22               | 6.9  | 7.1  | 7    | 7.3 | 7.1  | 6   | 5.1  | 4.5 | 6.8  | 6.9  | 6.9  | 7.2 | 7   | 6.1 | 5.2 | 4.5 |
| 24               | 6    | 6.2  | 6    | 6.4 | 6.2  | 5.7 | 5    | 4.4 | 5.9  | 6    | 6    | 6.2 | 6   | 5.8 | 5   | 4.4 |
| 26               | 5.3  | 5.4  | 5.4  | 5.6 | 5.5  | 5.5 | 4.9  | 4.3 | 5.2  | 5.3  | 5.3  | 5.5 | 5.4 | 5.6 | 4.9 | 4.4 |
| 28               | 4.7  | 4.8  | 4.8  | 5   | 4.9  | 5.2 | 4.7  | 4.2 | 4.6  | 4.7  | 4.7  | 4.9 | 4.8 | 5.1 | 4.8 | 4.3 |
| 30               | 4.2  | 4.3  | 4.3  | 4.5 | 4.4  | 4.6 | 4.4  | 4.1 | 4.1  | 4.2  | 4.2  | 4.4 | 4.3 | 4.6 | 4.4 | 4.2 |
| 32               | 3.7  | 3.9  | 3.9  | 4   | 3.9  | 4.1 | 4    | 3.9 | 3.7  | 3.7  | 3.7  | 3.9 | 3.9 | 4.1 | 3.9 | 4   |
| 34               | 3.3  | 3.3  | 3.5  | 3.5 | 3.5  | 3.7 | 3.5  | 3.8 | 3.2  | 3.3  | 3.3  | 3.5 | 3.5 | 3.7 | 3.5 | 3.7 |
| 36               | 3    | 3    | 3.1  | 3.2 | 3.2  | 3.3 | 3.2  | 3.5 | 2.9  | 2.9  | 3    | 3.1 | 3   | 3.2 | 3.1 | 3.3 |
| 38               |      |      | 2.8  | 2.8 | 2.9  | 3   | 2.9  | 3.1 | 2.6  | 2.6  | 2.7  | 2.8 | 2.8 | 2.9 | 2.8 | 3   |
| 40               |      |      | 2.5  | 2.5 | 2.6  | 2.7 | 2.6  | 2.8 |      |      | 2.4  | 2.5 | 2.5 | 2.6 | 2.5 | 2.7 |
| 42               |      |      |      |     | 2.3  | 2.4 | 2.4  | 2.5 |      |      | 2.2  | 2.2 | 2.2 | 2.3 | 2.3 | 2.5 |
| 44               |      |      |      |     | 2.1  | 2.2 | 2.1  | 2.3 |      |      |      |     | 2   | 2.1 | 2.1 | 2.2 |
| 46               |      |      |      |     |      |     | 1.9  | 2   |      |      |      |     | 1.8 | 1.9 | 1.9 | 1.9 |
| 48               |      |      |      |     |      |     |      | 1.8 |      |      |      |     |     |     | 1.7 | 1.7 |
| 50               |      |      |      |     |      |     |      |     |      |      |      |     |     |     | 1.5 | 1.5 |

LIFTING PERFORMANCE

Lifting capacity (SF-1, 3/3)

Unit:T

| Main boom length | 40m  |      |      |     |      |     |      |     | 43m |     |     |     |     |     |     |     |
|------------------|------|------|------|-----|------|-----|------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Jib length       | 7m   |      | 11 m |     | 15 m |     | 19 m |     | 7m  |     | 11m |     | 15m |     | 19m |     |
| Angle            | 10°  | 30°  | 10°  | 30° | 10°  | 30° | 10°  | 30° | 10° | 30° | 10° | 30° | 10° | 30° | 10° | 30° |
| 11               | 15   |      |      |     |      |     |      |     |     |     |     |     |     |     |     |     |
| 12               | 14.7 |      | 8.5  |     |      |     |      |     | 8.5 |     |     |     |     |     |     |     |
| 14               | 12.3 | 12.6 | 8.5  |     | 8.5  |     |      |     | 8.5 | 8.5 | 8.5 |     | 8.5 |     |     |     |
| 16               | 10.4 | 10.6 | 8.5  | 8.5 | 8.5  |     | 5.7  |     | 8.5 | 8.5 | 8.5 | 8.5 | 8.5 |     | 5.8 |     |
| 18               | 8.8  | 9.1  | 8.5  | 8.5 | 8.5  | 6.8 | 5.6  |     | 8.5 | 8.5 | 8.5 | 8.5 | 8.5 |     | 5.6 |     |
| 20               | 7.6  | 7.9  | 7.6  | 8.1 | 7.6  | 6.4 | 5.4  |     | 7.4 | 7.6 | 7.4 | 7.9 | 7.4 | 6.5 | 5.5 |     |
| 22               | 6.6  | 6.9  | 6.8  | 7.1 | 6.8  | 6.2 | 5.2  | 4.5 | 6.6 | 6.8 | 6.6 | 6.9 | 6.6 | 6.3 | 5.3 | 4.5 |
| 24               | 5.7  | 5.9  | 5.9  | 6.2 | 6    | 5.9 | 5.1  | 4.5 | 5.7 | 5.9 | 5.7 | 6   | 5.7 | 6   | 5.2 | 4.5 |
| 26               | 5.1  | 5.2  | 5.2  | 5.4 | 5.3  | 5.6 | 5    | 4.4 | 5   | 5.2 | 5.1 | 5.4 | 5.2 | 5.5 | 5.1 | 4.4 |
| 28               | 4.5  | 4.6  | 4.6  | 4.8 | 4.7  | 5   | 4.7  | 4.3 | 4.4 | 4.6 | 4.5 | 4.7 | 4.6 | 4.9 | 4.6 | 4.4 |
| 30               | 4    | 4.1  | 4.1  | 4.3 | 4.2  | 4.4 | 4.3  | 4.2 | 3.9 | 4.1 | 4   | 4.2 | 4.1 | 4.4 | 4.1 | 4.3 |
| 32               | 3.5  | 3.7  | 3.7  | 3.7 | 3.7  | 4   | 3.7  | 4.1 | 3.5 | 3.5 | 3.5 | 3.7 | 3.7 | 3.9 | 3.7 | 4.1 |
| 34               | 3.1  | 3.2  | 3.2  | 3.3 | 3.3  | 3.5 | 3.3  | 3.7 | 3   | 3.1 | 3.1 | 3.3 | 3.2 | 3.5 | 3.2 | 3.5 |
| 36               | 2.8  | 2.8  | 2.9  | 3   | 3    | 3.1 | 3    | 3.2 | 2.7 | 2.8 | 2.8 | 2.9 | 2.9 | 3   | 2.9 | 3.2 |
| 38               | 2.5  | 2.5  | 2.6  | 2.7 | 2.6  | 2.8 | 2.7  | 2.9 | 2.4 | 2.5 | 2.5 | 2.6 | 2.5 | 2.7 | 2.6 | 2.9 |
| 40               | 2.2  | 2.3  | 2.3  | 2.4 | 2.4  | 2.5 | 2.4  | 2.6 | 2.1 | 2.2 | 2.2 | 2.3 | 2.3 | 2.4 | 2.3 | 2.5 |
| 42               |      | 2    | 2.1  | 2.1 | 2.1  | 2.3 | 2.2  | 2.4 | 1.9 | 1.9 | 1.9 | 2.1 | 2   | 2.2 | 2.1 | 2.3 |
| 44               |      |      | 1.8  | 1.9 | 1.9  | 2   | 1.9  | 2.1 | 1.7 | 1.7 | 1.7 | 1.8 | 1.8 | 1.9 | 1.9 | 2   |
| 46               |      |      |      | 1.7 | 1.7  | 1.8 | 1.7  | 1.9 |     |     | 1.5 | 1.5 | 1.5 | 1.7 | 1.6 | 1.8 |
| 48               |      |      |      |     | 1.5  | 1.5 | 1.5  | 1.7 |     |     | 1.4 | 1.4 | 1.4 | 1.5 | 1.4 | 1.5 |
| 50               |      |      |      |     |      | 1.4 | 1.4  | 1.5 |     |     |     |     | 1.2 | 1.3 | 1.3 | 1.4 |
| 52               |      |      |      |     |      |     | 1.2  | 1.3 |     |     |     |     |     | 1.1 | 1.1 | 1.2 |
| 54               |      |      |      |     |      |     |      | 1.1 |     |     |     |     |     |     | 1   | 1   |
| 56               |      |      |      |     |      |     |      |     |     |     |     |     |     |     |     | 0.9 |