



**Калининград
Кран**

Опыт и надежность с 2000 года

АРЕНДА ГРУЗОПОДЪЕМНЫХ МЕХАНИЗМОВ И СПЕЦТЕХНИКИ

Полный спектр грузоподъемной техники
для строительных проектов любой сложности



+7(4012) 56-69-34



info@kaliningradkran.ru



kaliningradkran.ru



PACIFIC MARINE GROUP PTY LTD

AUSTRALIA




'Zoomlion 70T Crawler Crane'

Zoomlion QUY70 70T Crawler Crane

¹ The 4th rope layer ² With A-frame and boom pivot section ³ Crawler carrier retracted

Attribute		Value
Max lifting capacity x radius		70t x 3.8m
Deadweight with basic boom		61t
Main boom length		12~57m
Fixed jib length		6~18m
Max lifting capacity on fixed jib		6.4t
Fixed jib angle		10,30°
Max length of main boom with fixed jib		42 + 18m
Single rope speed of winches	Hoisting winch 1 ¹	120m/min
	Hoisting winch 2 ¹	120m/min
	Derricking winch ¹	45m/min
Slewing speed		0~2.4rpm
Traveling speed		0~1.35km/hr
Gradeability		30%
Ground pressure		0.074MPa
Overall dimensions (L x W x H) ²		12400 X 3300 X 3200mm
Engine	Weichai	
	Rated power / rotational speed	175kW @ 2200rpm
	Max output torque / rotational speed	1000/1400Nm @ 1600/rpm
	Exhaust emission std.	EU Stage II / III
	USA Cummins	
	Rated power / rotational speed	153kW / 1800rpm
	Max output torque / rotational speed	929Nm / 1300rpm
	Exhaust emission std.	TIER3/EU Stg II
Distance between track centre x crawler contact length x crawler width ³		2540 x 5150 x 1020mm
Distance between track centre x crawler contact length x crawler width ³		4000 x 5150 x 1020mm

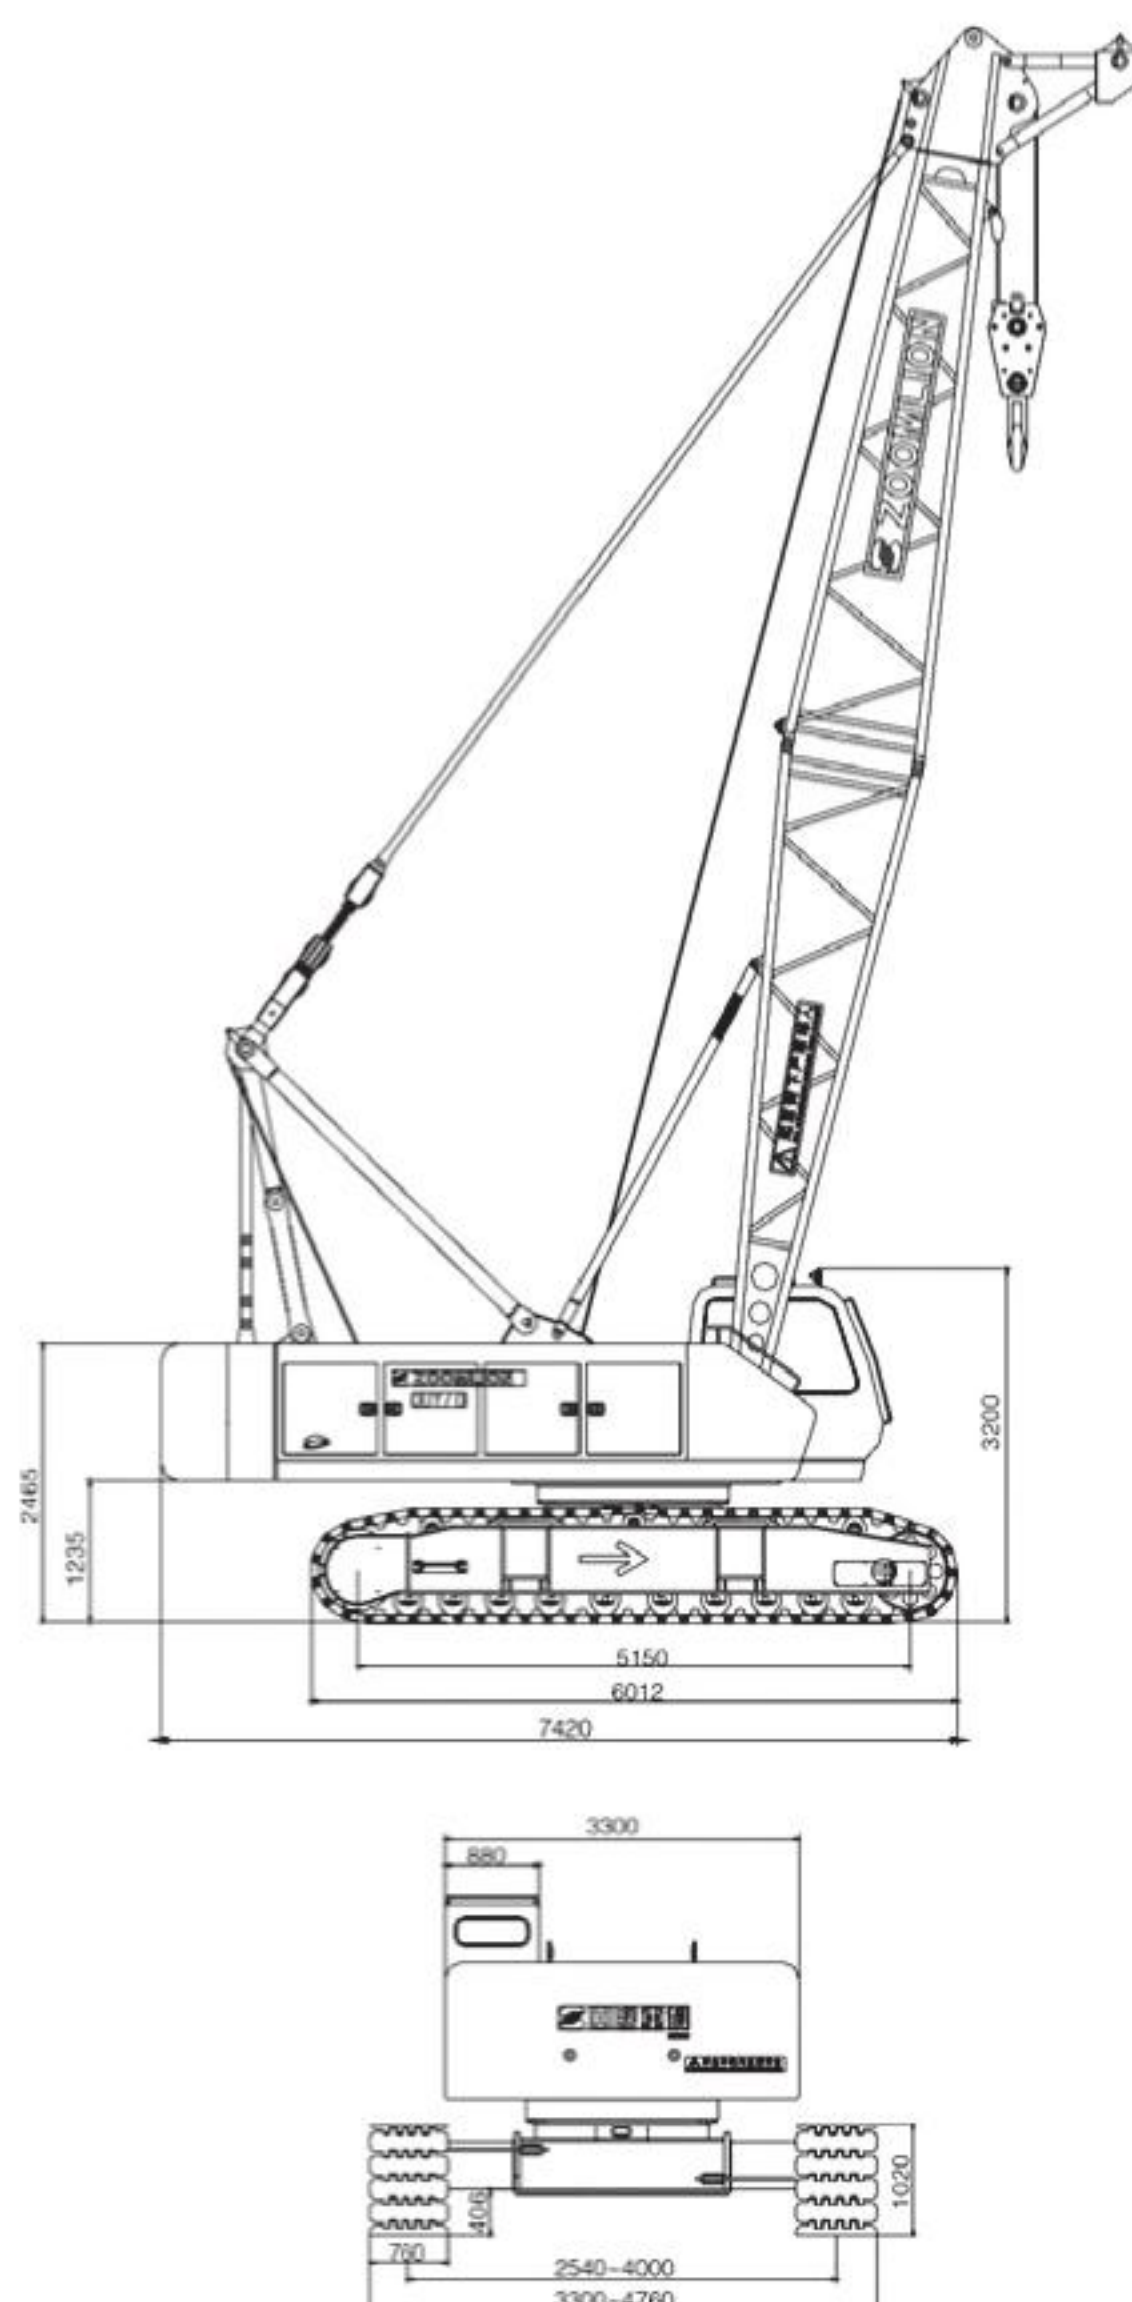

T +61 7 4724 2200

F +61 7 4724 2208

11-15 Sandspit Drive South Townsville

PO Box 1155 Townsville QLD 4810 Australia

info@pacificmarinegroup.com.au

www.pacificmarinegroup.com.au

TOWAGE & BARGES • COMMERCIAL DIVING • MARINE CONSTRUCTION • VESSEL HIRE

Lifting Capacity on S Boom



Length of S(m)	12	15	18	21	24	27	30	33
Reeving Radius (m)	12	12	10	8	8	6	6	6
3.8	70							
4	65	65	58.2/4.1	51.2/4.6				
5	53.6	52.3	51	49.8	44.2/5.2	37/5.7		
6	40.5	40.1	39.3	38.5	37.7	36.9	34/6.2	30.4/6.7
7	32.1	32	31.8	31.2	30.6	30.1	29.5	28.9
8	26.6	26.5	26.4	26.2	25.8	25.3	24.8	24.3
9	22.6	22.5	22.4	22.3	22.2	21.8	21.4	21
10	19.7	19.5	19.4	19.3	19.2	19.1	18.7	18.4
12		15.4	15.3	15.1	15	14.9	14.8	14.6
14		12.6	12.5	12.4	12.2	12.1	12	11.9
16			10.5	10.4	10.2	10.1	10	9.9
19				8.3	8.1	8	7.9	7.8
20					7.6	7.5	7.3	7.2
22					6.7	6.5	6.4	6.3
24						5.8	5.7	5.5
26							5	4.9
28								4.4
29								4.1

Note: The lifting capacity given in the above chart contains the weight of load hook and weight of wire rope between boom head and load hook.