



ÉCOLE
POLYTECHNIQUE
DE BRUXELLES



UNIVERSITÉ LIBRE DE BRUXELLES

Interferometric stabilisation of a fibre-based optical computer

Experimental study

Mémoire présenté en vue de l'obtention du diplôme
d'Ingénieur Civil physicien à finalité spécialisée

Denis Verstraeten

Directeur

Professeur Marc Haelterman

Co-Promoteur

Professeur Serge Massar

Superviseur

Lorenz Butschek

Service

Opera

Année académique
2018 - 2019

Abstract

Acknowledgements

Contents

1	Introduction	6
2	Reservoir Computing	7
2.1	Introduction	7
3	Optical RC with frequency multiplexed neurons	9
4	Interferometric stabilisation of RC optical resonator	10
5	Results	11
6	Conclusion	12
	Acronyms	13

List of Figures

2.1	Principle scheme of a RC [1]	7
-----	--	---

Chapter 1

Introduction

For the past few years, interest in optical data processing devices has been increasing. Their main advantage over silicon-based computers is that they are intrinsically faster because the information is carried around at nearly the speed of light, which could allow to overcome the limit in processing speed soon to be reached by classical integrated circuit electronics.

This Master thesis tackles the implementation of an optical computer based on reservoir computing.

Chapter 2

Reservoir Computing

2.1 Introduction

Reservoir Computing (RC) is a bio-inspired artificial recurrent Neural Network (NN) which is based on the Echo State Network (ESN) paradigm introduced by Herbert Jaeger in [4]. This computation scheme is well suited for real-time data processing and for chaotic time series prediction[4, 5, 7], and achieves state of the art performances in those domains, as well as in speech recognition[10, 9, 6], non-linear channel equalisation[4] and financial forecasting [1].

A Reservoir Computer (RC) is made of a large ensemble of interconnected neurons, which are merely entities carrying an activation level. The activation level is updated according to the connection weights of the reservoir, or *synaptic matrix* as it is referred to in the field of neural networks, and with a nonlinear function, called the *activation function*. The nonlinear character is one of the main features making neural networks so powerful. Moreover, with a proper activation function, one can reach a saturation state, which mimics the behaviour of biological neurons. This is traditionally achieved using the *sigmoid* function. Those principles are introduced in [2, p.227-228] and in [8, p.727-728].

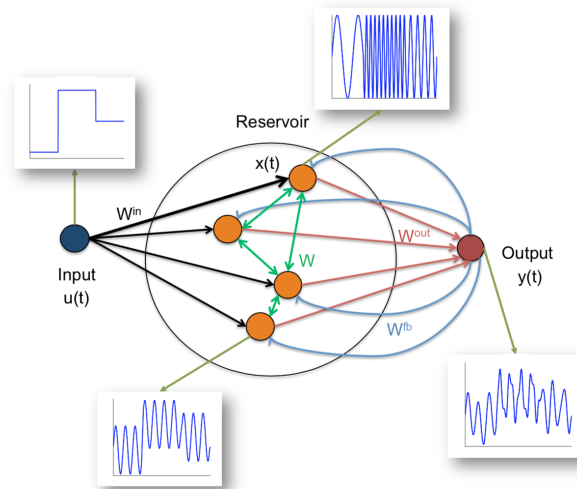


Figure 2.1: Principle scheme of a RC [1]

The activation level of the neurons making up the reservoir characterise its state, which is a time-dependent object. The neurons are interconnected in such a way that they influence the dynamic of each other, leading to a complicated evolution of the state of the reservoir. What a first glance may seem to be a mathematical nightmare turns out to be the main advantage of RC. Indeed, by making the connection matrix as messy as possible, *i.e.* by using randomness, breaking symmetries,... one notices that the effect of such a reservoir, when being fed a time-dependent signal into the input neurons, is to map it to a higher-dimensional functional space. RC reach their best performance when they are used in the echo state. This is a regime where the transients caused by the inputs are neither amplified nor damped, somehow providing a memory to the reservoir. The output of a RC is obtained by adequately combining the activation state of each neurons. [3] gives a good intuitive overview of the RC paradigm. The concepts introduced in this paragraph are illustrated at Figure 2.1.

RC only need the output weights to be tuned through Machine Learning (ML), whereas other schemes of NN usually require every weights to be adapted during training. They not only have the advantage to be computationally lighter, but they are also easier to practically implement and analyse theoretically.

Chapter 3

Optical RC with frequency multiplexed neurons

Chapter 4

Interferometric stabilisation of RC optical resonator

Chapter 5

Results

Chapter 6

Conclusion

Acronyms

ESN Echo State Network 7

ML Machine Learning 8

NN Neural Network 7, 8

RC Reservoir Computer 4, 5, 7–10

RC Reservoir Computing 4, 7, 8

Bibliography

- [1] A. Bernal, S. Fok, and R. Pidaparthi. “Financial Market Time Series Prediction with Recurrent Neural Networks”. In: (2012). URL: <http://citeseerx.ist.psu.edu/viewdoc/download?doi=10.1.1.278.3606&rep=rep1&type=pdf>.
- [2] Christopher Bishop. *Pattern recognition and machine learning*. New York: Springer, 2006. ISBN: 978-0387-31073-2.
- [3] Alireza Goudarzi et al. “A Comparative Study of Reservoir Computing for Temporal Signal Processing”. In: *CoRR* abs/1401.2224 (2014).
- [4] H. Jaeger. “Harnessing Nonlinearity: Predicting Chaotic Systems and Saving Energy in Wireless Communication”. In: *Science* 304.5667 (Apr. 2004), pp. 78–80. DOI: 10.1126/science.1091277. URL: <https://doi.org/10.1126/science.1091277>.
- [5] H. Jaeger. *The "echo state" approach to analysing and training recurrent neural networks*. 2001.
- [6] Herbert Jaeger et al. “Optimization and applications of echo state networks with leaky- integrator neurons”. In: *Neural Networks* 20.3 (Apr. 2007), pp. 335–352. DOI: 10.1016/j.neunet.2007.04.016. URL: <https://doi.org/10.1016/j.neunet.2007.04.016>.
- [7] M. Lukoševičius, M. Jaeger, and B. Schrauwen. “Reservoir Computing Trends”. In: *KI - Künstliche Intelligenz* 26.4 (May 2012), pp. 365–371. DOI: 10.1007/s13218-012-0204-5. URL: <https://doi.org/10.1007/s13218-012-0204-5>.
- [8] Stuart Russell. *Artificial intelligence : a modern approach*. Upper Saddle River, New Jersey: Prentice Hall, 2010. ISBN: 978-0-13-604259-4.
- [9] Fabian Triesenbach et al. “Phoneme Recognition with Large Hierarchical Reservoirs”. In: *Advances in Neural Information Processing Systems 23*. Ed. by J. D. Lafferty et al. Curran Associates, Inc., 2010, pp. 2307–2315. URL: <http://papers.nips.cc/paper/4056-phoneme-recognition-with-large-hierarchical-reservoirs.pdf>.
- [10] D. Verstraeten, B. Schrauwen, and D. Stroobandt. “Reservoir-based techniques for speech recognition”. In: *The 2006 IEEE International Joint Conference on Neural Network Proceedings*. IEEE, 2006. DOI: 10.1109/ijcnn.2006.246804. URL: <https://doi.org/10.1109/ijcnn.2006.246804>.