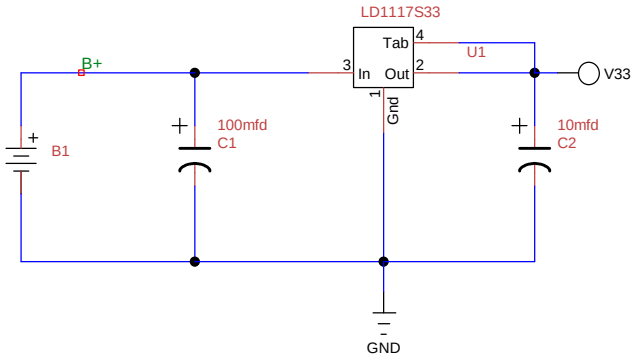

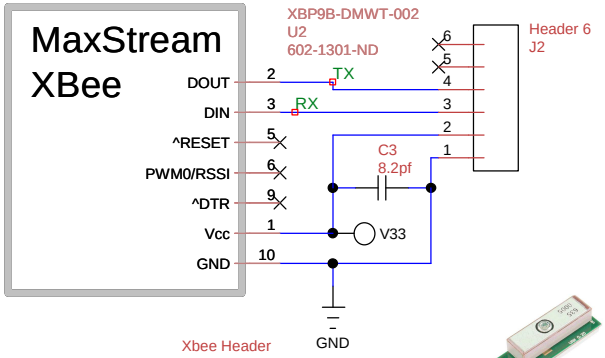



Xbee Header
S5751-10-ND



Xbee Header
S5751-10-ND



6-pin Interface, pitch 1.0mm, UART TTL

Pin	Name	Function	I/O
1	GND	Ground	Input
2	VCC	3.1 ~ 5.5 V power supply	Input
3	TXA	Port A serial data output (from GPS)	Output
4	RXA	Port A serial data input (to GPS)	Input
5	V_BAT	Backup power (1.5 ~ 3.5V)	Input
6	PWR_CTRL	Module power control High or disconnected: power ON Low: power OFF	Input



Title	
Author	
File ej\Documents\GitHub\mlaunch\mGPS\mGPS.dsn	
Revision 1.0	Date

Document

Sheets
1 of 1