WIRE SPECIFICATION:

0.032-0.08 mm², 28-32AWG, insulation outer diameter 0.4-0.8mm
Voltage rating: min 75V DC
Current rating: min 1.0A DC
Colors: Red, White, Yellow, Black

CONNECTORS SPECIFICATION:


Wire plug: JST SHR-04V-S-B (both sides)
Crimp contact: JST SSH-003T-P0.2-H
Voltage rating 50V DC
Current rating 1.0A DC

Cable designed to be used with: JST SM04B-SRSS-TB


Crimp contact: JST SSH-003T-P0.2-H




Wire plug: JST SHR-04V-S-B

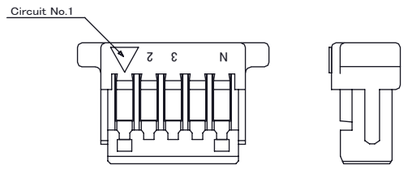


PCB rec: JST SM04B-SRSS-TB




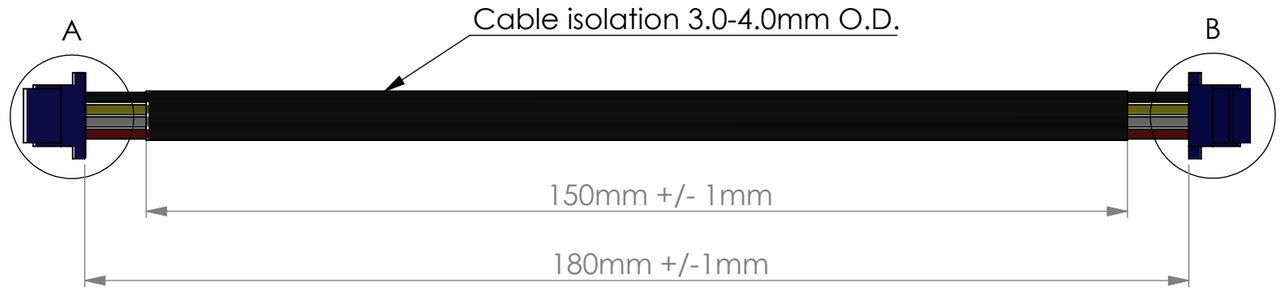

Assembly showcase

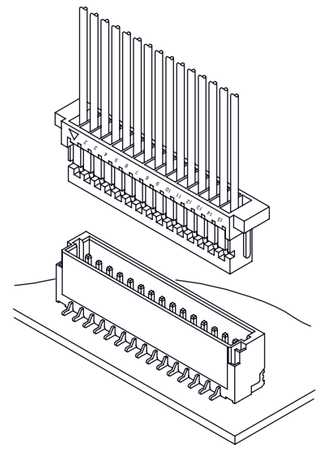


Wire plug: JST SHR-04V-S-B [bottom side view]

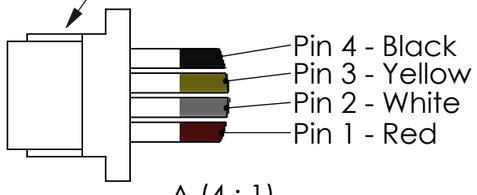

A (4 : 1)

Wire plug: JST SHR-04V-S-B [contacts side view]

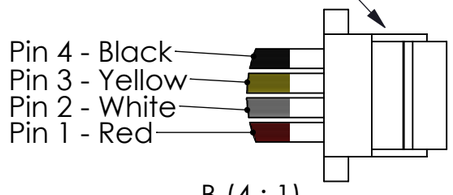

B (4 : 1)

LOGO:

DO NOT SCALE DRAWING | REVISION A1

AUTHOR: ALJAZ TITORIC [www.aljaztitoric.com]

TITLE: MONO65 JST CABLE 4-wire 180mm

DWG NO. MONO65_JST_CAB_A1 | A3

SCALE:1:1 | SHEET 1 OF 1