Central Coast Regional Water Quality Control Board

April 12, 2024 **Sent Via Electronic Mail**

Octavio Hurtado, Public Works Director / City Engineer
212 South Vanderhurst Avenue
King City, CA 93930
e-mail: ohurtado@kingcity.com

Dear Octavio Hurtado:

KING CITY DOMESTIC WASTEWATER TREATMENT PLANT, CEMETERY ROAD AND SAN ANTONIO DRIVE, KING CITY, MONTEREY COUNTY:

- **NOTICE OF APPLICABILITY FOR ENROLLMENT IN ORDER R3-2020-0020, GENERAL WASTE DISCHARGE REQUIREMENTS FOR DISCHARGES FROM DOMESTIC WASTEWATER SYSTEMS WITH FLOWS GREATER THAN 100,000 GALLONS PER DAY;**
- **TRANSMITTAL OF MONITORING AND REPORTING PROGRAM R3-2024-0023 AND**
- **TERMINATION OF INDIVIDUAL PERMIT, WASTE DISCHARGE REQUIREMENTS ORDER 91-05 FOR KING CITY DOMESTIC WASTEWATER FACILITY.**

The Central Coast Regional Water Quality Control Board (Central Coast Water Board) reviewed the May 25, 2022 notice of intent and available documents associated with King City's Domestic Wastewater Treatment Plant (Wastewater System) located at Cemetery Road and San Antonio Drive in King City, California. The Wastewater System, owned by King City is currently regulated pursuant to *Order 91-05, Waste Discharge Requirements for City of King Domestic Wastewater Treatment Facility* (Order 91-05).

On September 25, 2020, the Central Coast Water Board adopted *General Waste Discharge Requirements Order R3-2020-0020 for Discharges from Domestic Wastewater Systems with Flows Greater than 100,000 Gallons per Day* (General Permit).

This letter serves as a notice of applicability for enrollment in the General Permit. This letter includes: wastewater system operation summary, specific requirements, and limitations (Attachment 1); figures (Attachment 2); and King City's monitoring and reporting program requirements (Attachment 3).

This letter also serves as a notice of termination of King City's coverage in existing individual permit, Order 91-05.

King City must comply with the following:

1. **General Permit** – King City must comply with all conditions and requirements of the General Permit. As described in the General Permit, ongoing operation, maintenance, monitoring, and reporting are required. A copy of the General Permit can be found electronically at the following link:

   https://www.waterboards.ca.gov/centralcoast/board_decisions/adopted_orders/2020/r32020_0020.pdf

2. **Monitoring and Reporting Program** – King City must comply with the requirements of the monitoring and reporting program enclosed with this letter (monitoring and reporting program R3-2024-0023, Attachment 3). King City must start implementing the monitoring on **April 12, 2024**. The first quarterly monitoring report is due **August 1, 2024,** and the first annual report is due **March 1, 2025.** King City is also required to comply with annual volumetric reporting requirements[1] established by the State Water Resources Control Board (State Water Board), due annually to the GeoTracker database on April 30th.

   Quarterly monitoring reports and annual reports must be provided electronically in searchable PDF with the Central Coast Water Board's current transmittal sheet found at the link below as the cover page. The transmittal sheet must be signed.

   https://www.waterboards.ca.gov/centralcoast/water_issues/programs/wastewater_permitting/docs/transmittal_sheet.pdf

   All annual reports must be formatted and completed as specified in the annual report template found at the following link:

   https://www.waterboards.ca.gov/centralcoast/board_decisions/adopted_orders/2020/wdr_annual_report_format.pdf

   King City must submit all reports/documents and laboratory data (using the transmittal sheet as the cover page) to the publicly accessible State Water Board's GeoTracker[2,3] database with applicable Electronic Submittal of

---

[1] See: Volumetric Annual Reporting | California State Water Resources Control Board
[2] Information for first-time GeoTracker users is available at: https://www.waterboards.ca.gov/ust/electronic_submittal/
[3] Additional information available at: http://geotracker.waterboards.ca.gov/

Information (ESI) requirements under the Wastewater System – specific global identification number WDR100030085 over the internet at:

https://geotracker.waterboards.ca.gov/esi/login.asp

The attached monitoring and reporting program outlines the GeoTracker electronic reporting requirements. The Central Coast Water Board may request submittal of some documents on paper, particularly drawings or maps that require a large size to be readable, or in other electronic formats where evaluation of data is required.

3. **Fees** – King City paid an annual fee of $26,785 on January 4, 2024 for coverage in existing individual permit, Order 91-05. This payment covers King City 's enrollment in the General Permit for the 2023-2024 fiscal year.

   King City must pay an annual fee to maintain coverage in the General Permit. Annual fees are determined by the State Water Board's fee program and cover the state fiscal year of July 1 through June 30. Your current annual fee is $26,785. King City's Wastewater System is currently assigned a threat and complexity rating of 2B. A copy of the current state fee schedule is available electronically at the following link:

   https://www.waterboards.ca.gov/resources/fees/water_quality/#wdr

4. **Notification** – The Central Coast Water Board will be notified of King City's enrollment at a regularly scheduled public meeting on June 20-21, 2024. Details about that meeting are available on our website at:

   https://www.waterboards.ca.gov/centralcoast/board_info/agendas/

5. **Future Discharge Modifications** – Pursuant to California Water Code section 13260, King City must inform the Central Coast Water Board at least 120 days prior to modifying your discharge. If there are any significant changes in either treatment or disposal methodologies, or the volume or character of the treated wastewater, King City must notify the Central Coast Water Board immediately of such changes.

   Attachment 1 contains the Central Coast Water Board's understanding of the Wastewater System located at Cemetery Road and San Antonio Drive, King City, California. Please review Attachment 1 to determine if the description is representative of your current system. Pursuant to California Water Code section 13267, King City must notify the Central Coast Water Board if this information is out of date or incorrect. You are required to provide staff with your updated information within **30 days** of issuance of this letter.

6. **Responsible Party** – King City is responsible for the management and disposal of the domestic wastewater in compliance with the conditions of the General Permit. Any noncompliance with this General Permit constitutes a violation of the

California Water Code, and subjects King City to enforcement action, and termination of enrollment under this General Permit.

7. **Change in Ownership** - In the event of any change in control or ownership of the property, King City must notify the succeeding owner or operator of the existence of this General Permit by letter, a copy of which shall be immediately forwarded to the Central Coast Water Board so that the new owner or operator can be enrolled in the General Permit and King City's enrollment in the General Permit can be terminated.

8. **Certified Operator** – King City is required to comply with the operator certification requirements[4] administered by the State Water Board's Office of Operator Certification, which currently requires a Grade II certified operator onsite to maintain and operate the Wastewater System.

9. **Termination of Permit** – The existing individual permit, Order 91-05 is terminated, except for enforcement purposes[5]. King City is responsible for compliance with Order 91-05 prior to the date of this letter.

10. **Compliance Schedule** – As required in the attached monitoring and reporting program, King City must submit a time schedule compliance plan by April 12, 2025. If more than 24 months is needed to achieve compliance with effluent limitations, King City must request a time schedule order pursuant to Water Code section 13300, which must include details, milestones, and a schedule for upgrades.

If you have any questions, please contact **Kathy Truong at (805) 549-3293 or by email at Kathy.Truong@waterboards.ca.gov** or Jennifer Epp at (805) 594-6181 or by email at Jennifer.Epp@waterboards.ca.gov.

Sincerely,

Jennifer Epp Digitally signed by Jennifer Epp
Date: 2024.04.12 10:38:35 -07'00'
Water Boards

for Ryan Lodge
Executive Officer

[4] Title 23 Division 3. Chapter 26 Wastewater Treatment Plant Classification, Operator Certification and Contract Operator Registration. https://www.waterboards.ca.gov/water_issues/programs/operator_certification/docs/ocr_clean.pdf

[5] The General Permit states "… where a Wastewater System discharge is currently regulated by an individual permit, that permit is terminated upon the enrollment of the Wastewater System into this General Permit."

Attachments:

Attachment 1: Wastewater System Operation Summary, Specific Requirements, and Limitations
Attachment 2: Figures
Attachment 3: Monitoring and Reporting Program R3-2024-0023

cc:
Steve Adams, King City, City Manager, sadams@kingcity.com
Miles Farmer, Cypress Water Services, Inc., miles@cypresswaterservices.com
Cypress Water Services, Inc., service@cypresswaterservices.com
Tracy Warriner, Carollo Engineers, twarriner@carollo.com
Nicki Fowler, Monterey County, fowlerne@co.monterey.ca.us
Jennifer Epp, Central Coast Water Board, Jennifer.Epp@waterboards.ca.gov
Jesse Woodard, Central Coast Water Board, Jesse.Woodard@waterboards.ca.gov
Kathy Truong, Central Coast Water Board, Kathy.Truong@waterboards.ca.gov
Kristina Olmos, Central Coast Water Board, Kristina.Olmos@waterboards.ca.gov
WDR Program, *GeoTracker* RB3-WDR@waterboards.ca.gov

ECM/CIWQS = CW-235021
GeoTracker = GT- WDR100030085
Rev 6/1/2023
ECM Subject Name = King City WWTP NOA for R3-2020-0020
\\ca.epa.local\RB\RB3\Shared\WDR\WDR Facilities\Monterey Co\King City Domestic\1_Permit\Application\Big Order Enrollment\For Review\King City Big Order NOA_MRP_Final.docx

ATTACHMENT 1
WASTEWATER SYSTEM OPERATION SUMMARY, SPECIFIC REQUIREMENTS, AND LIMITATIONS

1. Ownership And Wastewater System Information

Ownership and wastewater system information submitted by King City to the Central Coast Water Board is shown in Table 1.

Table 1. Ownership and Wastewater System Information

Name	King City Domestic Wastewater Treatment Plant (WWTP)
Physical Address	Cemetery Road and San Antonio Drive King City, CA 93930
Latitude	36° 13' 01.7"N
Longitude	121° 09' 09.3"W
Mailing Address	212 South Vanderhurst Avenue King City, CA 93930
Owner	King City
Operator	Cypress Water Services, Inc., Miles Farmer phone: 831-594-2620 E-mail: miles@cypresswaterservices.com and service@cypresswaterservices.com
Legally Responsible Official	Octavio Hurtado phone: 831-601-0301 E-mail: ohurtado@kingcity.com
Raw Wastewater Characteristics	Sewer Connections: 2,290 Population Served: 14,221 Domestic (%): 100%
Permitted Design Flow, Average Monthly (gallons per day, gpd)	1,200,000
Baseline Flow (average annual flow) in gpd	900,000
Threat to Water Quality	2
Complexity	B
For Internal Use	
Fee Code	58
Primary Place Type	Wastewater Treatment Facility
Facility Type	Municipal/Domestic
Facility Waste Type	Domestic Wastewater
Regulatory measure Type	Enrollee - WDR
Reclamation Included	No
EPA Approved Pretreatment Program	No

2. Wastewater System Operation Summary

King City domestic wastewater treatment plant (Wastewater System) is a Class II wastewater system. King City must staff a Class II chief plant operator for proper operation of the Wastewater System. The current chief plant operator is Miles Farmer with Cypress Water Services, Grade 3, License Number 40014. The operation and maintenance of the wastewater collection, treatment, and disposal for both the domestic and industrial facilities is overseen by Cypress Water Services. Cypress Water Services is the primary point of contact for operations and reporting.

King City also owns and operates an industrial wastewater treatment and disposal facility adjacent to the domestic wastewater treatment plant. The industrial facility is permitted to treat 2.4 million gallons per day from May 1 to November 30 and 1 million gallons per day from December 1 to April 30, but currently operates at a much lower flow. This General Permit only covers the treatment and disposal of domestic wastewater, King City has a sperate permit (currently Order 91-84) for the industrial system.

The Wastewater System is capable of treating an average daily flow of 1,200,000 gallons per day (gpd) and a peak hour flow of 3,000,000 gpd to a secondary treatment level. The Wastewater System consists of the treatment technologies and treatment capabilities shown in Table 2.

Table 2. Treatment Technology and Capacity

Headworks/Preliminary Treatment	Influent flow enters a wet well prior to flowing through a Parshall flume that meters influent flows. Metered influent flow enters a grit removal channel and rags and debris are grinded and removed via a Muffin Monster grinder. Flow can also be diverted to a bar screen post grit channel should an issue with the Muffin Monster grinder arise. Screened wastewater is then pumped via a triplex lift station to a distribution box where it is distributed simultaneously to one of five aerated treatment ponds.
	Headworks treatment capacity (gpd): 3,000,000

Secondary Treatment - Aerated Ponds	The first stage of secondary treatment consists of five clay-lined, aerated faculative ponds (Ponds 1A, 1B, 1, 2, and 3) that operate in parallel. These ponds are fed directly from the primary treatment lift station, typically in parallel, however the ponds can be configured to produce some degree of series flow if desired. **Ponds 1A and 1B:** 12.2 acres, 39.8 MG, 300 HP aerator power, 63 day detention time. **Pond 1**: 5.5 acres pond with volume of 5.4-9 million gallons (MG). **Pond 2:** 5.8 acres pond with volume of 5.4-9.5 MG. **Pond 3**: 6 acres pond with volume of 5.9-9.8 MG.
Secondary Treatment – Polishing Ponds	The second stage of secondary treatment occurs in two unlined polishing ponds (Pond 4 and Pond 5) plumbed in series. Effluent from Pond 5 flows to the effluent pump station where it is pumped to the disposal spray fields. Since these ponds are unlined they are acting as treatment and disposal ponds.[6] Ponds 4 and 5: 20.9 acres total for both ponds, 31.5 MG, 26-day detention time.
	Secondary treatment capacity (gpd): 1,200,000
Wastewater Disposal Method	Treated wastewater is disposed at the domestic spray field labeled 8 (see Figure 2). The field consists of six spray disposal areas. King City alternates between the six disposal areas in the field to allow the previous disposal areas to rest. Spray field size is 65 acres of total domestic disposal surface area with a design application rate of 0.8 inches per day.
	Disposal Capacity (gpd): 1,400,000
Biosolids/Sludge Production and Handling	Solids are stored within the ponds and removed by special dredging events on an as needed basis.

[6] Current effluent sampling location ES-1 is after Ponds 4 and 5. When King City re-designs the facility for needed upgrades, Central Coast Water Board staff will re-evaluate where disposal is occurring and ensure effluent samples are being taken prior to disposal. If Ponds 4 and 5 continue to be combined treatment and disposal ponds, ES-1 and the point of compliance will be moved prior to Pond 4 to capture water quality at disposal.

A summary of historic and recent average effluent concentrations is included in Table 3, which were reported in King City quarterly monitoring reports. The Central Coast Water Board used reported effluent water quality data to establish the effluent and groundwater limitations in section 3.

Table 3. Effluent Water Quality for Select Constituents

Constituents	Units[1]	Historical Average[2]	Annual Average
Biochemical Oxygen Demand, 5-Day	mg/L	27	27 [3]
Total Suspended Solids	mg/L	80	85 [3]
Total Dissolved Solids	mg/L	780	785 [3]
Chloride	mg/L	150	158 [4]
Sodium	mg/L	150	154 [4]
Sulfate	mg/L	160	152 [4]
Boron	mg/L	0.40	0.50 [4]
Total Nitrogen	mg/L	19	21 [3]
Nitrate as Nitrogen	mg/L	1.6	0.10 [3]

[1] mg/L denotes milligrams per liter
[2] Based on water quality data reported by King City in their 2004 to 2020 monitoring reports.
[3] Based on water quality data reported by King City in the 2023 reports.
[4] Based on water quality data reported by King City in the 2021 reports.

3. WASTEWATER SYSTEM SPECIFIC REQUIREMENTS AND LIMITATIONS

King City must operate the Wastewater System in accordance with the General Permit and this notice of applicability. King City must comply with the wastewater limitations specified in Table 4 through Table 8. King City land applies treated wastewater and thus organic loading limitations specified in Table 8 apply.

Flow limitations are shown in Table 4. **Interim effluent limitations are shown in Table 5 and apply prior to April 12, 2026. Beginning on April 12, 2026, effluent limitations shown in Table 6 apply.**

A. Flow Limitations:

Table 4. Flow Limitations

Flow	Units	Limit	Point of Compliance
Maximum Hourly	Gallons per hour	3,000,000	Influent
Monthly Average[1]	Gallons per day	1,200,000	Influent
Maximum Daily Effluent (to disposal area)	Gallons per day	1,400,000	Effluent

[1]Monthly average is the total discharge to the headworks by volume during a calendar month divided by the number of days in the month that the wastewater system headworks received flow.

B. Effluent Limitations:

Based on reported water quality data, effluent water quality for 5-day Biochemical Oxygen Demand (BOD_5) and Total Suspended Solids (TSS) (see Table 3) exceed the General Permit effluent limits for Treatment Ponds. Therefore, pursuant to the General Permit, King City must comply with their individual permit R3-2002-0062 limits for two years. **Beginning April 12, 2026, treatment pond effluent limitations shown in Table 6 apply.**

Table 5. Interim Effluent Limitations: Treatment Ponds (Prior to April 12, 2026)

Constituent	Units	30-Day Average	7-Day Average	Sample Maximum
Biochemical Oxygen Demand, 5-Day	mg/L[1]	45	65	Not Applicable
Total Suspended Solids	mg/L	100	150	Not Applicable
Settleable Solids	mL/L[2]	0.8	1.2	Not Applicable
Boron	mg/L	Not Applicable	Not Applicable	0.5
pH	Standard Units	Not Applicable	Not Applicable	Between 6.5 and 8.4

[1] mg/L denotes milligram per liter
[2] mL/L denotes milliliter per liter

Table 6. Effluent Limitations: Treatment Ponds (Beginning April 12, 2026)

Constituent	Units	30-Day Average	7-Day Average	Sample Maximum
Biochemical Oxygen Demand, 5-Day	mg/L[1]	45[4]	65	Not Applicable
Total Suspended Solids	mg/L	45[4]	65	Not Applicable
Settleable Solids	mL/L[2]	0.3	Not Applicable	0.5
Boron	mg/L	Not Applicable	Not Applicable	0.5
pH	Standard Units	Between 6.5 and 8.4[3]	Not Applicable	Not Applicable

[1] mg/L denotes milligram per liter
[2] mL/L denotes milliliter per liter
[3] Basin Plan. For pH, the effluent limitation values shown are a range, not an average or maximum.
[4] USEPA Office of Wastewater Management, Water Permits Division, State and Regional Branch, EPA833-K-10-001, September 2010

C. Groundwater Limitations:

Based on review of historical effluent water quality (see Table 3), King City is unable to consistently comply with the General Permit effluent limitations for all constituents in Table 7, thus the point of compliance for these constituents will be underlying groundwater.

Through groundwater monitoring, King City must demonstrate that the discharge does not cause underlying groundwater to exceed the water quality objectives set forth in the Basin Plan including the limitations listed in Table 7.

Table 7. Groundwater Limitations for Designated Groundwater Basin - *Salinas Valley Upper Valley*

Constituents	Units	25-Month Rolling Median[1]
Total Dissolved Solids	mg/L[2]	600
Chloride	mg/L	150
Boron	mg/L	0.5
Sodium	mg/L	70
Sulfate	mg/L	150
Total Nitrogen	mg/L	10

[1] Rolling Median is the median from all data collected over the most recent 25 months.
[2] mg/L denotes milligram per liter

Table 8. Disposal Area Application Rate Limitations

Constituents	Units	Limit
Application Rate	Inches/ day	0.8

D. Organic Loading Limitations

King City land applies treated wastewater and thus organic loading limitations specified in Table 9 apply. King City can only apply domestic wastewater to the domestic disposal Spray Field, shown as number 8 in Figure 2.

Table 9. Organic Loading Limitations

Constituents	Units	30-Day Average	Maximum
Biochemical Oxygen Demand, 5-Day	Pounds/acre/day	100	300

ATTACHMENT 2

FIGURES

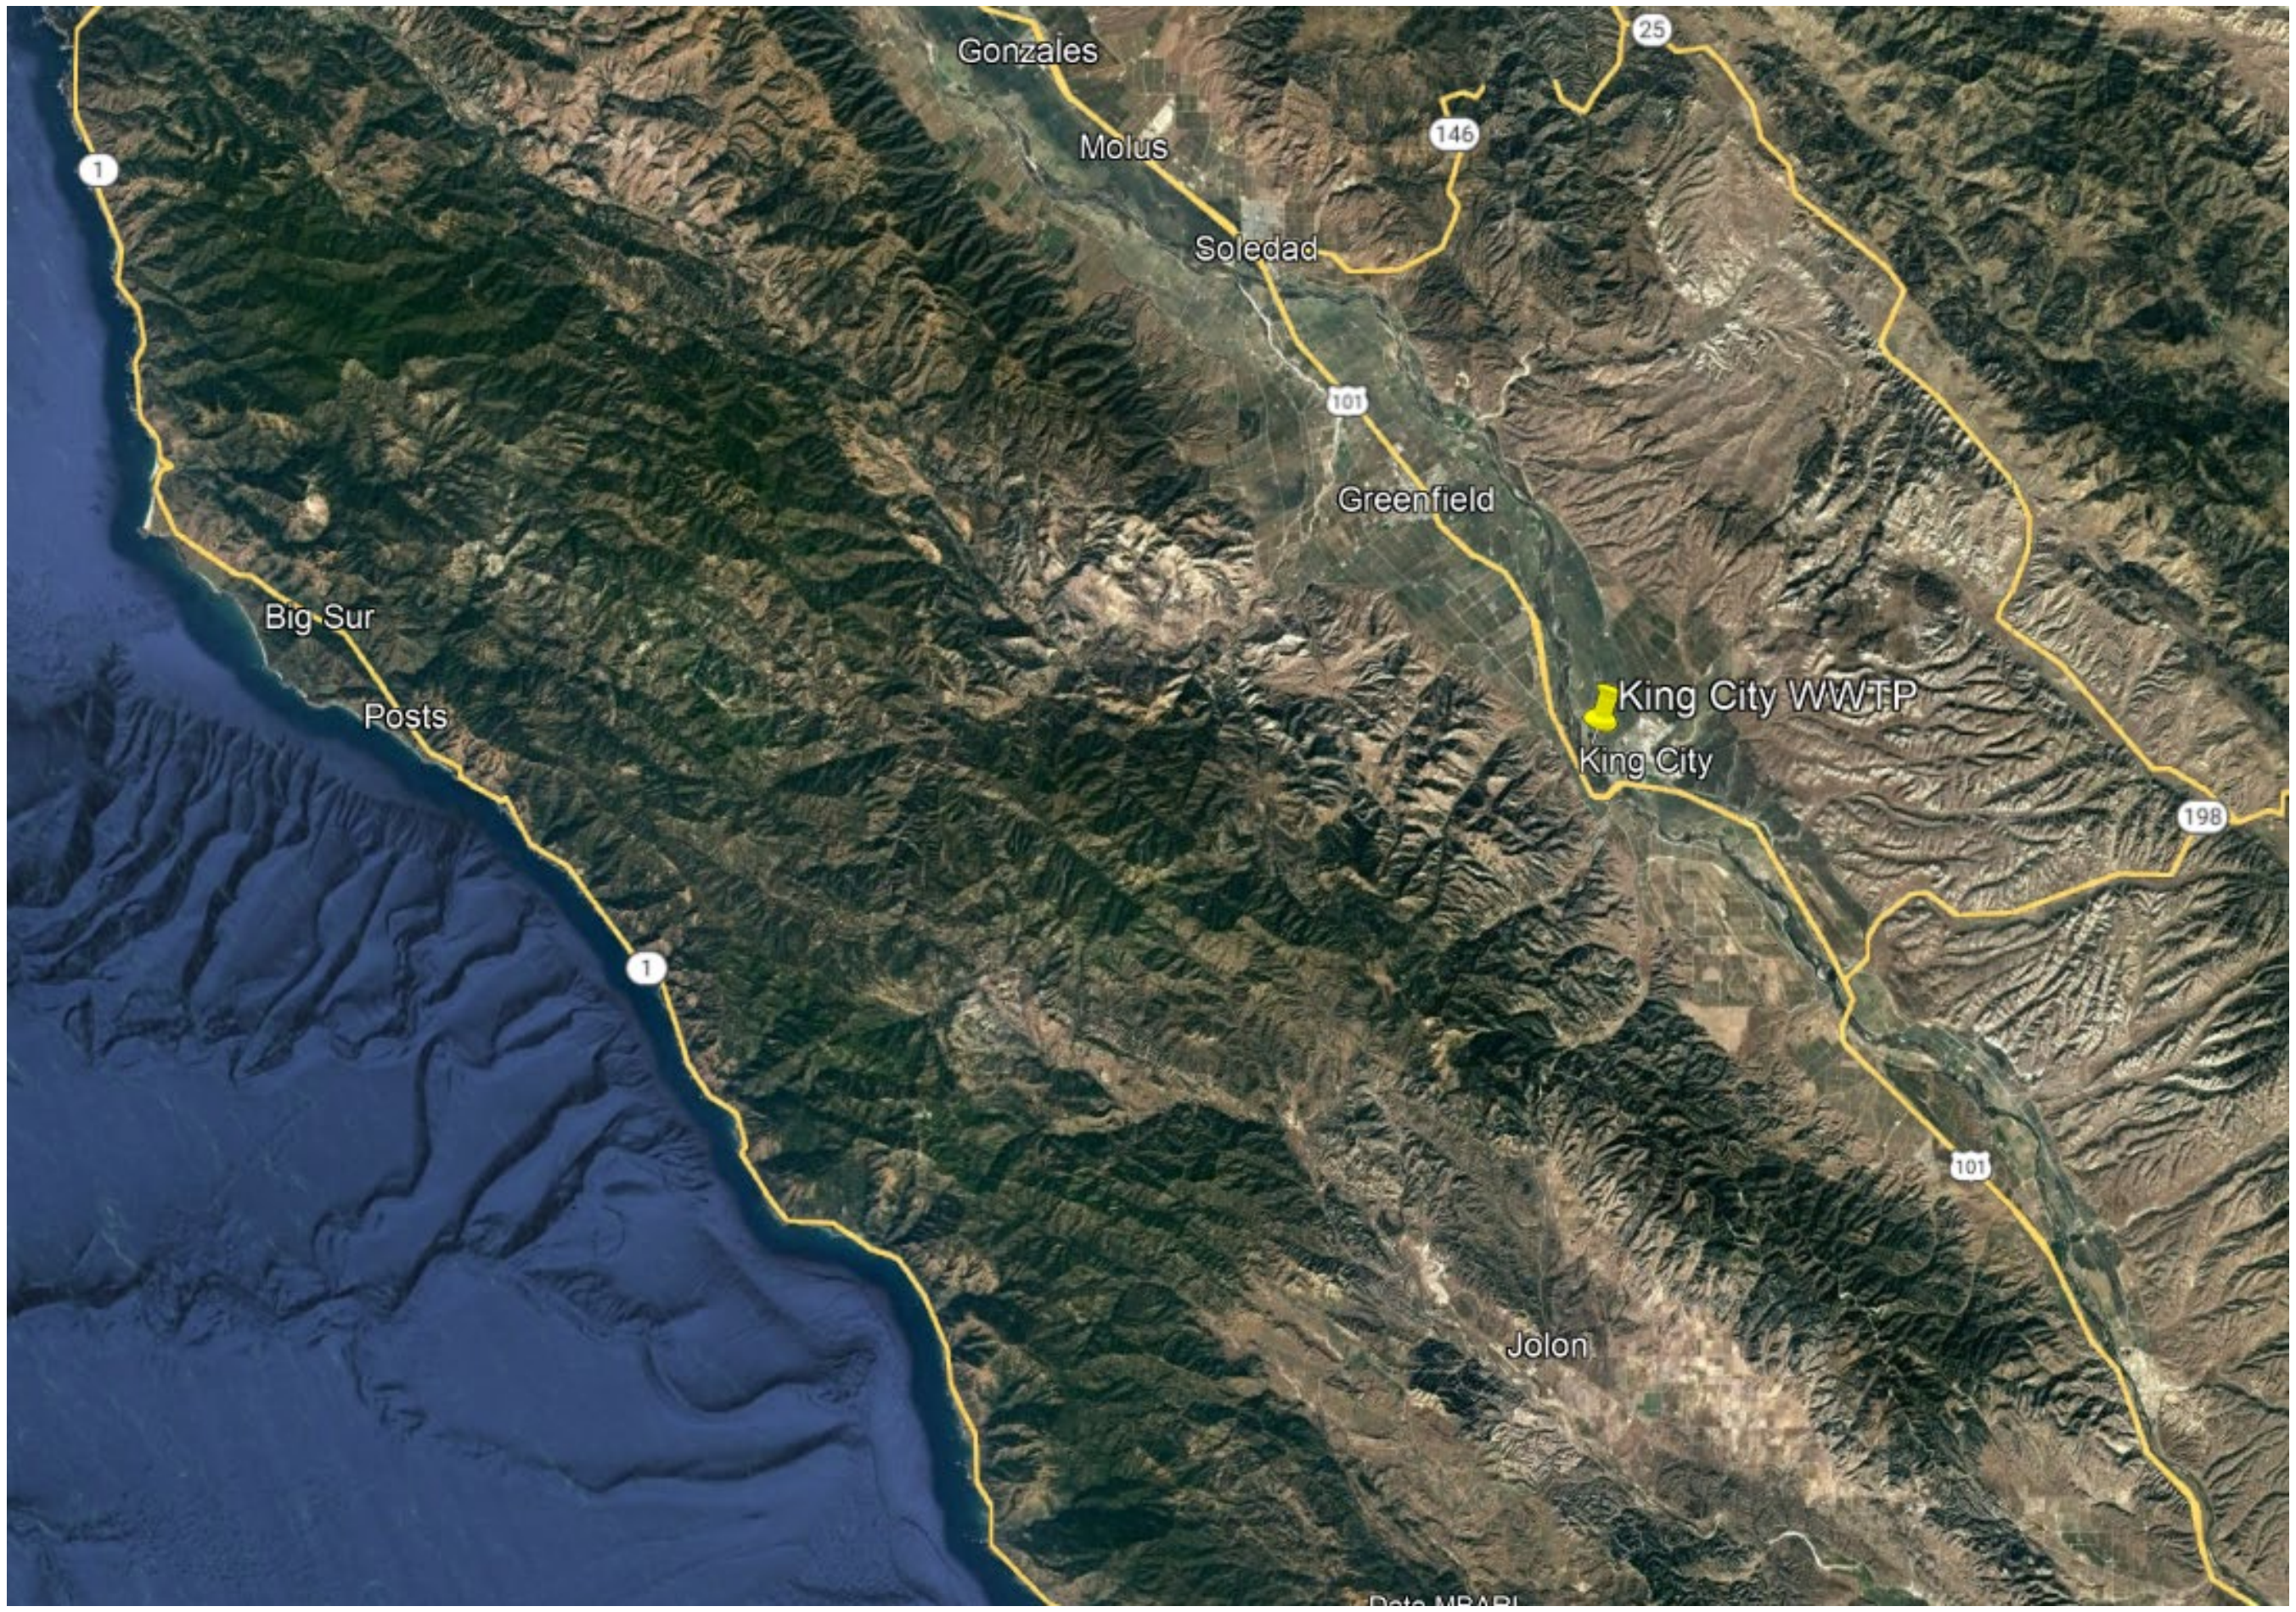

Figure 1. Site Vicinity Map

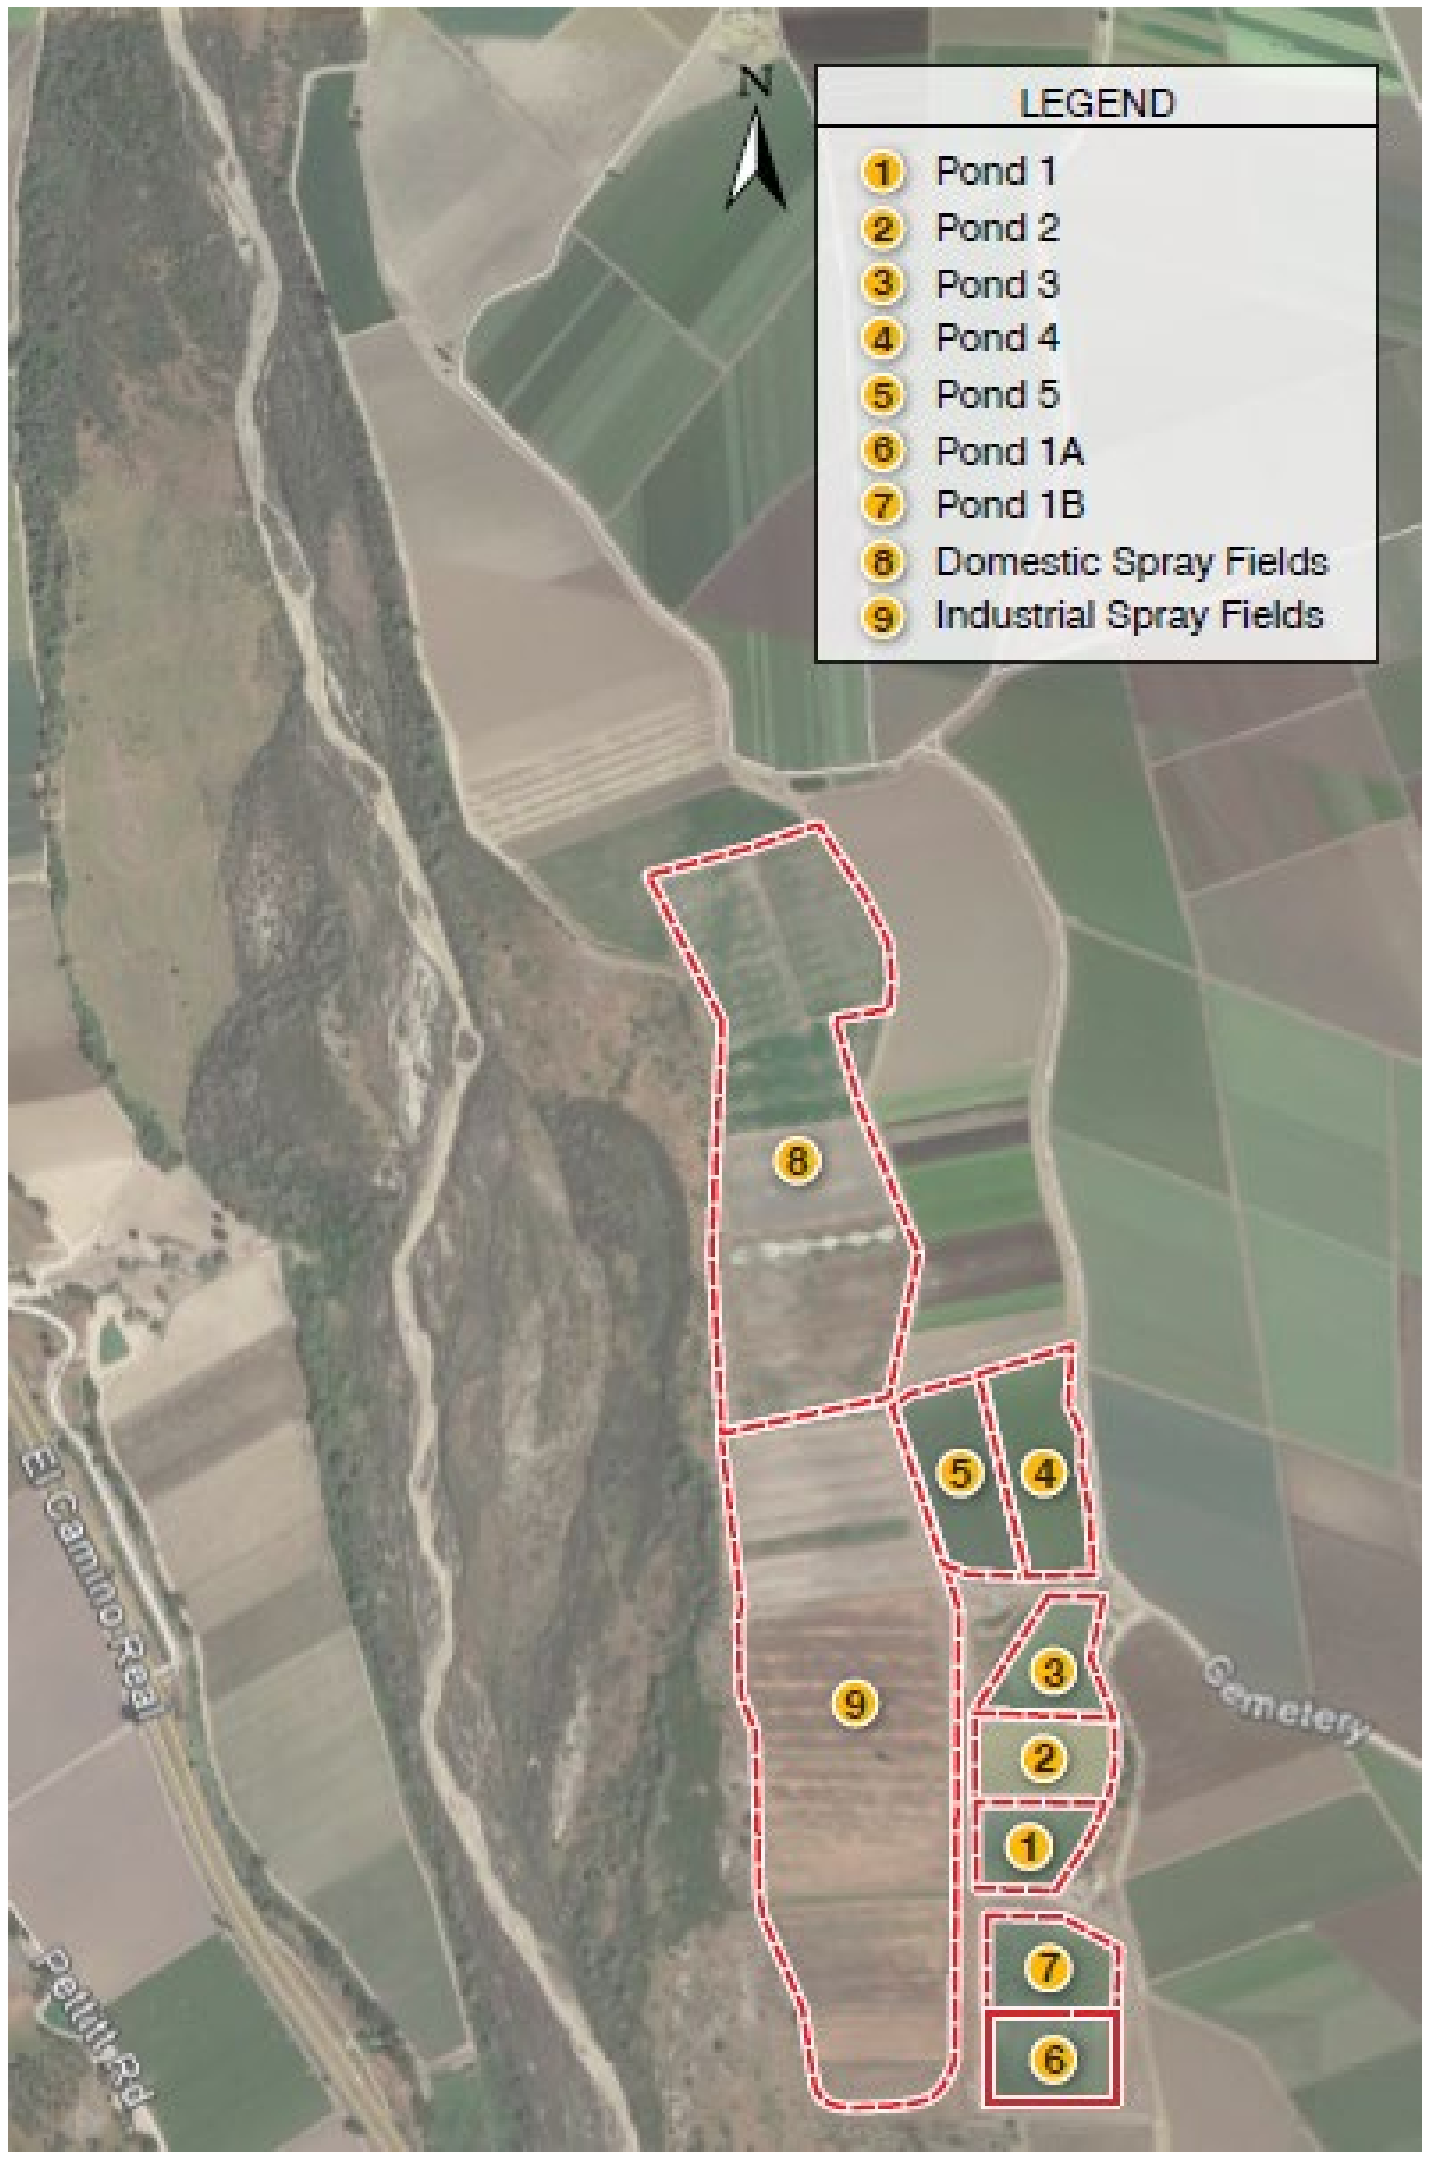

Figure 2. Site Map: Domestic WWTP ponds on the right, Spray Fields are 65 acres shown in area 8. (Industrial Spray fields are shown in 9, and have a separate wastewater permit.)

Figure 3. Aerial Site Map, white lines and arrows depict wastewater piping and flow direction

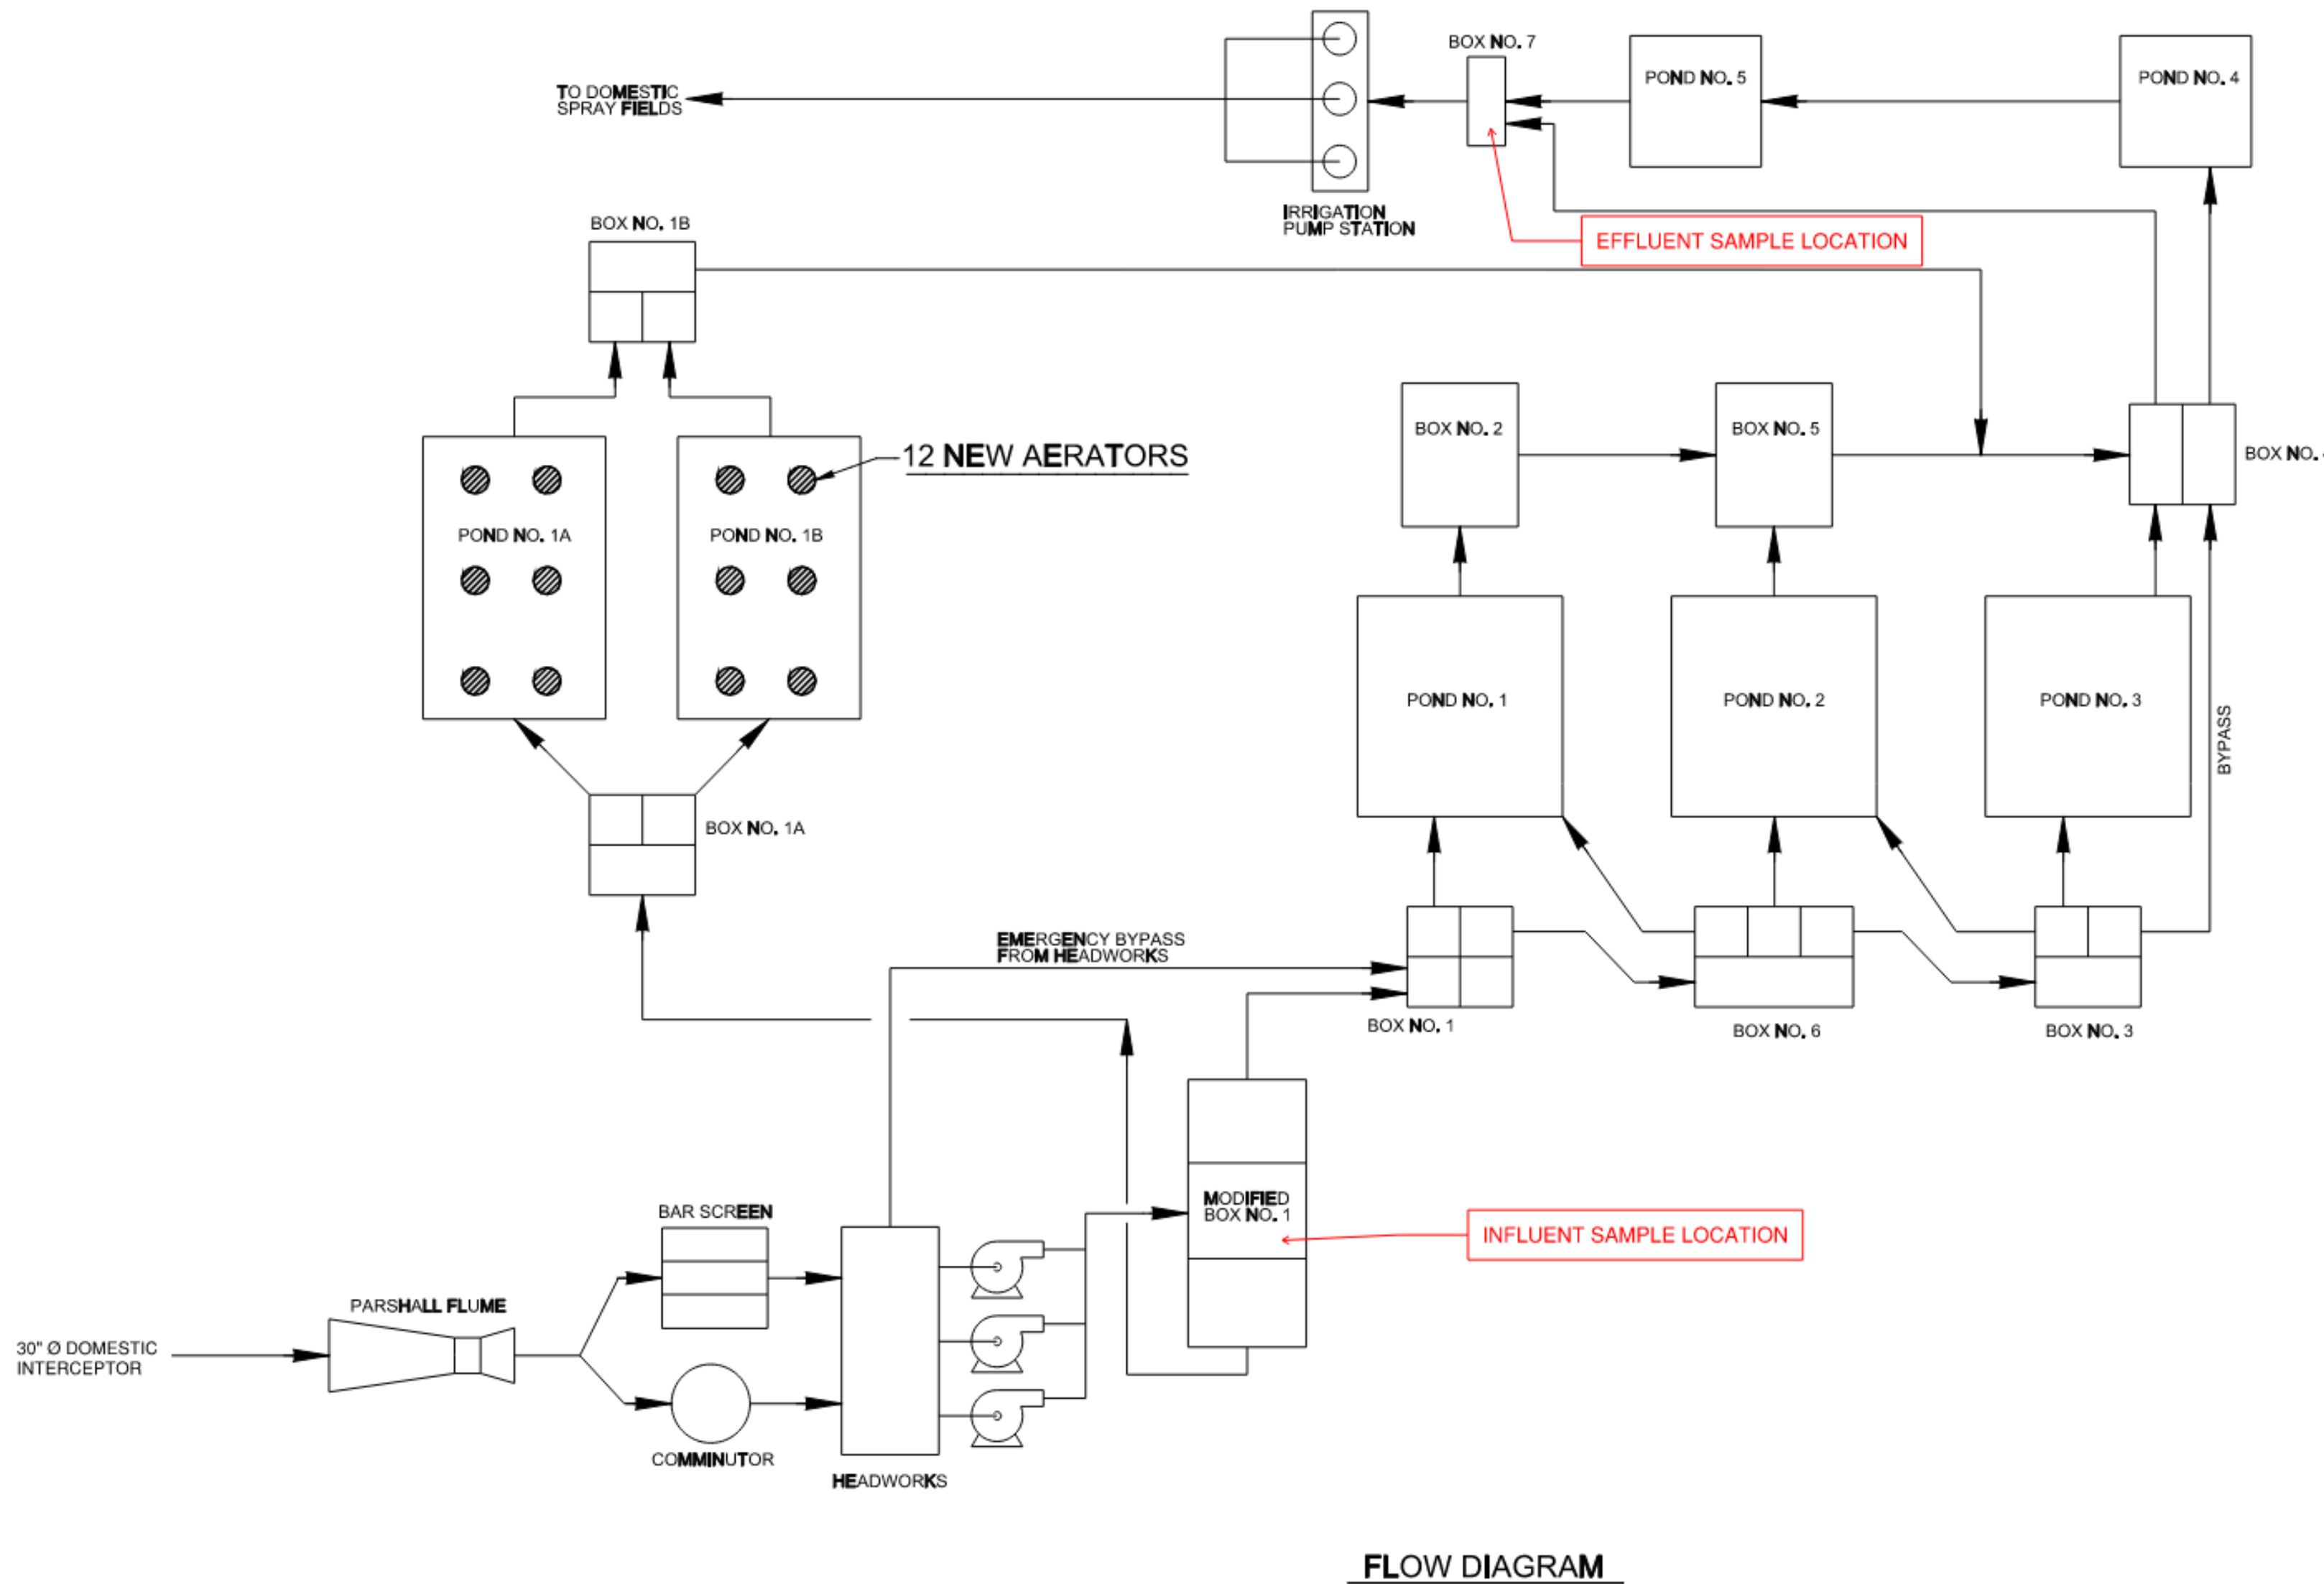

Figure 4. Process Flow Diagram

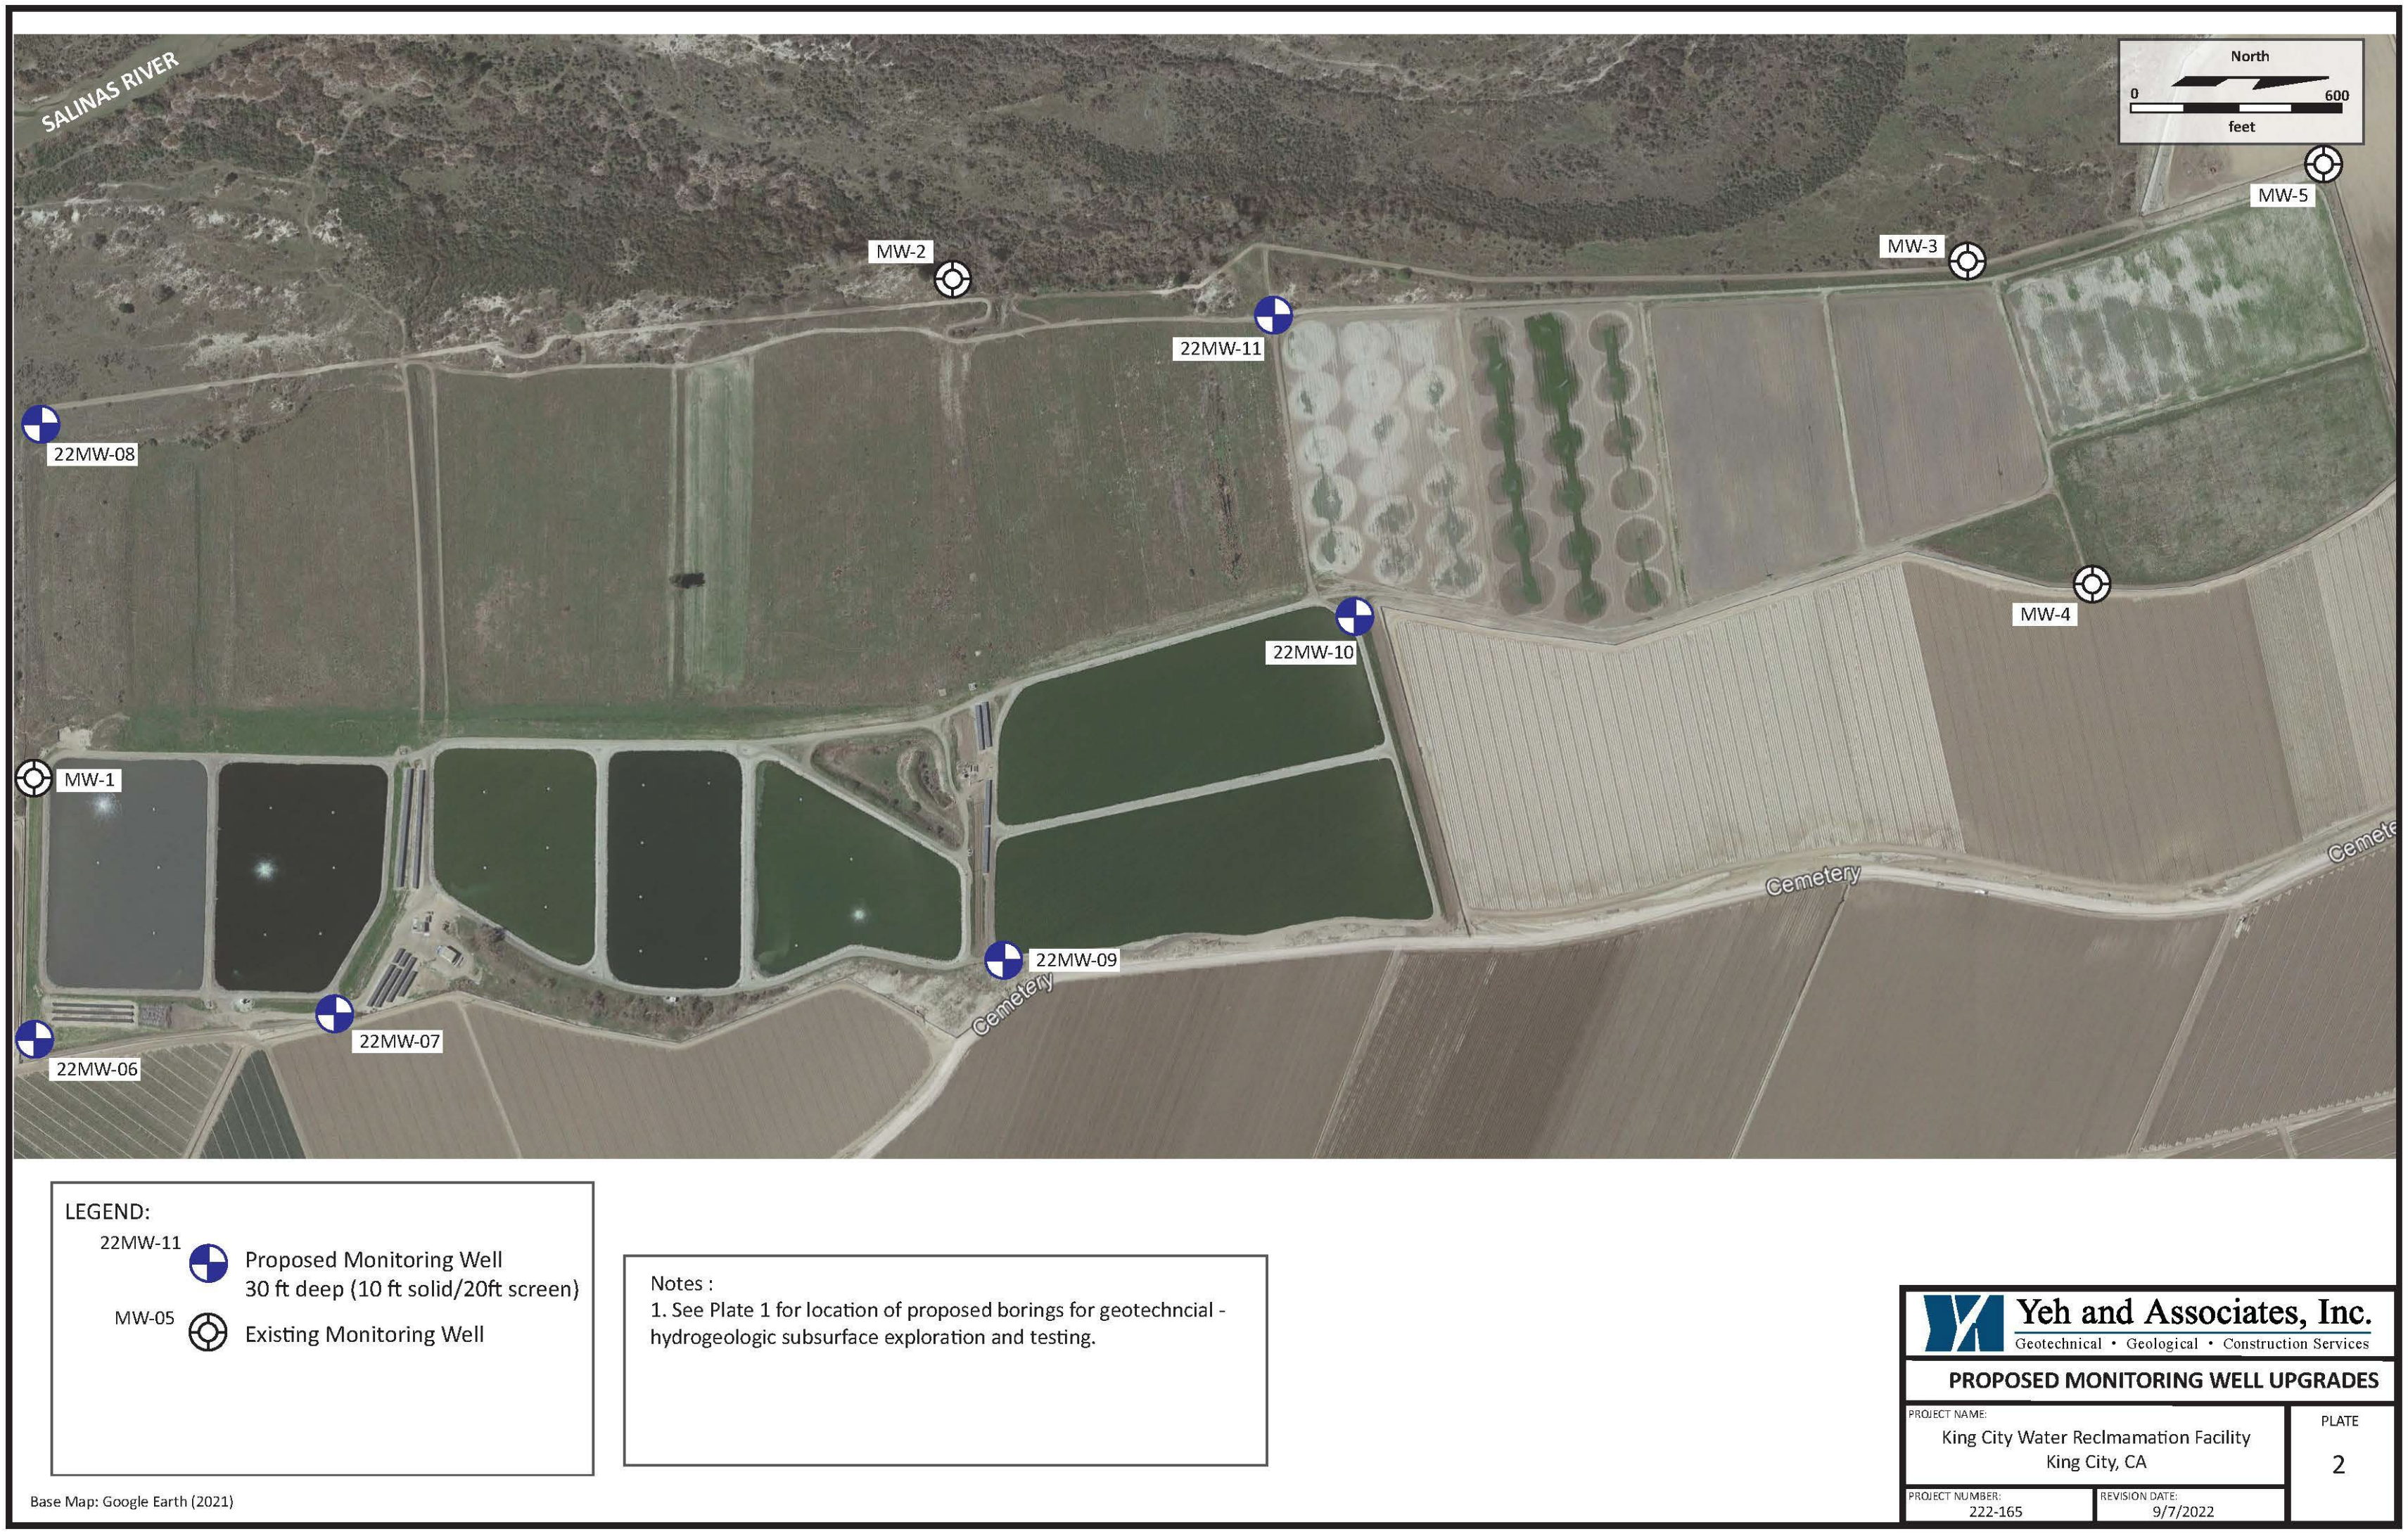

Figure 5. Monitoring Well Locations

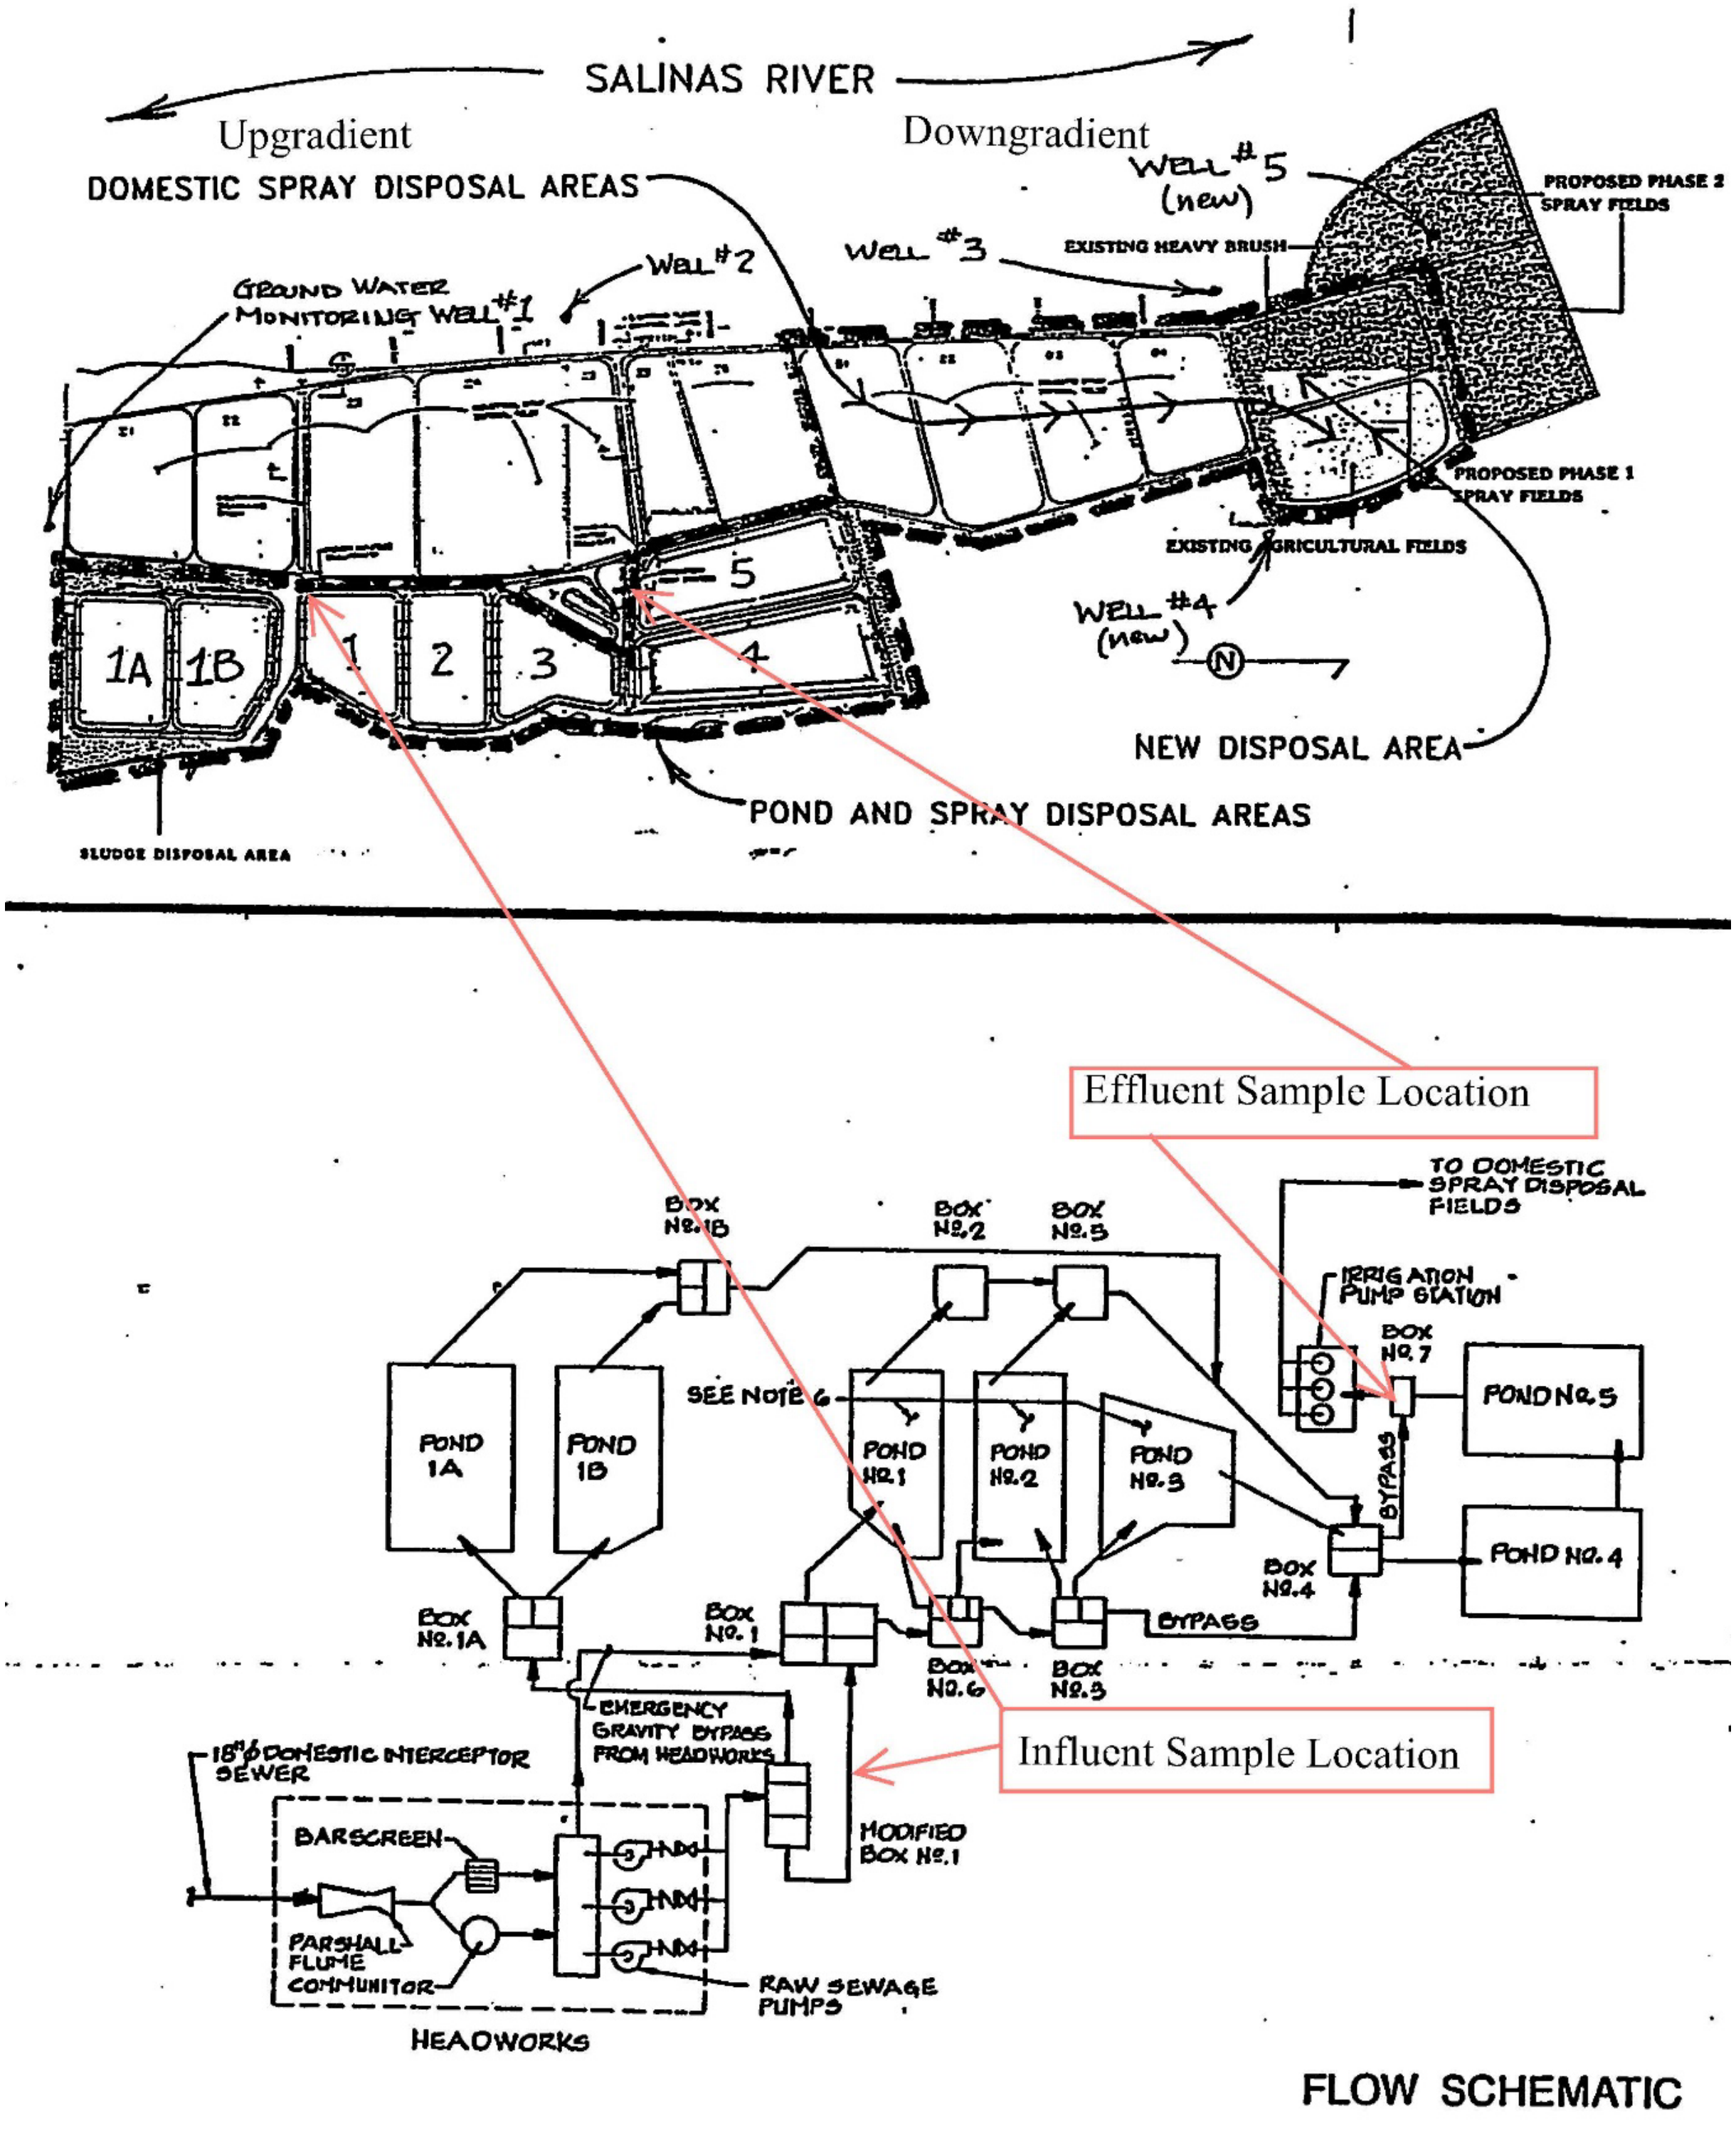

Figure 6. Older figure of the process flow diagram and monitoring locations

ATTACHMENT 3

MONITORING AND REPORTING PROGRAM

CENTRAL COAST REGIONAL WATER QUALITY CONTROL BOARD

MONITORING AND REPORTING PROGRAM R3-2024-0023
APRIL 12, 2024
MODIFICATION OF MONITORING AND REPORTING
PROGRAM R3-2020-0020
FOR
KING CITY DOMESTIC WASTEWATER TREATMENT PLANT
KING CITY, MONTEREY

This Monitoring and Reporting Program applies to the monitoring and reporting requirements for King City Domestic Wastewater Treatment Plant (Wastewater System) enrolled in *General Waste Discharge Requirements Order R3-2020-0020 for Discharges from Domestic Wastewater Systems with Flows Greater than 100,000 Gallons per Day* (General Permit).

King City owns and operates the Wastewater System that is subject to the General Permit and notice of applicability. King City must not implement any changes to this monitoring and reporting program unless and until a revised monitoring and reporting program is issued by the Central Coast Regional Water Quality Control Board (Central Coast Water Board).

The State Water Resources Control Board (State Water Board) and Regional Water Quality Control Boards are transitioning to the use of the publicly accessible State Water Board's GeoTracker database for the tracking of environmental and regulatory data for sites that operate under waste discharge requirements. The monitoring and reporting program directs King City to submit reports (both technical and monitoring reports) and analytical data electronically to the State Water Board's GeoTracker database (see monitoring and reporting program section VII.C).

I. SAMPLING AND ANALYSIS

King City must collect representative samples in accordance with the most recently approved sampling and analysis plan contained in the Operations and Maintenance Manual and validate analytical results prior to submittal to the Central Coast Water Board. All samples (e.g., wastewater, groundwater, soil, sludge, etc.) must be representative of the volume and nature of the discharge or matrix of materials sampled.

All samples must be collected by a qualified person, trained in proper procedures for collecting the samples. The name of the sampler, sample type (grab or composite), time, date, location, bottle/container type, and any preservative used for each sample must be recorded on the sample chain of custody form. The chain of custody form must also contain all custody information including date, time, and to whom samples were relinquished. If composite samples are collected, the basis for sampling (time or flow weighted) must be included in the sampling and analysis plan contained in the Operations and Maintenance Manual for Central Coast Water Board review and approval.

A. Sampling Schedule – Unless otherwise specified below, sampling must be performed in accordance with Table 1.

Table 1. Sampling Schedule

Monitoring Period	Sample Collection Time
Quarterly	January, April, July, and October
Semiannual	April and October
Annual	October

Field test instruments (such as those used to test pH, dissolved oxygen, and electrical conductivity, etc.) may be used if they are used by a State Water Board Environmental Laboratory Accreditation Program accredited laboratory, or:

1. The user is trained in proper use and maintenance of the instruments;
2. The instruments are field calibrated prior to monitoring events at the frequency recommended by the manufacturer;
3. Instruments are serviced and/or calibrated by the manufacturer at the recommended frequency; and
4. Field calibration reports are maintained and available for at least three years.

B. Monitoring Location Descriptions – All samples including influent samples (IS), effluent samples (ES), groundwater monitoring well (MW), etc. must be collected at the locations described in Table 2. These locations must be consistent with the Central Coast Water Board approved sampling and analysis plan. **King City must upload the GeoTracker field point information for each sampling location in the GeoTracker database once, prior to uploading laboratory data (see Table 10).**

Table 2. Sample Identification Details

GeoTracker Field Point Class	GeoTracker Field Point Name (Sample ID)	GeoTracker Field Point Description
Influent Sample	IS-1	Raw wastewater sample collected after the headworks, grab sample
Effluent Sample	ES-1	Treated wastewater sample collected downstream of Pond 5, grab sample

GeoTracker Field Point Class	GeoTracker Field Point Name (Sample ID)	GeoTracker Field Point Description
Monitoring Well 1	MW-1	Southern edge of Pond 1A;
Monitoring Well 2	MW-2	Western edge of industrial sprayfield 4; screened 20 to 30 feet bgs
Monitoring Well 3	MW-3	Western edge of domestic sprayfield 5; screened 20 to 30 feet bgs
Monitoring Well 4	MW-4	Eastern corner of domestic sprayfield 6; screened 20 to 30 feet bgs
Monitoring Well 5	MW-5	Western edge of domestic sprayfield 4; screened 20 to 30 feet bgs

II. WATER SUPPLY MONITORING

Representative samples of King City's raw water supply (sampled before use or treatment) must be collected and analyzed, at a minimum, for constituents specified in Table 3.

In lieu of the required water supply sampling, King City may request Central Coast Water Board approval to submit a Well Identification Number and the reporting year's consumer confidence report (annual water quality report or drinking water quality report), as required by the State Water Board Division of Drinking Water and/or county, provided, at a minimum, all of the required constituents are sampled at the frequency specified in Table 3. King City must report the results of any constituent monitored more frequently than is required by the monitoring program shown in Table 3. King City must also report detectable concentrations (above the reporting limit) for any other constituent that has a published maximum contaminant level (MCL).

King City must evaluate and provide a tabular summary of the water supply data with the annual monitoring report.

Table 3. Water Supply Monitoring

Constituent	Units[1]	Sample Type	Sampling Frequency
Nitrate (as N)	mg/L	Grab	Annually
Total Dissolved Solids	mg/L	Grab	Annually
Chloride	mg/L	Grab	Annually
Sodium	mg/L	Grab	Annually
Sulfate	mg/L	Grab	Annually
Boron	mg/L	Grab	Annually

Constituent	Units[1]	Sample Type	Sampling Frequency
Carbonate	mg/L	Grab	Annually
Bicarbonate	mg/L	Grab	Annually
Calcium	mg/L	Grab	Annually
Potassium	mg/L	Grab	Annually
Magnesium	mg/L	Grab	Annually

[1] mg/L denotes milligrams per liter

III. INFLUENT AND EFFLUENT MONITORING

A. Influent and Effluent Flow Monitoring – King City must monitor and report flow in gallons per day, as described in Table 4, with each monitoring report. See monitoring and reporting program section VII.A.3 for supplemental volumetric annual reporting requirements established by the State Water Board.

Table 4. Influent and Effluent Flow Monitoring

	INFLUENT IS-1	INFLUENT IS-1	EFFLUENT ES-1	EFFLUENT ES-1
Parameter	**Sample Type**	**Sampling Frequency**	**Sample Type**	**Sampling Frequency**
Daily Flow	Metered Continuous	Daily	Metered	Daily
Maximum Hourly Flow	Metered	Hourly	Metered	Hourly
Maximum Daily Flow	Not required	Not required	Calculated	Daily
Monthly Average[1]	Calculated	Monthly	Not required	Not required
Percent of Permitted Flow[2]	Calculated	Quarterly	Not required	Not required

[1] Monthly average to be calculated by taking the total discharge to the headworks by volume during a calendar month divided by the number of days in the month that the wastewater system headworks received flow.

[2] The General Permit notice of applicability specifies the Wastewater System's maximum permitted flow. In the monitoring reports, King City must evaluate and provide a comparison of monitored flow to the permitted flow.

B. Wastewater System Monitoring – Representative samples of King City's influent (raw wastewater) into the wastewater system and effluent (treated wastewater) discharged to land must be collected and analyzed in accordance with the treatment technology-based monitoring requirements (including sample type and frequency) summarized in the tables below. See Figure 1 below for the location of samples and GeoTracker field points.

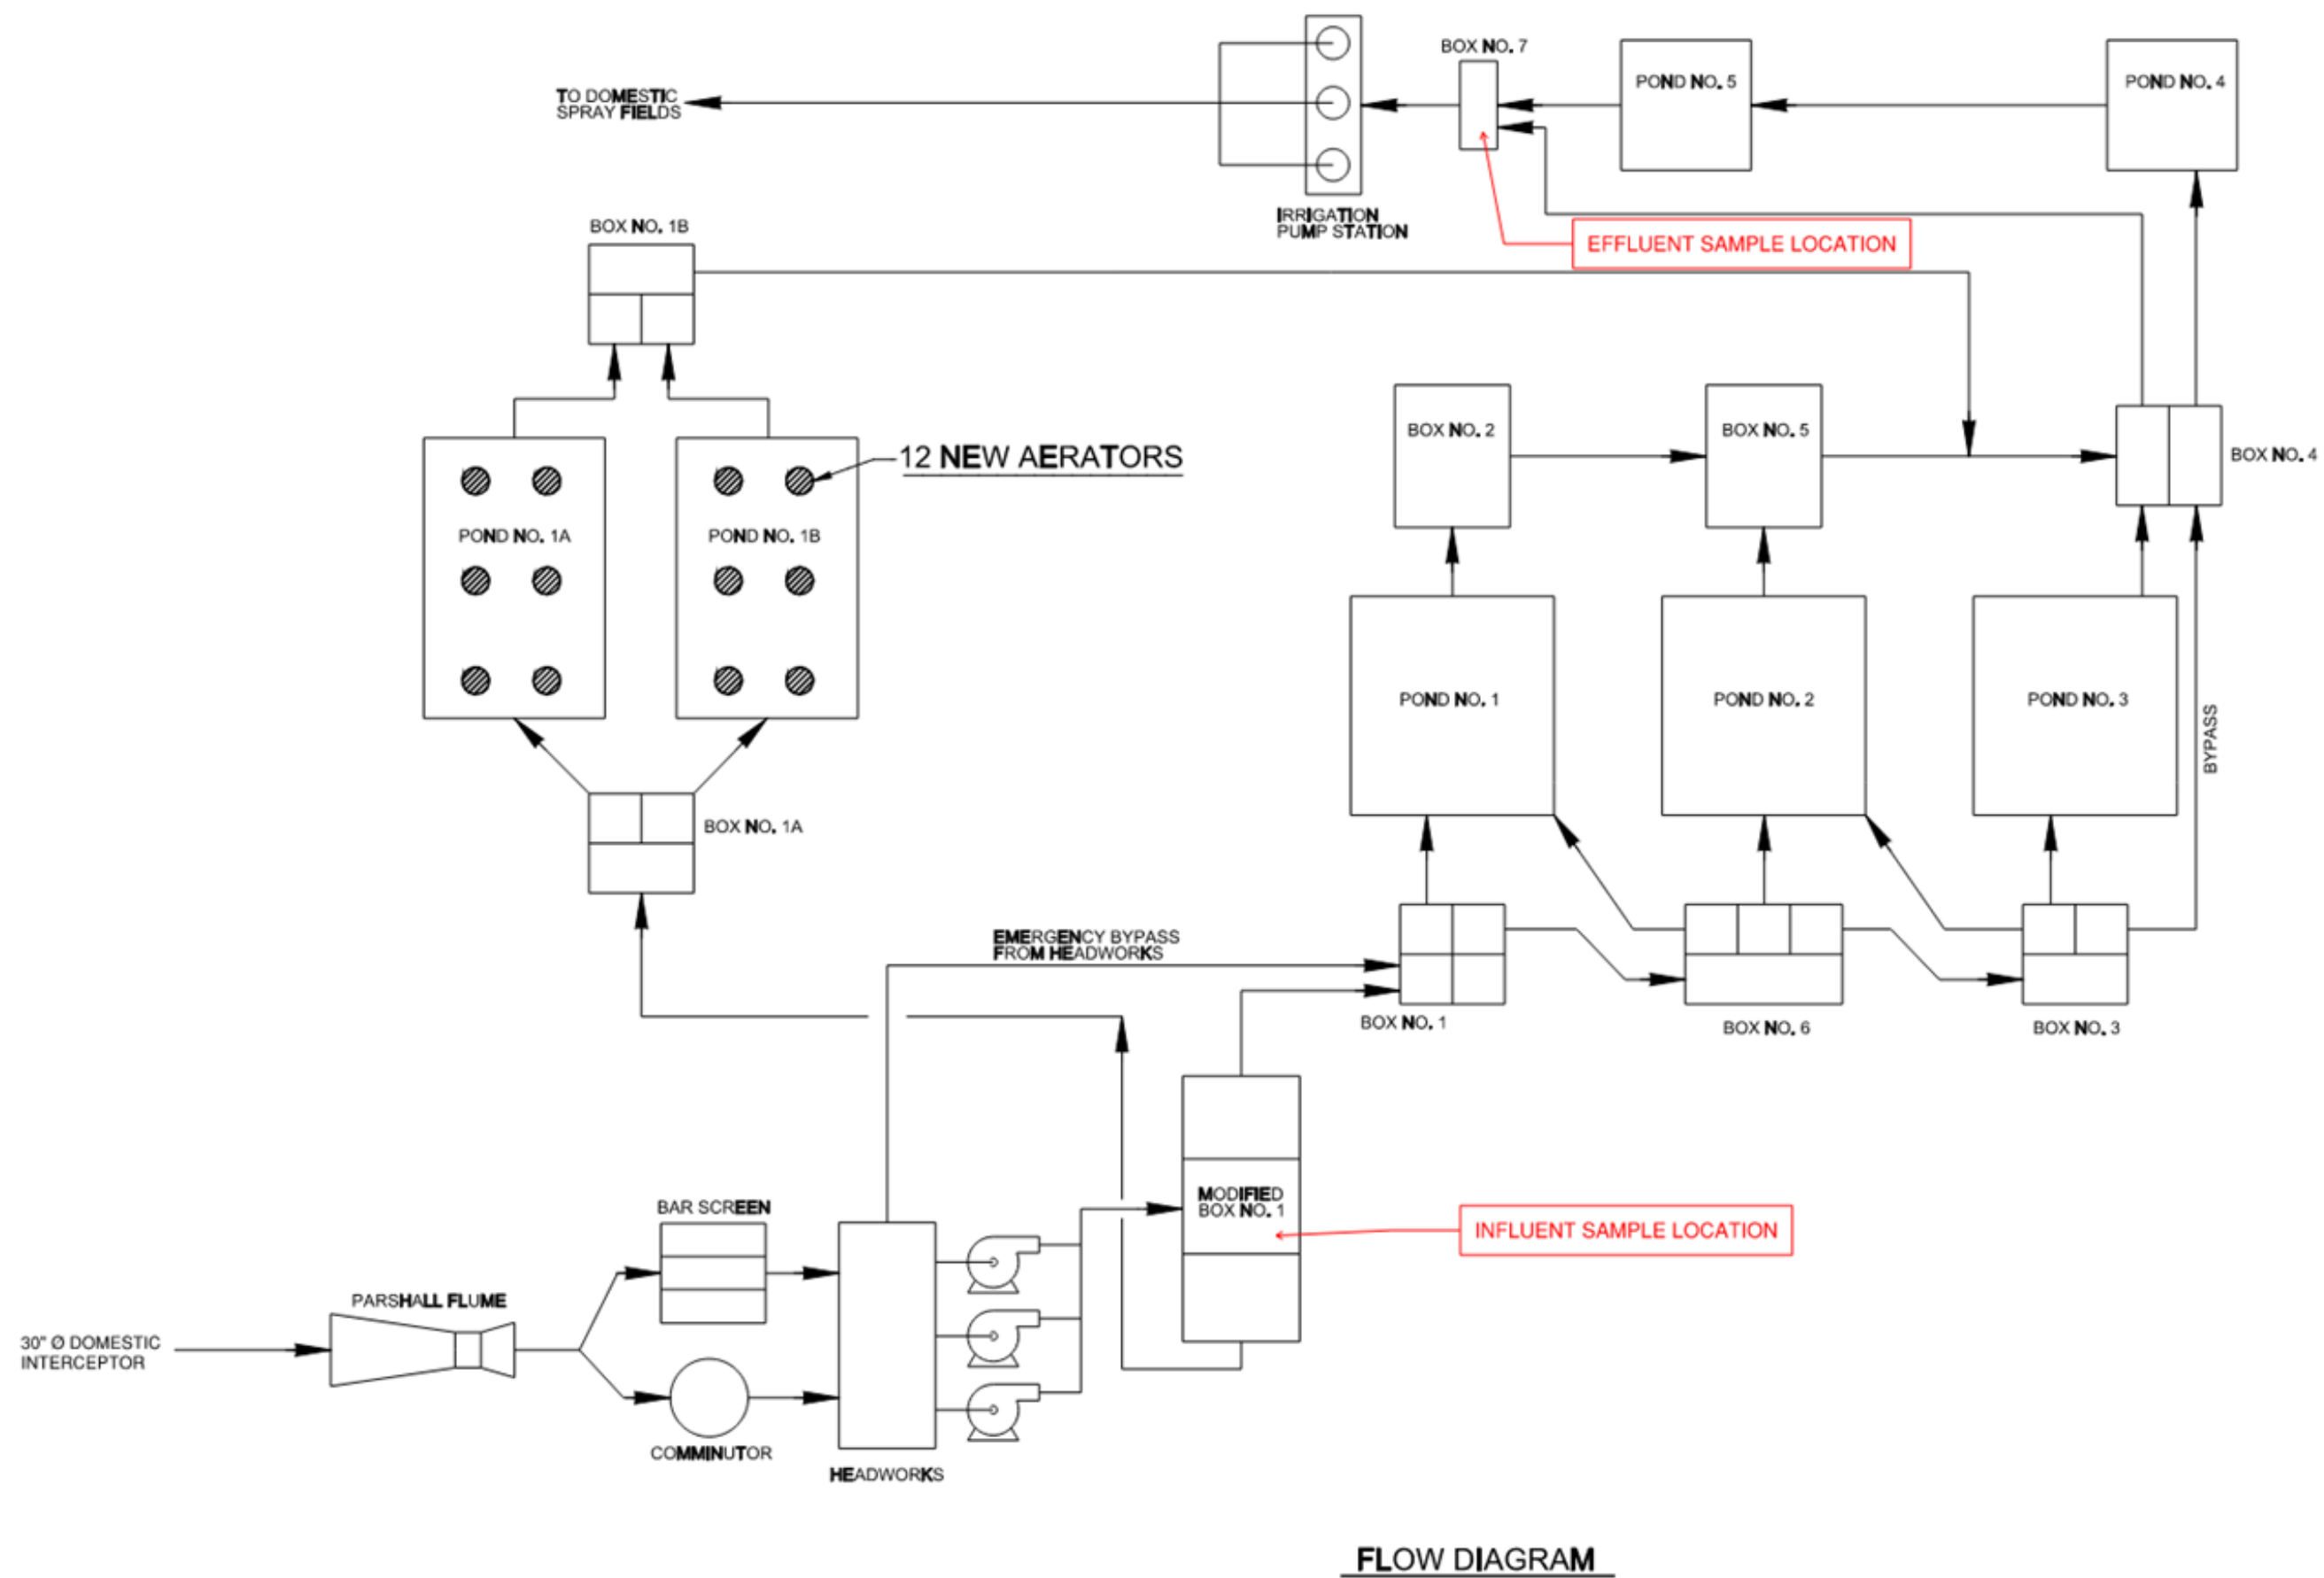

Figure 1. Wastewater Treatment Process Flow Schematic

1. **Pond System Monitoring**

   i. **Required Pond Monitoring –** All wastewater treatment and treated wastewater storage/disposal ponds (lined and unlined) must be monitored as specified in Table 5.

Table 5. Wastewater Treatment/Storage/Disposal Pond Monitoring

Parameter/ Constituent	Units[1]	Sample Type	Sampling/Monitoring Frequency
Freeboard	0.1 feet	Measured	Weekly
pH	Standard Units	Grab	Weekly
Dissolved Oxygen (1-foot below pond surface)	mg/L	Grab	Monthly
Odors	Not Applicable	Observation	Weekly
Pond Color and condition	Not Applicable	Observation and Pictures	Monthly
Berm condition	Not Applicable	Observation and Pictures	Monthly
Sludge Depth	0.1 feet	Measured	Annually
Precipitation	inches/day and date	Measured [1]	Each precipitation event[3]

[1] mg/L denotes milligrams per liter.

[2] King City may use a rain gauge or use a National Oceanic and Atmospheric Administration or the United States Geological Survey rain station, such as http://scacis.rcc-acis.org/.

[3] A precipitation event is one producing precipitation of ½ inch or more.

   ii. **Influent and Effluent Monitoring –** At a minimum, influent and effluent constituent monitoring for pond treatment systems must be monitored as specified in Table 6.

Table 6. Influent and Effluent Monitoring for Pond Treatment Systems

		INFLUENT (IS-1)	INFLUENT (IS-1)	EFFLUENT (ES-1)	EFFLUENT (ES-1)
Parameter/ Constituent	**Units**	**Sample Type**	**Sampling Frequency**	**Sample Type**	**Sampling Frequency**
Biochemical Oxygen Demand,	mg/L	Grab	Quarterly	Grab	Monthly

		INFLUENT (IS-1)	INFLUENT (IS-1)	EFFLUENT (ES-1)	EFFLUENT (ES-1)
Parameter/ Constituent	**Units**	**Sample Type**	**Sampling Frequency**	**Sample Type**	**Sampling Frequency**
5-Day					
Total Suspended Solids	mg/L	Grab	Quarterly	Grab	Monthly
Settleable Solids	mg/L	Not Applicable	Not Applicable	Grab	Monthly
Total Nitrogen[2]	mg/L	Calculated	Quarterly	Calculated	Monthly
Nitrate (as N) + Nitrite (as N) or separate species	mg/L	Grab	Quarterly	Grab	Monthly
Total Kjeldahl Nitrogen (as N)	mg/L	Grab	Quarterly	Grab	Monthly
Ammonia (as N)	mg/L	Grab	Quarterly	Grab	Monthly
Total Dissolved Solids	mg/L	Grab	Quarterly	Grab	Quarterly
Chloride	mg/L	Grab	Quarterly	Grab	Quarterly
Sodium	mg/L	Grab	Quarterly	Grab	Quarterly
Sulfate	mg/L	Grab	Quarterly	Grab	Quarterly
Carbonate	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Bicarbonate	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Calcium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Potassium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Magnesium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually

[1] Total nitrogen is the sum of total inorganic nitrogen (nitrate + nitrite + ammonium + ammonia) and organic nitrogen.

IV. WASTEWATER DISPOSAL MONITORING

King City must monitor all wastewater disposal areas (e.g., land application areas, percolation ponds, etc.) when wastewater and/or supplemental irrigation water is applied. Monitoring must be conducted as described in Table 7. Sample types listed as observations (and weather station) must be made in a bound logbook and problems must be promptly corrected and recorded. The logbook must be maintained onsite and made available to the Central Coast Water Board upon inspection and information included in the quarterly reports.

King City must evaluate and summarize wastewater disposal application rates, loading rates (pounds/acre/day), violations found during the inspections, etc. with each monitoring report.

If wastewater is not discharged to land during a reporting period, the monitoring report must still be submitted and indicate that there was no discharge during the reporting period.

Table 7. Wastewater Disposal Monitoring

Constituent	Units	Sample Type	Monitoring Frequency
Application Rate	Inches/day	Metered/Estimated [1]	Monthly
Local Precipitation	Inches/day	Weather Station [2]	Each precipitation event
Acreage Applied [3]	Acres	Measured	Daily
Average Monthly Biochemical Oxygen Demand, 5-Day (BOD) Applied [4] [5]	lbs/acre/day	Calculated	Monthly
Maximum Daily BOD_5 Applied[5]	lbs/acre/day	Calculated	Monthly
Total Nitrogen Applied [4] [5]	lbs/acre/day	Calculated	Monthly
Salts Applied [4] [5] (total dissolved solids, sodium, chloride, sulfate)	lbs/acre/day	Calculated	Monthly
Soil Erosion Evidence	Not Applicable	Observation	Monthly
Soil Saturation/Ponding	Not Applicable	Observation	Monthly
Nuisance Odors/Vectors	Not Applicable	Observation	Monthly
Discharge Offsite	Not Applicable	Observation	Monthly

[1] Requires meter reading, a pump run time meter, or other approved method. If the flow is estimated, King City is required to provide an explanation (e.g., no meter- estimated using pump operations including rate and time) with each monitoring report.

[2] King City must have a rain gauge or use a NOAA or USGS rain station, such as http://scacis.rcc-acis.org/.

[3] Acreage applied denotes the acreage to which wastewater is applied.

[4] The total nitrogen, salts, and BOD applied loading rates must be calculated from wastewater flow volumes, applied acreage, and concentrations reported in effluent analytical testing as follows:

Total Nitrogen/Salts/BOD Applied (pounds/acre/ day) =

$$\frac{X\ [\text{mg/L}] \times Q\ [\text{million gallons per day}] \times 8.34\ [(\text{conversion from mg/L to pounds/million gallons per day}]}{\text{Acreage Applied [acres]}}$$

Where X = Total nitrogen, salts, or BOD concentration
Where Q = Application Rate (often effluent flow rate)

[5] Frequencies of analytical testing are defined in the influent and effluent monitoring tables (Table 3 and Table 6).

V. SLUDGE/BIOSOLIDS DISPOSAL MONITORING

King City must report the handling and disposal of all sludge/biosolids generated at the Wastewater System. Records must include the date removed from the Wastewater System, name/contact information for the hauling company, the type and volume of waste transported, the disposal facility name and address, and copies of analytical data required by the entity accepting the waste. These records must be submitted as part of the annual monitoring report.

King City must also monitor sludge/biosolids consistent with a Central Coast Water Board approved sludge management plan and in accordance with the requirements specified by the receiving party, including a regulated landfill and/or regulated composting facility.

If sludge/biosolids are not removed during the year, King City must explain the absence of this monitoring in the annual report.

VI. GROUNDWATER MONITORING

King City cannot meet groundwater limits for total dissolved solids, chloride, sodium, sulfate, and total nitrogen in the General Permit and water quality objectives specified in the Basin Plan in effluent water. Therefore, King City must implement a groundwater monitoring program to demonstrate compliance with the groundwater limitations in the NOA and water quality objectives specified in the Basin Plan. Groundwater monitoring reports, workplans, etc. that interpret groundwater data must be prepared and stamped by a California licensed civil engineer or professional geologist.

Prior to sampling, depth to groundwater must be measured and groundwater elevations[7] must be calculated. The monitoring wells must be purged of at least three well volumes and until measurements of the following parameters have stabilized (i.e., are reproducible within 10 percent): pH, temperature, dissolved oxygen, electrical conductivity, and turbidity. No-purge, low-flow, or other sampling techniques are acceptable only if they are approved in advance by the Central Coast Water Board and

[7] The locations and top-of-casing elevations for the existing groundwater monitoring wells must be surveyed by a licensed land surveyor if not already completed at the time of installation.

described in an approved sampling and analysis plan. Once the groundwater level in each of the wells has recovered sufficiently to ensure the collection of representative groundwater samples, a qualified individual (e.g., consultant, technician, etc.) trained in using proper sampling methods must recover samples using approved USEPA methods. Laboratories analyzing groundwater samples must be accredited by the State Water Board Environmental Laboratory Accreditation Program, in accordance with California Water Code section 13176, and must include quality assurance/quality control data with their reports.

King City must provide monitoring well field sheets and report monitoring data, as described in Table 8, with each monitoring report, for monitoring wells 1 to 5 (MW-1, MW-2, MW-3, MW-4, MW-5).

Table 8. Groundwater Monitoring

Constituent	Units	Sample Type	Sampling Frequency
Groundwater Elevation [1]	0.01 feet	Calculated	Quarterly
Depth to Groundwater [1]	0.01 feet	Measurement	Quarterly
Gradient	feet/feet	Calculated	Quarterly
Groundwater Flow Direction [4]	degrees	Calculated	Quarterly
Total Nitrogen[5]	mg/L	Calculated	Quarterly
Nitrate (as N)	mg/L	Grab	Quarterly
Nitrite (as N)	mg/L	Grab	Quarterly
Total Kjeldahl Nitrogen (as N)	mg/L	Grab	Quarterly
Ammonia (as N)	mg/L	Grab	Quarterly
Total Dissolved Solids	mg/L	Grab	Quarterly
Chloride	mg/L	Grab	Quarterly
Sodium	mg/L	Grab	Quarterly
Sulfate	mg/L	Grab	Quarterly
Carbonate	mg/L	Grab	Semiannually
Bicarbonate	mg/L	Grab	Semiannually
Calcium	mg/L	Grab	Semiannually

Constituent	Units	Sample Type	Sampling Frequency
Potassium	mg/L	Grab	Semiannually
Magnesium	mg/L	Grab	Semiannually
pH	pH Units	Metered	Quarterly
Dissolved Oxygen	mg/L	Metered	Quarterly
Electrical Conductivity	μS/cm [2]	Metered	Quarterly
Oxidation Reduction Potential	mV [3]	Metered	Quarterly
Temperature	degrees Celsius	Metered	Quarterly

[1] ft.msl denotes feet above mean sea level and ft bgs denotes feet below ground surface.
[2] μS/cm denotes microsiemens per centimeter.
[3] mV denotes millivolts
[4] Calculations must be prepared by, or under the responsible charge of, a California licensed professional.
[5] Total nitrogen is the sum of total inorganic nitrogen (nitrate + nitrite + ammonium + ammonia) and organic nitrogen.

VII. REPORTING REQUIREMENTS

A. QUARTERLY AND ANNUAL MONITORING REPORTS

Quarterly and annual monitoring reports are due as described in Table 9.

Table 9. Quarterly and Annual Monitoring Reporting

Report	Monitoring Period	Report Due Date
First Quarter Monitoring Report	January 1 to March 31	May 1
Second Quarter Monitoring Report	April 1 to June 30	August 1
Third Quarter Monitoring Report	July 1 to September 30	November 1
Fourth Quarter Monitoring Report	October 1 to December 31	February 1
Annual Report	January 1 to December 31	March 1
State Water Board Volumetric Annual Reporting	January 1 to December 31	April 30

1. **Quarterly Monitoring Reporting –** At a minimum, the quarterly reports must include:

   i. Results of all required monitoring in tabular format.

   ii. The results of any pollutant or parameter monitored more frequently than is required by this monitoring program. Values obtained through additional monitoring must be used in calculations as appropriate.

   iii. A comparison of monitoring data to the discharge specifications, applicable effluent limitations, disclosure of any violations of the notice of applicability and/or General Permit, and an explanation of any violation of those requirements. **King City must calculate 7-day averages, 30-day averages and 25-month rolling medians for select analytes when comparing monitoring data to applicable effluent limitations specified in the General Permit.** Data must be presented in tabular format.

   iv. Copies of laboratory analytical report(s) and chain of custody form(s).

   v. Copies of groundwater monitoring well field sheets with purge methods and data.

2. **Annual Reporting –** King City must submit annual reports in compliance with Standard Provisions 2013[8], (and any updates to the Standard Provisions) Section C, General Reporting Requirements, Item 16 using the most recent annual report template provided by Central Coast Water Board.

   The current annual report template can be found here:

   https://www.waterboards.ca.gov/centralcoast/board_decisions/adopted_orders/2020/wdr_annual_report_format.pdf

3. **State Water Board Volumetric Annual Reporting** – King City must electronically certify and submit a summary of the monthly influent and effluent flow volume by April 30th of each calendar year via the State Water Board's Internet GeoTracker database[9].

   The following information is required:

   i. Monthly volume of wastewater collected and treated by the wastewater treatment plant (i.e. total monthly influent volume).

   ii. Monthly volume of wastewater treated, specifying level of treatment, including treated wastewater discharged.

[8] See Attachment E, Standard Provisions, 2013:
https://www.waterboards.ca.gov/centralcoast/board_decisions/docs/wdr_standard_provisions_2013.pdf
[9] See: https://geotracker.waterboards.ca.gov/

iii. If applicable, monthly volume of recycled water distributed, and annual volume of treated wastewater distributed for beneficial use in compliance with California Code of Regulations, title 22 use categories.

Additional information about volumetric annual reporting of wastewater and recycled water and the Recycled Water Policy is available at the Recycled Water Policy Volumetric Annual Reporting Website[10].

B. VERBAL NON-COMPLIANCE REPORTING:

King City must verbally notify and report to Central Coast Water Board noncompliance of limits related to pond freeboard, flow rate, bypass or overflow, the conditionally accepted, and wastewater containment failure, pursuant to General Permit section VI.C.2.

C. ELECTRONIC GEOTRACKER SUBMITTAL

All monitoring reports must be provided electronically in a searchable PDF format, with the Central Coast Water Board's current transmittal sheet found at the link below as the cover page. The transmittal sheet must be signed.

https://www.waterboards.ca.gov/centralcoast/water_issues/programs/wastewater_permitting/docs/transmittal_sheet.pdf

King City must submit all reports/documents and laboratory analytical data to the State Water Board's GeoTracker[11,12] database consistent with applicable Electronic Submittal of Information (ESI) requirements under the Wastewater System-specific global identification number WDR100030085 at:

https://geotracker.waterboards.ca.gov/esi/login

For general questions, please contact the GeoTracker Help Desk at: Geotracker@waterboards.ca.gov.

Table 10 summarizes all the GeoTracker electronic reporting requirements. Central Coast Water Board may request submittal of some documents on paper, particularly drawings or maps that require a large size to be readable, or in other electronic formats where evaluation of data is required.

[10] See: Volumetric Annual Reporting | California State Water Resources Control Board
[11] Information for first-time GeoTracker users is available at: https://www.waterboards.ca.gov/ust/electronic_submittal/docs/beginnerguide2.pdf
[12] Additional information available at: https://geotracker.waterboards.ca.gov/

Table 10. GeoTracker Electronic Submittal Information Data Requirements

Electronic Submittal	Description of Action	Action	Frequency
Reports and Documents	Complete copy of all documents including monitoring reports (in searchable PDF format) and any other associated documents related to the Wastewater System.	Upload directly to GeoTracker all monitoring reports (in searchable PDF format) and any other associated documents.	On or before the due dates required by this General Permit and for other documents when required by the Central Coast Water Board.
Laboratory Data	All analytical data (including geochemical data) in electronic deliverable format (EDF). This includes all water, soil, and vapor samples collected when monitoring a discharge.	Upload, or direct your California ELAP-accredited laboratory staff to upload, all EDF laboratory data directly to GeoTracker.	On or before the due date of the required monitoring report.
Depth to Groundwater	Monitoring wells must have the depth-to-water information reported. Report data only for wells defined as permanent sampling points.	Upload depth-to-water information to the GeoTracker GEO_WELL file.	On or before the due date of the required monitoring report.
Boring Logs and Well Screen Intervals	Boring logs must be prepared by a registered professional and submitted in PDF format separately (not only as attachments to reports).	Upload boring logs (in searchable PDF format) to GeoTracker GEO_BORE file whenever a new boring is drilled.	Every time a new boring is drilled.

Electronic Submittal	Description of Action	Action	Frequency
Field Points, Location Data (Geo XY)[1]	Name, classify, and identify the location (latitude and longitude) of all sampling points. Monitoring wells must be surveyed, influent and effluent sample locations must be identified on the GeoTracker mapping tool under "non-surveyed data." These data points are required prior to laboratory data uploads.	Upload the location data (surveyed and non-surveyed) to the GeoTracker Geo_XY file.	Every time a permanent monitoring point is established.
Elevation Data (Geo Z)[2]	Survey and mark the elevation at the top of groundwater well casings for all permanent groundwater wells. These points are required prior to depth-to-water data uploads.	Upload the survey data to the GeoTracker GEO_Z file.	One-time, for all groundwater monitoring wells.
Geo Map	Site layout, map of facilities, Wastewater System including treatment and disposal area(s).	Upload the Site layout PDF to the GeoTracker site plan file.	Year one and every five years thereafter and when the facilities are modified.

[1] Geo XY required for all wells. New wells must be surveyed. For existing wells, use original well installation survey data. King City must also upload sample locations (e.g., influent and effluent samples) that are not defined as a **permanent monitoring well** and have not been surveyed by a licensed professional.

[2] Geo Z required for all wells. New wells must be surveyed. For existing wells, use original well installation survey data.

VIII. TECHNICAL REPORTS

The technical reports are due as described in Table 11.

Table 11. Technical Report Submittal Due Dates

Report	Report Due Date
Operations and Maintenance Manual	April 12, 2025
Climate Change Adaptation Plan	April 12, 2026

Report	Report Due Date
Time Schedule Compliance Plan	April 12, 2025
Capital Improvement Plan	April 12, 2026

1. **Operations and Maintenance Manual –** In addition to the required components specified in Standard Provisions[13] A.12 and A.28 (and any updates to the Standard Provisions) and General Permit section VI.A.2, the Operations and Maintenance Manual must contain the following components. Each component must contain an implementation schedule and identification of adequate funding to implement the component.

   i. **Sampling and Analysis Plan –** King City's Operation and Maintenance Manual must contain a sampling and analysis plan that meets the requirements specified herein. Anyone performing sampling on behalf of King City must be familiar with the sampling and analysis plan. At a minimum, the sampling and analysis plan must contain the following:

      a. A wastewater treatment process flow schematic with the monitoring locations labeled and scaled Wastewater System maps with treatment components, discharge locations (both treated wastewater and non-potable recycled water), monitoring locations, groundwater wells, storage locations (e.g., chemical, sludge, emergency overflow ponds, etc.), buildings, etc. (if King City needs to update Figure 1 to comply with this requirement, a copy of the updated process flow schematic will also be included with the annual report).
      b. Sample identification details in tabular format. The table must include the sample titles, GeoTracker field point information, sample description(s), and sampling frequencies.
      c. Sample chain-of-custody procedures and documentation.
      d. Sample handling/preservation procedures.
      e. A description of the analytical methods.
      f. A description of sample containers, preservatives, and holding times.
      g. For water supply monitoring, a description of the location and method of data collection (e.g., onsite well sampling, use of consumer confidence report, etc.).

[13] See Attachment E, Standard Provisions, 2013: https://www.waterboards.ca.gov/centralcoast/board_decisions/docs/wdr_standard_provisions_2013.pdf

h. For groundwater monitoring, a description of the well purging and field methods.

ii. **Sludge Management Plan –** King City's Operation and Maintenance Manual must contain a sludge management plan that is sufficient to ensure compliance with the terms of the General Permit and the notice of applicability. At a minimum, the plan must describe the following:

a. An estimated volume/amount and quality of sludge and scum that will be generated.

b. How sludge, scum, and supernatant will be stored and disposed of to protect groundwater quality.

c. If sludge will be subject to further treatment, describe the treatment and storage requirements.

d. Procedures for cleaning of digesters or storage vessels and the treatment and disposal of the residuals. If drying of residuals is planned, describe how that will be performed to prevent nuisance odors, prevent vectors, and protect groundwater quality.

iii. **Wastewater Disposal Management Plan –** King City's Operation and Maintenance Manual must contain a wastewater disposal management plan that is sufficient to ensure compliance with the terms of the General Permit and the notice of applicability. At a minimum, the wastewater disposal management plan must include:

a. A description of the wastewater disposal area and a map denoting acreage.

b. Loading calculations based on flow volumes, applied acreage, and biochemical oxygen demand, salts (total dissolved solids, sodium, chloride, sulfate), and nitrogen analytical results.

c. A description of wastewater disposal and water quality protection practices.

iv. **Spill Prevention and Emergency Response Plan –**King City's Operation and Maintenance Manual must contain a spill prevention and emergency response plan that is sufficient to ensure compliance with the terms of the General Permit and the notice of applicability. The spill prevention and emergency response plan must describe operation and maintenance activities to prevent accidental releases of wastewater and to effectively respond to such releases and minimize the environmental impact. At a minimum, the spill prevention and emergency response plan must address the following:

a. Operation and Control of Wastewater System - A description of the wastewater treatment equipment, operational controls, flow measurement and calibration procedures, and treatment system schematic including valve/gate locations.

b. Sludge Handling - A description of the sludge handling equipment, operational controls, and disposal procedures.

c. Collection System Maintenance - A description of collection system cleaning and maintenance, equipment tests, and alarm functionality tests to minimize the potential for wastewater spills originating in the collection system or headworks. For collection systems subject to State Water Board Order 2006-0003-DWQ, Statewide General Waste Discharge Requirements for Sanitary Sewer Systems (or its replacement), reports prepared to comply with State Water Board Order 2006-0003-DWQ satisfy this requirement.

d. Emergency Response - A description of emergency response procedures including for emergencies such as power outage, severe weather, flooding, or inadequate freeboard (for systems with wastewater treatment, storage, or disposal ponds or treated non-potable recycled water storage ponds). An equipment and telephone list for contractors/consultants, emergency personnel, and equipment vendors.

e. Finance - At a minimum, discuss current fees, projected fees, current budget for spill prevention and emergency response, projected budget for spill prevention and emergency response.

f. Notification Procedures - Coordination procedures with fire, police, Governor's Office of Emergency Services (CalOES), Central Coast Water Board, and local county health department personnel.

v. **Training Records Log –** King City's Operation and Maintenance Manual must contain updated training records logs that demonstrates King City is complying with General Permit section VI.B.3.

2. **Climate Change Adaptation** –The Climate Change Adaptation Plan must, at a minimum, include the following components:

i. Hazards and Vulnerabilities – Identify climate change hazards, at a minimum accounting for the hazards listed below, applicable to the Wastewater System. Using up-to-date tools, data, and guidance from the State of California (e.g., Cal-Adapt[14], Sea-Level Rise Guidance from

[14] Cal-Adapt is an online resource with downscaled climate project data. It provides users with projections and more detailed downloadable data supporting a range of needs and array of climate models and emissions scenarios. Cal-Adapt offers climate projections for the major stressors facing California, including the following: temperature averages and extremes, precipitation averages and extremes, sea-level rise, wildfires, and drought. The Governor's Office of Planning and Research (OPR) recommends agencies use Representative Concentration Pathway (RCP) 8.5 for analyses considering impacts through 2050, because there are minimal differences between emissions scenarios during the first half of the 21st century.

Ocean Protection Council, reports from the Climate-Safe Infrastructure Working Group, the Climate Adaptation Planning Guide, and California Climate Assessment Regional Reports), assess the Wastewater System's vulnerability to identified hazards that could cause reduction, loss, or failure of treatment processes and/or critical structures at the Wastewater System. Identify and justify the resources (e.g., models and tools, design parameters) used to inform identification of these hazards and vulnerabilities.

a. Sea Level Rise – Saltwater intrusion, flooding and inundation, and increased coastal erosion.

b. Precipitation Pattern Changes.

   I. Drought – Decreased influent quantity and quality.

   II. Peak Events – Flooding and increased influent quantity.

c. Temperature fluctuations and extremes.

d. Increased wildfires.

e. Increased power outages.

ii. Resiliency Actions – Identify actions to build Wastewater System and operational resilience to identified vulnerabilities, accounting for options that minimize resource impacts.

3. **Time Schedule Compliance Plan -** As set forth in General Permit sections V.A and VI.A.5, if King City anticipates that additional time is needed to achieve compliance with the effluent limitations, King City must prepare and submit for Central Coast Water Board review and approval, a time schedule compliance plan. At a minimum, the time schedule compliance plan must address the following:

i. Comparison of the current effluent quality to the effluent and groundwater limitations in General Permit Tables 3-6.

ii. A detailed description and chronology of efforts, since issuance of the notice of applicability, to reduce wastes.

iii. Justification of the need for additional time to achieve the effluent limitations in General Permit Tables 3-6.

iv. A detailed time schedule of specific actions King City will take to achieve the effluent limitations.

v. A demonstration that the time schedule requested is as short as possible, considering the technological, operation, and economic factors that affect the design, development, and implementation of the measures that are necessary to comply with the effluent limitation(s).

vi. If the requested time schedule exceeds one year, the proposed schedule shall include interim requirements and the date(s) for their achievement. The interim requirements shall include both of the following:

a. Effluent limitation(s) for the pollutant(s) of concern.

b. Actions, measurable milestones, and tangible products leading to compliance with the effluent limitation(s).

4. **Capital Improvements Plan**

King City must prepare and submit a Capital Improvement Plan. The Capital Improvement Plan must contain all significant capital projects, equipment purchases, and major studies for operating the King City 's Wastewater System. In general, the Capital Improvement Plan will include the following elements:

i. Estimated overall cost of each project

ii. Estimated operational and maintenance cost for each project

iii. Estimated project timelines

iv. Funding sources

v. Project prioritization

IX. LEGAL REQUIREMENTS

The Central Coast Water Board requires King City to submit the technical and monitoring reports described in this monitoring and reporting program pursuant to California Water Code section 13267. Failure to submit reports in accordance with the schedules established by the Permit or failure to submit a report of sufficient technical quality to be acceptable to the Central Coast Water Board may subject King City to enforcement action pursuant to California Water Code section 13268.

The burden, including costs, of the reports bears a reasonable relationship to their need and the benefits to be obtained. The requirement for the reports is necessary to ensure compliance with the Permit and to protect water quality. King City is required to submit this information because it is subject to the Permit and is responsible for the discharge.

King City must implement the above monitoring program on April 12, 2024. The Central Coast Water Board may rescind or modify this monitoring and reporting program at any time. The Central Coast Water Board may rescind or modify the monitoring and reporting program at any time. King City must not implement any changes to this monitoring and reporting program unless and until a revised monitoring and reporting program is issued by the Central Coast Water Board.

Ordered By:

Jennifer Epp Digitally signed by Jennifer Epp
Date: 2024.04.12 10:42:13
-07'00'
Water Boards

for Ryan E. Lodge
Executive Officer

\\ca.epa.local\RB\RB3\Shared\WDR\WDR Facilities\Monterey Co\King City Domestic\1_Permit\Application\Big Order Enrollment\For Review\King City Big Order NOA_MRP_Final.docx