



Central Coast Regional Water Quality Control Board

October 19, 2023

Sent Via Electronic Mail

City of Solvang
Randy Murphy, City Manager
1644 Oak Street
Solvang, CA 93463
e-mail: randym@cityofsolvang.com

Dear Randy Murphy:

CITY OF SOLVANG WASTEWATER TREATMENT FACILITY, 101 S. ALISAL ROAD, SOLVANG, CALIFORNIA 93463, SANTA BARBARA COUNTY:

- **REVISED NOTICE OF APPLICABILITY FOR ENROLLMENT IN ORDER NO. R3-2020-0020, GENERAL WASTE DISCHARGE REQUIREMENTS FOR DISCHARGES FROM DOMESTIC WASTEWATER SYSTEMS WITH FLOWS GREATER THAN 100,000 GALLONS PER DAY;**
- **TRANSMITTAL OF REVISED MONITORING AND REPORTING PROGRAM NO. R3-2022-0040; AND**
- **TERMINATION OF INDIVIDUAL PERMIT, WASTE DISCHARGE REQUIREMENTS ORDER NO. R3-2007-0069 FOR CITY OF SOLVANG WASTEWATER TREATMENT FACILITY.**

Note: This is a revised notice of applicability. The notice of applicability issued on October 17, 2023 contained some error messages in the table references that were created during conversion to a PDF file.

The Central Coast Regional Water Quality Control Board (Central Coast Water Board) reviewed the January 28, 2022 notice of intent and available documents associated with City of Solvang's domestic wastewater treatment facility (Wastewater System) located at 101 S. Alisal Road in Solvang, California. The Wastewater System, owned by City of Solvang, is currently regulated pursuant to *Waste Discharge Requirements Order No. R3-2007-0069 for The City of Solvang Wastewater Facilities Santa Barbara County* (Order No. R3-2007-0069).

On September 25, 2020, the Central Coast Water Board adopted *General Waste Discharge Requirements Order No. R3-2020-0020 for Discharges from Domestic*

JANE GRAY, CHAIR | RYAN E. LODGE, EXECUTIVE OFFICER

Wastewater Systems with Flows Greater than 100,000 Gallons per Day (General Permit).

This letter serves as a notice of applicability for enrollment in the General Permit. This letter includes: wastewater system operation summary, specific requirements, and limitations (Attachment 1); figures (Attachment 2); and City of Solvang's monitoring and reporting program requirements (Attachment 3).

This letter also serves as a notice of termination of City of Solvang's coverage in existing individual permit, Order No. R3-2007-0069.

City of Solvang must comply with the following:

1. **General Permit** – City of Solvang must comply with all conditions and requirements of the General Permit. As described in the General Permit, ongoing operation, maintenance, monitoring, and reporting are required. A copy of the General Permit can be found electronically at the following link:

https://www.waterboards.ca.gov/centralcoast/board_decisions/adopted_orders/2020/r32020_0020.pdf

2. **Monitoring and Reporting Program** – City of Solvang must comply with the requirements of the monitoring and reporting program enclosed with this letter (monitoring and reporting program no. R3-2022-0040, Attachment 3). City of Solvang must start implementing the monitoring on July 1, 2022. The first quarterly monitoring report is due **November 1, 2022** and the first annual report is due **March 1, 2023**. City of Solvang is also required to comply with annual volumetric reporting requirements¹ established by the State Water Resources Control Board (State Water Board), due annually to the GeoTracker database on April 30th.

Quarterly monitoring reports and annual reports must be provided electronically in searchable PDF with the Central Coast Water Board's current transmittal sheet found at the link below as the cover page. The transmittal sheet must be signed.

https://www.waterboards.ca.gov/centralcoast/water_issues/programs/wastewater_permitting/docs/transmittal_sheet.pdf

All annual reports must be formatted and completed as specified in the annual report template found at the following link:

https://www.waterboards.ca.gov/centralcoast/board_decisions/adopted_orders/2020/wdr_annual_report_format.pdf

¹ See: [Volumetric Annual Reporting | California State Water Resources Control Board](#)

City of Solvang must submit all reports/documents and laboratory data (using the transmittal sheet as the cover page) to the publicly accessible State Water Board's GeoTracker^{2,3} database with applicable Electronic Submittal of Information (ESI) requirements under the Wastewater System – specific global identification number WDR100010527 over the internet at:

https://www.waterboards.ca.gov/ust/electronic_submittal/index.html

The attached monitoring and reporting program outlines the GeoTracker electronic reporting requirements. The Central Coast Water Board may request submittal of some documents on paper, particularly drawings or maps that require a large size to be readable, or in other electronic formats where evaluation of data is required.

3. **Fees** – City of Solvang paid an annual fee of \$24,687 on February 3, 2023 for coverage in existing General Permit, Order No. R3-2020-0020. This payment covers City of Solvang's enrollment in the General Permit for the 2022-2023 fiscal year.

City of Solvang must pay an annual fee to maintain coverage in the General Permit. Annual fees are determined by the State Water Board's fee program and cover the state fiscal year of July 1 through June 30. Your current annual fee is \$26,785. A copy of the current state fee schedule is available electronically at the following link:

https://www.waterboards.ca.gov/resources/fees/water_quality/#wdr

City of Solvang's Wastewater System is currently assigned a threat and complexity rating of 2B.

4. **Notification** – The Central Coast Water Board notified the City of Solvang's enrollment at the regularly scheduled public meeting on August 25-26, 2022. Details about that meeting are available on our website at:

https://www.waterboards.ca.gov/centralcoast/board_info/agendas/

5. **Future Discharge Modifications** – Pursuant to California Water Code section 13260, City of Solvang must inform the Central Coast Water Board at least 120 days prior to modifying your discharge. If there are any significant changes in either treatment or disposal methodologies, or the volume or character of the treated wastewater, City of Solvang must notify the Central Coast Water Board immediately of such changes.

² Information for first-time GeoTracker users is available at:

https://www.waterboards.ca.gov/ust/electronic_submittal/docs/beginnerguid2.pdf

³ Additional information available at: <http://geotracker.waterboards.ca.gov/>

Attachment 1 contains the Central Coast Water Board's understanding of the Wastewater System located at 101 S. Alisal Road, Solvang, California, 93463. Please review Attachment 1 to determine if the description is representative of your current system. Pursuant to California Water Code section 13267, City of Solvang must notify the Central Coast Water Board if this information is out of date or incorrect. You are required to provide staff with your updated information within **30 days** of issuance of this letter.

- 6. Responsible Party** – City of Solvang is responsible for the management and disposal of the domestic wastewater in compliance with the conditions of the General Permit. Any noncompliance with this General Permit constitutes a violation of the California Water Code, and subjects City of Solvang to enforcement action, and termination of enrollment under this General Permit.
- 7. Change in Ownership** - In the event of any change in control or ownership of the property, City of Solvang must notify the succeeding owner or operator of the existence of this General Permit by letter, a copy of which shall be immediately forwarded to the Central Coast Water Board so that the new owner or operator can be enrolled in the General Permit and City of Solvang's enrollment in the General Permit can be terminated.
- 8. Certified Operator** – City of Solvang is required to comply with the operator certification requirements⁴ administered by the State Water Board's Office of Operator Certification, which currently requires a Class IV certified operator onsite to maintain and operate the Wastewater System.
- 9. Termination of Permit** - The existing individual permit, Order No. R3-2007-0069 is terminated, except for enforcement purposes⁵. City of Solvang is responsible for compliance with Order No. R3-2007-0069 prior to the date of this letter.
- 10. Compliance Schedule** – As required in the attached monitoring and reporting program, City of Solvang must request a time schedule order 12 months from the date of this notice of applicability pursuant to Water Code section 13300, which must include more details, milestones, and a schedule for upgrades. Prior to developing the request, Central Coast Water Board recommends the City of Solvang set up a meeting with staff to discuss potential options.

⁴ Title 23 Division 3. Chapter 26 Wastewater Treatment Plant Classification, Operator Certification and Contract Operator Registration.

https://www.waterboards.ca.gov/water_issues/programs/operator_certification/docs/ocr_clean.pdf

⁵ The General Permit states "... where a Wastewater System discharge is currently regulated by an individual permit, that permit is terminated upon the enrollment of the Wastewater System into this General Permit."

If you have any questions, please contact **Cecile Blancarte at (805) 542-4782 or by email at Cecile.Blancarte@waterboards.ca.gov** or Jennifer Epp at (805) 594-6181 or by email at Jennifer.Epp@waterboards.ca.gov.

Sincerely,

for Ryan E. Lodge
Executive Officer

Attachments:

Attachment 1: Revised Wastewater System Operation Summary, Specific Requirements, and Limitations

Attachment 2: Figures

Attachment 3: Revised Monitoring and Reporting Program Order No. R3-2022-0040

cc:

Nathan Giacinto, nathang@cityofsolvang.com

Matt van der Linden, mattv@cannoncorp.us

Lydia Holmes, lholfmes@carollo.com

Alec Beyers, abeyers@carollo.com

Jeff Weishaar, jweishaar@carollo.com

Jennifer Epp, Jennifer.Epp@Waterboards.ca.gov

Jesse Woodard, Jesse.Woodard@Waterboards.ca.gov

Cecile Blancarte, Cecile.Blancarte@Waterboards.ca.gov

WDR Program, *GeoTracker* RB3-WDR@Waterboards.ca.gov

ECM/CIWQS = CW-257687

GeoTracker No. = GT- WDR100010527

Rev 3/4/2022

ECM Subject Name = Revised City of Solvang NOA for R3-2020-0020

\\ca.epa.local\RB\RB3\Shared\WDR\WDR Facilities\Santa Barbara Co\Solvang WWTP, City of\1_Permit\Existing Permit\Revised_Solvang_R3-2020-0020 NOA_Oct_19_final.docx

**ATTACHMENT 1
WASTEWATER SYSTEM OPERATION SUMMARY, SPECIFIC REQUIREMENTS,
AND LIMITATIONS**

1. OWNERSHIP AND WASTEWATER SYSTEM INFORMATION

Ownership and wastewater system information submitted by City of Solvang to the Central Coast Water Board is shown in Table 1.

Table 1. Ownership and Wastewater System Information

Name	City of Solvang Wastewater Treatment Facility
Physical Address	101 S. Alisal Road, Solvang, California, 93463
Latitude	34°35'25.00"
Longitude	-120°09'28.27"
Mailing Address	1644 Oak Street, Solvang, California, 93463
Owner	City of Solvang
Operator	City of Solvang phone: 805-688-6997 e-mail: nathang@cityofsolvang.com
Legally Responsible Official	Xenia Bradford phone: 805-688-5575 e-mail: xeniab@cityofsolvang.com
Raw Wastewater Sources	Sewer Connections: 2,576 Population Served: 6,126 Domestic (%): 100% Industrial (%): 0%
Permitted Design Flow (gallons per day, gpd)	1,500,000
Baseline Flow (average annual flow) in gpd	612,000
Threat to Water Quality	2
Complexity	B
For Internal Use	
Fee Code	58
Place Type	Wastewater Treatment Facility
Place Subtype	n/a
Facility Type	Municipal/Domestic
Facility Waste Type	Domestic Wastewater
Regulatory measure Type	Waste Discharge Requirements

Reclamation Included	No
-----------------------------	----

2. WASTEWATER SYSTEM OPERATION SUMMARY

City of Solvang Wastewater treatment Facility wastewater treatment facility (Wastewater System) is a Class IV wastewater system. City of Solvang must staff a Class IV chief plant operator for proper operation of the Wastewater System. The current chief plant operator is Nathan Giacinto, Grade IV, License Number 10031.

The Wastewater System is capable of treating a 1.5 million gallons per day to a secondary treatment level. The Wastewater System consists of the treatment technologies and treatment capabilities shown in Table 2.

Table 2. Treatment Technology and Capacity

Headworks/Preliminary Treatment	Mechanical bar screen, screenings grinder, compactor/washer and vortex grit separator.
	Headworks capacity (gpd): 1,500,000
Primary Treatment	None. All wastewater sent directly to sequencing batch reactor process.
	Primary treatment capacity (gpd): Not applicable.
Secondary Treatment	The facility uses a sequencing batch reactor performing activated sludge secondary treatment. There are three separate reactors working in sequence performing equalization, biological treatment, and secondary clarification. The facility typically operates with two of the three tanks, within the following process: - Each reactor is capable of treating 500,000 gpd. - Each tank completes 2 to 3 cycles per 24-hour period depending on flow. - Each tank starts with a mixed and aerated fill cycle. - The air is controlled by dissolved oxygen and oxidation-reduction potential set points. - When the tank reaches optimum oxidation potential the air is shut off temporarily to allow for denitrification. - The react cycle continues the air cycles without any more fill to ensure the wastewater is completely treated. - After the react cycle, the tank goes into settle mode. - The treated water is decanted off the top with a floating decanter. - Lastly, the waste sludge cycle pulls sludge from the bottom of the tank and sends it to the aerobic digester.
	Secondary treatment capacity (gpd): 1,500,000
Tertiary Treatment	Not Applicable
	Tertiary treatment capacity (gpd): Not Applicable
Disinfection	Not Applicable

	Disinfection Capacity (gpd): Not Applicable	
Wastewater Disposal Method	Treated effluent is discharged into a 1-acre-foot lined polishing pond and then flows into one of two percolation basins. The primary percolation basin has a capacity of 1.4 acre-feet. The second percolation basin has a capacity of 0.75 acre-feet. The percolation basins undergo annual cleaning and bottom ripping.	
	Disposal capacity (gpd): 1,500,000	
Biosolids/Sludge Production and Handling	Biosolids are sent to an aerobic digester. Approximately 150,000 gallons of digestate is dewatered three days a week primarily on a three belt two meter Ashbrook Belt Filter Press. A cationic polymer is added to the digestate onto the belt press. Filtrate is captured under the press and drains back to the facility influent sump pit. The press produces cake between 15% and 18% solids. The cake is loaded into roll off bins and is trucked to Engel and Gray in Santa Maria where it is composted and repurposed as fertilizer.	
	Annual production of biosolids: approximately 1,260 tons	
	Biosolids produced are collected by Engel & Gray, Inc. and transported to 745 Betteravia Road, Santa Maria.	
Non-Potable Recycled Water	Non-potable recycled water produced onsite:	Not Applicable
	Recycled water usage areas:	Not Applicable
	Enrolled in WQ 2016-0068-DDW:	Not Applicable
	Recycled water production volume (gpd):	Not Applicable

A summary of historic and recent average effluent concentrations is included in Table 3, which were reported in City of Solvang's quarterly monitoring reports. The Central Coast Water Board used reported effluent water quality data to establish the effluent and groundwater limitations in section 3.

Table 3. Historic and Recent Average Effluent Water Quality

Constituents	Units	Historical Average ^[2]	Annual Average for 2021 ^[3]
Biochemical Oxygen Demand, 5-Day	mg/L _[1]	16	9
Total Suspended Solids	mg/L	8	0.25
Total Dissolved Solids	mg/L	900	912
Chloride	mg/L	203	228
Sodium	mg/L	175	189
Sulfate	mg/L	Not Analyzed	Not Analyzed

Constituents	Units	Historical Average ^[2]	Annual Average for 2021 ^[3]
Boron	mg/L	Not Analyzed	Not Analyzed
Total Nitrogen	mg/L	11	9.6
Nitrate as Nitrogen	mg/L	Not Analyzed	Not Analyzed

[1] mg/L denotes milligrams per liter

[2] Based on effluent water quality data reported by City of Solvang 2012 to 2019. Total Nitrogen effluent data is limited to data collected from 2016 through 2021.

[3] Based on effluent water quality data reported by City of Solvang in 2021.

3. WASTEWATER SYSTEM SPECIFIC REQUIREMENTS AND LIMITATIONS

City of Solvang must operate the Wastewater System in accordance with the General Permit and this notice of applicability. City of Solvang must comply with the wastewater limitations specified in Tables 4 through 8.

Flow limitations are shown in Table 4. **Interim effluent limitations are shown in Table 5 apply until June 30, 2024. Beginning July 1, 2024, effluent limitations shown in Table 6 and Table 7 apply.**

A. Flow Limitations:

Table 4. Flow Limitations

Flow	Units	Limit	Point of Compliance
Maximum Daily	Gallons per day	1,500,000	Influent
Mean Monthly ^[1]	Gallons per day	1,125,000	Influent

[1] A mean monthly flow exceedance is evidence that the Wastewater System is operating at 75% capacity on a regular basis. If the City of Solvang plans to accept increased flows, the City of Solvang must begin plans to accommodate the elevated flows.

B. Effluent Limitations:

The City of Solvang's wastewater disposal ponds overly the Santa Ynez River Valley subbasin Buellton, a non-designated groundwater basin. Pursuant to General Permit section V.A.2.i Effluent Limitations, the City of Solvang has opted to comply with the groundwater quality objectives for the Santa Ynez River Valley subbasin Santa Rita. Based on reported water quality data, effluent water quality for chloride and sodium (see Table 6 of General Permit) exceeds the General Permit effluent limits for designated groundwater basin Santa Ynez River Valley subbasin Santa Rita. Therefore, pursuant to the General Permit, the City of Solvang can comply with their individual permit No. R3-2007-0069 limits for two years (until June 30, 2024) as presented in Table 5. The individual permit No. R3-2007-0069 did not contain effluent limits for sulfate, boron, and total nitrogen, therefore there are no effluent limits for those constituents until July 1, 2024. **On July 1, 2024, effluent limitations shown in Table 6 and Table 7 apply.**

Table 5. Interim Effluent Limitations: Activated Sludge

Constituent	Units	30-Day Average	Daily Maximum
Biochemical Oxygen Demand, 5-Day	mg/L	30	45
Total Suspended Solids	mg/L	20	40
Settleable Solids	mL/L ^[1]	0.1	0.3
Total Dissolved Solids	mg/L	1,000	1,400
Sodium	mg/L	150	250
Chloride	mg/L	150	250
pH	Standard Units	Between 6.5 and 8.4	Not Applicable

[1] mL/L denotes milliliters per liter

Table 6. Effluent Limitations Beginning July 2024: Activated Sludge

Constituent	Units	30-Day Average	7-Day Average	Sample Maximum
Biochemical Oxygen Demand, 5-Day	mg/L	30	45	Not Applicable
Total Suspended Solids	mg/L	20	45	Not Applicable
Settleable Solids	mL/L	0.1	0.3	0.5
pH	Standard Units	Between 6.5 and 8.4	Not Applicable	Not Applicable

**Table 7. Effluent Limitations Beginning July 2024
Based on - *Santa Ynez River Valley - Santa Rita Sub-Area***

Constituents	Units	25-Month Rolling Median
Total Dissolved Solids	mg/L	1,500
Chloride	mg/L	150
Sodium	mg/L	100
Sulfate	mg/L	700
Boron	mg/L	0.5
Total Nitrogen	mg/L	10

**ATTACHMENT 2
FIGURES**



Figure 1 - Vicinity Map

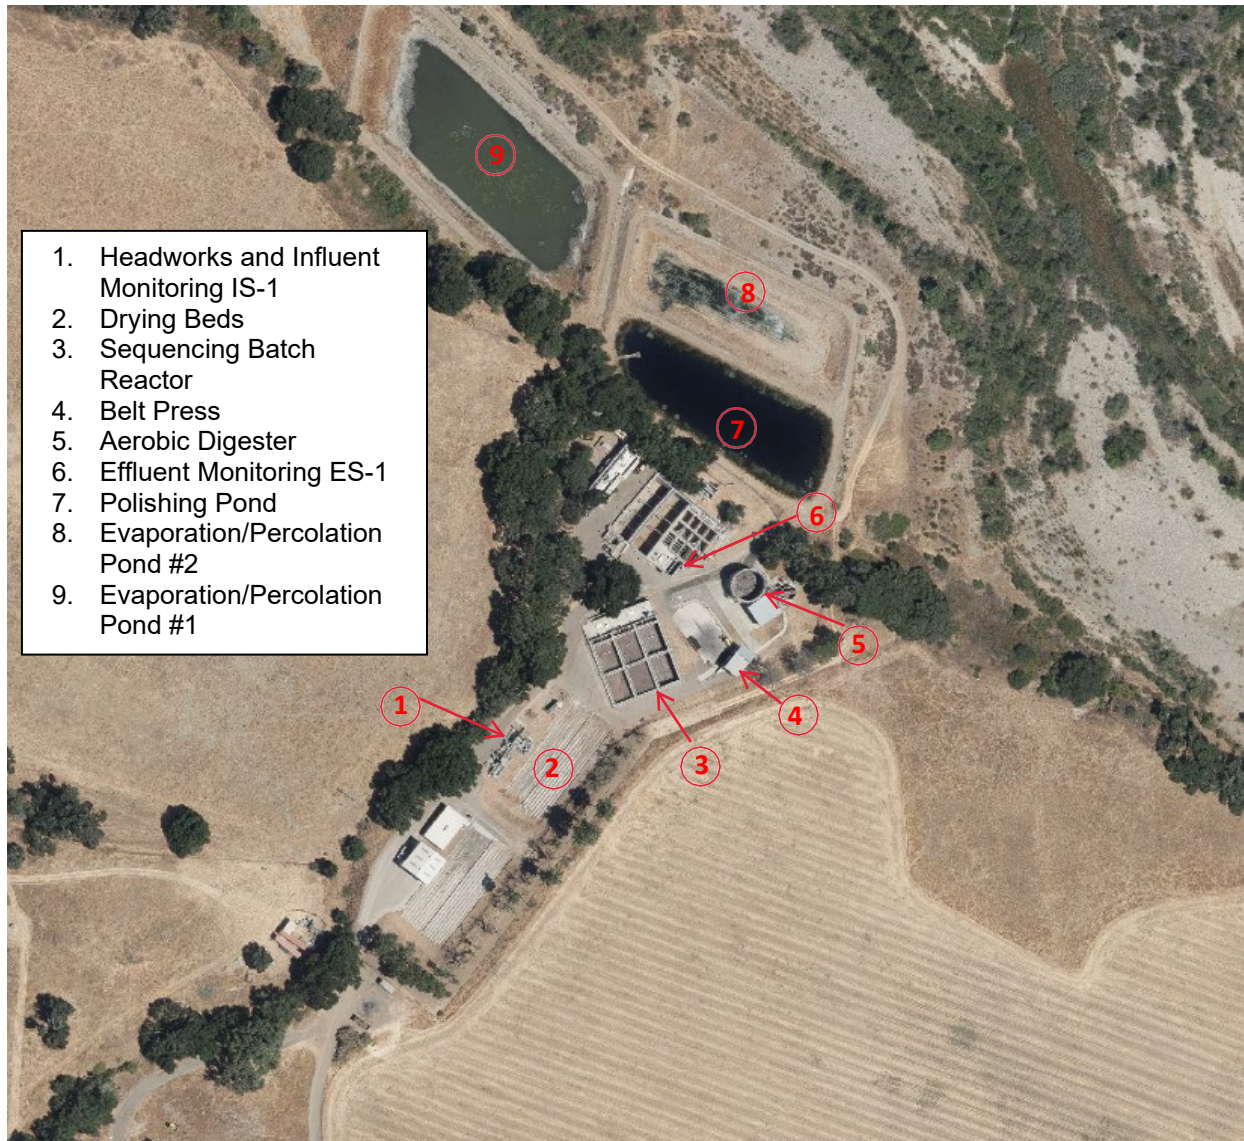


Figure 2 - Solvang Wastewater Treatment Facility

ATTACHMENT 3
MONITORING AND REPORTING PROGRAM

CENTRAL COAST REGIONAL WATER QUALITY CONTROL BOARD

MONITORING AND REPORTING PROGRAM NO. R3-2022-0040 (OCTOBER 19, 2023 MODIFICATION OF MRP NO. R3-2020-0020)

FOR

CITY OF SOLVANG WASTEWATER TREATMENT FACILITY SOLVANG, SANTA BARBARA COUNTY

This Monitoring and Reporting Program (MRP) applies to the monitoring and reporting requirements for City of Solvang Wastewater Treatment Facility (Wastewater System) enrolled in *General Waste Discharge Requirements Order No. R3-2020-0020 for Discharges from Domestic Wastewater Systems with Flows Greater than 100,000 Gallons per Day* (General Permit).

City of Solvang owns and operates the Wastewater System that is subject to the General Permit and notice of applicability. City of Solvang must not implement any changes to this MRP unless and until a revised MRP is issued by the Central Coast Regional Water Quality Control Board (Central Coast Water Board).

The State Water Resources Control Board (State Water Board) and Regional Water Quality Control Boards are transitioning to the use of the publicly accessible State Water Board's GeoTracker database for the tracking of environmental and regulatory data for sites that operate under waste discharge requirements. The MRP directs City of Solvang to submit reports (both technical and monitoring reports) and analytical data electronically to the State Water Board's GeoTracker database (see MRP section V.C).

I. SAMPLING AND ANALYSIS

City of Solvang must collect representative samples in accordance with the most recently approved sampling and analysis plan contained in the Operations and Maintenance Manual and validate analytical results prior to submittal to the Central Coast Water Board. All samples (e.g., wastewater, groundwater, soil, sludge, etc.) must be representative of the volume and nature of the discharge or matrix of materials sampled.

All samples must be collected by a qualified person, trained in proper procedures for collecting the samples. The name of the sampler, sample type (grab or composite), time, date, location, bottle/container type, and any preservative used for each sample must be recorded on the sample chain of custody form. The chain of custody form must also contain all custody information including date, time, and to whom samples were relinquished. If composite samples are collected, the basis for sampling (time or flow weighted) must be included in the sampling and analysis plan contained in the Operations and Maintenance Manual for Central Coast Water Board review and approval.

A. Sampling Schedule – Unless otherwise specified below, sampling must be performed in accordance with Table 1.

Table 1. Sampling Schedule

Monitoring Period	Sample Collection Time
Quarterly	January, April, July, and October
Semiannual	April and October
Annual	October

Field test instruments (such as those used to test pH, dissolved oxygen, and electrical conductivity, etc.) may be used if they are used by a State Water Board Environmental Laboratory Accreditation Program accredited laboratory, or:

1. The user is trained in proper use and maintenance of the instruments;
2. The instruments are field calibrated prior to monitoring events at the frequency recommended by the manufacturer;
3. Instruments are serviced and/or calibrated by the manufacturer at the recommended frequency; and
4. Field calibration reports are maintained and available for at least three years.

B. Monitoring Location Descriptions – All samples including influent samples (IS), effluent samples (ES), groundwater monitoring well (MW), etc. must be collected at the locations described in Table 2. These locations must be consistent with the Central Coast Water Board approved sampling and analysis plan. **City of Solvang must upload the GeoTracker field point information for each sampling location in the GeoTracker database once, prior to uploading laboratory data (see Table 8).**

Table 2. Sample Identification Details

GeoTracker Field Point Class	GeoTracker Field Point Name (Sample ID)	GeoTracker Field Point Description
Water Supply Well	WSW-1	Water supply for City of Solvang
Water Supply Well	WSW-2	Water supply for Santa Ynez River Water Conservation District ID#1
Water Supply Well	WSW-3	Central Coast Water Authority
Influent Sample	IS-1	Raw wastewater sample collected at the headworks
Effluent Sample	ES-1	Treated wastewater sample collected downstream of the Sequencing Batch Reactor prior to polishing pond.

GeoTracker Field Point Class	GeoTracker Field Point Name (Sample ID)	GeoTracker Field Point Description
Effluent Sample	ES-2	Treated wastewater sample collected from polishing pond.
Effluent Sample	ES-3	Treated wastewater sample collected Percolation Pond #1
Effluent Sample	ES-4	Treated wastewater sample collected Percolation Pond #2
Monitoring Well Sample	MW-1	Groundwater monitoring well located between Percolations Ponds #1 and #2, along dirt access road within Santa Ynez River stream bed. Upgradient of MW-2 and MW-3. Screened 20 to 40 feet below ground surface (bgs).
Monitoring Well Sample	MW-2	North-Western Edge of Percolation Pond #1 along dirt access road within Santa Ynez River stream bed. Upgradient of MW-3. Screened 20 to 40 feet bgs.
Monitoring Well Sample	MW-3	250-feet North-West of MW-2, along dirt access road within Santa Ynez River stream bed. Screened 25 to 40 feet bgs.

II. WATER SUPPLY MONITORING

The water supply sources for the City of Solvang and Santa Ynez Community Services District (SYCSD)—from which wastewater flow is derived—are upland wells (Nos. 4, 21, 22 and HCA South), river wells (Nos. 3 and 7A), wells from the Santa Ynez River Water Conservation District - Improvement District No. 1, and Central Coast Water Authority (CCWA, surface water).

Representative samples of City of Solvang, CCWA, and SYCSD's raw water supply (sampled before use or treatment) must be collected and analyzed, at a minimum, for constituents specified in Table 3.

In lieu of the required water supply sampling, City of Solvang may request Central Coast Water Board approval to submit a Well Identification Number and the reporting year's consumer confidence report (annual water quality report or drinking water quality report), as required by the State Water Board Division of Drinking Water and/or county, provided, at a minimum, all of the required constituents are sampled at the frequency specified in Table 3. City of Solvang must report the results of any constituent monitored more frequently than is required by the monitoring program shown in Table 3. City of

Solvang must also report detectable concentrations (above the reporting limit) for any other constituent that has a published maximum contaminant level (MCL).

City of Solvang must evaluate and provide a tabular summary of the water supply data with the annual monitoring report.

Table 3. Water Supply Monitoring WSW-1, WSW-2, and WSW-3

Constituent	Units ^[1]	Sample Type	Sample Location	Sampling Frequency
Nitrate (as N)	mg/L	Grab	WSW-1 and WSW-2	Annually
Total Dissolved Solids	mg/L	Grab	WSW-1, WSW-2 and WSW-3	Annually
Chloride	mg/L	Grab	WSW-1, WSW-2 and WSW-3	Annually
Sodium	mg/L	Grab	WSW-1, WSW-2 and WSW-3	Annually
Sulfate	mg/L	Grab	WSW-1, WSW-2 and WSW-3	Annually
Boron	mg/L	Grab	WSW-1 and WSW-2	Annually
Carbonate	mg/L	Grab	WSW-3	Annually
Bicarbonate	mg/L	Grab	WSW-3	Annually
Calcium	mg/L	Grab	WSW-2 and WSW-3	Annually
Potassium	mg/L	Grab	WSW-2 and WSW-3	Annually
Magnesium	mg/L	Grab	WSW-2 and WSW-3	Annually

[1] mg/L denotes milligrams per liter

III. INFLUENT AND EFFLUENT MONITORING

A. Influent Flow Monitoring – City of Solvang must monitor and report flow in gallons per day, as described in Table 4, with each monitoring report. See MRP section V.A.3 for supplemental volumetric annual reporting requirements established by the State Water Board.

Table 4. Influent Flow Monitoring IS-1

	INFLUENT	INFLUENT
Parameter	Sample Type	Reporting Frequency
Daily Flow ^[1]	Metered	Daily
Maximum Daily Flow	Metered	Monthly

	INFLUENT	INFLUENT
Parameter	Sample Type	Reporting Frequency
Mean Daily Flow	Calculated	Monthly

[1] The General Permit notice of applicability specifies the Wastewater System's maximum permitted flow. In the monitoring reports, City of Solvang must evaluate and provide a comparison of monitored flow to the permitted flow.

B. Wastewater System Monitoring – Representative samples of City of Solvang's influent (raw wastewater) into the Wastewater System and effluent (treated wastewater) discharged to percolation basins must be collected and analyzed in accordance with the treatment technology-based monitoring requirements (including sample type and frequency) summarized in the tables below. See Figure 1 for the location of samples and GeoTracker field points.

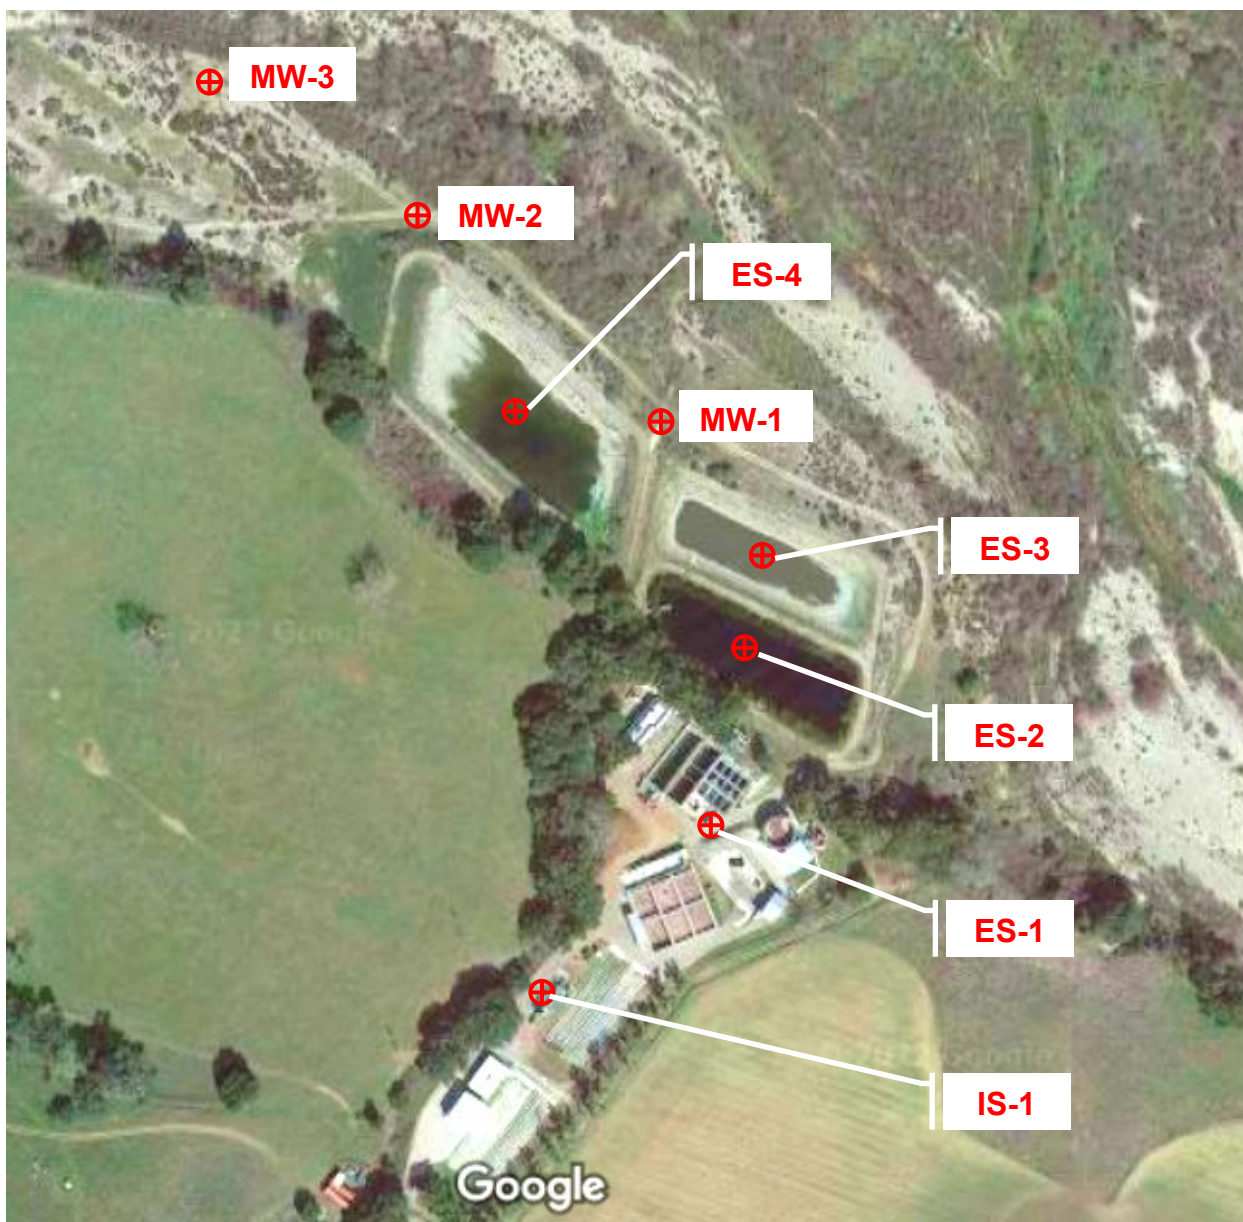


Figure 1. Sample Locations Referenced in Table 2

1. Pond System Monitoring

- i. **Required Pond Monitoring** – All treated wastewater storage/disposal ponds (lined and unlined) must be monitored as specified in Table 5.

Table 5. Wastewater Storage/Disposal Pond Monitoring ES-2, ES-3, ES-4

Parameter/ Constituent	Units	Sample Type	Sampling/Monitoring Frequency
Freeboard	0.1 feet	Measured	Weekly

Parameter/ Constituent	Units	Sample Type	Sampling/Monitoring Frequency
pH	Standard Units	Grab	Weekly
Dissolved Oxygen (in pond)	mg/L	Grab	Monthly
Odors	Present / Not Present	Observation	Weekly
Berm condition	Good / Poor	Observation	Monthly
Sludge Depth	0.1 feet	Measured	Annually
Precipitation	inches/day and date	Measured ^[1]	Each precipitation event

[1] City of Solvang may use a rain gauge or use a National Oceanic and Atmospheric Administration or the United States Geological Survey rain station, such as <http://scacis.rcc-acis.org/>.

2. Sequencing Batch Reactor Wastewater System

- i. **Influent and Effluent Monitoring** – At a minimum, influent and effluent constituent monitoring for the sequencing batch reactor wastewater treatment system must be consistent with Table 6.

Table 6. Influent and Effluent Monitoring for Wastewater Systems IS-1 and ES-1

		INFLUENT	INFLUENT	EFFLUENT	EFFLUENT
Constituent	Units	Sample Type	Sampling Frequency	Sample Type	Sampling Frequency
pH	units	Grab	Weekly	Grab	Weekly
Settleable Solids	mg/L	Not Applicable	Not Applicable	Grab	Weekly
Biochemical Oxygen Demand, 5-Day	mg/L	24-hour composite	Quarterly	Grab	Monthly
Total Suspended Solids	mg/L	24-hour composite	Quarterly	Grab	Monthly
Total Nitrogen ^[2]	mg/L	Calculated	Quarterly	Calculated	Monthly
Nitrate (as N) + Nitrite (as N) or separate species	mg/L	24-hour composite	Quarterly	Grab	Monthly
Total Kjeldahl Nitrogen (as N)	mg/L	24-hour composite	Quarterly	Grab	Monthly
Ammonia (as N)	mg/L	24-hour composite	Quarterly	Grab	Monthly

		INFLUENT	INFLUENT	EFFLUENT	EFFLUENT
Constituent	Units	Sample Type	Sampling Frequency	Sample Type	Sampling Frequency
Total Dissolved Solids	mg/L	24-hour composite	Quarterly	Grab	Monthly
Chloride	mg/L	24-hour composite	Quarterly	Grab	Monthly
Sodium	mg/L	24-hour composite	Quarterly	Grab	Monthly
Sulfate	mg/L	24-hour composite	Quarterly	Grab	Monthly
Boron	mg/L	Not Applicable	Not Applicable	Grab	Monthly
Carbonate	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Bicarbonate	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Calcium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Potassium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually
Magnesium	mg/L	Not Applicable	Not Applicable	Grab	Semiannually

[1] Total nitrogen is the sum of total inorganic nitrogen (nitrate + nitrite + ammonium + ammonia) and organic nitrogen.

IV. SLUDGE/BIOSOLIDS DISPOSAL MONITORING

City of Solvang must report the handling and disposal of all sludge/biosolids generated at the Wastewater System. Records must include the date removed from the Wastewater System, name/contact information for the hauling company, the type and volume of waste transported, the disposal facility name and address, and copies of analytical data required by the entity accepting the waste. These records must be submitted as part of the annual monitoring report.

City of Solvang must also monitor sludge/biosolids consistent with a Central Coast Water Board approved sludge management plan and in accordance with the requirements specified by the receiving party, including a regulated landfill and/or regulated composting facility.

If sludge/biosolids are not removed during the year, City of Solvang must explain the absence of this monitoring in the annual report.

V. REPORTING REQUIREMENTS

A. QUARTERLY AND ANNUAL MONITORING REPORTS

Quarterly and annual monitoring reports are due as described in Table 7.

Table 7. Quarterly and Annual Monitoring Reporting

Report	Monitoring Period	Report Due Date
First Quarter Monitoring Report	January 1 to March 31	May 1
Second Quarter Monitoring Report	April 1 to June 30	August 1
Third Quarter Monitoring Report	July 1 to September 30	November 1
Fourth Quarter Monitoring Report	October 1 to December 31	February 1
Annual Report	January 1 to December 31	March 1
State Water Board Volumetric Annual Reporting	January 1 to December 31	April 30

1. **Quarterly Monitoring Reporting** – At a minimum, the quarterly reports must include:
 - i. Results of all required monitoring in tabular format.
 - ii. The results of any pollutant or parameter monitored more frequently than is required by this monitoring program. Values obtained through additional monitoring must be used in calculations as appropriate.
 - iii. A comparison of monitoring data to the discharge specifications, applicable effluent limitations, disclosure of any violations of the notice of applicability and/or General Permit, and an explanation of any violation of those requirements. **City of Solvang must calculate 7-day averages, 30-day averages and 25-month rolling medians for select analytes when comparing monitoring data to applicable effluent limitations specified in the General Permit.** Data must be presented in tabular format.
 - iv. Copies of laboratory analytical report(s) and chain of custody form(s).
 - v. An updated hydrogeologic conceptual site model with the groundwater monitoring reporting requirements based on new information generated from the monitoring well boring logs, groundwater elevation data, water quality data, etc. Submit quarterly if there are significant gradient changes in direction, otherwise submit annually.
 - vi. Copies of groundwater monitoring well field sheets with purge methods and data.

2. **Annual Reporting** – City of Solvang must submit annual reports in compliance with Standard Provisions 2013¹, (and any updates to the Standard Provisions) Section C, General Reporting Requirements, Item 16 using the most recent annual report template provided by Central Coast Water Board.

The current annual report template can be found here:

https://www.waterboards.ca.gov/centralcoast/board_decisions/adopted_orders/2020/wdr_annual_report_format.pdf

3. **State Water Board Volumetric Annual Reporting** – City of Solvang must electronically certify and submit a summary of the monthly influent and effluent flow volume by April 30th of each calendar year via the State Water Board's Internet GeoTracker database².

The following information is required:

- i. Monthly volume of wastewater collected and treated by the wastewater treatment plant (i.e., total monthly influent volume).
- ii. Monthly volume of wastewater treated, specifying level of treatment, including treated wastewater discharged.
- iii. If applicable, monthly volume of recycled water distributed, and annual volume of treated wastewater distributed for beneficial use in compliance with California Code of Regulations, title 22 use categories.

Additional information about volumetric annual reporting of wastewater and recycled water and the Recycled Water Policy is available at the Recycled Water Policy Volumetric Annual Reporting Website³.

B. VERBAL NON-COMPLIANCE REPORTING:

City of Solvang must verbally notify and report to Central Coast Water Board noncompliance of limits related to pond freeboard, flow rate, bypass or overflow, and wastewater containment failure, pursuant to General Permit section III.B.1.

¹ See Attachment E, Standard Provisions, 2013:

https://www.waterboards.ca.gov/centralcoast/board_decisions/docs/wdr_standard_provisions_2013.pdf

² See: <https://geotracker.waterboards.ca.gov/>

³ See: [Volumetric Annual Reporting | California State Water Resources Control Board](#)

C. ELECTRONIC GEOTRACKER SUBMITTAL

All monitoring reports must be provided electronically in a searchable PDF format, with the Central Coast Water Board's current transmittal sheet found at the link below as the cover page. The transmittal sheet must be signed.

https://www.waterboards.ca.gov/centralcoast/water_issues/programs/wastewater_permiiting/docs/transmittal_sheet.pdf

City of Solvang must submit all reports/documents and laboratory analytical data to the State Water Board's GeoTracker^{4,5} database consistent with applicable Electronic Submittal of Information (ESI) requirements under the Wastewater System-specific global identification number **WDR100010527** at:

<https://geotracker.waterboards.ca.gov/esi/login>

For general questions, please contact the GeoTracker Help Desk at:
Geotracker@waterboards.ca.gov.

Table 8 summarizes all the GeoTracker electronic reporting requirements. Central Coast Water Board may request submittal of some documents on paper, particularly drawings or maps that require a large size to be readable, or in other electronic formats where evaluation of data is required.

Table 8. GeoTracker Electronic Submittal Information Data Requirements

Electronic Submittal	Description of Action	Action	Frequency
Reports and Documents	Complete copy of all documents including monitoring reports (in searchable PDF format) and any other associated documents related to the Wastewater System.	Upload directly to GeoTracker all monitoring reports (in searchable PDF format) and any other associated documents.	On or before the due dates required by this General Permit and for other documents when required by the Central Coast Water Board.

⁴ Information for first-time GeoTracker users is available at:

https://www.waterboards.ca.gov/ust/electronic_submittal/docs/beginnerguide2.pdf

⁵ Additional information available at:

<https://geotracker.waterboards.ca.gov/>

Electronic Submittal	Description of Action	Action	Frequency
Laboratory Data	All analytical data (including geochemical data) in electronic deliverable format (EDF). This includes all water, soil, and vapor samples collected when monitoring a discharge.	Upload, or direct your California ELAP-accredited laboratory staff to upload, all EDF laboratory data directly to GeoTracker.	On or before the due date of the required monitoring report.
Depth to Groundwater	Monitoring wells must have the depth-to-water information reported. Report data only for wells defined as permanent sampling points.	Upload depth-to-water information to the GeoTracker GEO_WELL file.	On or before the due date of the required monitoring report.
Boring Logs and Well Screen Intervals	Boring logs must be prepared by a registered professional and submitted in PDF format separately (not only as attachments to reports).	Upload boring logs (in searchable PDF format) to GeoTracker GEO_BORE file whenever a new boring is drilled.	Every time a new boring is drilled.
Field Points, Location Data (Geo XY) ^[1]	Name, classify, and identify the location (latitude and longitude) of all sampling points. Monitoring wells must be surveyed, influent and effluent sample locations must be identified on the GeoTracker mapping tool under “non-surveyed data.” These data points are required prior to laboratory data uploads.	Upload the location data (surveyed and non-surveyed) to the GeoTracker Geo_XY file.	Every time a permanent monitoring point is established.
Elevation Data (Geo Z) ^[2]	Survey and mark the elevation at the top of groundwater well casings for all permanent groundwater wells. These points are required prior to depth-to-water data uploads.	Upload the survey data to the GeoTracker GEO_Z file.	One-time, for all groundwater monitoring wells.
Geo Map	Site layout, map of facilities, Wastewater System including treatment and disposal area(s).	Upload the Site layout PDF to the GeoTracker site plan file.	Year one and every five years thereafter and when the facilities are modified.

[1] Geo XY required for all wells. New wells must be surveyed. For existing wells, use original well

installation survey data. City of Solvang must also upload sample locations (e.g., influent and effluent samples) that are not defined as a **permanent monitoring well** and have not been surveyed by a licensed professional.

- [2] Geo Z required for all wells. New wells must be surveyed. For existing wells, use original well installation survey data.

VI. TECHNICAL REPORTS

The technical reports are due as described in Table 9.

Table 9. Technical Report Submittal Due Dates

Report	Report Due Date
Operations and Maintenance Manual	June 11, 2023
Climate Change Adaptation Plan	June 11, 2024
Time Schedule Compliance Plan	June 11, 2023

1. **Operations and Maintenance Manual** – In addition to the required components specified in Standard Provisions⁶ A.12 and A.28 (and any updates to the Standard Provisions) and General Permit section VI.A.2, the Operations and Maintenance Manual must contain the following components. Each component must contain an implementation schedule and identification of adequate funding to implement the component.
 - i. **Sampling and Analysis Plan** – City of Solvang’s Operation and Maintenance Manual must contain a sampling and analysis plan that meets the requirements specified herein. Anyone performing sampling on behalf of City of Solvang must be familiar with the sampling and analysis plan. At a minimum, the sampling and analysis plan must contain the following:
 - a. A wastewater treatment process flow schematic with the monitoring locations labeled and scaled Wastewater System maps with treatment components, discharge locations (both treated wastewater and non-potable recycled water), monitoring locations, groundwater wells, storage locations (e.g., chemical, sludge, emergency overflow ponds, etc.), buildings, etc. (if City of Solvang needs to update Figure 1 to

⁶ See Attachment E, Standard Provisions, 2013:
https://www.waterboards.ca.gov/centralcoast/board_decisions/docs/wdr_standard_provisions_2013.pdf

comply with this requirement, a copy of the updated process flow schematic will also be included with the annual report).

- b. Sample identification details in tabular format. The table must include the sample titles, GeoTracker field point information, sample description(s), and sampling frequencies.
 - c. Sample chain-of-custody procedures and documentation.
 - d. Sample handling/preservation procedures.
 - e. A description of the analytical methods.
 - f. A description of sample containers, preservatives, and holding times.
 - g. For water supply monitoring, a description of the location and method of data collection (e.g., onsite well sampling, use of consumer confidence report, etc.).
 - h. For groundwater monitoring, a description of the well purging and field methods.
- ii. **Sludge Management Plan** – City of Solvang’s Operation and Maintenance Manual must contain a sludge management plan that is sufficient to ensure compliance with the terms of the General Permit and the notice of applicability. At a minimum, the plan must describe the following:
- a. An estimated volume/amount and quality of sludge and scum that will be generated.
 - b. How sludge, scum, and supernatant will be stored and disposed of to protect groundwater quality.
 - c. If sludge will be subject to further treatment, describe the treatment and storage requirements.
 - d. Procedures for cleaning of digesters or storage vessels and the treatment and disposal of the residuals. If drying of residuals is planned, describe how that will be performed to prevent nuisance odors, prevent vectors, and protect groundwater quality.
- iii. **Wastewater Disposal Management Plan** – City of Solvang’s Operation and Maintenance Manual must contain a wastewater disposal management plan that is sufficient to ensure compliance with the terms of the General Permit and the notice of applicability. At a minimum, the wastewater disposal management plan must include:
- a. A description of the wastewater disposal area and a map denoting acreage.

- b. Loading calculations based on flow volumes, applied acreage, and biochemical oxygen demand, salts (total dissolved solids, sodium, chloride, sulfate, boron), and nitrogen analytical results.
 - c. A description of wastewater disposal and water quality protection practices.
- iv. **Spill Prevention and Emergency Response Plan** –City of Solvang’s Operation and Maintenance Manual must contain a spill prevention and emergency response plan that is sufficient to ensure compliance with the terms of the General Permit and the notice of applicability. The spill prevention and emergency response plan must describe operation and maintenance activities to prevent accidental releases of wastewater and to effectively respond to such releases and minimize the environmental impact. At a minimum, the spill prevention and emergency response plan must address the following:
 - a. Operation and Control of Wastewater System - A description of the wastewater treatment equipment, operational controls, flow measurement and calibration procedures, and treatment system schematic including valve/gate locations.
 - b. Sludge Handling - A description of the sludge handling equipment, operational controls, and disposal procedures.
 - c. Collection System Maintenance - A description of collection system cleaning and maintenance, equipment tests, and alarm functionality tests to minimize the potential for wastewater spills originating in the collection system or headworks. For collection systems subject to State Water Board Order No. 2006-0003-DWQ, Statewide General Waste Discharge Requirements for Sanitary Sewer Systems (or its replacement), reports prepared to comply with State Water Board Order No. 2006-0003-DWQ satisfy this requirement.
 - d. Emergency Response - A description of emergency response procedures including for emergencies such as power outage, severe weather, flooding, or inadequate freeboard (for systems with wastewater treatment, storage, or disposal ponds or treated non-potable recycled water storage ponds). An equipment and telephone list for contractors/consultants, emergency personnel, and equipment vendors.
 - e. Finance - At a minimum, discuss current fees, projected fees, current budget for spill prevention and emergency response, projected budget for spill prevention and emergency response.
 - f. Notification Procedures - Coordination procedures with fire, police, Governor’s Office of Emergency Services (CalOES), Central Coast Water Board, and local county health department personnel.

- v. **Training Records Log** – City of Solvang’s Operation and Maintenance Manual must contain updated training records logs that demonstrates City of Solvang is complying with General Permit section VI.B.3.
2. **Climate Change Adaptation** –The Climate Change Adaptation Plan must, at a minimum, include the following components:
- i. **Hazards and Vulnerabilities** – Identify climate change hazards, at a minimum accounting for the hazards listed below, applicable to the Wastewater System. Using up-to-date tools, data, and guidance from the State of California (e.g., Cal-Adapt⁷, Sea-Level Rise Guidance from Ocean Protection Council, reports from the Climate-Safe Infrastructure Working Group, the Climate Adaptation Planning Guide, and California Climate Assessment Regional Reports), assess the Wastewater System’s vulnerability to identified hazards that could cause reduction, loss, or failure of treatment processes and/or critical structures at the Wastewater System. Identify and justify the resources (e.g., models and tools, design parameters) used to inform identification of these hazards and vulnerabilities.
 - a. Sea Level Rise – Saltwater intrusion, flooding and inundation, and increased coastal erosion.
 - b. Precipitation Pattern Changes.
 - I. Drought – Decreased influent quantity and quality.
 - II. Peak Events – Flooding and increased influent quantity.
 - c. Temperature fluctuations and extremes.
 - d. Increased wildfires.
 - e. Increased power outages.
 - ii. **Resiliency Actions** – Identify actions to build Wastewater System and operational resilience to identified vulnerabilities, accounting for options that minimize resource impacts.

⁷ Cal-Adapt is an online resource with downscaled climate project data. It provides users with projections and more detailed downloadable data supporting a range of needs and array of climate models and emissions scenarios. Cal-Adapt offers climate projections for the major stressors facing California, including the following: temperature averages and extremes, precipitation averages and extremes, sea-level rise, wildfires, and drought. The Governor’s Office of Planning and Research (OPR) recommends agencies use Representative Concentration Pathway (RCP) 8.5 for analyses considering impacts through 2050, because there are minimal differences between emissions scenarios during the first half of the 21st century.

- iii. Adaptation Strategy – For Wastewater Systems with design flows over 1,000,000 gallons per day, develop and implement a strategy to complete resiliency actions, at a minimum encompassing the following:
 - a. Prioritization – Prioritized resiliency actions based on risks to water quality, but also accounting for costs and benefits.
 - b. Schedule and Milestones – Timeframes to complete prioritized resiliency actions and/or climate change hazard triggers to inform when City of Solvang must implement actions. Milestones to complete critical steps for prioritized resiliency actions, designed to demonstrate measurable progress at a steady, or accelerated, completion pace over the established timeframes.
 - c. Financial Planning – Projected costs necessary to implement and sustain resiliency actions and strategy to procure funds.
- 3. **Time Schedule Compliance Plan** - As set forth in General Permit sections V.A and VI.A.5, if City of Solvang anticipates that additional time is needed to achieve compliance with the effluent limitations, City of Solvang must prepare and submit for Central Coast Water Board review and approval, a time schedule compliance plan. At a minimum, the time schedule compliance plan must address the following:
 - i. Comparison of the current effluent quality to the effluent and groundwater limitations in General Permit Tables 3-6.
 - ii. A detailed description and chronology of efforts, since issuance of the notice of applicability, to reduce wastes.
 - iii. Justification of the need for additional time to achieve the effluent limitations in General Permit Tables 3-6.
 - iv. A detailed time schedule of specific actions City of Solvang will take to achieve the effluent limitations.
 - v. A demonstration that the time schedule requested is as short as possible, considering the technological, operation, and economic factors that affect the design, development, and implementation of the measures that are necessary to comply with the effluent limitation(s).
 - vi. If the requested time schedule exceeds one year, the proposed schedule shall include interim requirements and the date(s) for their achievement. The interim requirements shall include both of the following:
 - a. Effluent limitation(s) for the pollutant(s) of concern.
 - b. Actions, measurable milestones, and tangible products leading to compliance with the effluent limitation(s).

VII. LEGAL REQUIREMENTS

The Central Coast Water Board's requirements that the City of Solvang submit the technical and monitoring reports described in this MRP are made pursuant to [section 13267 of the California Water Code](#). Failure to submit reports in accordance with schedules established by this General Permit and notice of applicability with attachments or failure to submit a report of sufficient technical quality to be acceptable to the Central Coast Water Board may subject City of Solvang to enforcement action pursuant to section 13268 of the California Water Code. Pursuant to [section 13268 of the Water Code](#), a violation of a request made pursuant to section 13267 may subject City of Solvang to civil liability assessment of up to \$1,000 per day in which the violation occurs.

The Central Coast Water Board needs the required information to ensure compliance with the notice of applicability and the General Permit. City of Solvang is required to submit this information because it is subject to the General Permit and is responsible for the discharge.

The burden, including costs, of the reports bears a reasonable relationship to their need and the benefits to be obtained. The requirement for the reports is necessary to ensure compliance with the General Permit, notice of applicability, and monitoring and reporting program to protect water quality.

City of Solvang must implement the above monitoring program on October 19, 2023. The Central Coast Water Board may rescind or modify this MRP at any time.

Ordered By:

for Ryan E. Lodge
Executive Officer

\\ca.epa.local\RB\RB3\Shared\WDR\WDR Facilities\Santa Barbara Co\Solvang WWTP,
City of\1_Permit\Existing Permit\Revised_Solvang_R3-2022-0040
MRP_Oct_19_2023_final.docx