

**CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
LOS ANGELES REGION**

320 West 4th Street, Suite 200, Los Angeles, California 90013
(213) 576-6660 • Fax (213) 576-6640
<http://www.waterboards.ca.gov/losangeles/>

**MONITORING AND REPORTING PROGRAM NO. CI-10041
FOR
THE VISTA CANYON WATER FACTORY
(FILE NO. 14-031)
ISSUED TO CITY OF SANTA CLARITA**

This Monitoring and Reporting Program (MRP) No. CI-10041 is issued pursuant to California Water Code section 13267, which authorizes the Regional Water Quality Control Board, Los Angeles Region, (Regional Water Board) to require the City of Santa Clarita (City) who discharges the disinfected tertiary-treated wastewater generated from the Vista Canyon Water Factory (Water Factory) for landscape irrigation and non-potable recycled water applications to furnish technical or monitoring reports. The reports required herein are necessary to assure compliance with Waste Discharge Requirements (WDRs) and Water Reclamation Requirements (WRRs) in Order No. R4-2020-0049 and to protect the waters of the state and their beneficial uses. The evidence that supports the need for the reports is set forth in the WDRs/WRRs and the Regional Water Board record.

I. SUBMITTAL OF REPORTS

1. The City shall comply with the Electronic Submittal of Information (ESI) requirements by submitting all reports (including reports conducted by the City's authorized agencies) required under the MRP, including electronic data format (EDF) effluent and groundwater monitoring data, effluent storage tank data, and use of recycled water data. These reports shall be received by the Regional Water Board via the State Water Board GeoTracker database under Global ID WDR100016910 on the dates indicated as follows:
 - A. **Quarterly Monitoring Reports** shall be received by the Regional Water Board by the 30th day of the month following the end of each quarterly monitoring period according to Table 1. The first Quarterly Monitoring Report under this program must be received by the Regional Water Board by July 30, 2020.

Table 1. Reporting Period and Due Dates for Quarterly Reports

Reporting Period	Report Due Date
January – March	April 30

Reporting Period	Report Due Date
April – June	July 30
July – September	October 30
October – December	January 30

- B. **Annual Summary Reports** shall be received by the Regional Water Board by March 1 of each year. The first Annual Summary Report under this program must be received by the Regional Water Board no later than March 1, 2021.
- C. **Annual Summary Reports** for wastewater and recycled water volumes shall be uploaded to the GeoTracker system at <https://geotracker.waterboards.ca.gov/> using Global ID WDR100016910 by March 1 of each calendar year. Data for the prior calendar year shall be reported for the months of January through December. The wastewater and recycled water volumes summary report shall furnish information detailed in section III of this MRP. The City must submit this annual report containing monthly data in an electronic format. All data will be made publicly accessible as machine readable datasets. The City shall continue to comply with all existing permits and MRP provisions.
2. If there is no discharge and/or water recycled during any reporting period, the report shall so state.
3. Effluent sampling data shall be included in the quarterly, and annual effluent groundwater monitoring reports and monitoring wells sampling data shall be included in the quarterly and annual report. The data shall include the sampling date and location, well specifications, well heads elevation relative to mean sea level (MSL) and when applicable, the method used to develop the well. The construction of wells shall follow *California Well Standards* of the California Department of Water Resources, and comply with all county, city, or other applicable well construction ordinances.
4. All reports shall be prepared by or under the direction of a licensed engineer in the State of California or a certified hydrogeologist in the State of California. All monitoring reports must include, at minimum, the following:
- A. Effluent and/or well sampling location identification
 - B. Date and time of sampling;
 - C. Sampler identification;
 - D. Laboratory identification; and

- E. Quarterly and annual reports must also contain observations of groundwater levels, recorded to 0.01 feet MSL, and interpreted flow direction based on groundwater elevation and other site characteristics.

II. MONITORING REQUIREMENTS

1. Monitoring shall be used to determine compliance with the requirements of Order No. R4-2020-0049 and shall include, but not be limited to, implementation, documentation, and reporting of the following:
 - A. Locations of each monitoring point, including groundwater wells where representative samples can be obtained and the rationale for the selection. The City must include a map, at a scale of 1 inch equals 1,200 feet or less, that clearly identifies the locations of the Water Factory and all groundwater monitoring wells.
 - B. Sampling protocols (specified in Title 40 Code of Federal Regulations [CFR] Part 136 or American Water Works Association standards where appropriate) and chain of custody procedures.
 - C. For groundwater monitoring, outline the methods and procedures to be used for measuring water levels; purging wells; collecting samples; decontaminating equipment; containing, preserving, and shipping samples; and maintaining appropriate documentation. Also include the procedures for handling, storing, testing, and disposing of purge and decontamination waters generated from the sampling events.
 - D. Laboratory or laboratories, which conducted the analyses. Include copy or copies of laboratory certifications by the Environmental Laboratory Accreditation Program (ELAP) of the State Water Board's Division of Drinking Water (DDW) every year or when the City change their contract laboratory.
 - E. Analytical test methods used and the corresponding detection limits for purposes of reporting (DLRs) for unregulated and regulated chemicals. For unregulated and regulated chemicals, please see the DDW's website (https://www.waterboards.ca.gov/drinking_water/certlic/drinkingwater/Chemicalcontaminants.html).
 - F. Quality assurance and control measures.
2. Unless specified differently below, the samples shall be analyzed using analytical methods described in 40 CFR Part 136; or where no methods are specified for a given pollutant, by commercially available methods approved by the United State Environmental Protection Agency (USEPA) or DDW, the

Regional Water Board and/or State Water Board. The City shall select the analytical methods that provide reporting limits (RLs) lower than the limits prescribed in the accompanying Order No. R4-2020-0049.

3. The City shall instruct its laboratories to establish calibration standards so that the RLs (or its equivalent if there is a different treatment of samples relative to calibration standards) are the lowest calibration standard. At no time shall the City use analytical data derived from extrapolation beyond the lowest point of the calibration curve.
4. Upon request by the City, the Regional Water Board, in consultation with the USEPA or DDW and the State Board Quality Assurance Program, may establish RLs, in any of the following situations:
 - A. When the pollutant has no established method under 40 CFR 136 (revised May 14, 1999, or subsequent revision);
 - B. When the method under 40 CFR 136 for the pollutant has an RL higher than the limit specified in this Order; or
 - C. When the City agrees to use a test method that is more sensitive than those specified in 40 CFR Part 136 and is commercially available.
5. Samples of influent and disinfected effluent must be analyzed within allowable holding time limits as specified in 40 CFR Part 136.3. All QA/QC analyses must be run on the same dates when samples were actually analyzed. The City shall make available for inspection and/or submit the QA/QC documentation upon request by Regional Water Board staff. Proper chain of custody procedures must be followed and a copy of that documentation shall be submitted with the quarterly report.
6. For unregulated chemical analyses, the City shall select methods according to the following approach:
 - A. Use drinking water methods, if available;
 - B. Use DDW-recommended methods for unregulated chemicals, if available;
 - C. If there is no DDW-recommended drinking water method for a chemical, and more than a single USEPA-approved method is available, use the most sensitive USEPA-approved method;
 - D. If there is no USEPA-approved method for a chemical, and more than one method is available from the scientific literature and commercial laboratory, after consultation with DDW, use the most sensitive method;

- E. If no approved method is available for a specific chemical, the City's laboratory may develop or use its own methods and should provide the analytical methods to DDW or the Regional Water Board for review. Those methods may be used until DDW recommended or USEPA-approved methods are available;
- F. If the only method available for a chemical is for wastewater analysis (e.g., a chemical listed as a priority pollutant only), sample and analyze for that chemical in the treated and disinfected effluent. Use this approach until the City's laboratory develops a method for the chemical in drinking water, or until a DDW-recommended or USEPA-approved drinking water method is available.
- G. The City is required to inform the Regional Water Board, in event that D, E, and F are occurring.

III. MONITORING REQUIREMENTS FOR WASTEWATER AND RECYCLED WATER VOLUMES

- 1. Wastewater and recycled water volumes monitoring reports must include the information below in accordance with the Recycled Water Policy:
 - A. *Influent*: Monthly volume of wastewater collected and treated by the wastewater treatment plant.
 - B. *Production*: Monthly volume of wastewater treated, specifying level of treatment.
 - C. *Discharge*: Monthly volume of treated wastewater discharged to each of the following, specifying level of treatment:
 - a. Underground injection wells, such as those classified by USEPA's Underground Injection Control Program, excluding groundwater recharge via subsurface application intended to reduce seawater intrusion into a coastal aquifer with a seawater interface.
 - b. Land, where beneficial use is not taking place, including evaporation or percolation ponds, overland flow, or spray irrigation disposal, excluding pasture or fields with harvested crops.
 - D. *Reuse*: Monthly volume of recycled water distributed.
 - E. *Reuse Categories*: Annual volume of treated wastewater distributed for beneficial use in compliance with California Code of Regulations, Title 22 in each of the use categories listed below:

- a. Agricultural irrigation: pasture or crop irrigation.
- b. Landscape irrigation: irrigation of parks, greenbelts, and playgrounds; school yards; athletic fields; cemeteries; residential landscaping, common areas; commercial landscaping; industrial landscaping; and freeway, highway, and street landscaping.
- c. Golf course irrigation: irrigation of golf courses, including water used to maintain aesthetic impoundments within golf courses.
- d. Commercial application: commercial facilities, business use (such as laundries and office buildings), car washes, retail nurseries, and appurtenant landscaping that is not separately metered.
- e. Industrial application: manufacturing facilities, cooling towers, process water, and appurtenant landscaping that is not separately metered.
- f. Geothermal energy production: augmentation of geothermal fields.
- g. Other non-potable uses: including but not limited to dust control, flushing sewers, fire protection, fill stations, snow making, and recreational impoundments.
- h. Groundwater recharge: the planned use of recycled water for replenishment of a groundwater basin or an aquifer that has been designated as a source of water supply for a public water system. Includes surface or subsurface application, except for seawater intrusion barrier use.
- i. Seawater intrusion barrier: groundwater recharge via subsurface application intended to reduce seawater intrusion into a coastal aquifer with a seawater interface.
- j. Reservoir water augmentation: the planned placement of recycled water into a raw surface water reservoir used as a source of domestic drinking water supply for a public water system, as defined in section 116275 of the Health and Safety Code, or into a constructed system conveying water to such a reservoir (Water Code § 13561).
- k. Raw water augmentation: the planned placement of recycled water into a system of pipelines or aqueducts that deliver raw water to a drinking water treatment plant that provides water to a public water system as defined in section 116275 of the Health and Safety Code (Water Code § 13561).

- I. Other potable uses: both indirect and direct potable reuse other than for groundwater recharge, seawater intrusion barrier, reservoir water augmentation, or raw water augmentation.

IV. REPORTING REQUIREMENTS

The City shall submit all reports to the Regional Water Board by the dates indicated in section I. All quarterly, and annual monitoring reports shall contain a separate section titled "Summary of Non-Compliance", which discusses the compliance records and corrective actions taken or planned that may be needed to bring the reuse into full compliance with water reclamation requirements. All quarterly and annual reports shall clearly list all non-compliance with WDRs/WRRs, as well as all excursions of effluent limits.

1. Quarterly Reports

- A. These reports shall include, at a minimum, the following information:
 - a. The volume of the treated wastewater used for non-potable Title 22 recycled water applications including landscape irrigation. If no wastewater and recycled water are used during the quarter, the report shall so state.
 - b. The volume of the effluent to sewer. If no effluent to sewer is delivered during the quarter, the report shall so state.
 - c. The date and time of sampling and analyses on the influent, effluent, and groundwater.
 - d. All analytical results of samples collected during the monitoring period of the influent, effluent, and groundwater.
 - e. Documentation of all QA/QC procedures that were followed during sampling and laboratory analyses.
 - f. Santa Clarita Water District water quality data containing information on the quality and quantity of these two water sources (State Water Project water and local groundwater) provided by Santa Clarita Valley Water Agency (SCVWA) and local groundwater purveyor(s) to the service area for the Vista Canyon Water Factory.
 - g. Records of any operational problems, plant upset and equipment breakdowns or malfunctions, and any discharge(s) used for non-potable Title 22 recycled water applications including landscape irrigation.

- h. Discussion of compliance, non-compliance, or violation of requirements.
 - i. All corrective or preventive action(s) taken or planned with schedule of implementation, if any violation occurs.
 - j. Documentation of all non-compliances with this Order including conditions specified in DDW's February 19, 2020 conditional acceptance letter in Attachment A.
- B. For the purpose of reporting compliance with numerical limitations, analytical data shall be reported using the following reporting protocols:
 - a. Sample results greater than or equal to the RL must be reported "as measured" by the laboratory (i.e., the measured chemical concentration in the sample);
 - b. Sample results less than the RL, but greater than or equal to the laboratory's method detection limit (MDL), must be reported as "Detected, but Not Quantified," or DNQ. The laboratory must write the estimated chemical concentration of the sample next to DNQ as well as the words "Estimated Concentration" (may be shortened to Est. Conc.); or
 - c. Sample results less than the laboratory's MDL must be reported as "Not detected," or ND. It is appropriate to leave the result blank and qualify the result as ND (i.e., *Qualifier* = [ND]) for database entry.
 - d. If more than one analytical test method is available for a given parameter, the City must select the test method with lowest Minimum Level.
- C. If the City samples and performs analyses (other than for process/operational control, startup, research, or equipment testing) on any sample more frequently than required in this MRP using approved analytical methods, the results of those analyses shall be included in the report. These results shall be included in the calculation of the average used in demonstrating compliance with average effluent, receiving groundwater water, etc., limitations.
- D. The Regional Water Board may request supporting documentation, such as daily logs of operations.

2. Annual Reports

- A. The separate annual reports in accordance with the Recycled Water Policy shall include the information specified in section III of this MRP above. If no wastewater or recycled water is produced during the month, the report shall so state.
- B. Tabular and graphical summaries of the monitoring data (quantity and quality of water imported from SCVWA and local groundwater; quality of influent, effluent, and groundwater; quantity of influent, effluent to effluent storage tank and sewer; and effluent used for recycled water applications) obtained during the previous calendar year. A comparison of laboratory results against effluent limits contained in these WDR/WRRs and notations of any exceedances of limits or other requirements shall be summarized and submitted at the beginning of the report.
- C. Discussion of the compliance record and corrective or preventive action(s) taken or planned that may be needed to bring the following items into full compliance with:
 - a. Requirements of the treated effluent, including the treated effluent used for recycled water specified in the accompanying Order No. R4-2020-0049.
 - b. Documentation of all non-compliances with this Order including conditions specified in DDW's February 19, 2020 conditional acceptance letter in Attachment A.
- D. An in-depth discussion of the results of the final effluent monitoring and groundwater monitoring conducted during the previous year includes:
 - a. Any change of receiving groundwater resulting from effluent discharges as recycled water for landscape irrigation;
 - b. Any change of groundwater flow pattern resulting from irrigation; and
 - c. Mass balance and groundwater assimilative capacity calculations for total dissolved solids, chloride, sulfate, boron, and nitrate.

Temporal and spatial trends in the data shall be analyzed, with particular reference to comparisons between stations with respect to distances from the monitoring wells and comparisons to data collected during previous years. Appropriate statistical tests and indices, subject to approval by the Executive Officer, shall be calculated and included in the annual report.
- E. The description of any changes and anticipated changes including any impacts in operation of any unit processes or facilities shall be provided.

- F. A list of the analytical methods employed for each test and associated laboratory quality assurance/quality control procedures shall be included. The report shall restate the laboratories used by the City to monitor compliance with the accompanying Order, their status of certification, and provide a summary of analyses.
- G. The report shall confirm operator certification and provide a list of current operating personnel, their responsibilities, and their corresponding grade of certification.
- H. The report shall demonstrate the compliance with conditions specified in DDW's February 19, 2020 Conditional Acceptance letter and summarize any change of the **Operation, Maintenance, and Monitoring Plan (OMM Plan)** due to the optimization of the existing Water Factory operation. The summary shall discuss conformance with the Water Factory's OMM Plan for operations, maintenance, and monitoring of the Water Factory, and whether the OMM Plan requires revision for the current facilities.

V. WATER QUALITY MONITORING REQUIREMENTS

1. Influent Monitoring

The City shall monitor influent to the Water Factory at Influent Pump Station located in the mainstream of the influent channel prior to the headworks as specified in Table 2.

- A. The BOD shall report 5-day biochemical oxygen demand at 20°C.
- B. For total waste flow, the City shall report the daily minimum, maximum, and average values.
- C. For total suspended solids and BOD shall be monitored on a daily basis during the startup period of the first month.

Table 2. Influent Monitoring

Constituents	Units	Type of Sample	Minimum Frequency of Analysis
Total waste flow	gpd	Recorder	Continuous
Total suspended solids	mg/L	24-hour composite	Weekly
BOD _{5@20°C}	mg/L	24-hour composite	Weekly

Table 2 notes: The unit of gpd indicates gallons per day; the unit of mg/L indicates milligrams per liter.

2. Effluent Monitoring

- A. The City shall monitor the tertiary-treated effluent downstream of all treated effluent passing through the final disinfection process of UV and chlorination at the location indicated as “Recycled Water Flow Meter & Sampling” in Figure 4.
- B. The following shall constitute the effluent monitoring program, specified in Table 3.
- Grab sample is an individual sample collected in a short period of time not exceeding 15 minutes. Grab samples shall be collected during normal peak loading conditions for the parameter of interest, which may or may not be during hydraulic peaks. When an automatic composite sampler is not used, composite sampling shall be done as follows: If the duration of the discharge is equal to or less than 24 hours but greater than eight (8) hours, at least eight (8) flow-weighted samples shall be obtained during the discharge period and composited. For discharge duration of less than eight (8) hours, individual ‘grab’ sample may be substituted. 24-hour composite is for semi-volatile and volatile chemicals.
 - For total flow, the City shall report the daily minimum, maximum, and average values. The City shall report the estimated daily volume of wastewater used for irrigation and for disposal.
 - If the continuous turbidity meter and recorder failed, grab sampling may be substituted for a period of up to 24-hours. The turbidity samples must be taken at intervals of no more than 1.2 hours over a 24-hour period to determine compliance for turbidity.
 - During the startup period of the first month, weekly monitoring constituents shall be monitored on a daily basis.
 - During the startup period of the first month, monthly constituent shall be monitored on a weekly basis.

Table 3. Effluent/Recycled Water Monitoring

Constituents	Units	Type of Sample	Minimum Frequency of Analysis
Total flow	gpd	Recorder	Continuous
Turbidity	NTU	Recorder	Continuous
UV transmittance	%	Recorder	Continuous
UV intensity	W/m ²	Recorded	Continuous
UV dose	mJ/cm ²	Calculated	Continuous
pH	pH units	Grab	Daily

Constituents	Units	Type of Sample	Minimum Frequency of Analysis
Total coliform	MPN/100 mL	Grab	Daily
Fecal coliform	MPN/100 mL	Grab	Daily
BOD _{5@20°C}	mg/L	24-hour composite	Weekly
Total suspended solids	mg/L	Grab	Weekly
Nitrate as nitrogen	mg/L	Grab	Weekly
Nitrite as nitrogen	mg/L	Grab	Weekly
Ammonia as nitrogen	mg/L	Grab	Weekly
Organic nitrogen	mg/L	Grab	Weekly
Total nitrogen	mg/L	Grab	Weekly
Oil and grease	mg/L	Grab	Monthly
Total phosphorus	mg/L	Grab	Monthly
Total dissolved solids	mg/L	Grab	Monthly
Sulfate	mg/L	Grab	Monthly
Chloride	mg/L	Grab	Monthly
Boron	mg/L	Grab	Monthly
MBAS	mg/L	Grab	Monthly
Constituents listed in Attachments B-1 to B-6	various	Grab/24-hour composite	Quarterly
Remaining priority pollutants in Attachment D	µg/L	Grab	Annually

Table 3 notes:

- The unit of NTU denotes nephelometric turbidity unit.
- The unit of MPN/100 mL denotes most probable number per 100 milliliters.
- The unit of mJ/cm² denotes millijoules per square centimeter.
- The unit of µg/L denotes micrograms per liter.
- MBAS stands for methylene blue active substances.
- Total nitrogen is the sum of nitrate, nitrite, organic nitrogen and ammonia (all expressed as nitrogen).

3. Groundwater Monitoring

- A. Groundwater Monitoring Well Specifications: Table 4 shows specifications of groundwater monitoring wells for groundwater monitoring programs.

Table 4. Specifications of Groundwater Monitoring Wells

Monitoring Well Identification	Monitoring Well Location	Purpose of Monitoring Location
MW-1	34°25'09.9690" N; 118°25'44.3696" W	Upgradient background groundwater quality
MW-2	34°25'09.9820" N; 118°25'43.4433" W	Upgradient background groundwater quality

Monitoring Well Identification	Monitoring Well Location	Purpose of Monitoring Location
MW-3	34°25'09.2759" N; 118°25'43.8822" W	Upgradient background groundwater quality
MW-4	34°25'03.2932" N; 118°25'43.5712" W	Upgradient background groundwater quality
MW-5	34°24'50.5360" N; 118°25'58.5262" W	Cross-gradient groundwater quality for impacts of recycled water for irrigation
MW-6	34°25'02.4202" N; 118°25'50.3356" W	Cross-gradient groundwater quality for impacts of recycled water for irrigation
Sand Canyon	34°25'12.2121" N; 118°25'38.5636" W	Upgradient background groundwater quality
Mitchell 5B	34°25'01.1846" N; 118°26'07.3717" W	Impacts of recycled water for irrigation
Sierra	34°24'49.2181" N; 118°27'26.7537" W	Impacts of recycled water for irrigation

B. Groundwater Monitoring

- a. Groundwater monitoring is used to monitor any possible impact from landscape irrigation and non-potable recycled water applications.
- b. Groundwater monitoring shall be simultaneously collected the minimum constituents and parameters, specified in Table 5, for monitoring groundwater quality at all nine (9) monitoring wells.
- c. Water level elevations must be measured to the nearest 0.01 feet and referenced to mean sea level.
- d. Annual samples shall be collected during the dry season each year.

Table 5. Groundwater Monitoring

Constituent/Parameter	Units	Type of Sample	Minimal Frequency
Water level	feet	Vertical measure	Quarterly
pH	pH unit	Grab	Quarterly
Total dissolved solids	mg/L	Grab	Quarterly
Sulfate	mg/L	Grab	Quarterly
Chloride	mg/L	Grab	Quarterly
Boron	mg/L	Grab	Quarterly
Ammonia nitrogen	mg/L	Grab	Quarterly
Nitrate as nitrogen	mg/L	Grab	Quarterly
Nitrite as nitrogen	mg/L	Grab	Quarterly
Total coliform	MPN/100 mL	Grab	Quarterly
Fecal coliform	MPN/100 mL	Grab	Quarterly
Enterococcus	MPN/100mL	Grab	Quarterly

Constituent/Parameter	Units	Type of Sample	Minimal Frequency
Constituents listed in Attachments B-1 to B-6	various	Grab	Annually
Remaining priority pollutants in Attachment D	µg/L	Grab	Annually

- C. All monitoring reports must include, at minimum, the following:
- Well or location identification, date and time of sampling;
 - Sampler identification, laboratory identification; and chain of custody;
 - Water temperature (in field); and
 - Calculation of vertical separation of the water table from the bottom of the disposal system.
- D. Based on the results of the quarterly analyses, the City may propose to the Executive Officer for review and approval a reduced sampling and testing program to annually.

4. Effluent Storage Tank Monitoring

The City shall record the volume in gallons per day of treated wastewater stored in the effluent storage tanks, discharged for non-potable recycled water use and discharged to the sewer.

5. Water Supply Monitoring

The City shall annually submit monthly water supply report for each calendar year stating the amount supplied to the sewer area served by the Water Factory, each source of water and the resulting flow-weighted water supply quality for TDS, chloride, boron, and sulfate.

VI. GENERAL MONITORING AND REPORTING REQUIREMENTS

- The City shall comply with all Standard Provisions (Attachment C) related to monitoring, reporting, and recordkeeping.
- For every item where the requirements are not met, the City shall submit a statement of the actions undertaken or proposed which will bring the treated effluent and/or treated effluent used for the recycled water program into full compliance with requirements at the earliest possible time, and submit a timetable for implementation of the corrective measures.

3. Monitoring reports shall be signed by either the principal Executive Officer or ranking elected official. A duly authorized representative of the aforementioned signatories may sign documents if:
 - A. The authorization is made in writing by the signatory;
 - B. The authorization specifies the representative as either an individual or position having responsibility for the overall operation of the regulated facility or activity; and
 - C. The written authorization is submitted to the Executive Officer of this Regional Water Board.
4. The monitoring report shall contain the following completed declaration:

"I certify under penalty of law that this document, including all attachments and supplemental information, was prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of a fine and imprisonment."

Executed on the ____ day of ____ at ____

Signature

Title

5. The City shall retain records of all monitoring information, including all calibration and maintenance, monitoring instrumentation, and copies of all reports required by this Order, for a period of at least three (3) years from the date of sampling measurement, or report. This period may be extended by request of the Regional Water Board at any time and shall be extended during the course of any unresolved litigation regarding the regulated activity.
6. Records of monitoring information shall include:
 - A. The date, exact place, and time of sampling or measurements;
 - B. The individual(s) who performed the sampling or measurements;
 - C. The date(s) analyses were performed;

- D. The individual(s) who performed the analysis;
 - E. The analytical techniques or methods used; and
 - F. The results of such analyses.
7. The City shall submit to the Regional Water Board, together with the first monitoring report required by this Order, a list of all chemicals and proprietary additives which could affect the quality of the treated effluent and the treated effluent used for recycled water, including quantities of each. Any subsequent changes in types and/or quantities shall be reported promptly. An annual summary of the quantities of all chemicals, listed by both trade and chemical names, which are used in the treatment process shall be included in the annual report.

VII. WASTE HAULING REPORTING

In the event that waste sludge, septage, or other wastes are hauled offsite, the name and address of the hauler shall be reported, along with types and quantities hauled during the reporting period and the location of final point of disposal. In the event that no wastes are hauled during the reporting period, a statement to that effect shall be submitted in the quarterly monitoring report.

VIII. MONITORING FREQUENCIES

Monitoring frequencies may be adjusted to a less frequent basis or parameters dropped by the Executive Officer if the City makes a request (with justification) and the Executive Officer determines that the request is adequately supported by statistical trends in the monitoring data submitted. The City cannot make any adjustments until written approval is received from the Executive Officer.

These records and reports are public documents and shall be made available for inspection during normal business hours at the office of the California Regional Water Quality Control Board, Los Angeles Region.

Ordered by:
Renee Purdy
Executive Officer


Digitally signed by R.
Purdy
Date: 2020.04.30
12:21:50 -07'00'

Date: April 16, 2020

Attachment A

DDW Conditional Acceptance Letter (February 19, 2020)



State Water Resources Control Board

Division of Drinking Water

February 19, 2020

Renee Purdy
Executive Officer
Los Angeles Regional Water Quality Control Board
320 W. 4th Street, Suite 200, 1st floor
Los Angeles, CA 90013

CONDITIONAL ACCEPTANCE LETTER FOR CITY OF SANTA CLARITA'S VISTA CANYON WATER FACTORY ENGINEERING REPORT (1995019-701)

Dear Ms. Purdy,

This letter transmits the State Water Resources Control Board's Division of Drinking Water (Division) conditional acceptance of the Title 22 Engineering Report (Report), dated November 27, 2019, prepared and submitted by Dexter Wilson Engineering Inc. on behalf of the City of Santa Clarita (City) for the production, distributions, and use of recycled water from the Vista Canyon Water Factory plant (Plant). A previous engineering report was submitted on February 2, 2018 which the Division reviewed for compliance with the California Water Recycling Criteria (Title 22) requirements and sent review comments via email on March 23, 2018. The Division reviewed the November 27, 2019 Report and finds that it addressed the previous review comments.

The City must implement all applicable recycled water requirements found in Title 17 and Title 22 for production and use of recycled water in addition to the requirements below:

1. To verify performance of the UV disinfection process on the site-specific recycled water, upon completion of construction and prior to operation and delivery of produced recycled water, an on-site check-point bioassay must be performed using seeded MS2 coliphage as described in the August 2012 NWRI Guidelines. The Division reviewed and accepted the submitted spot-check bioassay testing protocol for the UV disinfection system in an email sent on March 23, 2018. The results, documenting virus disinfection performance of the system to the standards specified by Title 22 criteria, must be submitted to the Division for review and acceptance.
2. Prior to operation and delivery of recycled water, the engineering report may need to be updated following the completion of the spot-check bioassay and review of the results by the Division to include the specific operating requirements of the UV disinfection system at the Plant.

E. JOAQUIN ESQUIVEL, CHAIR | EILEEN SOBECK, EXECUTIVE DIRECTOR

1350 Front Street, Room 2050, San Diego, CA 92101 | www.waterboards.ca.gov

Renee Purdy
Los Angeles Regional Water Board

- 2 -

February 19, 2020

3. Each UV channel must be operated independently to deliver a minimum validated equivalent UV dose of 100 mJ/cm² at all times.
4. The equations below must be used for each UV reactor as part of the automatic UV disinfection control system for calculating UV dose and should be specified as a permit provision. They are from the "Xylem Water Solutions Duron UV System 2012 NWRI Validation Report" (Carollo Engineers, February 2015).

$$S_{pred} = 10^{-7.97} \times UVT^{4.491} \times P^{0.6804}$$

$$RED_{module} = 0.877 \times 10^{2.1242} \times UVA^{-1.104} \times [S/S_o]^{0.722} \times [1/Q_{lamp}]^{0.7167} \times M$$

Where:

S_{pred} = Predicted UV sensor value (W/m²),
UVT= Percent UV transmittance expressed as a decimal (55% = 55),¹
UVA= UV absorbance at 254 nm
S = Measured UV sensor intensity value (W/m²).
 S_o = Predicted UV intensity at full lamp power, corresponding to 600W for new lamps with clean sleeves (W/m²).
P = Percent ballast power setting expressed as a decimal (100% = 100)
 RED_{module} = UV dose per module calculated with the RED-monitoring equation (mJ/cm²).
 Q_{lamp} = Flow rate in a channel, calculated as gallons per minute (gpm) divided by the number of modules in parallel in one channel and then divided by 12 lamps (gpm/lamp)²
M = Number of operating modules.

5. This UV dose equation assumes that the intensity sensors would measure the decline as the lamps age. Since there is one UV Intensity sensor that monitors two of the 24 lamps in a bank, the two lamps with the highest number of hours should be the ones closest to the UV intensity sensor.
6. The UV disinfection system is limited to the following operational parameter ranges:
 - a. Permit total plant flow up to the maximum that is tested during full-scale UV commissioning.
 - b. UVTs at or above 55 percent,
 - c. UV sensor intensities to be specified after UV commissioning.
7. On-line monitoring of UV intensity, flow, and UVT must be provided at all times.

¹ At UVT values above 83 percent, the value (83 percent UVT) shall be used as the default value in the RED calculation

² At flow rates below 28 gpm/lamp, this value (28 gpm/lamp) should be used as the default value in the RED calculation

Renee Purdy
Los Angeles Regional Water Board

- 3 -

February 19, 2020

8. Flow meters, UV intensity sensors, and UVT monitors must be properly calibrated to ensure proper disinfection.
9. At least monthly, all duty UV intensity sensors must be checked for calibration against a reference UV intensity sensor.
10. For all UV intensity sensors in use, the ratio of the duty UV sensor intensity to the reference UV sensor intensity must be less than or equal to 1.2. If the calibration ratio is >1.2 , the failed duty UV sensor must be replaced by a properly calibrated sensor and recalibrated by a qualified facility. The reference UV intensity sensors shall be recalibrated at least annually by a qualified facility using a National Institute of Standards and Technology (NIST) traceable standard.
11. UVT meter must be inspected and checked against a reference bench-top unit weekly to document accuracy.
12. If the on-line analyzer UVT reading varies from the bench-top spectrophotometer UVT reading by 2% or more, the on-line UVT analyzer must be recalibrated by a procedure recommended by the manufacturer.
13. Flow meters measuring the flow through a UV reactor must be verified to determine accuracy at least monthly via checking the flow reading against other flow determination methods.
14. Each UV reactor at the UV system must be designed with built-in automatic reliability features that must be triggered by critical alarm setpoints.
15. Conditions triggering an alarm and startup of the redundant UV bank include the following:
 - a. the UV dose goes below 105 mJ/cm^2 ,
 - b. whole bank failure,
16. Conditions that should divert effluent to waste include the following:
 - a. UV dose is below the minimum UV dose of 100 mJ/cm^2 ,
 - b. UVT is below of 55%,
 - c. UV intensity below the minimum that is tested during full-scale UV commissioning
 - d. complete UV channel failure, and
 - e. flow above the maximum that is tested during full-scale UV commissioning.

Renee Purdy
Los Angeles Regional Water Board

- 4 -

February 19, 2020

17. The UV system should be operated in accordance with an approved operations plan, which specifies clearly the operational limits and responses required for critical alarms. The operations plan should be submitted and approved prior to issuance of the operating permit. A copy of the approved operations plan should be maintained at the treatment plant and be readily available to operations personnel and regulatory agencies. A quick reference plant operations data sheet should be posted at the treatment plant and include the following information:
 - a. The alarm set points for flow, UV dose, UV intensity, and UVT.
 - b. The values of flow, UV dose, UV intensity, and UVT when effluent must be diverted to waste.
 - c. The required frequency of verification and calibration for all meters/analyzers measuring flow, UV intensity, and UV transmittance.
 - d. The required frequency of mechanical cleaning and equipment inspection.
 - e. The UV lamp hour tracking procedures and replacement intervals.
18. Equivalent or substitutions of equipment are not acceptable without an adequate demonstration of equivalent disinfection performance.
19. These applicable recommendations should be incorporated into the final permit for the UV system. Approval for the use of any and all water recycling applications is granted through the Regional Water Quality Control Board's Water Reclamation permitting process.
20. Prior to operation and delivery of recycled water, an Operations and Maintenance Manual must be submitted to the Division for review and acceptance.
21. Sampling of the disinfected tertiary recycled water for total coliform bacteria must be conducted daily in accordance with Title 22 section 60301.230.
22. Continuous Monitoring of turbidity in the disinfected tertiary recycled water must be conducted in accordance with the requirements specified in Title 22 section 60301.320.
23. The City must submit an updated engineering report to the Division for review and acceptance if any changes to the information provided in the current Report are considered in the future.
24. The City must submit a supplementary engineering report along with all necessary information and drawings for new recycled water use sites in the future for review and acceptance by the Division.


Renee Purdy
Los Angeles Regional Water Board

- 5 -

February 19, 2020

If you have any questions regarding this letter, please contact Saeedreza Hafeznezami at (818) 551-2972 or via email at Saeedreza.Hafeznezami@waterboards.ca.gov or me at (619) 525-4022 or via email at Randy.Barnard@waterboards.ca.gov.

Sincerely,

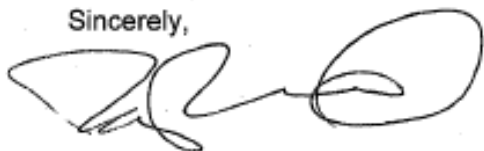

Randy Barnard, P.E.
Recycled Water Unit Chief
Recycled Water Unit
Division of Drinking Water
State Water Resources Control Board
1350 Front St., Rm. 2050
San Diego, CA 92101

cc:

Milasol Gaslan, Los Angeles Regional Water Quality Control Board (via email)

Kim Woonhoe, Los Angeles Regional Water Quality Control Board (via email)

Shu-Fang Orr, Angeles District Engineer, Division of Drinking Water (via email)

Kurt Souza, Division of Drinking Water (via email)

Jeff O'Keefe, Division of Drinking Water (via email)

County of Los Angeles Public Health, Environmental Health, Cross Connection Program,
5050 Commerce Drive, Baldwin Park, CA 91706-1423

Amalia Marreh, Associate Engineer, City of Santa Clarita, 23920 Valencia Blvd, Suite
300, Santa Clarita, CA 91355-2196 (email: amarreh@santa-clarita.com)

Steven Henderson, Dexter Wilson Engineering, Inc., 2234 Faraday Ave, Carlsbad, CA
92008 (email: steven@dwilsoneng.com)

RWU File

Attachment B

**Maximum Contaminant Levels
California Code of Regulation Title 22
(Updated April 16, 2019)**

Attachment B-1

Table 64431-A and Table 64432-A – Inorganic Chemicals

Chemical	Maximum Contaminant Levels (mg/L)	Reporting Detection Limit (mg/L)
Aluminum	1	0.05
Antimony	0.006	0.006
Arsenic	0.010	0.002
Asbestos	7 MFL	0.2 MFL > 10 µm
Barium	1	0.1
Beryllium	0.004	0.001
Cadmium	0.005	0.001
Chromium	0.05	0.01
Cyanide	0.15	0.1
Fluoride	2.0	0.1
Mercury	0.002	0.001
Nickel	0.1	0.01
Nitrate (as nitrogen)	10	0.4
Nitrate+Nitrite (sum as nitrogen)	10	
Nitrite (as nitrogen)	1	0.4
Perchlorate	0.006	0.004
Selenium	0.05	0.005
Thallium	0.002	0.001

Table notes:

- The unit of mg/L denotes milligrams per liter.
- The unit of MFL denotes million fibers per liter; MCL for fibers exceeding 10 micrometer (µm) in length.

Attachment B-2

Table 64442 – Radionuclides

Chemical	Maximum Contaminant Levels (pCi/L)	Reporting Detection Limit (pCi/L)
Radium-226	5 (combined radium-226 and radium-228)	1
Radium-228	5 (combined radium-226 and radium-228)	1
Gross Alpha particle activity (excluding radon and uranium)	15	3
Uranium	20	1

Table notes: The unit of pCi/L denotes picocuries per liter.

Attachment B-3

Table 64443 – Radionuclides

Chemical	Maximum Contaminant Levels (pCi/L)	Reporting Detection Limit (pCi/L)
Beta/photon Emitters	4 millirem/year dose equivalent to the total body or any internal organ	Gross Beta particle activity: 4
Strontium-90	8 (=4 millirem/year dose to bone marrow)	2
Tritium	20,000 (=4 millirem/year dose to total body)	1,000

Attachment B-4

Table 64444-A – Organic Chemicals – (a) Volatile Organic Chemicals

Chemical	Maximum Contaminant Levels (mg/L)	Reporting Detection Limit (mg/L)
Benzene	0.001	0.0005
Carbon Tetrachloride (CTC)	0.0005	0.0005
1,2-Dichlorobenzene	0.6	0.0005
1,4-Dichlorobenzene	0.005	0.0005
1,1-Dichloroethane	0.005	0.0005
1,2-Dichloroethane (1,2-DCA)	0.0005	0.0005
1,1-Dichloroethene (1,1-DCE)	0.006	0.0005
cis-1,2-Dichloroethylene	0.006	0.0005
trans-1,2-Dichloroethylene	0.01	0.0005
Dichloromethane	0.005	0.0005
1,2-Dichloropropane	0.005	0.0005
1,3-Dichloropropene	0.0005	0.0005
Ethylbenzene	0.3	0.0005
Methyl- <i>tert</i> -butyl-ether (MTBE)	0.013	0.003
Monochlorobenzene	0.07	0.0005
Styrene	0.1	0.0005
1,1,2,2-Tetrachloroethane	0.001	0.0005
Tetrachloroethylene (PCE)	0.005	0.0005
Toluene	0.15	0.0005
1,2,4-Trichlorobenzene	0.005	0.0005
1,1,1-Trichloroethane	0.200	0.0005
1,1,2-Trichloroethane	0.005	0.0005
Trichloroethylene (TCE)	0.005	0.0005
Trichlorofluoromethane	0.15	0.005

Chemical	Maximum Contaminant Levels (mg/L)	Reporting Detection Limit (mg/L)
1,1,2-Trichloro-1,2,2-Trifluoroethane	1.2	0.01
Vinyl Chloride	0.0005	0.0005
Xylenes (m,p)	1.750	0.0005

Table notes: Xylenes MCL is for either a single isomer or the sum of the isomers.

Table 64444-A (continued) – Organic Chemicals – (b) Synthetic Organic Chemicals

Chemical	Maximum Contaminant Levels (mg/L)	Reporting Detection Limit (mg/L)
Alachlor	0.002	0.001
Atrazine	0.001	0.0005
Bentazon	0.018	0.002
Benzo(a)pyrene	0.0002	0.0001
Carbofuran	0.018	0.005
Chlordane	0.0001	0.0001
2,4-D	0.07	0.01
Dalapon	0.2	0.01
Dibromochloropropane	0.0002	0.00001
Di(2-ethylhexyl)adipate	0.4	0.005
Di(2-ethylhexyl)phthalate	0.004	0.003
Dinoseb	0.007	0.002
Diquat	0.02	0.004
Endothall	0.1	0.045
Endrin	0.002	0.0001
Ethylene Dibromide (EDB)	0.00005	0.00002
Glyphosate	0.7	0.025
Heptachlor	0.00001	0.00001
Heptachlor Epoxide	0.00001	0.00001
Hexachlorobenzene	0.001	0.0005
Hexachlorocyclopentadiene	0.05	0.001

Chemical	Maximum Contaminant Levels (mg/L)	Reporting Detection Limit (mg/L)
Lindane	0.0002	0.0002
Methoxychlor	0.03	0.01
Molinate	0.02	0.002
Oxamyl	0.05	0.02
Pentachlorophenol	0.001	0.0002
Picloram	0.5	0.001
Polychlorinated Biphenyls	0.0005	0.0005
Simazine	0.004	0.001
Thiobencarb	0.07	0.001
Toxaphene	0.003	0.001
1,2,3-Trichloropropane	0.000005	0.000005
2,3,7,8-TCDD (Dioxin)	3×10^{-8}	5×10^{-9}
2,4,5-TP (Silvex)	0.05	0.001

Attachment B-5

Table 64449-A – Secondary Maximum Contaminant Levels

Chemical	Maximum Contaminant Levels/Units
Aluminum	0.2 mg/L
Color	15 Units
Copper	1.0 mg/L
Foam Agents (MBAS)	0.5 mg/L
Iron	0.3 mg/L
Manganese	0.05 mg/L
Methyl- <i>tert</i> -butyl-ether (MTBE)	0.005 mg/L
Odor – Threshold	3 Units
Silver	0.1 mg/L
Thiobencarb	0.001 mg/L
Turbidity	5 Units
Zinc	5.0 mg/L

Attachment B-6

Table 64533-A – Disinfection Byproducts

Chemical	Maximum Contaminant Levels (mg/L)	Reporting Detection Limit (mg/L)
Total trihalomethanes (TTHM)	0.080	
Bromodichloromethane		0.0010
Bromoform		0.0010
Chloroform		0.0010
Dibromochloromethane		0.0010
Haloacetic acid (five) (HAA5)	0.060	
Monochloroacetic acid		0.0020
Dichloroacetic acid		0.0010
Trichloroacetic acid		0.0010
Monobromoacetic acid		0.0010
Dibromoacetic acid		0.0010
Bromate	0.010	0.0050 0.0010
Chlorite	1.0	0.020

Table notes:

- Bromate is listed for plant using ozone disinfection only.
- The detection limit for purposes of reporting for the bromate is 0.0010 mg/L when using EPA Method 317.0 Revision 2.0, 321.8, or 326.0.
- Chlorite is listed for plant using chlorine dioxide only.

**Attachment C – Standard Provisions
Applicable to Waste Discharge Requirements**

1. DUTY TO COMPLY

The discharger must comply with all conditions of these waste discharge requirements. A responsible party has been designated in the Order for this project, and is legally bound to maintain the monitoring program and permit. Violations may result in enforcement actions, including Regional Board orders or court orders requiring corrective action or imposing civil monetary liability, or in modification or revocation of these waste discharge requirements by the Regional Board. (California Water Code, Sections 13261, 13263, 13265, 13268, 13300, 13301, 13304, 13340, and 13350). Failure to comply with any waste discharge requirement, monitoring and reporting requirement, or other order or prohibition issued, reissued or amended by the Los Angeles Water Board or State Water Resources Control Board is a violation of these waste discharge requirements and the Water Code, which can result in the imposition of civil liability. (California Water Code, Section 13350, subdivision (a).)

2. GENERAL PROHIBITION

Neither the treatment nor the discharge of waste shall create a pollution, contamination or nuisance, as defined by California Water Code section 13050. In addition, the discharge of waste classified as hazardous, as defined in California Code of Regulations, Title 23, Section 2521, subdivision (a) is also prohibited.

3. AVAILABILITY

A copy of these waste discharge requirements shall be maintained at the discharge facility and be available at all times to operating personnel. (California Water Code, Section 13263)

4. CHANGE IN OWNERSHIP

The discharger must notify the Executive Officer, in writing at least 30 days in advance of any proposed transfer of this Order's responsibility and coverage to a new discharger containing a specific date for the transfer of this Order's responsibility and coverage between the current discharger and the new discharger. This agreement shall include an acknowledgement that the existing discharger is liable for violations up to the transfer date and that the new discharger is liable from the transfer date forward. (California Water Code, Sections 13267 and 13263)

5. CHANGE IN DISCHARGE

In the event of a material change in the character, location, or volume of a discharge, the discharger shall file with this Regional Board a new Report of Waste Discharge. (California Water Code, Section 13260, subdivision (c)). A material change includes, but is not limited to, the following:

- (a) Addition of a major industrial waste discharge to a discharge of essentially domestic sewage, or the addition of a new process or product by an industrial facility resulting in a change in the character of the waste.
- (b) Significant change in disposal method, e.g., change from a land disposal to a direct discharge to water, or change in the method of treatment which would significantly alter the characteristics of the waste.
- (c) Significant change in the disposal area, e.g., moving the discharge to another drainage area, to a different water body, or to a disposal area significantly removed from the original area potentially causing different water quality or nuisance problems.
- (d) Increase in flow beyond that specified in the waste discharge requirements.
- (e) Increase in the area or depth to be used for solid waste disposal beyond that specified in the waste discharge requirements. (California Code of Regulations, Title 23, Section 2210)

6. REVISION

These waste discharge requirements are subject to review and revision by the Regional Board. (California Water Code, Sections 13263)

7. NOTIFICATION

Where the discharger becomes aware that it failed to submit any relevant facts in a Report of Waste Discharge or submitted incorrect information in a Report of Waste Discharge or in any report to the Regional Board, it shall promptly submit such facts or information. (California Water Code, Sections 13260 and 13267)

8. VESTED RIGHTS

This Order does not convey any property rights of any sort or any exclusive privileges. The requirements prescribed herein do not authorize the commission of any act causing injury to persons or property, do not protect the discharger from his liability under Federal, State or local laws, nor do they create a vested right for the

discharger to continue the waste discharge. (California Water Code, Section 13263, subdivision (g).)

9. SEVERABILITY

Provisions of these waste discharge requirements are severable. If any provisions of these requirements are found invalid, the remainder of the requirements shall not be affected.

10. OPERATION AND MAINTENANCE

The discharger shall, at all times, properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the discharger to achieve compliance with conditions of this Order. Proper operation and maintenance include effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory and process controls including appropriate quality assurance procedures. This provision requires the operation of backup or auxiliary facilities or similar systems only when necessary to achieve compliance with the conditions of this Order. (California Water Code, Section 13263, subdivision (f).)

11. NOTIFICATION REQUIREMENT

Except for a discharge which is in compliance with these waste discharge requirements, any person who, without regard to intent or negligence, causes or permits any hazardous substance or sewage to be discharged in or on any waters of the State, or discharged or deposited where it is, or probably will be, discharged in or on any waters of the State, shall, as soon as (a) that person has knowledge of the discharge, (b) notification is possible, and (c) notification can be provided without substantially impeding cleanup or other emergency measures, immediately notify the Office of Emergency Services of the discharge in accordance with the spill reporting provision of the State toxic disaster contingency plan adopted pursuant to Article 3.7 (commencing with Section 8574.7) of Chapter 7 of Division 1 of Title 2 of the Government Code, and immediately notify the State Board or the appropriate Regional Board of the discharge. This provision does not require reporting of any discharge of less than a reportable quantity as provided for under subdivisions (f) and (g) of Section 13271 of the Water Code unless the discharger is in violation of a prohibition in the applicable Water Quality Control plan. (California Water Code, Section 13271, subdivision (a).)

12. OIL OR PETROLEUM RELEASES

Except for a discharge which is in compliance with these waste discharge requirements, any person who without regard to intent or negligence, causes or permits any oil or petroleum product to be discharged in or on any waters of the

State, or discharged or deposited where it is, or probably will be, discharged in or on any waters of the State, shall, as soon as (a) such person has knowledge of the discharge, (b) notification is possible, and (c) notification can be provided without substantially impeding cleanup or other emergency measures, immediately notify the Office of Emergency Services of the discharge in accordance with the spill reporting provision of the State oil spill contingency plan adopted pursuant to Article 3.5 (commencing with Section 8574.1) of Chapter 7 of Division 1 of Title 2 of the Government Code. This provision does not require reporting of any discharge of less than 42 gallons unless the discharge is also required to be reported pursuant to Section 311 of the Clean Water Act or the discharge is in violation of a prohibition in the applicable Water Quality Control Plan. (California Water Code, Section 13272)

13. INVESTIGATIONS AND INSPECTIONS

The discharger shall allow the Regional Board, or an authorized representative upon the presentation of credentials and other documents as may be required by law, to:

- (a) Enter upon the discharger's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of this Order;
- (b) Have access to and copy, at reasonable times, any records that must be kept under the conditions of this Order;
- (c) Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under this Order; and
- (d) Sample or monitor at reasonable times, for the purposes of assuring compliance with this Order, or as otherwise authorized by the California Water Code, any substances or parameters at any location. (California Water Code, Section 13267)
- (e) Except for material determined to be confidential in accordance with applicable law, all reports prepared in accordance with the terms of this Order shall be available for public inspection at the office of the Los Angeles Water Board. Data on waste discharges, water quality, geology, and hydrogeology shall not be considered confidential.

14. MONITORING PROGRAM AND DEVICES

The discharger shall furnish, under penalty of perjury, technical monitoring program reports; such reports shall be submitted in accordance with specifications prepared by the Executive Officer, which specifications are subject to periodic revisions as may be warranted. (California Water Code, Section 13267)

All monitoring instruments and devices used by the discharger to fulfill the prescribed monitoring program shall be properly maintained and calibrated as necessary to ensure their continued accuracy. All flow measurement devices shall be calibrated at least once per year, or more frequently, to ensure continued accuracy of the devices. Annually, the discharger shall submit to the Executive Office a written statement, signed by a registered professional engineer, certifying that all flow measurement devices have been calibrated and will reliably achieve the accuracy required.

The analysis of any material required pursuant to Division 7 of the Water Code shall be performed by a laboratory that has accreditation or certification pursuant to Article 3 (commencing with Section 100825) of Chapter 4 of Part 1 of Division 101 of the Health and Safety Code. However, this requirement does not apply to field tests, such as test for color, odor, turbidity, pH, temperature, dissolved oxygen, conductivity, and disinfectant residual chlorine. (California Water Code, Section 13176). Unless otherwise permitted by the Regional Board Executive officer, all analyses shall be conducted at a laboratory certified for such analyses by the State Water Resources Control Board's Division of Drinking Water. All analyses shall be required to be conducted in accordance with the latest edition of "Guidelines Establishing Test Procedures for Analysis of Pollutants" (40 CFR Part 136) promulgated by the United States, Environmental Protection Agency (USEPA). (California Code of Regulation, Title 23, Section 2230)

The Quality Assurance-Quality Control Program must conform to the USEPA Guidelines "Laboratory Documentation Requirements for Data Validation", January 1990, USEPA Region 9) or procedures approved by the Los Angeles Regional Water Quality Control Board.

All quality assurance and quality control (QA/QC) analyses must be run on the same dates when samples were actually analyzed. All QA/QC data shall be reported, along with the sample results to which they apply, including the method, equipment, analytical detection and quantitation limits, the percent recovery, and explanation for any recovery that falls outside the QC limits, the results of equipment and method blanks, the results of spiked and surrogate samples, the frequency of quality control analysis, and the name and qualifications of the person(s) performing the analyses. Sample results shall be reported unadjusted for blank results or spike recoveries. In cases where contaminants are detected in QA/QC samples (e.g., field, trip, or lab blanks); the accompanying sample results shall be appropriately flagged.

The Discharger shall make all QA/QC data available for inspection by Regional Board staff and submit the QA/QC documentation with its respective quarterly report. Proper chain of custody procedures must be followed and a copy of that documentation shall be submitted with the quarterly report.

15. TREATMENT FAILURE

In an enforcement action, it shall not be a defense for the discharger that it would have been necessary to halt or to reduce the permitted activity in order to maintain compliance with this Order. Upon reduction, loss, or failure of the treatment facility, the discharger shall, to the extent necessary to maintain compliance with this Order, control production or all discharges, or both, until the facility is restored or an alternative method of treatment is provided. This provision applies, for example, when the primary source of power of the treatment facility fails, is reduced, or is lost. (California Water Code, Section 13263, subdivision (f).)

16. DISCHARGE TO NAVIGABLE WATERS

A person who discharges pollutants or proposes to discharge pollutants or proposes to discharge pollutants to the navigable waters of the United States within the jurisdiction of this state or a person who discharges dredged or fill material or proposes to discharge dredged or fill material into the navigable waters of the United States within the jurisdiction of this state shall file a report of waste discharge in compliance with the procedures set forth in Water Code section 13260. (California Water Code, Section 13376)

17. ENDANGERMENT TO HEALTH AND ENVIRONMENT

The discharger shall report any noncompliance which may endanger health or the environment. Any such information shall be provided verbally to the Executive Officer within 24 hours from the time the discharger becomes aware of the circumstances. A written submission shall also be provided within five days of the time the discharger becomes aware of the circumstances. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected; the anticipated time it is expected to continue and steps taken or planned to reduce, eliminate, and prevent recurrence of the noncompliance. The Executive officer, or an authorized representative, may waive the written report on a case-by-case basis if the oral report has been received within 24 hours. The following occurrence(s) must be reported to the Executive Office within 24 hours:

- (a) Any bypass from any portion of the treatment facility.
- (b) Any discharge of treated or untreated wastewater resulting from sewer line breaks, obstruction, surcharge or any other circumstances.
- (c) Any treatment plan upset which causes the effluent limitation of this Order to be exceeded. (California Water Code, Sections 13263 and 13267)

18. MAINTENANCE OF RECORDS

The discharger shall retain records of all monitoring information including all calibration and maintenance records, all original strip chart recordings for continuous monitoring instrumentation, copies off all reports required by this Order, and record of all data used to complete the application for this Order. Records shall be maintained for a minimum of three years from the date of the sample, measurement, report, or application. This period may be extended during the course of any unresolved litigation regarding this discharge or when requested by the Regional Board Executive Officer.

Records of monitoring information shall include:

- (a) The date, exact place, and time of sampling or measurement;
- (b) The individual(s) who performed the sampling or measurement;
- (c) The date(s) analyses were performed;
- (d) The individual(s) who performed the analyses;
- (e) The analytical techniques or method used; and
- (f) The results of such analyses.

19. (a) All application reports or information to be submitted to the Executive Office shall be signed and certified as follows:

- (1) For a corporation – by a principal executive officer or at least the level of vice president.
 - (2) For a partnership or sole proprietorship – by a general partner or the proprietor, respectively.
 - (3) For a municipality, state, federal, or other public agency – by either a principal executive officer or ranking elected official.
- (b) A duly authorized representative of a person designated in paragraph (a) of this provision may sign documents if:
- (1) The authorization is made in writing by a person described in paragraph (a) of this provision.
 - (2) The authorization specifies either an individual or position having responsibility for the overall operation of the regulated facility or activity; and

(3) The written authorization is submitted to the Executive Officer.

Any person signing a document under this Section shall make the following certification:

"I certify under penalty of law that I have personally examined and am familiar with the information submitted in this document and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment. [California Water Code Sections 13263, 13267, and 13268]"

20. OPERATOR CERTIFICATION

Supervisors and operators of municipal wastewater treatment plants and privately owned facilities regulated by the Public Utilities Commission, used in the treatment or reclamation of sewage and industrial waste shall possess a certificate of appropriate grade in accordance with California Code of Regulations, Title 23, section 3680. State Boards may accept experience in lieu of qualification training. (California Code of Regulations, Title, 23, Sections 3680 and 3680.2.) In lieu of a properly certified wastewater treatment plant operator, the State Board may approve use of a water treatment plant operator of appropriate grade certified by the State Department of Public Health where reclamation is involved. (California Code of Regulations, Title, 23, Section 3670.1, subdivision (b).)

ADDITIONAL PROVISIONS APPLICABLE TO PUBLICLY OWNED TREATMENT WORKS' ADEQUATE CAPACITY

- 21.** Whenever a regional board finds that a publicly owned wastewater treatment plant will reach capacity within four years, the board shall notify the discharger. Such notification shall inform the discharger that the regional board will consider adopting a time schedule order pursuant to Section 13300 of the Water Code or other enforcement order unless the discharger can demonstrate that adequate steps are being taken to address the capacity problem. The notification shall require the discharger to submit a technical report to the regional board within 120 days showing how flow volumes will be prevented from exceeding existing capacity or how capacity will be increased. A copy of such notification shall be sent to appropriate local elected officials, local permitting agencies and the press. The time for filing the required technical report may be extended by the regional board. An extension of 30 days may be granted by the executive officer. Longer extensions may be granted by the regional board itself. (California Code of Regulations, Title, 23, Section 2232.)

Attachment D – Monitoring for Priority Pollutants

Acenaphthene	Bis(2-chloroethoxy) methane
Acrolein	Methylene chloride
Acrylonitrile	Methyl chloride
Benzene	Methyl bromide
Benzidine	Bromoform
Carbon tetrachloride	Dichlorobromomethane
Chlorobenzene	Chlorodibromomethane
1,2,4-trichlorobenzene	Hexachlorobutadiene
Hexachlorobenzene	Hexachlorocyclopentadiene
1,2-dichloroethane	Isophorone
1,1,1-trichloroethane	Naphthalene
Hexachloroethane	Nitrobenzene
1,1-dichloroethane	2-nitrophenol
1,1,2-trichloroethane	4-nitrophenol
1,1,2,2-tetrachloroethane	2,4-dinitrophenol
Chloroethane	4,6-dinitro-o-cresol
Bis(2-chloroethyl) ether	N-nitrosodimethylamine
2-chloroethyl vinyl ethers	N-nitrosodiphenylamine
2-chloronaphthalene	N-nitrosodi-n-propylamine
2,4,6-trichlorophenol	Pentachlorophenol
Parachlorometa cresol	Phenol
Chloroform	Bis(2-ethylhexyl) phthalate
2-chlorophenol	Butyl benzyl phthalate
1,2-dichlorobenzene	Di-N-Butyl Phthalate 2
1,3-dichlorobenzene	Di-n-octyl phthalate
1,4-dichlorobenzene	Diethyl Phthalate
3,3-dichlorobenzidine	Dimethyl phthalate
1,1-dichloroethylene	Benzo(a) anthracene
1,2-trans-dichloroethylene	Benzo(a) pyrene
2,4-dichlorophenol	Benzo(b) fluoranthene
1,2-dichloropropane	Benzo(k) fluoranthene
1,3-dichloropropylene	Chrysene
2,4-dimethylphenol	Acenaphthylene
2,4-dinitrotoluene	Anthracene
2,6-dinitrotoluene	Benzo(ghi) perylene
1,2-diphenylhydrazine	Fluorene
Ethylbenzene	Phenanthrene
Fluoranthene	Dibenzo(,h) anthracene
4-chlorophenyl phenyl ether	Indeno (1,2,3-cd) pyrene
4-bromophenyl phenyl ether	Pyrene
Bis(2-chloroisopropyl) ether	Tetrachloroethylene

Toluene	PCB-1221 (Arochlor 1221)
Trichloroethylene	PCB-1232 (Arochlor 1232)
Vinyl chloride	PCB-1248 (Arochlor 1248)
Aldrin	PCB-1260 (Arochlor 1260)
Dieldrin	PCB-1016 (Arochlor 1016)
Chlordane	Toxaphene
4,4-DDT	Antimony
4,4-DDE	Arsenic
4,4-DDD	Asbestos
Alpha-endosulfan	Beryllium
Beta-endosulfan	Cadmium
Endosulfan sulfate	Chromium
Endrin	Copper
Endrin aldehyde	Cyanide, Total
Heptachlor	Lead
Heptachlor epoxide	Mercury
Alpha-BHC	Nickel
Beta-BHC	Selenium
Gamma-BHC	Silver
Delta-BHC	Thallium
PCB-1242 (Arochlor 1242)	Zinc
PCB-1254 (Arochlor 1254)	2,3,7,8-TCDD