

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

ORDER NO. 5-01-002

WASTE DISCHARGE REQUIREMENTS
FOR

TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND
TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

The California Regional Water Quality Control Board, Central Valley Region, (hereafter Board) finds that:

1. TA Operating Corporation, a Delaware corporation doing business as (dba) TravelCenters of America, operates a Wastewater Treatment Facility (WWTF) near Wheeler Ridge and adjacent to Interstate 5 in Kern County. Blue Beacon U.S. A., L.P., a Kansas corporation dba Blue Beacon of Wheeler Ridge (Blue Beacon) owns and operates a truck wash at the TravelCenters of America complex. Tejon Ranchcorp, a California corporation, owns the property and has leased its property to TA Operating Corporation and Blue Beacon U.S. A., L.P. TA Operating Corporation and Blue Beacon U.S.A., L.P. are considered the primary Dischargers and Tejon Ranchcorp a secondary Discharger. TA Operating Corporation and Blue Beacon are responsible for day-to-day operation of the WWTF and compliance with this Order. However, all three Dischargers are ultimately responsible for any condition of pollution and/or nuisance resulting from discharges at the complex. Throughout the rest of this Order, unless otherwise indicated, Discharger refers to TA Operating Corporation and Blue Beacon, collectively. On 12 August 1983, the Board adopted Waste Discharge Requirements (WDRs) Order No. 83-089 to regulate the WWTF. Order No. 83-089 does not reflect current operations at the complex and is not consistent with Board policies.
2. The WWTF is in Section 31, T11N, R19W, SBB&M, as shown in Attachment A, which is attached hereto and part of this Order by reference. The site lies within the Wheeler Ridge hydrologic area (No. 557.30), as depicted on interagency hydrologic maps prepared by the California Department of Water Resources in August 1986. Vineyards bound the WWTF to the north and east.
3. The TravelCenters of America complex (complex) consists of: a convenience store, gas station, laundry and shower facility, two restaurants, truck fueling station, maintenance shop, and a truck wash (Blue Beacon). The Blue Beacon truck wash is not owned or operated by TA Operating Corporation. The Blue Beacon truck wash is constructed on land owned by Tejon Ranchcorp, and under a 3 June 1983 agreement with Tejon Ranchcorp, TA Operating Corporation must accept wastewater from a third party, which now is the Blue Beacon. The WWTF treats about 25,000 gallons per day (gpd) of domestic wastewater and approximately 16,000 gpd of Blue Beacon wastewater at the complex. This discharge to the WWTF is referred to as Discharge 001. The

WASTE DISCHARGE REQUIREMENTS ORDER NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

-2 -

WWTF is designed to treat a peak flow of 70,000 gpd. A wastewater flow diagram is shown on Attachment B, which is attached hereto and part of this Order by reference.

4. The WWTF consists of a flow meter, a manual bar screen, a primary pond with aerators, a polishing pond to facilitate settling and biological degradation of wastes, and four evaporation/percolation ponds.
5. The complex has a storm water pond located east of Laval Road, and adjacent to the truck fueling station. The storm water pond receives all storm water run-off from the site. In addition, the storm water pond receives approximately 200 gallons per day of wash down water from the diesel islands, according to a supplemental report dated 9 August 2000. The discharge to the storm water pond is referred to as Discharge 002.
6. Federal Regulations for storm water discharges were promulgated by the United States Environmental Protection Agency (USEPA) on 16 November 1990 (Title 40 CFR Parts 122, 123, and 124). The regulations require specific categories of facilities that discharge storm water associated with industrial activity (storm water) to obtain NPDES permits and to implement Best Available Technology Economically Achievable (BAT) and Best Conventional Pollutant Control Technology (BCT) to reduce or eliminate industrial storm water pollution. The facility's Standard Industrial Classification (SIC) code of 5541 is an exempt category listed in the State Water Resources Control Board General Order No. 92-08-DWQ, and not required to obtain an NPDES general industrial storm water permit.
7. An inspection of the facility in February 1996 found the conductivity (electrical conductivity at 25°C, also "EC") of the WWTF's effluent at approximately 5,000 µmhos/cm. Stains of black oil on the sides of the storm water pond and oil sheen were present on the water surface. Later, the Kern County Environmental Health Department collected soil samples beneath the storm water pond that revealed high levels of Total Petroleum Hydrocarbon (TPH) diesel, TPH gasoline, and a detectable amount of lead. The Board issued a notice of violation on 22 April 1996, and the Discharger was asked to address the conductivity issue, and to delineate the lateral and vertical extent of contamination in the storm water pond. In response to the request, Agra Earth and Environmental, on behalf of the Discharger, submitted a technical report dated 14 May 1997. The report indicated significant levels of heavy metals, TPH gasoline, BTEX (benzene, toluene, ethyl benzene, xylene), and TPH diesel constituents in the soil and water samples collected during the investigation. All of the pond water was removed and several tons of sediments were removed and disposed of off-site, according to a *Soils Sampling Report* submitted by BP Oil Company dated 12 December 1999. The storm water pond no longer receives any wastewater from the truck maintenance shop. All of the floor and pit drains in the shop have been closed.

WASTE DISCHARGE REQUIREMENTS ORDER NO. 5-01-002
 TA OPERATING CORPORATION
 BLUE BEACON U.S.A., L.P.
 AND TEJON RANCHCORP
 TRAVELCENTERS OF AMERICA COMPLEX
 KERN COUNTY

-3-

8. An inspection of the WWTF on 10 April 2000 found the WWTF's effluent EC in excess of 4000 $\mu\text{mhos/cm}$, with a BOD_5 of 42 mg/l and total suspended solids concentration of 79 mg/l. A Notice of Violation dated 6 June 2000 was issued to the Discharger for violating Discharge Prohibition A.2 and Discharge Specification Nos. B.2 and B.4 of WDRs Order No. 83-089.
9. The Discharger submitted a technical report prepared by its consultant, URS Greiner Woodward Clyde, dated 1 March 1999. The technical report outlines a list of probable causes for increased conductivity and a list of corrective actions. The report states that effluent discharge from the Blue Beacon comprises approximately 45% of the total wastewater flow to the WWTF, and is the major cause of increased effluent conductivity. According to the report, Blue Beacon contributes approximately 60% of the ions (cations and anions) to the elevated EC readings. It uses an acid solution to remove solids and residues from trucks entering the truck wash. The report also includes supplemental information on waste characterization, and shows the following constituents present in the waste streams:

<u>Sampling Location</u>	<u>Constituent</u>	<u>Sample Type</u>	<u>Units</u>	<u>Highest⁴</u>	<u>Lowest⁴</u>	<u>Average</u>
Aeration Pond ¹	EC ²	24-hr composite ⁴	$\mu\text{mhos/cm}$	14,480	1,508	3193 ⁵
	Total Sodium	Grab	mg/l	4,460	434	*
	Chloride	Grab	mg/l	8,900	104	*
	TSS	Grab	mg/l	565	375	*
Blue Beacon ³	EC	24-hr composite	$\mu\text{mhos/cm}$	15,950	1460	5036 ⁵
	Total Sodium	Grab	mg/l	12,870	552	*
	Chloride	Grab	mg/l	19,600	130	*
	TSS	Grab	mg/l	590	312	*

¹ Aeration pond samples were collected from the weir box prior to discharge to the pond.

² Conductivity at 25° C.

³ Blue Beacon (truck wash) effluent samples were collected from a weir box downstream of the discharge.

⁴ Based on 24-hour composite sampling conducted on 12/18/97 through 12/21/97.

⁵ Based on grab samples collected on 12/18/97 through 12/21/97.

⁶ Inconclusive data to calculate an accurate average.

WASTE DISCHARGE REQUIREMENTS ORDER NO. 5-01-002
 TA OPERATING CORPORATION
 BLUE BEACON U.S.A., L.P.
 AND TEJON RANCH CORP
 TRAVELCENTERS OF AMERICA COMPLEX
 KERN COUNTY

-4 -

10. The Discharger submitted a technical report prepared by its consultant, Shepard Engineering Inc., dated 10 August 2000. The report states that the URS Greiner Woodward Clyde report dated 1 March 1999 incorrectly identified Blue Beacon Truck Wash as the main source contributing to an increased EC of the wastewater. The report recommends that elimination of the brine waste stream from water softener regeneration units as a technically and economically feasible method for reducing the wastewater EC. In addition, the report shows that two water softening units at the complex use approximately 761 lbs/day of salt that contributes an estimated 2088 mg/l of sodium chloride concentration in the effluent. This increase in sodium chloride concentration (i.e., 2088 mg/l) is estimated to contribute to an EC of 4100 μ mhos/cm. The report shows the following discharge characteristics:

<u>Sample Location</u>	<u>Constituent</u>	<u>Units</u>	<u>Average¹</u>
WWTF Influent	BOD	mg/l	180
Polishing Pond Effluent	BOD	mg/l	40
Polishing Pond Effluent	EC ²	μ mhos/cm	5300
Polishing Pond Effluent	Calcium	mg/l	140
Polishing Pond Effluent	Magnesium	mg/l	67
Polishing Pond Effluent	Sodium	mg/l	910
Polishing Pond Effluent	Chloride	mg/l	890
Polishing Pond Effluent	Nitrate as N	mg/l	<3.5
Polishing Pond Effluent	Total Dissolved Solids	mg/l	3066
Polishing Pond Effluent	Total Hardness as CaCO ₃	mg/l	633
Polishing Pond Effluent	pH	pH Units	7.47

¹ From Discharger's supplemental report *Evaluation of Wastewater Management Alternatives Travel Centers of America Truck Stop, Table 3-2*, 10 August 2000.

² Conductivity at 25° C.

11. The Basin Plan designates beneficial uses, establishes water quality objectives, and contains implementation plans and policies, for protecting waters of the basin. This includes plans and policies adopted by the State Water Resources Control Board and incorporated by reference.

WASTE DISCHARGE REQUIREMENTS ORDER NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

-5 -

12. All of the storm water runoff at the facility is captured via pipelines and diverted to a storm water pond. However, if storm water runoff at the facility was not captured it would most likely reach Tecuya Creek. Tecuya Creek is a valley floor water, as identified in the Basin Plan. As such, the designated beneficial uses include: agricultural, industrial service, and industrial process supply; water contact and non-contact water recreation; warm water habitat; wildlife habitat; preservation of rare and endangered species; and groundwater recharge. In reality, because Tecuya Creek flows only during and shortly after storm events, which are infrequent in this arid area, it does not support fish life. The only realized beneficial uses of Tecuya Creek are wildlife habitat, preservation of rare and endangered species, and groundwater recharge.
13. The average annual rainfall in the area is about 6 inches and annual average pan evaporation rate is about 52 inches.
14. Water supply is by an on-site production well that draws groundwater from approximately 700 feet below ground surface. The beneficial uses of groundwater are domestic, industrial, and agricultural supply. The quality of the groundwater is characterized below:

<u>Constituent</u>	<u>Units</u>	<u>Onsite Well¹</u>
EC	µmhos/cm	2000
Chloride	mg/l	51
Nitrate	mg/l	2.8
Sodium	mg/l	170
Sulfate	mg/l	820
Calcium	mg/l	150
Magnesium	mg/l	56
Total Hardness (as CaCO ₃)	mg/l	600

¹ Based on June 2000 sampling performed by the Discharger and included in the report dated 9 August 2000.

15. The discharge authorized herein is exempt from the requirements of Title 27. The exemption, pursuant to Section 20090(b), is based on the following:
- a. The Board is issuing these waste discharge requirements,

WASTE DISCHARGE REQUIREMENTS ORDER NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

-6-

- b. These waste discharge requirements implement the Basin Plan and allow discharge only in accordance with the Basin Plan, and
 - c. The wastewater is not hazardous waste and need not be managed according to Title 22 CCR, Division 4.5, Chapter 11, as a hazardous waste.
16. The Basin Plan states in part, that discharges to surface waters and evaporation of reclaimable wastewater will not be acceptable permanent disposal methods where opportunity exists to replace an existing use or proposed use of fresh water with reclaimed water. The area's existing land use includes agricultural operations specifically grapes and citrus crops, that are not appropriate for use of reclaimed municipal wastewater. Since 1983, the ongoing small volume discharge to evaporation/percolation ponds at the facility has not shown any evidence of groundwater degradation. In addition, there appear to be no economically feasible opportunities for wastewater reclamation.
17. The Board has considered antidegradation pursuant to State Board Resolution No. 68-16 and finds that the current discharge is inconsistent with those provisions, and could cause an increase in groundwater constituents, specifically conductivity above that of the allowable limitation prescribed in the Basin Plan. Degradation of groundwater by this discharge is not consistent with maximum benefit to the people of the State. Therefore, effluent limitations are necessary for the discharge to be in accordance with the Basin Plan requirements. The discharge as permitted herein is consistent with the antidegradation provisions of Resolution No. 68-16. The discharge as permitted will not unreasonably affect present and anticipated beneficial use of underlying groundwater and will not result in water quality less than that described in the Basin Plan. However, to assure this the Discharger must improve both treatment and control for the subject wastewater so that the discharge does not create a condition of pollution or nuisance and that the highest water quality will be maintained.
18. The facility described in Finding No. 3 needs to provide best practicable treatment and control (BPTC) for the subject wastewater to assure that the highest water quality will be maintained and that the discharge never creates a condition of pollution or of nuisance. The continuous discharge of high EC wastewater to unlined ponds has a potential to cause degradation of groundwater. Therefore, blended wastewater discharge to unlined ponds requires a mitigation measure to protect the underlying groundwater at the complex. The Discharger has agreed to mitigate the significant impact by implementing a corrective action within a reasonable time specified by the Board in a proposed Cease and Desist Order.

TA OPERATING CORPORATION

BLUE BEACON U.S.A., L.P.

AND TEJON RANCHCORP

TRAVELCENTERS OF AMERICA COMPLEX

KERN COUNTY

19. Pursuant to California Water Code section 13263(g) discharge is a privilege, not a right and issuance of this Order does not create a vested right to continue the discharge. Failure to provide the level of treatment and control required to preclude conditions that threaten pollution or nuisance, and maintain the highest quality groundwater will be sufficient reason to reclassify the waste as designated and modify this Order, or revoke the Order and prohibit further discharge. It remains the responsibility of the Discharger to assure that its waste loading practices do not degrade groundwater.
20. The action to update waste discharge requirements for the existing land discharge is exempt from the provisions of CEQA in accordance with Title 14, California Code of Regulations (CCR), Section 15301.
21. The Board has notified the Discharger and interested agencies and persons of its intent to update waste discharge requirements for this discharge, and has provided them with an opportunity for a public hearing, and an opportunity to submit their written views and recommendations.
22. The Board, in a public meeting, heard and considered all comments pertaining to the discharge.

IT IS HEREBY ORDERED that Order No. 83-089 is rescinded and that TA Operating Corporation, Blue Beacon U.S.A., L.P. and Tejon Ranchcorp, their agents, successors, and assigns, in order to meet the provisions contained in Division 7 of the California Water Code and regulations adopted there under, shall comply with the following at the complex:

A. Discharge Prohibitions

1. Discharge of waste to surface waters or surface water drainage courses is prohibited.
2. Bypass or overflow of untreated or partially treated waste (Discharge 001 or Discharge 002) is prohibited, except as allowed in Provision E.2 of Standard Provisions and Reporting requirements.
3. Discharge of waste classified as 'hazardous' as defined in Section 2521 (a) of Title 23, CCR, Section 2510, et seq., or 'designated', as defined in Section 13173 of the California Water Code, is prohibited.

B. Discharge Specifications (Discharge 001)

1. The monthly average discharge flow to the ponds shall not exceed 70,000 gpd.

WASTE DISCHARGE REQUIREMENTS ORDER NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

-8 -

2. Objectionable odors originating at this facility shall not be perceivable beyond the limits of the wastewater treatment and disposal areas.
3. As a means of discerning compliance with Discharge Specification No. B.2, the dissolved oxygen content in the upper zone (2- feet) of wastewater in ponds shall not be less than 1.0 mg/l.
4. Discharge to ponds shall not exceed the following limits:

<u>Constituent</u>	<u>Units</u>	<u>Daily Maximum²</u>	<u>Monthly Average²</u>
BOD ₅ ¹	mg/l	140	70
Total Suspended Solids	mg/l	140	70

¹ Five-day, 20°C biochemical oxygen demand.

² To be determined after settling and biological degradation of waste (i.e., after aeration and polishing ponds as shown in Attachment B).

5. The WWTF shall be designed, constructed, operated, and maintained to prevent inundation or washout due to floods with a 100-year return frequency.
6. The maximum conductivity of the discharge shall not exceed the average EC of the source water plus 500 µmhos/cm. When the source water is from more than one source, its EC shall be determined from the weighted average of all sources.
7. Ponds should not have a pH less than 6.5 or greater than 8.5.
8. Ponds shall be managed to prevent breeding of mosquitoes. In particular:
 - a. An erosion control program should assure that small coves and irregularities are not created around the perimeter of the water surface.
 - b. Weeds shall be minimized through control of water depth, harvesting, or herbicides.
 - c. Dead algae, vegetation, and debris shall not accumulate on the water surface.
9. Public contact with wastewater shall be precluded through such means as fences and signs, or acceptable alternatives.

WASTE DISCHARGE REQUIREMENTS ORDER NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

-9 -

10. The ponds shall have sufficient capacity to accommodate allowable effluent flow and design seasonal precipitation and ancillary inflow and infiltration. Design seasonal precipitation shall be based on total annual precipitation using a return period of 100 years, distributed monthly in accordance with historical rainfall patterns. Freeboard shall never be less than two feet (measured vertically to the lowest point of potential overflow).
11. Disposal of wastewater shall not occur within 100-feet of any domestic well or within 50-feet of any irrigation well.

C. Discharge Specifications (Discharge 002)

1. The Discharge shall not exceed a daily maximum oil and grease limitation of 35 mg/l.

D. Sludge Disposal

1. Collected screenings, sludges, and other solids removed from liquid wastes shall be disposed of in a manner approved by the Executive Officer and consistent with *Consolidated Regulations for Treatment, Storage, Processing, or Disposal of Solid Waste*, as set forth in Title 27, CCR, Division 2, Subdivision 1, Section 20005, et seq.
2. Any proposed change in previously approved sludge use or disposal practice shall be reported to the Executive Officer **at least 90 days in advance** of the change.

E. Groundwater Limitations

The discharge, in combination with other waste sources, shall not cause underlying groundwater to contain waste constituents in concentrations statistically greater than background water quality, except for inorganic waste constituents measured by EC. For waste constituents measurable by EC, the incremental increase in EC over the most recent five-year period shall not exceed 30 $\mu\text{mhos/cm}$.

F. Provisions

1. The Discharger shall comply with Monitoring and Reporting Program No. 5-01-002, which is part of this Order, and any revisions thereto as ordered by the Executive Officer.

WASTE DISCHARGE REQUIREMENTS ORDER NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

-10-

2. The Discharger shall comply with *Standard Provisions and Reporting Requirements for Waste Discharge Requirements*, dated 1 March 1991, which are attached hereto and by reference a part of this Order. This attachment and its individual paragraphs are commonly referenced as *Standard Provision(s)*.
3. The Discharger must comply with all conditions of this Order, including timely submittal of technical and monitoring reports as directed by the Executive Officer. Violations may result in enforcement action, including Regional Board or court orders requiring corrective action or imposing civil monetary liability, or in revision or rescission of this Order.
4. The Discharger shall employ BPTC, including proper operation and maintenance, to comply with this Order.
5. The Discharger and Tejon Ranchcorp are ultimately responsible for the effectiveness of their treatment and control measures in assuring compliance with groundwater limitations, and liable for remediating any impact on groundwater not authorized herein. Failure to properly operate and maintain BPTC, or failure of such measures to perform effectively, shall be grounds to rescind this Order, reclassify the waste as designated, and require compliance with Title 27 prescribed waste containment standards, or to initiate enforcement, as appropriate.
6. In the event of any change in control or ownership of land, or waste discharge facilities described herein, the Discharger and Tejon Ranchcorp shall notify the succeeding owner or operator of the existence of this Order by letter, a copy of which shall be immediately forwarded to this office.

To assume operation under this Order, the succeeding owner or operator must apply in writing to the Executive Officer, requesting transfer of the Order. The request must contain the requesting entity's full legal name, the state of incorporation if a corporation, the name and address, and telephone number of persons responsible for contact with the Board, and a statement. The statement shall comply with the signatory paragraph of Standard Provision B.3 and state that the new owner or operator assumes full responsibility for compliance with this Order. Failure to submit the request shall be considered a discharge without requirements, a violation of the California Water Code. Transfer shall be approved or disapproved by the Executive Officer.


7. A copy of this Order shall be kept at the WWTF for reference by operating personnel. Key operating personnel shall be familiar with its contents.
8. The Board will review this Order periodically and will revise requirements when necessary:

WASTE DISCHARGE REQUIREMENTS ORDER NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

-11-

8. The Board will review this Order periodically and will revise requirements when necessary.

I, GARY M. CARLTON, Executive officer, do hereby certify the foregoing is a full, true, and correct copy of an Order adopted by the California Regional Water Quality Control Board, Central Valley Region, on 26 January 2001.

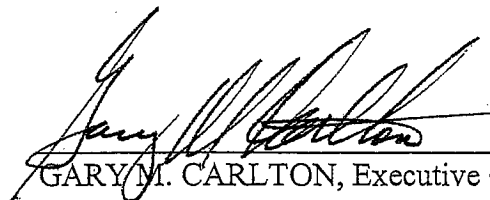

GARY M. CARLTON, Executive Officer

JSK:jsk:fmc:01/26/01

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

MONITORING AND REPORTING PROGRAM NO. 5-01-002

FOR

TA OPERATING CORPORATION

BLUE BEACON U.S.A., L.P.

AND

TEJON RANCHCORP

TRAVELCENTERS OF AMERICA COMPLEX

KERN COUNTY

INFLUENT MONITORING (DISCHARGE 001)

Influent samples shall be collected prior to discharge to the aeration pond (as shown in Attachment B) and approximately the same time as effluent samples. Influent monitoring shall include the following:

<u>Constituent</u>	<u>Units</u>	<u>Type</u>	<u>Frequency</u>
Flow ¹	mgd	Metered	Continuously
BOD ₅ ²	mg/l	24-hour composite	2/Month
Total Suspended Solids (TSS)	mg/l	24-hour composite	2/Month

¹ The flow shall be continuously measured at the headworks of the facility.

² Five day, 20° Celsius biochemical oxygen demand. If the constituent monitoring consistently shows no significant variation in magnitude, this monitoring frequency may be modified upon the written approval of the Executive Officer.

EFFLUENT MONITORING (DISCHARGE 001)

Effluent samples shall be collected after treatment but prior to discharge to the percolation ponds (as shown in Attachment B). Effluent samples shall be representative of the volume and nature of the discharge. Time of collection of sample shall be recorded. Effluent monitoring shall include the following:

<u>Constituent</u>	<u>Units</u>	<u>Type</u>	<u>Frequency</u> ³
BOD ₅	mg/l	Grab	2/Month
TSS	mg/l	Grab	2/Month
pH	pH Units	Grab	2/Month
EC ²	µmhos/cm	Grab	2/Month

MONITORING AND REPORTING PROGRAM NO. 5-01-002
 TA OPERATING CORPORATION
 BLUE BEACON U.S.A., L.P.
 AND TEJON RANCH CORP
 TRAVELCENTERS OF AMERICA COMPLEX
 KERN COUNTY

-2-

<u>Constituent</u>	<u>Units</u>	<u>Type</u>	<u>Frequency</u> ³
Total Dissolved Solids (TDS)	mg/l	Grab	2/Month
Nitrate-Nitrogen	mg/l	Grab	Quarterly ⁴
Ammonia-Nitrogen	mg/l	Grab	Quarterly ⁴
Total Kjeldahl Nitrogen	mg/l	Grab	Quarterly ⁴
Total Nitrogen	mg/l	Calculated	Quarterly ⁴
Mineral Analysis ⁵	mg/l	Grab	Quarterly ⁴

¹ The flow shall be continuously measured prior to discharge into the ponds.

² Electrical conductance at 25° C, also "EC".

³ If results of monitoring indicate that a pollutant appears to violate effluent limitations, but monitoring frequency is not sufficient to validate violation, the sampling frequency shall be increased to confirm the magnitude and duration of violation.

⁴ January, April, July, and October.

⁵ Mineral Analysis shall at least include pH, TDS, EC, alkalinity, calcium, chloride, copper, iron, magnesium, sodium, sulfate, zinc, and total hardness.

POND MONITORING (DISCHARGE 001)

<u>Constituent</u>	<u>Units</u>	<u>Type</u>	<u>Frequency</u> ¹
Freeboard	feet	Observation	Weekly
Dissolved Oxygen ¹	mg/l	Grab	Weekly

¹ Samples shall be collected at a depth of one foot from each pond, opposite of the inlet, and analyzed for dissolved oxygen. Samples shall be collected between 0800 and 0900 hours.

Permanent markers shall be placed in the pond with calibration indicating the water level at design capacity and available operational freeboard. In addition, the Discharger shall inspect the condition of the ponds once per week and write visual observations in a bound logbook. Notations shall include observations of whether weeds are developing in the water or along the bank, and their location; whether dead algae, vegetation, scum, or debris are accumulating on the water surface; whether burrowing animals or insects are present; and the color of the ponds. A copy of the entries made in the log during each month shall be submitted along with the monthly monitoring report. Where the Operation and Maintenance manual indicates remedial action is necessary, the Discharger shall briefly explain in the transmittal remedial action been taken or planned.

TA OPERATING CORPORATION
 BLUE BEACON U.S.A., L.P.
 AND TEJON RANCHCORP
 TRAVELCENTERS OF AMERICA COMPLEX
 KERN COUNTY

STORM WATER POND MONITORING (DISCHARGE 002)

The samples shall be representative of the volume and nature of the discharge. Time of collection of a grab sample shall be recorded. Samples shall be collected after treatment but prior to discharge to the pond. Discharge 002 monitoring shall include the following:

<u>Constituent</u>	<u>Units</u>	<u>Type</u>	<u>Frequency</u>
TDS	mg/l	Grab	Quarterly
EC	µmhos/cm	Grab	Quarterly
pH	pH units	Grab	Quarterly
TPH (diesel) ¹	ppb	Grab	Quarterly
TPH (gasoline) ¹	ppb	Grab	Quarterly
BTEX ²	ppb	Grab	Quarterly
MTBE ²	ppb	Grab	Quarterly
Oil and Grease	mg/l	Grab	2/Month

¹ TPH = Total Petroleum Hydrocarbons

² Should monitoring consistently show that the constituent does not have a reasonable potential to cause degradation of natural resources, or pose any significant threat to potential receptors such as humans and water supply well(s), this monitoring requirement may be discontinued upon the written approval of the Executive Officer. Monitoring frequency of MTBE (methyl-tertiary-butyl-ether) shall be terminated, if the constituent is found non-detect in three consecutive sampling periods, and shall be tested annually thereafter.

WATER SUPPLY MONITORING

A sampling station shall be established where a representative sample of the water supply can be obtained. Water supply monitoring shall include at least the following:

<u>Constituent¹</u>	<u>Units</u>	<u>Type</u>	<u>Frequency</u>
Mineral Analysis	mg/l	Grab	Quarterly
Nitrate-Nitrogen	mg/l	Grab	Quarterly

¹ If the source water is from more than one source, the constituent shall be reported for each source and as a weighted average and include copies of supporting calculations.

SLUDGE MONITORING

A composite sample of sludge shall be collected when sludge is removed from ponds for off-site disposal and shall be tested for the following metals:

Arsenic	Copper	Zinc	Chromium	Selenium
Cadmium	Lead	Nickel	Mercury	

Sampling records shall be maintained for a minimum of five years. A log shall be kept of sludge quantities generated and of handling and disposal activities.

REPORTING

Daily, weekly, biweekly, and monthly monitoring data shall be reported in monthly monitoring reports. Monthly and Quarterly monitoring reports shall be submitted to the Board by the 1st day of the second month following sample collection. Annual monitoring reports shall be submitted by 1 February of each year.

In reporting the monitoring data, the Discharger shall arrange the data in tabular form so that the date, the constituents and the constituent values are readily discernible. The data shall be summarized in such a manner that illustrates clearly whether the Discharge complies with waste discharge requirements.

If the Discharger monitors any pollutant at the locations designated herein more frequently than required by this Order, the results of such monitoring shall be included in the discharge monitoring report. The Discharger may also be requested to submit an annual report to the Board with tabular and graphical summaries of the monitoring data obtained during the previous year. Any such request shall be made in writing. The report shall discuss the corrective actions taken and planned to bring the discharge into full compliance with the waste discharge requirements.

By 1 February of each year, the Discharger shall submit a written report to the Executive Officer containing the following:

- a. The names and general responsibilities of all persons in charge of wastewater treatment and disposal.
- b. The names and telephone numbers of persons to contact regarding wastewater disposal for emergency and routine situations.
- c. A statement certifying when the flow meter and other monitoring instruments and devices were last calibrated, including identification of who performed the calibration (Standard Provision C.4).

MONITORING AND REPORTING PROGRAM NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY


-5-

- d. A statement certifying whether the current operation and maintenance manual, and contingency plan, reflect the wastewater treatment plant as currently constructed and operated, and the dates when these documents were last revised and last reviewed for adequacy.
- e. A description of sludge disposal methods, including the following information related to the disposal methods used at the WWTF. If more than one method is used, include the percentage of annual sludge production disposed by each method. The total quantity of sludge disposed of during the previous year and ultimate disposal site(s).

All reports submitted in response to this Order shall comply with the signatory requirements in Standard Provision B.3.

The Discharger shall implement the above monitoring program on the first day of the month following adoption of this Order.


Ordered by:

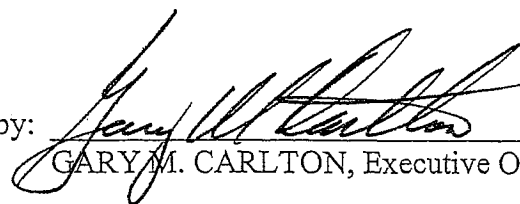
GARY M. CARLTON, Executive Officer

26 January 2001

(Date)

JSK:fmc:01/26/01

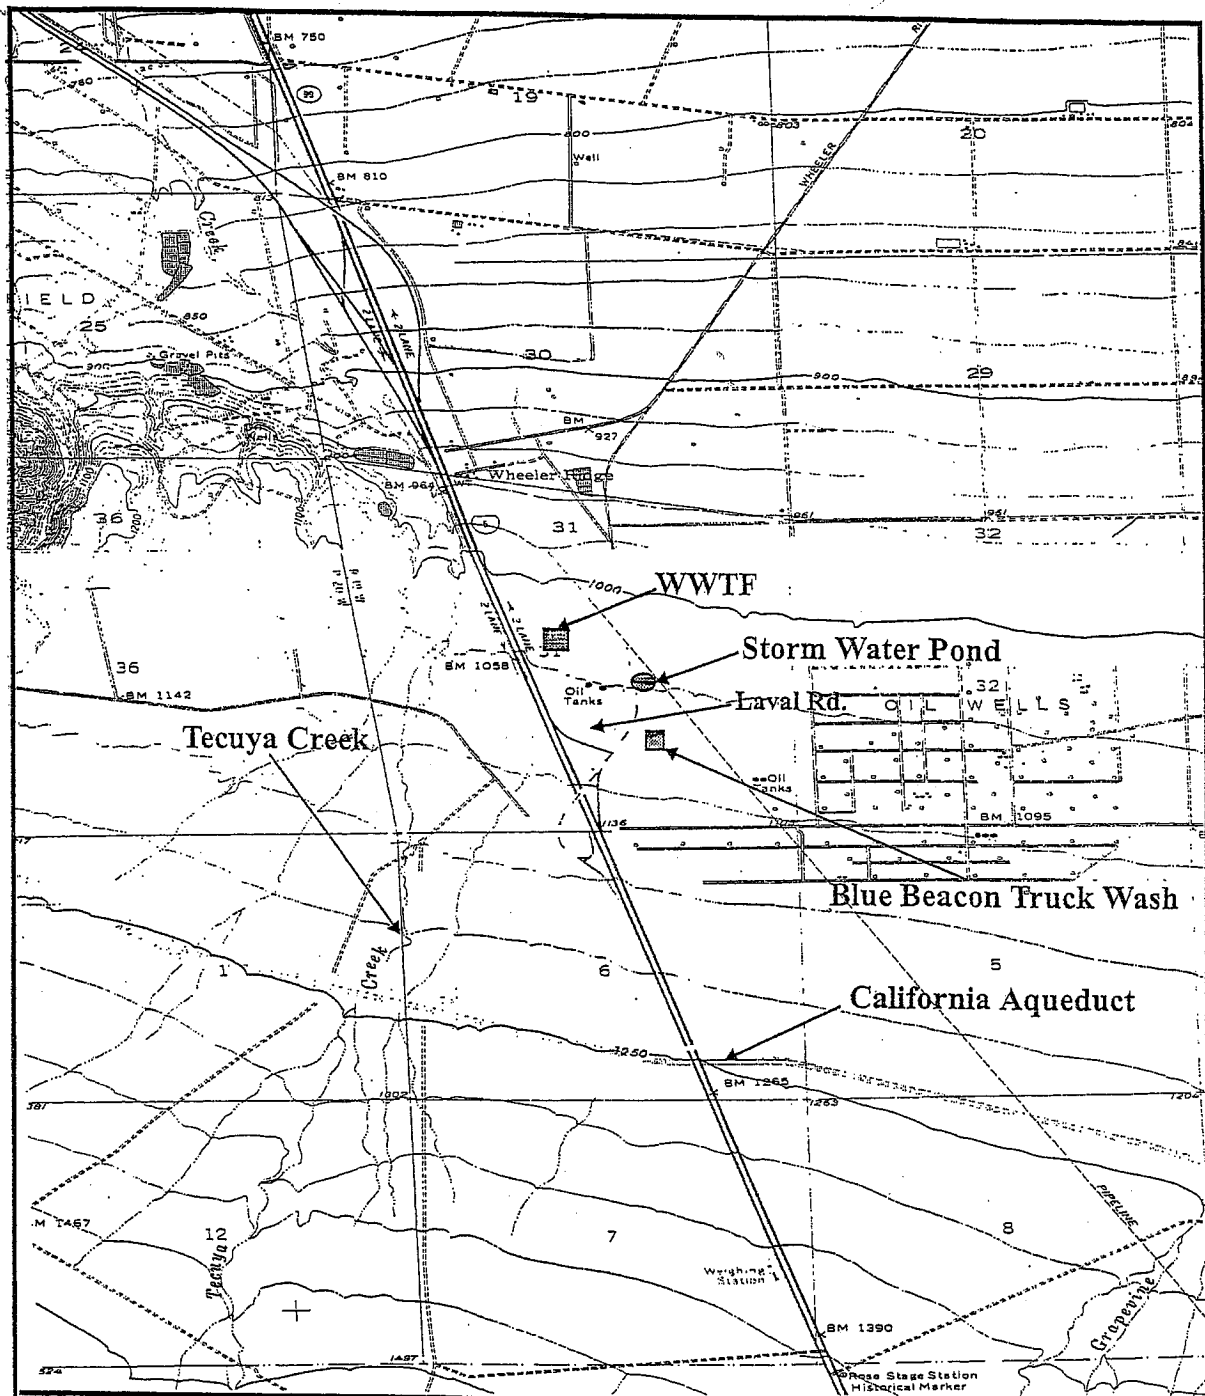

ATTACHMENT A

Vicinity Map

Order Number 5-01-002

TA OPERATING CORPORATION


BLUE BEACON U.S.A., L.P.

AND


TEJON RANCHCORP

TRAVELCENTERS OF AMERICA COMPLEX

KERN COUNTY



Section 31, T11N, R19W, SBB&M
Tejon Hills, 7.5 Minute USGS Quadrangle

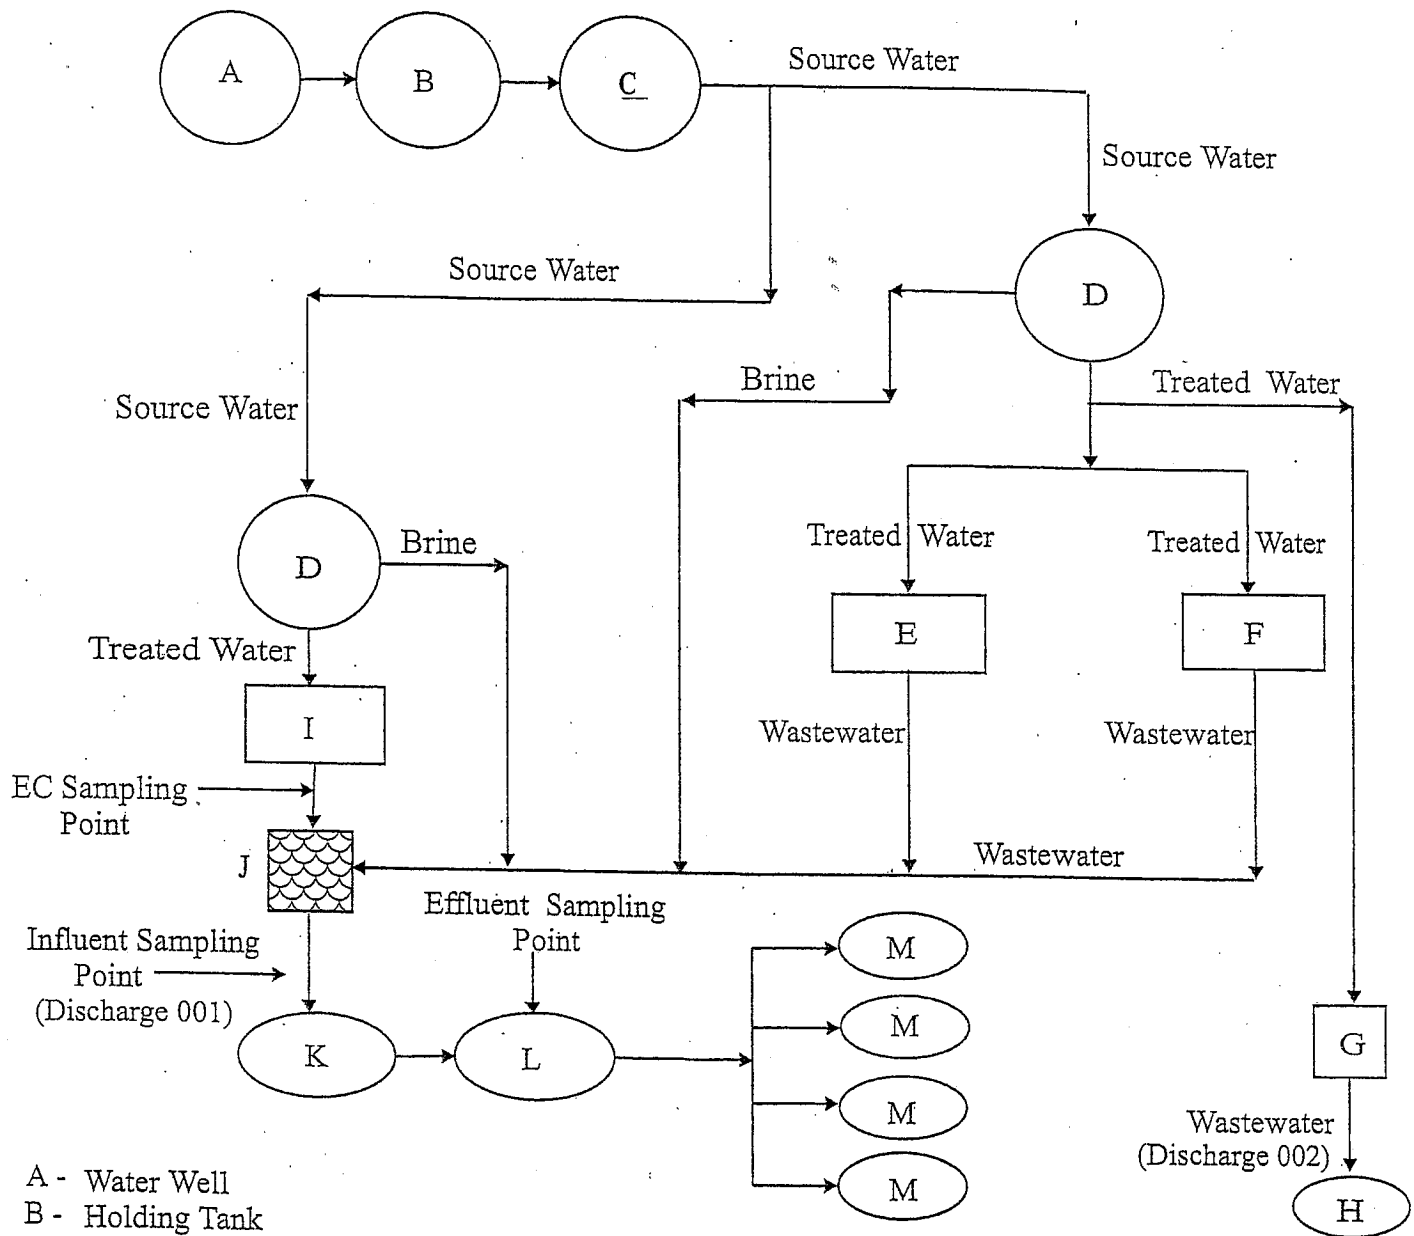

- A - Water Well
- B - Holding Tank
- C - Pneumatic Pressure Tanks
- D - Water Softening Units
- E - Convenience Store
- F - Restaurants
- G - Maintenance Building
- H - Storm Water Pond
- I - Blue Beacon Truckwash
- J - Bar Screen and a Flow meter
- K - Aeration Pond
- L - Polishing Pond
- M - Decanting/Percolation Pond

ATTACHMENT B

Wastewater Flow Diagram
Order Number 5-01-002

TA OPERATING CORPORATION
BLUE BEACON U.S.A. L.P.
AND
TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY



ATTACHMENT C

Order No. 5-01-002

TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP

TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

INFORMATION SHEET

ORDER NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

SITE SETTING

TA Operating Corporation, doing business as (dba) TravelCenters of America, operates a wastewater treatment facility (WWTF) near Wheeler Ridge, and adjacent to Interstate 5 on property owned by Tejon Ranchcorp. Blue Beacon U.S.A., L.P., dba Blue Beacon of Wheeler Ridge (Blue Beacon) owns and operates a truck wash at the TravelCenters of America complex. Tejon Ranchcorp owns the property where the complex is situated. The site lies within the Arvin-Wheeler Ridge hydrologic area. TA Operating Corporation and Blue Beacon U.S.A., L.P. are considered the primary Discharger and Tejon Ranchcorp a secondary Discharger. Currently, the WWTF is regulated by Waste Discharge Requirements Order No. 83-089. Order No. 83-089 does not reflect current operations at the complex and lacks effluent discharge limitations (i.e., BOD, TSS, conductivity, etc.) specified in the Basin Plan.

The WWTF treats about 25,000 gallons per day (gpd) of domestic wastewater and 16,000 gpd of truck wash (Blue Beacon) wastewater generated at the complex. This discharge is referred to as Discharge 001 in this Order. Approximately 200 gpd of wash down water from the diesel islands passes through an oil/water separator unit and then flows into an unlined storm water pond. The discharge to the storm water pond is referred to as Discharge 002.

EFFLUENT LIMITS

The proposed Order prescribes effluent limits for flow, EC, oil and grease, BOD₅, TSS, and pH. The EC and pH limits are based on the Basin Plan and the effluent limit for oil and grease is based upon Best Professional Judgment. The aforementioned effluent limits in this Order reflect performance consistent with similar permitted operations. The flow limit is set at the design flow of 70,000 gpd to ensure satisfactory WWTF performance (i.e., at the design flow, the desired wastewater treatment level should be achieved) without revisiting these permit conditions. The current Order (No. 83-089) excludes BOD₅ and total suspended solids (TSS) effluent limitations for the subject discharge. The proposed Order prescribes BOD₅ and TSS effluent limitations. The WWTF provides advanced primary treatment and the effluent limitations for BOD₅ and TSS are derived from the Basin Plan.

DISCHARGE 001 MONITORING

The proposed Order prescribes influent monitoring of flow, TSS, and BOD₅, and effluent monitoring of flow, BOD₅, TSS, pH, EC, general minerals, nitrate-nitrogen, ammonia-nitrogen, and total kjeldahl nitrogen for Discharge 001. The effluent monitoring of flow, BOD₅, TSS, pH, and EC are necessary to determine compliance with Discharge Specifications B.1, B.4, B.6, and B.7. Influent and effluent monitoring of the remaining listed constituents are necessary because these constituents are present in the discharge and have a potential to degrade the underlying groundwater.

INFORMATION SHEET ORDER NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCHCORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

-2-

Sodium, calcium, chloride, magnesium, and TDS concentrations in the discharge are high. The proposed Order requires monitoring of these constituents to determine their concentration in the discharge. Because they are proportional to EC, the EC limit prescribed in the proposed Order will limit the concentrations of these constituents in the discharge.

DISCHARGE 002 MONITORING

The proposed Order prescribes effluent monitoring of TDS, EC, pH, TPH (Total Petroleum Hydrocarbon) diesel, TPH gasoline, BTEX (benzene, toluene, ethyl-benzene, and xylene), MTBE (methyl tertiary butyl ether), and oil and grease for Discharge 002. Effluent monitoring of EC and oil and grease are necessary to determine compliance with Discharge Specifications C.1, C.2 respectively. Monitoring of the remaining constituents is necessary to adequately characterize the waste stream because storm water pond receives about 200 gpd of wash down water from diesel islands.

GROUNDWATER MONITORING

Groundwater monitoring is not required under the proposed Order. This is based on the facts that depth to groundwater is about 700 feet below ground surface and the discharge exhibits low organic and nutrient strengths (i.e., BOD₅, nitrogen and phosphorous). The main constituents of concern in the discharge are the salts that contribute to an increase in EC of the discharge. The proposed Order contains discharge specifications to limit constituents of concern and effluent monitoring for an early detection of any increased concentration of constituents of concern in the discharge. In addition, Board staff is proposing a Cease and Desist Order, which includes an appropriate time schedule to implement the corrective action to control and lower the EC of the wastewater. If the permitted discharge appears to threaten the underlying groundwater, or cause conditions of pollution or nuisance then the Order will be reopened, and appropriate changes will be made by the Board if deemed necessary (see Provision F. 5).

ANTIDEGRADATION AND CEQA CONSIDERATIONS

Board staff has considered antidegradation pursuant to State Board Resolution No. 68-16 and concludes that the current discharge is inconsistent with those provisions, and could cause an increase in groundwater constituents, specifically conductivity above that of the allowable limitation prescribed in the Basin Plan. Effluent limitations are necessary for the discharge to be in accordance with the Basin Plan requirements. The discharge as permitted herein is consistent with the antidegradation provisions of Resolution No. 68-16. The discharge as permitted will not unreasonably affect present and anticipated beneficial use of underlying groundwater and will not result in water quality less than that described in the Basin Plan. However, to assure this the Discharger must improve both treatment and control for the subject wastewater so that the discharge does not create a condition of pollution or nuisance and that the highest water quality will be maintained. Failure to provide the level of treatment and control required to preclude conditions that

INFORMATION SHEET ORDER NO. 5-01-002
TA OPERATING CORPORATION
BLUE BEACON U.S.A., L.P.
AND TEJON RANCH CORP
TRAVELCENTERS OF AMERICA COMPLEX
KERN COUNTY

-3-

threaten pollution or nuisance, and maintain the highest quality groundwater will be sufficient reason to reclassify the waste as designated and modify the proposed Order, or revoke the Order and prohibit further discharge. Further, since this is dependent upon the Discharger making some improvements, a related enforcement action (i.e., Cease and Desist Order) is proposed.

The action to revise waste discharge requirements for the existing land discharge is exempt from the provisions of CEQA in accordance with Title 14, California Code of Regulations (CCR), Section 15301.

JSK:jsk:fmc:01/02/01