

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
LAHONTAN REGION

AMENDED
MONITORING AND REPORTING PROGRAM NO. 95-22A1
WDID NO. 6AO20008000

FOR

MARKLEEVILLE PUBLIC UTILITY DISTRICT
WASTEWATER SYSTEM

Alpine County

I. MONITORING

A. Flow Monitoring

The Discharger shall monitor the following:

1. The total volume, in million gallons, of wastewater flow to the treatment facility *for each month*.
2. The average flow rate, in million gallons per day (mgd), of wastewater to the treatment facility calculated *for each month*.
3. The freeboard (distance from the top of the lowest part of the dike to the wastewater surface in the pond) *measured each month* in each surface impoundment. If a surface impoundment does not contain wastewater, indicate that it is empty.

B. Plant Effluent Monitoring

Grab samples shall be withdrawn from mid-depth in the aerated pond, at a point near the overflow to the percolation/ evaporation ponds, on a *quarterly* basis and analyzed for the following parameters:

<u>Parameter</u>	<u>Units</u>
pH	pH units
Filtered Biochemical Oxygen Demand	mg/l
Total Dissolved Solids	mg/l
Chloride	mg/l

C. Ground Water Monitoring

The pond facilities are located on a bench in a hill. A number of seeps and springs discharge (emerge) from the base of the hill to the northeast of the Facility, adjacent to Markleeville Creek. One of the seeps below the Facility was developed in 1997 to serve as a ground water monitoring station. Samples shall be collected from the seep tap on an *annual* basis. To purge the collection system, the tap should

be opened and water allowed to flow for at least five minutes before samples are collected. The samples shall be analyzed for the following parameters:

<u>Parameter</u>	<u>Units</u>
Total Nitrogen	mg/l
Nitrate Nitrogen	mg N/l
Total Phosphorus	mg/l
Total Dissolved Solids	mg/l
Chloride	mg/l

D. Surface Water Monitoring

Grab samples shall be collected from Markleeville Creek upstream¹ and downstream² of the Facility on a *quarterly* basis, and analyzed for the following parameters:

<u>Parameter</u>	<u>Units</u>
Chloride	mg/l
Total Dissolved Solids	mg/l
Total Nitrogen	mg/l
Total Phosphorus	mg/l

E. Sludge Monitoring

Beginning in 2004, and every third year thereafter, the Discharger shall estimate or measure the accumulation of sludge in each pond. The Discharger shall submit a Sludge Disposal Plan to the Regional Board for approval at least 180 days prior to any sludge removal activities. The Sludge Disposal Plan shall contain the following information:

1. Estimated quantity of sludge to be disposed of.
2. Approximate disposal date.
3. Proposed location for disposal.
4. Plans for chemical characterization of sludge.
5. Any planned operational changes to accomplish sludge removal.

¹ The upstream sampling location shall be adjacent to, and immediately upstream of, the sewage lift station.

² The downstream sampling location shall be within the Markleeville Campground, near the first campsite accessible from the entrance drive.

II. REPORTING

A. General Provisions

The Discharger shall comply with the "General Provisions for Monitoring and Reporting," dated September 1, 1994, which are attached to and made part of this Monitoring and Reporting Program.


B. Report Contents and Submittal Periods

1. The Discharger shall submit quarterly self-monitoring reports according to the schedule shown in the following table:

<u>Quarter</u>	<u>Monitoring period</u>	<u>Report due date</u>
1	January 1- March 30	April 15
2	April 1 – June 30	June 15
3	July 1- September 30	October 15
4	October 1 – December 31	January 15

2. Reports shall include results of all monitoring required above (including flow monitoring, plant effluent monitoring, ground water monitoring, surface water monitoring, and sludge monitoring) collected during each respective quarter. The monitoring reports shall also provide a clear description of any noncompliance with WDRs that occurred during the quarter, and describe how compliance has been or will be achieved. If no noncompliance incidents have occurred, the Discharger shall so certify in the report.
3. The report due January 15 shall also summarize the quarterly and monthly monitoring data obtained for the previous year and describe any significant trends.

Ordered by: _____

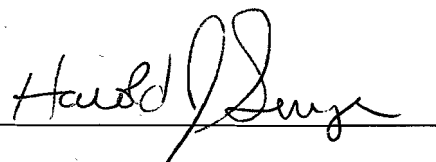

HAROLD J. SINGER
EXECUTIVE OFFICER

Dated: _____

Jan 24, 2002

Attachments: General Provisions for Monitoring and Reporting

**CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
LAHONTAN REGION**

**GENERAL PROVISIONS
FOR MONITORING AND REPORTING**

1. SAMPLING AND ANALYSIS

- a. All analyses shall be performed in accordance with the current edition(s) of the following documents:
 - i. Standard Methods for the Examination of Water and Wastewater
 - ii. Methods for Chemical Analysis of Water and Wastes, EPA
- b. All analyses shall be performed in a laboratory certified to perform such analyses by the California State Department of Health Services or a laboratory approved by the Regional Board Executive Officer. Specific methods of analysis must be identified on each laboratory report.
- c. Any modifications to the above methods to eliminate known interferences shall be reported with the sample results. The methods used shall also be reported. If methods other than EPA-approved methods or Standard Methods are used, the exact methodology must be submitted for review and must be approved by the Regional Board Executive Officer prior to use.
- d. The discharger shall establish chain-of-custody procedures to insure that specific individuals are responsible for sample integrity from commencement of sample collection through delivery to an approved laboratory. Sample collection, storage, and analysis shall be conducted in accordance with an approved Sampling and Analysis Plan (SAP). The most recent version of the approved SAP shall be kept at the facility.
- e. The discharger shall calibrate and perform maintenance procedures on all monitoring instruments and equipment to ensure accuracy of measurements, or shall insure that both activities will be conducted. The calibration of any wastewater flow measuring device shall be recorded and maintained in the permanent log book described in 2.b, below.
- f. A grab sample is defined as an individual sample collected in fewer than 15 minutes.
- g. A composite sample is defined as a combination of no fewer than eight individual samples obtained over the specified sampling period at equal intervals. The volume of each individual sample shall be proportional to the discharge flow rate at the time of sampling. The sampling period shall equal the discharge period, or 24 hours, whichever period is shorter.

- iv. In the case of a municipal, state or other public facility, by either a principal executive officer, ranking elected official, or other duly authorized employee.
- e. Monitoring reports are to include the following:
 - i. Name and telephone number of individual who can answer questions about the report.
 - ii. The Monitoring and Reporting Program Number.
 - iii. WDID Number.
- f. Modifications

This Monitoring and Reporting Program may be modified at the discretion of the Regional Board Executive Officer.

4. NONCOMPLIANCE

Under Section 13268 of the Water Code, any person failing or refusing to furnish technical or monitoring reports, or falsifying any information provided therein, is guilty of a misdemeanor and may be liable civilly in an amount of up to one thousand dollars (\$1,000) for each day of violation.