

California Regional Water Quality Control Board  
Santa Ana Region

Order No. 98-31

Waste Discharge Requirements  
for  
D.M. Adger  
dba  
Creekside Mobilehome Estates  
Corona, Riverside County

The California Regional Water Quality Control Board, Santa Ana Region (hereinafter Board), finds that:

1. On September 14, 1984, the Board adopted Order No. 84-93, Waste Discharge Requirements for Mr. D. M. Adger (hereinafter discharger), doing business as Creekside Mobile Home Park (now Creekside Mobilehome Estates) for the discharge of treated domestic wastewater to percolation ponds.
2. It is necessary to update Order No. 84-93 to reflect changes in operations at the facility, as well as changes in plans, policies, and regulations adopted by the State and Regional Board.
3. Mr. Adger operates a package wastewater treatment plant which processes the sewage from the 92-space mobilehome complex. The plant is designed to treat an average of 22,500 gallons per day. Currently, disinfected secondary wastewater is discharged to two adjacent onsite percolation ponds, which alternate in use. Each pond is approximately 10 feet deep.
4. The wastewater treatment plant percolation ponds are located approximately 600 feet west of Temescal Creek on a stream terrace, along Temescal Canyon Road southeast of the Weirick Road intersection, in Section 21, T4S, R6W, SBB&M.
5. Because of the depth to groundwater below the percolation ponds, which was thought to be less than 10 feet, combined with the ponds' proximity to Temescal Creek, the Riverside County Department of Environmental Health requested that Order No. 84-93 include a requirement that the wastewater receive tertiary treatment prior to its discharge to the percolation ponds. A groundwater monitoring well was recently constructed which found groundwater to be at a depth of 17 feet below the bottom of the ponds. The Riverside County Department of Environmental Health has reviewed this new information and has determined that sufficient separation is provided so that the need for tertiary treatment is no longer warranted. This order requires the discharger to continue to monitor the groundwater elevation. Should the groundwater elevation rise to within 10 feet of the bottom of the ponds, the discharger will be required to provide a geotechnical

report assessing the impacts of the discharge on the underlying groundwater subbasin and nearby surface waters. Based on the findings of this report, additional treatment may be necessary.

6. A revised Water Quality Control Plan (Basin Plan) became effective on January 24, 1995. The Basin Plan identifies beneficial uses and water quality objectives of waters and subbasins in the Santa Ana Region. The requirements contained in this order are necessary to implement the Basin Plan. It is necessary to require control of constituents in order to meet water quality objectives and to protect the beneficial uses of the affected receiving water.
7. The discharge overlies the Bedford Groundwater Subbasin (Upper Temescal I). The beneficial uses of the Bedford Groundwater Subbasin are:
  - a. Municipal and domestic supply,
  - b. Agricultural supply,
  - c. Industrial process supply, and
  - d. Industrial service supply.
8. The discharge is adjacent to Temescal Creek. The beneficial uses of Temescal Creek, Reach 2, are considered to be "Intermittent" and are:
  - a. Water contact recreation,
  - b. Non-contact water recreation,
  - c. Wildlife habitat,
  - d. Warm freshwater habitat,
  - e. Groundwater recharge,
  - f. Industrial service supply, and
  - g. Agricultural supply.
9. The water supply to the project will come from the City of Corona. The total dissolved solids (TDS) concentration of the water supply is approximately 420 mg/l.
10. Stormwater runoff from the treatment plant primarily flows into the two adjacent percolation ponds currently receiving treated wastewater. Therefore, a Storm Water Pollution Prevention Plan (SWPPP) is not required.
11. The project involves the issuance of waste discharge requirements for operations at an existing treatment facility, and as such, is categorically exempt from the provisions of the California Environmental Quality Act (Public Resources Code, Section 21100 et. seq.) in accordance with Section 15301, Chapter 3, Title 14, California Code of Regulations.

12. The Board has notified the discharger and other interested agencies and persons of its intent to prescribe waste discharge requirements for the discharge and has provided them with an opportunity for a public hearing and an opportunity to submit their written views and recommendations.
13. The Board, in a public meeting, heard and considered all comments pertaining to the discharge.

**IT IS HEREBY ORDERED** that the discharger shall comply with the following:

**A. Discharge Specifications**

1. The discharge of wastewater to the ponds in excess of the following limits is prohibited:

| Constituents                       | 30- Day Average Concentration<br>Limitation |
|------------------------------------|---------------------------------------------|
| Total Suspended Solids (TSS)       | 30 mg/l                                     |
| Biochemical Oxygen Demand<br>(BOD) | 30 mg/l                                     |

- 2.a. The discharge of wastewater containing a 12-month average concentration of total dissolved solids (TDS) in excess of 840 mg/l is prohibited.
- 2.b. The discharge of wastewater containing a 12-month average concentration of total dissolved solids which exceeds the concentration of that constituent in the water supply by more than 250 ppm is prohibited.

For either Discharge Specification 2.a. or 2.b. the limitation that results in the lower average total concentration shall be the controlling limitation.

3. The pH of the discharge shall at all times be within the range of 6 and 9 pH units.
4. Neither the treatment nor the discharge of waste shall cause or threaten to cause a nuisance or pollution as defined in Section 13050 of the California Water Code. Odors, vectors, and other nuisances of sewage origin are prohibited outside of the treatment plant/disposal area.

5. A minimum of 18 inches of freeboard shall be maintained in the ponds at all times.
6. The discharge of any substance or material in concentrations toxic or physiologically detrimental to human, animal, plant, or aquatic life is prohibited.
7. The discharge of excessively saline waste, defined by an electrical conductivity greater than 2,000 umhos/cm, is prohibited.
8. The discharge of wastes to property not owned or controlled by the discharger is prohibited.

**C. Provisions**

1. The discharger shall at all times properly operate and maintain all facilities and systems of treatment and control (and related appurtenances) which are installed or used by the discharger to achieve compliance with the conditions of this order.
2. The discharger shall comply with Monitoring and Reporting Program No. 98-31 as issued by the Executive Officer of the Regional Board. The monitoring and reporting program may be revised at any time during the term of this order, and may include a reduction or an increase in the number of parameters to be monitored, the frequency of monitoring, or the number of samples collected.
3. The treatment plant and disposal facilities shall be protected from a 100-year frequency flood.
4. The discharger shall file with Board a report of waste discharge at least 120 days before making any material change or proposed change in the character, location, or volume of the discharge or in the method of disposal of the discharge, or before making any proposed change in ownership of the facility.
5. The discharger shall take all reasonable steps to minimize or correct any adverse impact on the environment, or to prevent any discharge that has a reasonable likelihood of adversely affecting human health or the environment, resulting from noncompliance with this order, including such accelerated or additional monitoring as may be necessary to determine the nature and impact of the noncompliance.
6. Within 60 days of finding that groundwater has risen to within 10 feet of the bottom of the percolation ponds, the discharger shall provide a report, acceptable to the Executive Officer, assessing the impacts of the discharge on the underlying groundwater subbasin and any nearby surface waters. The report shall be prepared by a California registered

engineer or a California registered geologist. Should the report find that public health or the environment are not protected, the report shall include a discussion of the mitigation measures that will be implemented to provide adequate protection, including a proposed time schedule for their implementation.

7. The discharger shall report any discharge of waste that may endanger health or the environment. Such information shall be provided to the Executive Officer (909-782-4130) and the Office of Emergency Services (800-852-7550), if appropriate, as soon as the discharger becomes aware of the circumstances. A written report shall be submitted within five (5) days of the time the discharger becomes aware of the circumstances and shall contain a description of the discharge and its cause; the period of discharge, including exact dates and times and, if the discharge has not been corrected, the anticipated time necessary to reduce, eliminate, and prevent reoccurrence of the discharge.
8. The discharger shall maintain a copy of this order at the site so that it is available at all times to operating personnel. Key operating personnel shall be familiar with its content.
9. The provisions of this order are severable, and if any provision of this order, or the application of any provisions of this order to any circumstance is held invalid, the application of such provision to other circumstances and the remainder of this order shall not be affected thereby.
10. Collected screenings, sludge, and other solids removed from liquid wastes shall be disposed of in a manner approved by the Executive Officer of the Regional Board.
11. The discharger shall permit Board staff:
  - a. Entry upon premises where an effluent source is located, or where any required records are kept under the terms and conditions of this order;
  - b. Access to copy any records required to be kept under the terms and conditions of this order;
  - c. Inspection of monitoring and control equipment or records; and
  - d. To sample, monitor, and photograph any discharge for the purpose of assuring compliance with this order.

12. Order No. 84-93 is hereby rescinded.

I, Gerard J. Thibeault, Executive Officer, do hereby certify that the foregoing is a full, true, and correct copy of an order adopted by the California Regional Water Quality Control Board, Santa Ana Region, on April 17, 1998.

  
Gerard J. Thibeault  
Executive Officer

California Regional Water Quality Control Board  
Santa Ana Region

Monitoring and Reporting Program No. 98-31

D.M. Adger  
dba  
Creekside Mobilehome Estates  
Corona, Riverside County

**A. General Monitoring Guidelines**

1. All sampling, sample preservation, and analysis shall be performed in accordance with the most recent edition of 40 CFR Part 136 "Guidelines Establishing Test Procedures for the Analysis of Pollutants" promulgated by the United States Environmental Protection Agency (EPA), unless otherwise noted. In addition, the Executive Officer and/or EPA, at their discretion, may specify test methods which are more sensitive than those specified in 40 CFR 136.
2. Chemical analyses shall be conducted at a laboratory certified for such analyses by the State Department of Health Services or EPA or at laboratories approved by the Executive Officer of the Regional Board.
3. The discharger shall retain records of all monitoring information, including all sampling and analytical results, and copies of all reports required by this order. The sampling and analytical records shall include the sampler's name; the exact location, date, and time of sampling; the analyst's name, and the analytical techniques used.
4. All monitoring instruments and devices used by the discharger to fulfill the prescribed monitoring program shall be properly maintained and calibrated as necessary to ensure their continued accuracy.
5. Whenever the discharger monitors any pollutant more frequently than is required by this monitoring and reporting program, the results of the monitoring shall be included in the calculation and reporting of the data submitted in the discharge monitoring report for that monitoring period.
6. A "grab" sample is defined as any individual sample collected in less than 15 minutes.

**B. Water Supply Monitoring**

1. On the first working day of July on an annual basis, a grab sample of the water supply to the mobilehome park shall be obtained. The sample shall be analyzed for total dissolved solids.

**C. Effluent Monitoring**

1. A sampling station shall be established at the point of discharge, i.e, the outfall(s) to the ponds or where representative samples of the effluent can be obtained. The following shall constitute the effluent monitoring program:

| Constituents                    | Units    | Type of Sample     | Minimum Sampling Frequency |
|---------------------------------|----------|--------------------|----------------------------|
| Flow                            | gpd      | Recorder/Totalizer | Daily                      |
| Biochemical Oxygen Demand (BOD) | mg/l     | Grab               | Weekly                     |
| Total Suspended Solids (TSS)    | "        | "                  | Weekly                     |
| Total Dissolved Solids (TDS)    | "        | "                  | Quarterly                  |
| Total Inorganic Nitrogen        | "        | "                  | "                          |
| pH                              | pH units | "                  | "                          |

2. Weekly samples shall be collected on a representative day of the week.
3. Quarterly samples shall be collected on the first working day of January, April, July, and October.
4. Each working day, the discharger shall determine and record in a permanent log the dates and estimated flow of treated sanitary waste discharged to the percolation ponds.
5. Weekly measurements of the freeboard of each pond shall be recorded in the flow and visual observation log.
6. Every two weeks, the depth to groundwater, groundwater elevation, and the separation distance between basin bottoms and groundwater shall be determined in the monitoring well.




**D. Reporting**

1. Monitoring reports shall be submitted by the 30th day of each month, and shall include:
  - a. Copies of the flow, groundwater depths and elevations, and visual observation log for the previous month; and
  - b. Copies of all analyses, including those for supply water and effluent, performed during the previous month.
2. For every item where the requirements are not met, the discharger shall submit a statement of actions undertaken or proposed which will bring the discharge into full compliance with requirements at the earliest time, and a timetable for correction shall be submitted.

All reports shall be signed by a responsible officer or duly authorized representative of the discharger and shall be submitted under penalty of perjury.

Ordered by



Gerard J. Thibeault  
Executive Officer  
April 17, 1998

California Regional Water Quality Control Board  
Santa Ana Region

April 17, 1998

ITEM: 13

SUBJECT: Waste Discharge Requirements for D.M. Adger (dba Creekside Mobilehome Estates) Corona, Riverside County - Order No. 98-31

DISCUSSION:

Creekside Mobilehome Estates is a 92-space mobilehome park located in Temescal Canyon, southeast of the intersection of Temescal Canyon and Weirick Roads. The site is located on the margin of the Temescal Creek floodplain, approximately 600 feet from the Creek. Sanitary wastes from the mobilehome park are treated by a package secondary wastewater treatment plant. Treated wastewater is discharged to two evaporation/percolation ponds.

Order No. 98-31 revises and updates Order No. 84-93. Because of the depth to groundwater below the percolation ponds, which was thought to be less than 10 feet, combined with the ponds' proximity to Temescal Creek, the Riverside County Department of Environmental Health requested that Order No. 84-93 include a requirement that the wastewater receive tertiary treatment prior to its discharge to the percolation ponds. A groundwater monitoring well was recently constructed which found groundwater to be at a depth of 17 feet below the bottom of the ponds. The Riverside County Department of Environmental Health has reviewed this new information and has determined that sufficient separation is provided so that the need for tertiary treatment is no longer warranted. This order requires the discharger to continue to monitor the groundwater elevation. Should the groundwater elevation rise to within 10 feet of the bottom of the ponds, this order may be revised to require additional treatment to protect public health. This order also requires the treatment plant and disposal facilities to be protected from a 100-year frequency flood.


The proposed order contains BOD and total suspended solids limits which should ensure that odor nuisances will not result from the operation of the treatment plant or the discharge to the percolation ponds. The total dissolved solids limit proposed in the order is based on the water quality objective of the underlying Bedford Groundwater Subbasin.

RECOMMENDATION:

Adopt Order No. 98-31 as presented.

Comments were solicited from the following:

Creekside Mobilehome Estates, Corona - D.M. Adger  
Office of the Chief Counsel, SWRCB - Ted Cobb  
Division of Water Quality, SWRCB - John Youngerman  
CA DOHS Office of Drinking Water - Toby Roy, District Engineer  
Riverside Co. Dept. of Env. Health - John Silva  
City of Corona Public Works Department - Glenn Prentice, Director  
Elsinore Valley MWD - Julius Ma, Water Quality Manager

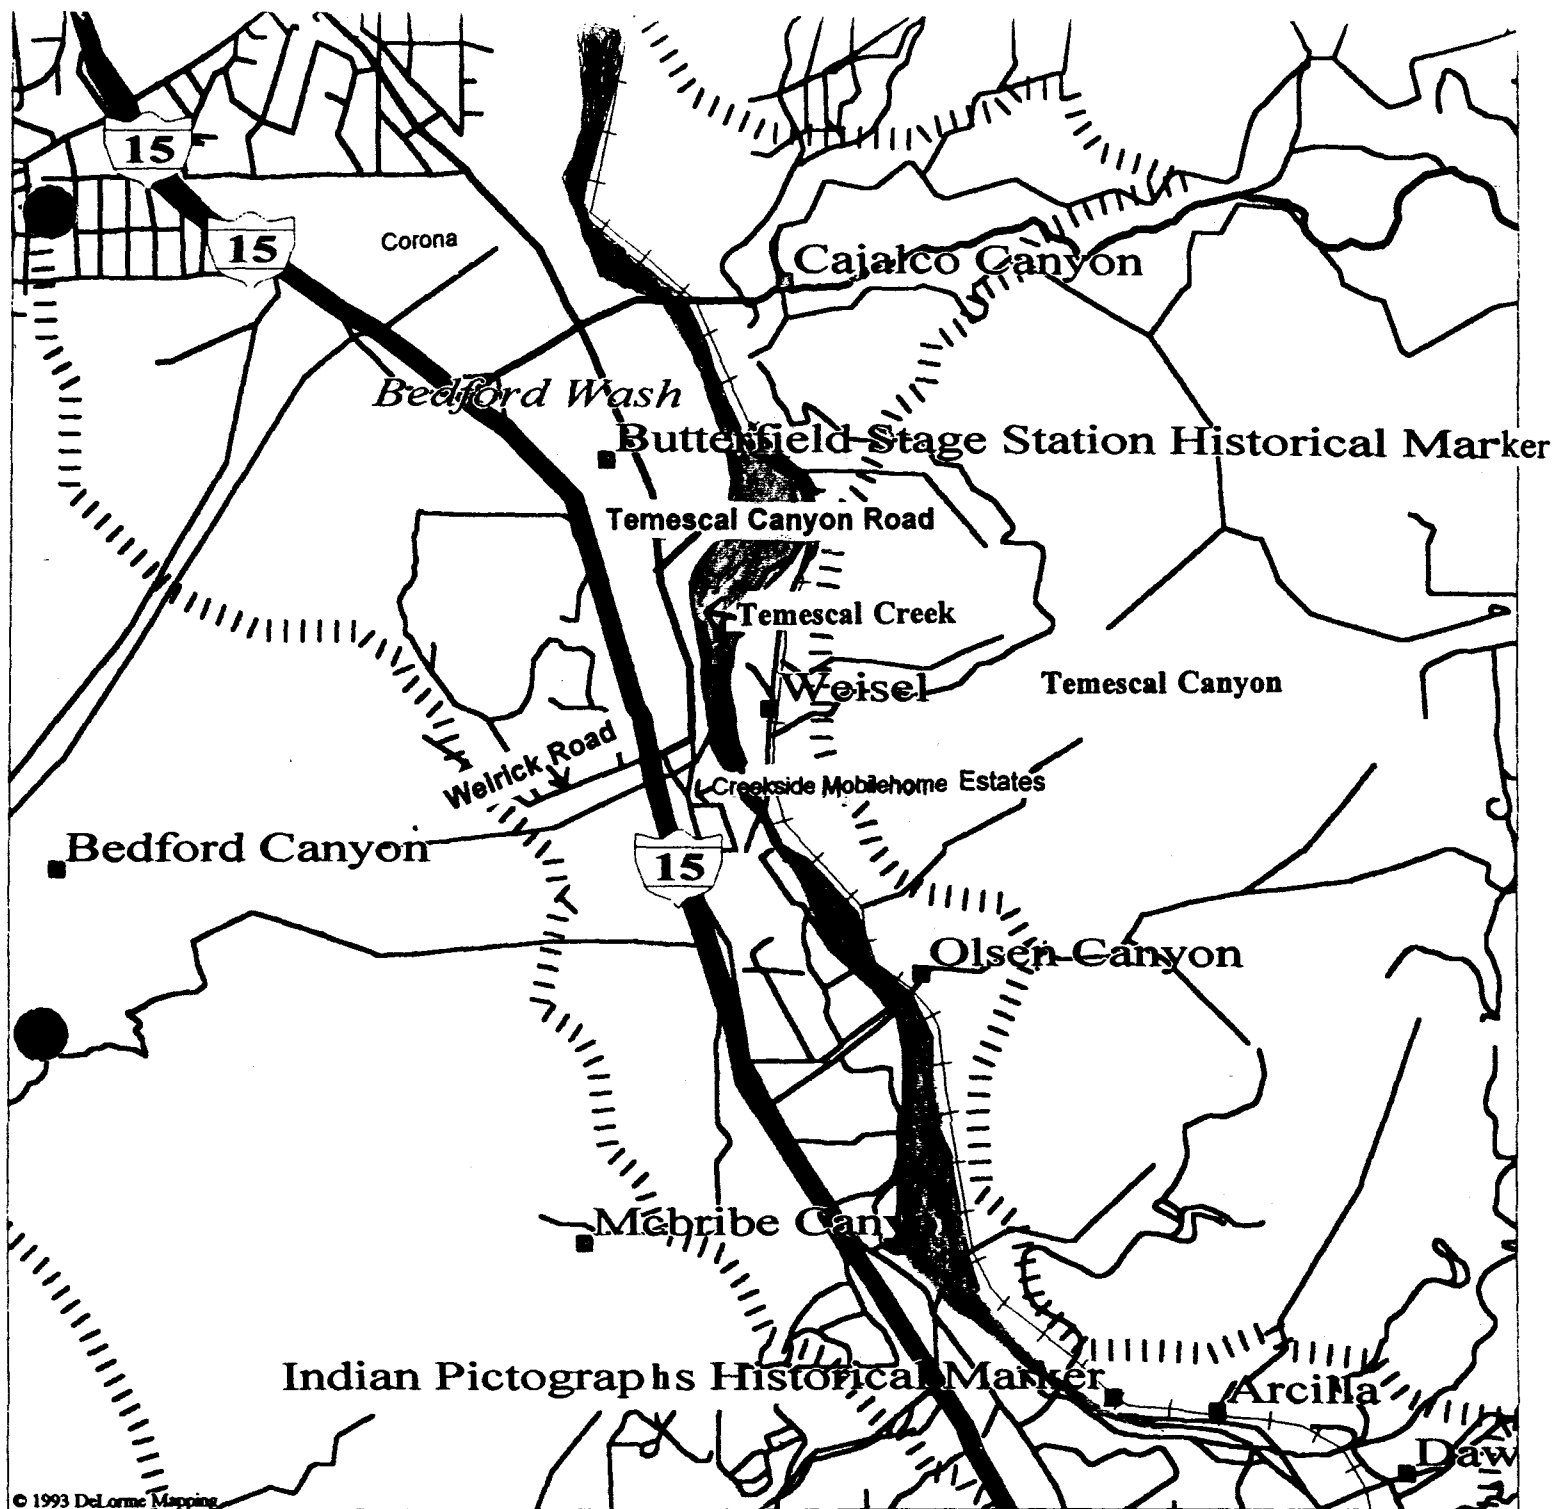

© 1993 DeLorme Mapping

# LEGEND

- Geo Feature
- Interstate, Turnpike
- Population Center
- Street, Road
- Hwy Ramp
- Major Street/Road
- Interstate Highway
- +++ Railroad

- River
- Open Water
- ||||| Contours

Scale 1:31,250 (at center)

2000 Feet

1000 Meters

Creekside Mobilehome Estates

Mag 13.00

Wed Mar 11 16:21:05 1998