

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

ORDER NO. 93-088

WASTE DISCHARGE REQUIREMENTS
FOR

GRAYSON COMMUNITY SERVICES DISTRICT
STANISLAUS COUNTY

The California Regional Water Quality Control Board, Central Valley Region, (hereafter Board) finds that:

1. Grayson Community Services District (hereafter Discharger). The property (Assessor's Parcel No. 16-26-41) is owned by the Discharger.
2. Waste Discharge Requirements Order No. 75-260, adopted by the Board on 21 November 1975, prescribes requirements for a discharge from the stabilization ponds to disposal beds (irrigation checks). The disposal beds are not used for pasture or crops.
3. Order No. 75-260 is neither adequate nor consistent with current plans and policies of the Board.
4. The Discharger discharges an average flow of 55,000 to 60,000 gallons per day. Design flow is 100,000 gallons per day.
5. Treatment consists of one aeration cell with two aerators followed by two stabilization ponds. Treated wastewater is disposed of on disposal beds (irrigation checks).
6. The facility is in Section 22, T4S, R7E, MDB&M, with surface water drainage to the San Joaquin River, as shown in Attachment A, which is attached hereto and part of the Order by reference.
7. The Board adopted a Water Quality Control Plan, Second Edition, for the Sacramento-San Joaquin Basin (hereafter Basin Plan), which contains water quality objectives for all waters of the Basin. These requirements implement the Basin Plan.
8. The beneficial uses of the San Joaquin River are municipal, industrial, and agricultural supply; recreation; esthetic enjoyment; navigation; and preservation and enhancement of fish, wildlife, and other aquatic resources.
9. The beneficial uses of underlying ground water are domestic, and agricultural supply.

WASTE DISCHARGE REQUIREMENTS
GRAYSON COMMUNITY SERVICES DISTRICT
STANISLAUS COUNTY

-2-

10. The action to update waste discharge requirements for this facility is exempt from the provisions of the California Environmental Quality Act (CEQA) in accordance with Title 14, California Code of Regulations (CCR), Section 15301.
11. This discharge is exempt from the requirements of Title 23, CCR, Section 2510, et seq. (hereafter Chapter 15). The exemption, pursuant to Section 2511(b), is based on the following:
 - a. The Board is issuing waste discharge requirements, and
 - b. The discharge complies with the Basin Plan, and
 - c. The wastewater does not need to be managed according to 22 CCR, Division 4, Chapter 30, as a hazardous waste.
12. The Board has notified the Discharger and interested agencies and persons of its intent to prescribe waste discharge requirements for this discharge and has provided them with an opportunity for a public hearing and an opportunity to submit their written views and recommendations.
13. The Board, in a public meeting, heard and considered all comments pertaining to the discharge.

IT IS HEREBY ORDERED that Order No. 75-260 is rescinded and Grayson Community Services District, its agents, successors, and assigns, in order to meet the provisions contained in Division 7 of the California Water Code and regulations adopted thereunder, shall comply with the following:

A. Discharge Prohibitions:

1. Discharge of wastes to surface waters or surface water drainage courses is prohibited.
2. Bypass or overflow of untreated or partially treated waste is prohibited.
3. Discharge of waste classified as 'hazardous' or 'designated', as defined in Sections 2521(a) and 2522(a) of Chapter 15, is prohibited.

B. Discharge Specifications:

1. The monthly average dry weather discharge flow shall not exceed 100,000 gallons/day.

WASTE DISCHARGE REQUIREMENTS
GRAYSON COMMUNITY SERVICES DISTRICT
STANISLAUS COUNTY

-3-

2. Objectionable odors originating at this facility shall not be perceivable beyond the limits of the wastewater treatment and disposal areas.
3. As a means of discerning compliance with Discharge Specification No. 2, the dissolved oxygen content in the upper zone (1 foot) of wastewater in ponds shall not be less than 1.0 mg/l.
4. The treatment facilities shall be designed, constructed, operated, and maintained to prevent inundation or washout due to floods with a 100-year return frequency.
5. Ponds shall be managed to prevent breeding of mosquitos. In particular,
 - a. An erosion control program should assure that small coves and irregularities are not created around the perimeter of the water surface.
 - b. Weeds shall be minimized through control of water depth, harvesting, or herbicides.
 - c. Dead algae, vegetation, and debris shall not accumulate on the water surface.
6. Public contact with wastewater shall be precluded through such means as fences, signs, and other acceptable alternatives.
7. Ponds shall have sufficient capacity to accommodate allowable wastewater flow and design seasonal precipitation and ancillary inflow and infiltration during the nonirrigation season. Design seasonal precipitation shall be based on total annual precipitation using a return period of 100 years, distributed monthly in accordance with historical rainfall patterns. Pond freeboard shall never be less than two feet (measured vertically).
8. On or about 1 October of each year, available pond storage capacity shall at least equal the volume necessary to comply with Discharge Specification B.7.

C. Sludge Disposal:

1. Collected screenings, sludges, and other solids removed from liquid wastes shall be disposed of in a manner that is consistent with Chapter 15 and approved by the Executive Officer.
2. Any proposed change in sludge use or disposal practice shall be reported to the Executive Officer at least 90 days in advance of the change.

WASTE DISCHARGE REQUIREMENTS
GRAYSON COMMUNITY SERVICES DISTRICT
STANISLAUS COUNTY

-4-

3. Use and disposal of sewage sludge shall comply with existing federal and state laws and regulations, including 40 CFR 503, "Standards for Use or Disposal of Sewage Sludge."
4. The Discharger is encouraged to comply with the State Guidance Manual issued by the Department of Health Services titled *Manual of Good Practice for Landspreading of Sewage Sludge*.

D. Ground Water Limitations:

The discharge, in combination with other sources, shall not cause underlying ground water to:

1. Contain waste constituents in concentrations statistically greater than background water quality.
2. Contain chemicals, heavy metals, or trace elements in concentrations that adversely affect beneficial uses or exceed maximum contaminant levels specified in 22 CCR, Division 4, Chapter 15.
3. Exceed a most probable number of total coliform organisms of 2.2/100 ml over any seven-day period.
4. Exceed concentrations of radionuclides specified in 22 CCR, Division 4, Chapter 15.
5. Contain taste or odor-producing substances in concentrations that cause nuisance or adversely affect beneficial uses.
6. Contain concentrations of chemical constituents in amounts that adversely affect agricultural use.

E. Provisions:

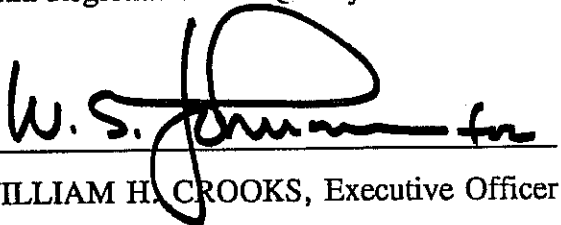
1. The Discharger shall comply with the Monitoring and Reporting Program No. 93-088, which is part of this Order, and any revisions thereto as ordered by the Executive Officer.
2. The Discharger shall comply with the "Standard Provisions and Reporting Requirements for Waste Discharge Requirements", dated 1 March 1991, which are attached hereto and by reference a part of this Order. This attachment and its individual paragraphs are commonly referenced as "Standard Provision(s)."

WASTE DISCHARGE REQUIREMENTS
GRAYSON COMMUNITY SERVICES DISTRICT
STANISLAUS COUNTY

-5-

3. In the event of any change in control or ownership of land or waste discharge facilities described herein, the Discharger shall notify the succeeding owner or operator of the existence of this Order by letter, a copy of which shall be immediately forwarded to this office.
4. The Discharger shall use the best practicable cost-effective control technique currently available to limit mineralization to no more than a reasonable increment.
5. The Discharger must comply with all conditions of this Order, including timely submittal of technical and monitoring reports as directed by the Executive Officer. Violations may result in enforcement action, including Regional Board or court orders requiring corrective action or imposing civil monetary liability, or in revision or rescission of this Order.
6. Grayson Community Services District, as owner of the real property at which the discharge will occur, is responsible for ensuring compliance with these requirements.
7. A copy of this Order shall be kept at the discharge facility for reference by operating personnel. Key operating personnel shall be familiar with its contents.
8. If reclaimed water is used for construction purposes, it shall comply with the most current edition of "Guidelines for Use of Reclaimed Water for Construction Purposes". Other uses of reclaimed water not specifically authorized herein shall be subject to the approval of the Executive Officer and shall comply with 22 CCR, Division 4.
9. The Board will review this Order periodically and will revise requirements when necessary.

I, WILLIAM H. CROOKS, Executive Officer, do hereby certify the foregoing is a full, true, and correct copy of an Order adopted by the California Regional Water Quality Control Board, Central Valley Region, on 25 June 1993.


WILLIAM H. CROOKS, Executive Officer

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

MONITORING AND REPORTING PROGRAM NO. 93-088

FOR

GRAYSON COMMUNITY SERVICES DISTRICT
STANISLAUS COUNTY

Specific sample station locations shall be established under direction of the Board's staff and a description of the stations shall be attached to this Order.

EFFLUENT MONITORING

Effluent samples shall be collected just prior to discharge to the disposal facility. Effluent samples should be representative of the volume and nature of the discharge. Samples collected from the outlet structure of ponds will be considered adequately composited. Time of collection of a grab sample shall be recorded. Effluent monitoring shall include at least the following:

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Sampling Frequency</u>
20°C BOD ₅	mg/l	Grab	Quarterly
Settleable Matter	ml/l	Grab	Quarterly
Nitrates as NO ₃	mg/l	Grab	Quarterly
Total Dissolved Solids	mg/l	Grab	Quarterly
Specific Conductivity	μmhos/cm	Grab	Quarterly
Flow	gallons/day	Cumulative	Weekly

SLUDGE MONITORING

A composite sample of sludge shall be collected prior to sludge reuse or disposal in accordance with EPA's *POTW Sludge Sampling and Analysis Guidance Document, August 1989*, and tested for the following metals:

Arsenic	Mercury
Cadmium	Molybdenum
Chromium	Nickel
Copper	Selenium
Lead	Zinc

MONITORING AND REPORTING PROGRAM
GRAYSON COMMUNITY SERVICES DISTRICT
STANISLAUS COUNTY

-2-

Sampling records shall be retained for a minimum of five years. A log shall be kept of sludge quantities generated and of handling and disposal activities. The frequency of entries is discretionary; however, the log should be complete enough to serve as a basis for part of the sludge reuse or disposal report.

WATER SUPPLY MONITORING

A sampling station shall be established where a representative sample of the municipal water supply can be obtained. Water supply monitoring shall include at least the following:

<u>Constituents</u>	<u>Units</u>	<u>Sampling Frequency</u>
Electrical Conductivity @ 25°C	μmhos/cm	Yearly
Total Dissolved Solids	mg/l	Yearly

REPORTING

In reporting the monitoring data, the Discharger shall arrange the data in tabular form so that the date, the constituents, and the concentrations are readily discernible. The data shall be summarized in such a manner to illustrate clearly the compliance with waste discharge requirements.

Monthly monitoring reports shall be submitted to the Regional Board by the **20th day** of the following month.

The results of any monitoring done more frequently than required at the locations specified in the Monitoring and Reporting Program shall be reported to the Board.

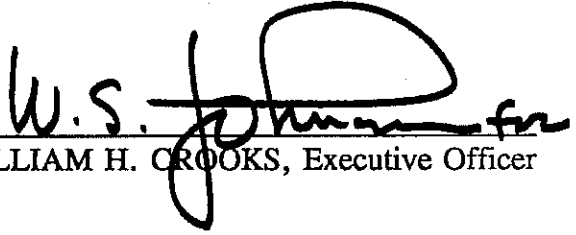
Upon written request of the Board, the Discharger shall submit a report to the Board by **30 January** of each year. The report shall contain both tabular and graphical summaries of the monitoring data obtained during the previous year. In addition, the Discharger shall discuss the compliance record and the corrective actions taken or planned which may be needed to bring the discharge into full compliance with the waste discharge requirements.

MONITORING AND REPORTING PROGRAM
GRAYSON COMMUNITY SERVICES DISTRICT
STANISLAUS COUNTY

-3-

The Discharger shall implement the above monitoring program as of the date of this Order.

Ordered by:


WILLIAM H. CROOKS, Executive Officer

25 June 1993

(Date)

SPD

INFORMATION SHEET

GRAYSON COMMUNITY SERVICES DISTRICT STANISLAUS COUNTY

The Grayson Community Services District operates a wastewater collection and treatment system for a design population of 959 and design flow of 100,000 gallons per day. Present flow (in 1993) is 55,000 to 60,000 gallons per day. The treatment and disposal facility is located 3,000 feet north of Grayson in Section 22, T4S, R7E, MDB&M.

Treatment consists of one aeration cell with two aerators followed by two stabilization ponds. Treated wastewater is disposed of on disposal beds (irrigation checks). The disposal beds are not used for pasture or crops.

Grayson Community Services District owns and operates the wastewater treatment plant. Grayson is primarily residential composed of farm laborers and agricultural services industry workers. Water is supplied by Del Este Water Company.

Annual precipitation is 10 inches per year; evaporation is 50 inches per year.

Depth to ground water is about 10 feet. Soil is relatively impervious Rincon Clay. Soil profile from 0-4.5 feet is silty clay; from 4.5-10 feet clay, sand and gravel. Surface water drainage is to the San Joaquin River.

