



STOCK PRODUCT CATALOG · SEPTEMBER 2026

Retractable Cords, Coiled Cords & **Curly Cords**

UL-listed retractile power cords, communications and test lead cords, shielded coiled cables, and miniature cords. Manufactured in Branford, Connecticut since 1947.

25

stock catalog numbers

1947

manufacturing since

100%

woman-owned

USA

made in Branford, CT

ABOUT THIS CATALOG

Stock retractile cords, ready to quote

Autac has manufactured retractile cords, also called coiled cords, coil cords, and curly cords, in Branford, Connecticut since 1947. Every cord in this catalog is wound and heat-set in our own plant, which is what gives it the spring memory to extend to its working length and pull itself back thousands of times without going slack.

The tables that follow list our 25 stock catalog numbers by construction. Each row gives the conductor count, wire gauge, UL cord type, voltage and amp rating, and the retracted coil lengths we stock for that number. Extended working length is approximately five times the retracted length.


Anything not listed here is built to order. Custom conductor counts, gauges, lengths, jacket colors, shielding, and terminations are all available, and there is no minimum order quantity on most constructions. The worksheet on the last page lists what we need to quote a custom cord.

How to read the tables

- **Cat. No.** is the stock catalog number. Quote it with the retracted length you need, for example **1610, 6 inch**.
- **Cond.** and **AWG** are conductor count and wire gauge.
- **UL Type** is the cord designation (SVT, SJT, SJTO, SO, SOW, CMG). Voltage and amps are the rated maximums for that construction.
- **Retracted Lengths** are the coil lengths stocked, in inches, measured with the cord at rest.
- **UL Listed** cords are finished, standalone products. **UL Recognized** cords are components for use inside equipment that carries its own approval.

Pricing

Pricing is not printed in this catalog. Call or email sales for a quote, or, if you are an existing customer, verify your email at [autacusa.com/products/](mailto:sales@autacusa.com) to view current pricing online.

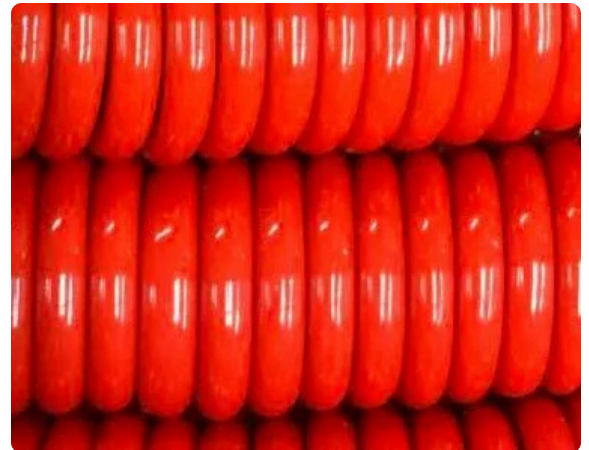

CONTENTS

- 1 Retractable Power Cords**
TPE Power Cords, TPR Power Cords, PVC Power Cords, TPE Power Cords (Bare Ends)
- 2 Communications, Control, and Test Lead Cords**
Communications & Control Cables, Test Lead Cords
- 3 Shielded Coiled Cables**
Shielded Communications Cables, PVC Shielded Cables
- 4 Miniature Coiled Cords**
Miniature PVC Cords, Miniature PVC Foil-Shielded Cords
- 5 Specifying a Custom Cord**
Spec worksheet, extension ratio, terminations

CONTACT

SALES

(800) 243-3161
(203) 481-3444

EMAIL

sales@autacusa.com

FACILITY

25 Thompson Rd,
Branford, CT 06405

MAILING AND REMITTANCE

P.O. Box 306, North
Branford, CT 06471

WEB

autacusa.com

HOURS

Mon to Fri, 8am to 5pm
ET

1

Retractable Power Cords

UL-listed retractile power cords in TPE, TPR, and PVC. Bare copper conductors. Specify by conductor count, gauge, UL type, and retracted length.

TPE Power Cords

UL LISTED

General-purpose retractile power cords. TPE stays flexible in cold service and resists oil and abrasion.

Conductor Bare copper Insulation TPE Jacket TPE Listing UL Listed Stock 5 catalog numbers

CAT. NO.	COND.	AWG	UL TYPE	VOLTAGE	AMPS	RETRACTED LENGTHS
1601	2	18	SVT	300V	7A	2", 4", 6", 8", 10"
1602	3	18	SVT	300V	7A	2", 4", 6", 8", 10", 15"
1610	3	16	SJT	300V	13A	2", 4", 6", 8", 10", 15", 20"
1615	3	14	SJT	300V	15A	4", 6", 8", 10", 15", 20"
1620	3	12	SJTO	300V	20A	4", 6", 8", 10", 15"

TPR Power Cords

UL LISTED

Thermoplastic rubber jacket for heavier industrial duty, including 600V SO construction.

Conductor Bare copper Insulation TPR Jacket TPR Listing UL Listed Stock 3 catalog numbers

CAT. NO.	COND.	AWG	UL TYPE	VOLTAGE	AMPS	RETRACTED LENGTHS
2201	3	16	SJTO	300V	13A	2", 4", 6", 8", 10", 15"
2210	3	14	SJTO	300V	15A	4", 6", 8", 10", 15", 20"
2215	3	12	SO	600V	20A	4", 6", 8", 10", 15"

PVC Power Cords

UL LISTED

Economical PVC retractile power cords for indoor, climate-controlled equipment.

Conductor Bare copper Insulation PVC Jacket PVC Listing UL Listed Stock 5 catalog numbers

CAT. NO.	COND.	AWG	UL TYPE	VOLTAGE	AMPS	RETRACTED LENGTHS
3301	2	18	SVT	300V	7A	2", 4", 6", 8", 10"
3310	3	16	SJT	300V	13A	2", 4", 6", 8", 10", 15"
3315	3	14	SJT	300V	15A	4", 6", 8", 10", 15", 20"
3320	3	12	SOW	600V	20A	4", 6", 8", 10", 15"
3325	3	10	SOW	600V	30A	6", 8", 10", 15"

TPE Power Cords (Bare Ends)

UL RECOGNIZED

TPE power cords supplied with bare, stripped ends for OEM termination. UL Recognized component.

Conductor Bare copper Insulation TPE Jacket TPE Listing UL Recognized Stock 2 catalog numbers

CAT. NO.	COND.	AWG	UL TYPE	VOLTAGE	AMPS	RETRACTED LENGTHS
4401	3	18	SVTO	300V	7A	2", 4", 6", 8", 10"
4410	4	16	SJT	300V	13A	2", 4", 6", 8", 10", 15"

2

Communications, Control, and Test Lead Cords

Tinned-copper curly cords for telephone handsets, dispatch radios, headsets, control panels, and meter and probe test leads.

Communications & Control Cables

UL LISTED

Handset, headset, radio, and control-panel curly cords. Tinned copper for flex life at the terminations.

Conductor Tinned copper Insulation PVC Jacket PVC Listing UL Listed Stock 2 catalog numbers

CAT. NO.	COND.	AWG	UL TYPE	VOLTAGE	AMPS	RETRACTED LENGTHS
5501	4	18	CMG	300V	5A	2", 4", 6", 8", 10"
5510	4	16	CMG	300V	8A	2", 4", 6", 8", 10", 15"

Test Lead Cords

UL RECOGNIZED

Two-conductor curly test leads for meters and probes. UL Recognized for use inside a listed instrument or lead set.

Conductor Tinned copper Insulation PVC Jacket PVC Listing UL Recognized Stock 2 catalog numbers

CAT. NO.	COND.	AWG	UL TYPE	VOLTAGE	AMPS	RETRACTED LENGTHS
6601	2	18	SVT	300V	7A	2", 4", 6"
6610	2	16	SJT	300V	10A	2", 4", 6", 8"

3

Shielded Coiled Cables

Shielded coiled cables for signal and data runs in electrically noisy environments, where EMI would otherwise couple into the conductors.

Shielded Communications Cables

UL LISTED

TPE shielded coiled cables for communications and data.

Conductor Tinned copper Insulation TPE Jacket TPE Shield Yes Listing UL Listed Stock 2 catalog numbers

CAT. NO.	COND.	AWG	UL TYPE	VOLTAGE	AMPS	RETRACTED LENGTHS
7701	3	18	SJTO	300V	5A	2", 4", 6", 8", 10"
7710	4	16	SJT	300V	8A	2", 4", 6", 8", 10", 15"

PVC Shielded Cables

UL LISTED

PVC shielded coiled cable for instrumentation and control circuits.

Conductor Tinned copper Insulation PVC Jacket PVC Shield Yes Listing UL Listed Stock 1 catalog number

CAT. NO.	COND.	AWG	UL TYPE	VOLTAGE	AMPS	RETRACTED LENGTHS
8801	2	18	SVT	300V	5A	2", 4", 6", 8"

4

Miniature Coiled Cords

Small-diameter coiled cords for handheld devices, panel wiring, and tight enclosures where a standard power cord will not fit.

Miniature PVC Cords

UL RECOGNIZED

Miniature PVC coiled cords, bare copper.

Conductor Bare copper Insulation PVC Jacket PVC Listing UL Recognized Stock 2 catalog numbers

CAT. NO.	COND.	AWG	UL TYPE	VOLTAGE	AMPS	RETRACTED LENGTHS
9901	2	18	SVT	300V	5A	2", 4", 6"
9910	3	18	SVT	300V	5A	2", 4", 6", 8"

Miniature PVC Foil-Shielded Cords

UL RECOGNIZED

Miniature PVC coiled cords with a foil shield, tinned copper, for low-level signal runs.

Conductor Tinned copper Insulation PVC Jacket PVC Shield Yes Listing UL Recognized Stock 1 catalog number

CAT. NO.	COND.	AWG	UL TYPE	VOLTAGE	AMPS	RETRACTED LENGTHS
9950	3	18	SVT	300V	5A	2", 4", 6"

Specifying a Custom Cord

Send us the items below and we will quote the build. Anything you leave blank we will recommend.

1. Reach, not coil

Measure the working distance the cord has to cover. Divide by five for the retracted length. Size it so the cord reaches with tension to spare, or it will take a set.

2. Electrical load

Voltage, current, and the number of circuits set the conductor count and gauge. Signal and handset cords run 22 to 26 AWG; power cords 18 down to 10 AWG.

3. Environment

PVC for indoor, climate-controlled service. TPE or TPR for cold, oil, or abrasion. Ask about Auta-Prene where coil recovery over a long life is the point of the cord.

Company / contact

Retracted length

Application

Extended working length

Number of conductors

Tangent (lead) length, each end

Wire gauge (AWG)

Termination, end A

Voltage / amps

Termination, end B

Insulation material

UL Listed or UL Recognized

Jacket material and color

Annual quantity

Shielding (none / braid / foil)

Target date

Sample cords. If you have a cord you are replacing, send it with the worksheet. We will match the construction and quote from the sample.

Request a quote

Online at autacusa.com/quote/ or configure a cord step by step at autacusa.com/build-your-cord/

(800) 243-3161

sales@autacusa.com