

STOCK PRODUCT CATALOG · SEPTEMBER 2026

Retractile Cords, Coiled Cords & Curly Cords

UL-listed retractile power cords, communications and control cords, test leads, shielded coiled cables, and miniature cords. Manufactured in Branford, Connecticut since 1947.

112
stock catalog numbers

1947
manufacturing since

100%
woman-owned

USA
made in Branford, CT

(800) 243-3161 (203) 481-3444 sales@autacusa.com autacusa.com

ABOUT THIS CATALOG

Stock retractile cords, ready to quote

Autac has manufactured retractile cords, also called coiled cords, coil cords, and curly cords, in Branford, Connecticut since 1947. Every cord in this catalog is wound and heat-set in our own plant, which is what gives it the spring memory to extend to its working length and pull itself back thousands of times without going slack.

The tables that follow list our 112 stock catalog numbers by construction, with the same specifications as our printed catalog: conductor count, gauge and stranding, cord type, electrical and temperature ratings, cord and coil diameter, and weight. Every stock number is available in 12, 24, 36, and 48 inch retracted lengths unless noted. Extended working length is five times the retracted length; the length chart on the reference page gives the full figures.


Anything not listed here is built to order. Custom conductor counts, gauges, lengths, jacket colors, shielding, and terminations are all available, and there is no minimum order quantity on most constructions. The worksheet on the last page lists what we need to quote a custom cord.

How to read the tables

- **Cat. No.** is the stock catalog number. Quote it with the retracted length you need, for example **93161, 24 inch**. A number ending in **W** is the white-jacket version and **R** the red-jacket version (91208R, a red test lead); **5P** is a PVC jacket and **7P** an Auta-Prene TPE jacket on the same cord.
- **Cond.**, **AWG**, and **Strand** are conductor count, wire gauge, and stranding (number of strands / strand gauge).
- **Type** is the UL cord designation. **AWM** is UL Recognized appliance wiring material. Volts, amps, and temperature are the rated maximums for that construction.
- **Cord OD** and **Coil OD** are the outside diameter of the finished cord and of the coil, in inches.
- **Retracted** lengths are the coil lengths stocked, in inches, at rest. **Wt. lbs** gives the weight at each of those lengths in order.
- **UL/cUL Listed** cords are finished, standalone products. **UL Recognized** cords are components for use inside equipment that carries its own approval.

Pricing

Pricing is not printed in this catalog. Call or email sales for a quote, or, if you are an existing customer, verify your email at autacusa.com/products/ to view current pricing online.

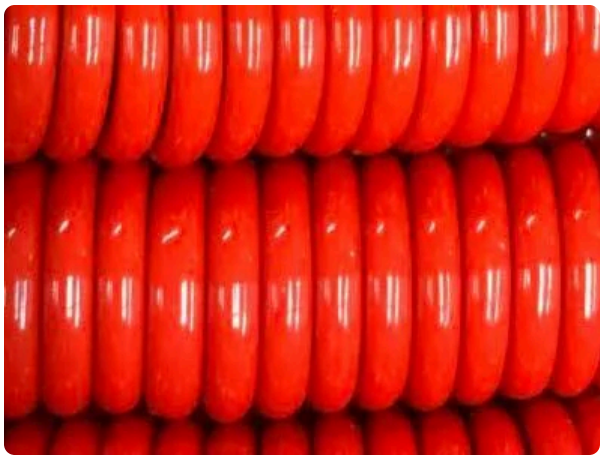

CONTENTS

1. **Retractile Power Cords**
   TPE Power Cords, TPR Power Cords, PVC Power Cords, TPE Power Cords (TPE Jacket)
2. **Communications, Control, and Test Lead Cords**
   Communications & Electronic Control Cords, Auta-Prene Test Leads
3. **Shielded Coiled Cables**
   PVC or Auta-Prene Shielded Cords, PVC Shielded Cords
4. **Miniature Coiled Cords**
   PVC Miniature Cords, PVC Miniature Cords with Foil Shield
5. **Reference**
   Length chart, cord types, conductor color codes
6. **Specifying a Custom Cord**
   Spec worksheet, extension ratio, terminations

CONTACT

SALES
(800) 243-3161
(203) 481-3444

EMAIL
sales@autacusa.com

FACILITY
25 Thompson Rd,
Branford, CT 06405

MAILING AND REMITTANCE
P.O. Box 306, North Branford, CT 06471

WEB
autacusa.com

HOURS
Mon to Fri, 8am to 5pm ET

1 Retractile Power Cords

UL-listed retractile power cords in TPE, TPR, and PVC. Bare copper conductors. Specify by conductor count, gauge, UL type, and retracted length.

TPE Power Cords

UL/CUL LISTED

Our most popular retractile power cords. TPE insulation stays flexible in cold service and resists oil and abrasion. TPE insulated, TPR black jacket. W suffix: white jacket.

Conductor Soft bare copper **Insulation** TPE **Jacket** TPR **Listing** UL/cUL Listed **Extension** 1:5 **Print catalog** p. 6

Stock 11 catalog numbers

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
72180	2	18	41/34	SVEO/SVTO	300V	7A	105°C	.242	7/8	12, 24, 36, 48	0.35 / 0.48 / 0.76 / 0.90
72180W	2	18	41/34	SVEO/SVTO	300V	7A	105°C	.242	7/8	12, 24, 36, 48	0.30 / 0.35 / 0.52 / 0.68
73180	3	18	41/34	SVEO/SVTO	300V	7A	105°C	.260	7/8	12, 24, 36, 48	0.35 / 0.36 / 0.51 / 0.67
72181	2	18	41/34	SJEOW/SJTOW	300V	7A	105°C	.300	1	12, 24, 36, 48	0.48 / 0.50 / 0.70 / 0.93
73181	3	18	41/34	SJEOW/SJTOW	300V	7A	105°C	.308	1 3/8	12, 24, 36, 48	0.55 / 0.80 / 1.10 / 1.50
74181	4	18	41/34	SJEOW/SJTOW	300V	7A	105°C	.340	1 3/8	12, 24, 36, 48	0.64 / 0.84 / 1.20 / 1.60
75181	5	18	41/34	SJEOW/SJTOW	300V	7A	105°C	.385	1 3/8	12, 24, 36, 48	0.82 / 0.90 / 1.30 / 1.80
77181	7	18	41/34	SJEOW/SJTOW	300V	7A	105°C	.430	1 5/8	12, 24, 36, 48	0.85 / 1.50 / 2.20 / 3.00
73182	3	18	41/34	SEOW/STOW	600V	7A	105°C	.375	1 3/8	12, 24, 36, 48	0.61 / 0.86 / 1.20 / 1.60
77182	7	18	41/34	SEOW/STOW	600V	7A	105°C	.500	1 7/8	12, 24, 36, 48	1.40 / 1.70 / 2.50 / 3.20
710182	10	18	41/34	SEOW/STOW	600V	7A	105°C	.590	2 3/8	12, 24, 36, 48	2.20 / 2.80 / 4.10 / 5.40

TPR Power Cords

UL/CUL LISTED

Heavier-gauge power cords for tools and industrial equipment, 16 to 12 AWG, at 300V and 600V. TPE insulated, TPR black jacket.

Conductor Soft bare copper **Insulation** TPE **Jacket** TPR **Listing** UL/cUL Listed **Extension** 1:5 **Print catalog** p. 7

Stock 17 catalog numbers

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
72161	2	16	65/34	SJEOW/SJTOW	300V	10A	105°C	.300	7/8	12, 24, 36, 48	0.49 / 0.55 / 0.81 / 1.20
73161	3	16	65/34	SJEOW/SJTOW	300V	10A	105°C	.340	1 3/8	12, 24, 36, 48	0.65 / 0.88 / 2.30 / 1.70
73162	3	16	65/34	SEOW/STOW	600V	10A	105°C	.385	1 1/2	12, 24, 36, 48	0.73 / 0.90 / 1.30 / 1.80
74161	4	16	65/34	SJEOW/SJTOW	300V	10A	105°C	.365	1 3/8	12, 24, 36, 48	0.82 / 0.96 / 1.40 / 1.90
74162	4	16	65/34	SEOW/STOW	600V	10A	105°C	.425	1 1/2	12, 24, 36, 48	1.20 / 1.30 / 1.90 / 2.30
75162	5	16	65/34	SEOW/STOW	600V	10A	105°C	.495	1 5/8	12, 24, 36, 48	1.50 / 1.70 / 2.90 / 3.90
76162	6	16	65/34	SEOW/STOW	600V	10A	105°C	.530	2	12, 24, 36, 48	1.80 / 2.40 / 3.50 / 4.60
77162	7	16	65/34	SEOW/STOW	600V	10A	105°C	.535	2	12, 24, 36, 48	1.90 / 2.60 / 3.60 / 4.70
78162	8	16	65/34	SEOW/STOW	600V	10A	105°C	.570	2 1/8	12, 24, 36, 48	2.10 / 2.70 / 3.60 / 4.80
73141	3	14	41/30	SJEOW/SJTOW	300V	10A	105°C	.390	1 9/16	12, 24, 36, 48	1.10 / 2.20 / 3.20 / 4.20
73142	3	14	41/30	SEOW/STOW	600V	12A	105°C	.540	2 1/8	12, 24, 36, 48	1.90 / 2.40 / 3.50 / 4.80

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
74142	4	14	41/30	SEOW/STOW	600V	12A	105°C	.570	2 1/8	12, 24, 36, 48	2.30 / 2.70 / 4.00 / 5.30
75141	5	14	41/30	SJEOW/SJTOW	300V	12A	105°C	.465	1 3/8	12, 24, 36, 48	1.90 / 1.90 / 2.30 / 3.00
77142	7	14	41/30	SEOW/STOW	600V	12A	105°C	.700	2 3/8	12, 24, 36, 48	2.10 / 2.30 / 3.40 / 4.50
72121	2	12	65/30	SJEOW/SJTOW	300V	12A	105°C	.420	1 1/2	12, 24, 36, 48	1.30 / 1.40 / 2.20 / 2.80
73122	3	12	65/30	SEOW/STOW	600V	20A	105°C	.580	2 3/8	12, 24, 36, 48	2.36 / 3.13 / 4.61 / 6.11
74122	4	12	65/30	SEOW/STOW	600V	20A	105°C	.660	2 3/8	12, 24, 36, 48	2.82 / 3.43 / 5.16 / 6.70

PVC Power Cords

UL/CUL LISTED

Economical PVC retractile power cords for indoor, climate-controlled equipment. PVC insulated, PVC black jacket. Numbers ending in W are the same cord in white.

Conductor Soft bare copper **Insulation** PVC **Jacket** PVC **Listing** UL/cUL Listed **Extension** 1:5 **Print catalog** p. 8

Stock 22 catalog numbers

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
92180	2	18	41/34	SVT	300V	10A	105°C	.250	7/8	12, 24, 36, 48	0.31 / 0.33 / 0.48 / 0.63
92180W	2	18	41/34	SVT	300V	10A	105°C	.250	7/8	12, 24, 36, 48	0.41 / 0.44 / 0.64 / 0.85
93180	3	18	41/34	SVT	300V	10A	105°C	.260	7/8	12, 24, 36, 48	0.35 / 0.36 / 0.51 / 0.67
93180W	3	18	41/34	SVT	300V	10A	105°C	.260	7/8	12, 24, 36, 48	0.38 / 0.39 / 0.56 / 0.73
92181	2	18	41/34	SJT	300V	10A	105°C	.295	1	12, 24, 36, 48	0.38 / 0.40 / 0.57 / 0.75
92181W	2	18	41/34	SJT	300V	10A	105°C	.295	1	12, 24, 36, 48	0.40 / 0.42 / 0.60 / 0.79
93181	3	18	41/34	SJT	300V	10A	105°C	.330	1 3/8	12, 24, 36, 48	0.52 / 0.70 / 1.00 / 1.40
93181W	3	18	41/34	SJT	300V	10A	105°C	.330	1 3/8	12, 24, 36, 48	0.56 / 0.75 / 1.10 / 1.50
94181	4	18	41/34	SJT	300V	7A	105°C	.360	1 3/8	12, 24, 36, 48	0.60 / 0.73 / 1.20 / 1.50
94181W	4	18	41/34	SJT	300V	7A	105°C	.360	1 3/8	12, 24, 36, 48	0.68 / 0.82 / 1.20 / 1.60
95181	5	18	41/34	SJT	300V	5.6A	105°C	.440	1 1/2	12, 24, 36, 48	1.20 / 1.20 / 1.70 / 2.30
95181W	5	18	41/34	SJT	300V	5.6A	105°C	.440	1 1/2	12, 24, 36, 48	1.10 / 1.10 / 1.50 / 2.10
92161	2	16	65/34	SJT	300V	13A	105°C	.315	1 1/8	12, 24, 36, 48	0.47 / 0.52 / 0.77 / 1.00
92161W	2	16	65/34	SJT	300V	13A	105°C	.315	1 1/8	12, 24, 36, 48	0.49 / 0.54 / 0.80 / 1.10
93161	3	16	65/34	SJT	300V	13A	105°C	.355	1 3/8	12, 24, 36, 48	0.68 / 0.83 / 1.20 / 1.60
93161W	3	16	65/34	SJT	300V	13A	105°C	.355	1 3/8	12, 24, 36, 48	0.67 / 0.82 / 1.20 / 1.60
94161	4	16	65/34	SJT	300V	10A	105°C	.410	1 5/8	12, 24, 36, 48	0.92 / 1.40 / 2.10 / 2.80
94161W	4	16	65/34	SJT	300V	10A	105°C	.410	1 5/8	12, 24, 36, 48	0.90 / 1.40 / 2.10 / 2.80
93141	3	14	41/30	SJT	300V	15A	105°C	.390	1 9/16	12, 24, 36, 48	1.10 / 2.10 / 3.10 / 4.10
93141W	3	14	41/30	SJT	300V	15A	105°C	.390	1 9/16	12, 24, 36, 48	1.10 / 2.10 / 3.20 / 4.20
93121	3	12	65/30	SJT	300V	20A	105°C	.435	1 5/8	12, 24, 36, 48	1.70 / 1.80 / 2.60 / 3.50
93121W	3	12	65/30	SJT	300V	20A	105°C	.435	1 5/8	12, 24, 36, 48	1.80 / 1.90 / 2.80 / 3.60

TPE Power Cords (TPE Jacket)

UL/CUL LISTED

TPE insulation and TPE jacket throughout, for full chemical resistance and flexibility. TPE throughout, insulation and jacket. E suffix series.

Conductor Soft bare copper **Insulation** TPE **Jacket** TPE **Listing** UL/cUL Listed **Extension** 1:5 **Print catalog** p. 10

Stock 9 catalog numbers

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
92180E	2	18	41/34	SVEO/SVT	300V	10A	105°C	.250	7/8	12, 24, 36, 48	0.41 / 0.44 / 0.64 / 0.85
93180E	3	18	41/34	SVEO/SVT	300V	10A	105°C	.260	7/8	12, 24, 36, 48	0.34 / 0.34 / 0.50 / 0.66
92181E	2	18	41/34	SJEOOW/SJTOOW	300V	10A	105°C	.295	1	12, 24, 36, 48	0.41 / 0.41 / 0.60 / 0.80
93181E	3	18	41/34	SJEOOW/SJTOOW	300V	10A	105°C	.330	1 3/8	12, 24, 36, 48	0.55 / 0.78 / 1.10 / 1.50
94181E	4	18	41/34	SJEOOW/SJTOOW	300V	7A	105°C	.350	1 3/8	12, 24, 36, 48	0.61 / 0.77 / 1.10 / 1.50
92161E	2	16	65/34	SJEOOW/SJTOOW	300V	13A	105°C	.315	1 1/8	12, 24, 36, 48	0.52 / 0.58 / 0.85 / 1.10
93161E	3	16	65/34	SJEOOW/SJTOOW	300V	13A	105°C	.355	1 3/8	12, 24, 36, 48	0.65 / 0.80 / 1.20 / 1.50
94161E	4	16	65/34	SJEOOW/SJTOOW	300V	10A	105°C	.410	1 5/8	12, 24, 36, 48	0.90 / 1.00 / 1.50 / 2.00
93141E	3	14	41/30	SJEOOW/SJTOOW	300V	15A	105°C	.390	1 1/2	12, 24, 36, 48	1.10 / 2.10 / 3.10 / 4.10

2 Communications, Control, and Test Lead Cords

Tinned-copper curly cords for telephone handsets, dispatch radios, headsets, control panels, and meter and probe test leads.

Communications & Electronic Control Cords

UL RECOGNIZED AWM (CUL AVAILABLE)

Handset, headset, radio, and control-panel curly cords. Tinned copper for flex life at the terminations. Number ending in 5P = PVC jacket, 7P = Auta-Prene TPE jacket. Colors on request.

Conductor Soft tinned copper **Insulation** Polypropylene **Jacket** PVC or Auta-Prene TPE **Listing** UL Recognized AWM (cUL available)

Extension 1:5 **Print catalog** p. 11 **Stock** 20 catalog numbers

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
22235P	2	23	21/36	AWM	300V	1A	80°C	.180	5/8	12, 24, 36, 48	0.17 / 0.18 / 0.27 / 0.35
22237P	2	23	21/36	AWM	300V	1A	80°C	.180	5/8	12, 24, 36, 48	0.17 / 0.18 / 0.27 / 0.35
23235P	3	23	21/36	AWM	300V	1A	80°C	.190	11/16	12, 24, 36, 48	0.19 / 0.22 / 0.32 / 0.43
23237P	3	23	21/36	AWM	300V	1A	80°C	.190	11/16	12, 24, 36, 48	0.20 / 0.23 / 0.34 / 0.45
24235P	4	23	21/36	AWM	300V	1A	80°C	.200	11/16	12, 24, 36, 48	0.21 / 0.22 / 0.33 / 0.44
24237P	4	23	21/36	AWM	300V	1A	80°C	.200	11/16	12, 24, 36, 48	0.21 / 0.22 / 0.33 / 0.44
25235P	5	23	21/36	AWM	300V	1A	80°C	.215	3/4	12, 24, 36, 48	0.22 / 0.24 / 0.35 / 0.46
25237P	5	23	21/36	AWM	300V	1A	80°C	.215	3/4	12, 24, 36, 48	0.25 / 0.26 / 0.38 / 0.50
26235P	6	23	21/36	AWM	300V	1A	80°C	.230	7/8	12, 24, 36, 48	0.27 / 0.33 / 0.48 / 0.64
26237P	6	23	21/36	AWM	300V	1A	80°C	.230	7/8	12, 24, 36, 48	0.27 / 0.33 / 0.48 / 0.64
27235P	7	23	21/36	AWM	300V	1A	80°C	.230	7/8	12, 24, 36, 48	0.28 / 0.33 / 0.48 / 0.64
27237P	7	23	21/36	AWM	300V	1A	80°C	.230	7/8	12, 24, 36, 48	0.28 / 0.33 / 0.49 / 0.65

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
28235P	8	23	21/36	AWM	300V	1A	80°C	.245	7/8	12, 24, 36, 48	0.31 / 0.34 / 0.50 / 0.67
28237P	8	23	21/36	AWM	300V	1A	80°C	.245	7/8	12, 24, 36, 48	0.33 / 0.37 / 0.54 / 0.71
210235P	10	23	21/36	AWM	300V	1A	80°C	.280	15/16	12, 24, 36, 48	0.46 / 0.46 / 0.68 / 0.89
210237P	10	23	21/36	AWM	300V	1A	80°C	.280	15/16	12, 24, 36, 48	0.47 / 0.47 / 0.69 / 0.92
212235P	12	23	21/36	AWM	300V	1A	80°C	.285	1	12, 24, 36, 48	0.48 / 0.52 / 0.76 / 1.10
212237P	12	23	21/36	AWM	300V	1A	80°C	.285	1	12, 24, 36, 48	0.50 / 0.54 / 0.80 / 1.10
215235P	15	23	21/36	AWM	300V	1A	80°C	.310	1 1/16	12, 24, 36, 48	0.58 / 0.62 / 0.91 / 1.20
215237P	15	23	21/36	AWM	300V	1A	80°C	.310	1 1/16	12, 24, 36, 48	0.63 / 0.67 / 1.20 / 1.30

Auta-Prene Test Leads

UL RECOGNIZED

Single-conductor test leads for meters and probes. Single-conductor 5000V test leads. Stocked in 12 and 24 inch retracted lengths.

Conductor Soft tinned copper **Insulation** TPE **Jacket** Auta-Prene TPE **Listing** UL Recognized **Extension** 1:5

Print catalog p. 11 **Stock** 2 catalog numbers

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
91207	1	20	41/36	Test lead	5000V	4A	105°C	.165	5/8	12, 24	0.17 / 0.19
91208R	1	20	41/36	Test lead, red	5000V	4A	105°C	.165	5/8	12, 24	0.17 / 0.19

3 Shielded Coiled Cables

Shielded coiled cables for signal and data runs in electrically noisy environments, where EMI would otherwise couple into the conductors.

PVC or Auta-Prene Shielded Cords

UL RECOGNIZED AWM (CUL AVAILABLE)

Each conductor individually shielded, for signal runs where crosstalk matters. Each conductor individually served shielded with 36 AWG soft tinned copper, average 90% coverage. Conductors white and/or black. Capacitance values on request.

Conductor Soft tinned copper **Insulation** Polypropylene **Jacket** PVC or Auta-Prene TPE **Shield** Yes

Listing UL Recognized AWM (cUL available) **Extension** 1:5 **Print catalog** p. 12 **Stock** 8 catalog numbers

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
31235P	1	23	21/36	AWM	300V	1A	80°C	.165	5/8	12, 24, 36, 48	0.16 / 0.19 / 0.28 / 0.37
31237P	1	23	21/36	AWM	300V	1A	80°C	.165	5/8	12, 24, 36, 48	0.18 / 0.20 / 0.30 / 0.40
32235P	2	23	21/36	AWM	300V	1A	80°C	.210	3/4	12, 24, 36, 48	0.26 / 0.29 / 0.43 / 0.57
32237P	2	23	21/36	AWM	300V	1A	80°C	.210	3/4	12, 24, 36, 48	0.26 / 0.29 / 0.43 / 0.57
33235P	3	23	21/36	AWM	300V	1A	80°C	.205	3/4	12, 24, 36, 48	0.21 / 0.24 / 0.36 / 0.48
33237P	3	23	21/36	AWM	300V	1A	80°C	.205	3/4	12, 24, 36, 48	0.23 / 0.25 / 0.37 / 0.49
34235P	4	23	21/36	AWM	300V	1A	80°C	.230	7/8	12, 24, 36, 48	0.30 / 0.37 / 0.54 / 0.71
34237P	4	23	21/36	AWM	300V	1A	80°C	.230	7/8	12, 24, 36, 48	0.29 / 0.35 / 0.52 / 0.68

PVC Shielded Cords

UL RECOGNIZED AWM (CSA AVAILABLE)

Overall shielded coiled cable for instrumentation and control circuits. Overall served shield, 36 AWG soft tinned copper, average 90% coverage. Black jacket, colors on request. Capacitance values on request.

Conductor Soft tinned copper **Insulation** Polypropylene **Jacket** PVC **Shield** Yes **Listing** UL Recognized AWM (CSA available)

Extension 1:5 **Print catalog** p. 13 **Stock** 7 catalog numbers

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
62235P	2	23	21/36	AWM	300V	1A	80°C	.180	11/16	12, 24, 36, 48	0.18 / 0.22 / 0.33 / 0.43
63235P	3	23	21/36	AWM	300V	1A	80°C	.190	11/16	12, 24, 36, 48	0.22 / 0.24 / 0.36 / 0.47
64235P	4	23	21/36	AWM	300V	1A	80°C	.205	11/16	12, 24, 36, 48	0.23 / 0.24 / 0.35 / 0.47
65235P	5	23	21/36	AWM	300V	1A	80°C	.215	3/4	12, 24, 36, 48	0.31 / 0.32 / 0.48 / 0.63
66235P	6	23	21/36	AWM	300V	1A	80°C	.230	7/8	12, 24, 36, 48	0.32 / 0.38 / 0.57 / 0.75
67235P	7	23	21/36	AWM	300V	1A	80°C	.235	7/8	12, 24, 36, 48	0.34 / 0.40 / 0.59 / 0.78
68235P	8	23	21/36	AWM	300V	1A	80°C	.245	7/8	12, 24, 36, 48	0.38 / 0.42 / 0.61 / 0.81

4 Miniature Coiled Cords

Small-diameter coiled cords for handheld devices, panel wiring, and tight enclosures where a standard power cord will not fit.

PVC Miniature Cords

UL RECOGNIZED AWM (CUL AVAILABLE)

Small-diameter cords for handheld devices and tight enclosures. 28 AWG miniature cords, black jacket. Colors on request.

Conductor Soft tinned copper **Insulation** Polypropylene **Jacket** PVC **Listing** UL Recognized AWM (cUL available) **Extension** 1:5

Print catalog p. 14 **Stock** 8 catalog numbers

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
22285P	2	28	7/36	AWM	300V	0.5A	80°C	.150	1/2	12, 24, 36, 48	0.09 / 0.10 / 0.14 / 0.19
23285P	3	28	7/36	AWM	300V	0.5A	80°C	.150	1/2	12, 24, 36, 48	0.09 / 0.10 / 0.14 / 0.20
24285P	4	28	7/36	AWM	300V	0.5A	80°C	.155	1/2	12, 24, 36, 48	0.09 / 0.10 / 0.14 / 0.20
25285P	5	28	7/36	AWM	300V	0.5A	80°C	.165	9/16	12, 24, 36, 48	0.10 / 0.11 / 0.16 / 0.21
26285P	6	28	7/36	AWM	300V	0.5A	80°C	.180	5/8	12, 24, 36, 48	0.15 / 0.16 / 0.23 / 0.31
27285P	7	28	7/36	AWM	300V	0.5A	80°C	.180	5/8	12, 24, 36, 48	0.17 / 0.18 / 0.26 / 0.34
28285P	8	28	7/36	AWM	300V	0.5A	80°C	.200	5/8	12, 24, 36, 48	0.18 / 0.19 / 0.24 / 0.32
210285P	10	28	7/36	AWM	300V	0.5A	80°C	.235	7/8	12, 24, 36, 48	0.23 / 0.27 / 0.39 / 0.52

PVC Miniature Cords with Foil Shield

UL RECOGNIZED AWM (CUL AVAILABLE)

Miniature cords with an overall foil shield, for low-level signal runs. Overall foil shield, black jacket. Colors on request. Capacitance values on request.

Conductor Soft tinned copper **Insulation** Polypropylene **Jacket** PVC **Shield** Yes **Listing** UL Recognized AWM (cUL available)

Extension 1:5 Print catalog p. 14 Stock 8 catalog numbers

CAT. NO.	COND.	AWG	STRAND	TYPE	VOLTS	AMPS	TEMP	CORD OD	COIL OD	RETRACTED IN.	WT. LBS AT EACH LENGTH
82285P	2	28	7/36	AWM	300V	0.5A	80°C	.155	1/2	12, 24, 36, 48	0.12 / 0.15 / 0.17 / 0.22
83285P	3	28	7/36	AWM	300V	0.5A	80°C	.160	1/2	12, 24, 36, 48	0.12 / 0.15 / 0.18 / 0.23
84285P	4	28	7/36	AWM	300V	0.5A	80°C	.180	9/16	12, 24, 36, 48	0.13 / 0.15 / 0.19 / 0.24
85285P	5	28	7/36	AWM	300V	0.5A	80°C	.180	9/16	12, 24, 36, 48	0.14 / 0.15 / 0.22 / 0.25
86285P	6	28	7/36	AWM	300V	0.5A	80°C	.190	11/16	12, 24, 36, 48	0.18 / 0.20 / 0.29 / 0.39
87285P	7	28	7/36	AWM	300V	0.5A	80°C	.195	11/16	12, 24, 36, 48	0.19 / 0.21 / 0.31 / 0.41
88285P	8	28	7/36	AWM	300V	0.5A	80°C	.205	3/4	12, 24, 36, 48	0.20 / 0.22 / 0.32 / 0.42
810285P	10	28	7/36	AWM	300V	0.5A	80°C	.235	7/8	12, 24, 36, 48	0.22 / 0.26 / 0.38 / 0.51

5 Reference

Length chart, UL cord types, and the conductor color codes used on every stock cord.

LENGTH CHART, 1:5 EXTENSION

RETRACTED	EXTENDED	TANGENT LEADS, BOTH ENDS
12 inches	5 feet	12 inches
24 inches	10 feet	6 inches
36 inches	15 feet	6 inches
48 inches	20 feet	6 inches
60 inches	25 feet	Special
Up to 12 feet	Up to 60 feet	Special

UL LISTED AND CUL CERTIFIED CORD TYPES

TYPE	TEMP. RATING	VOLTAGE
SVT, SVEO	60 to 105°C	300V
SJT, SJEOOW	60 to 105°C	300V
ST, SEOW	60 to 105°C	600V

All Autac cords are RoHS compliant. Conductors are soft bare copper on power cords and soft tinned copper on communications, control, test lead, shielded, and miniature cords. CAGE code 3AWW0.

CONDUCTOR COLORS, POWER CORDS

COND.	BASE COLOR	COND.	BASE COLOR
1	Black	6	Blue
2	White	7	Yellow
3	Green	8	Brown
4	Red	9	Gray
5	Orange	10	Violet

CONDUCTOR COLORS, AWM STYLE CORDS

COND.	BASE COLOR	COND.	BASE COLOR
1	Black	9	Gray
2	White	10	Pink
3	Red	11	Violet
4	Green	12	Tan
5	Orange	13	White / black
6	Blue	14	Red / black
7	Yellow	15	Green / black
8	Brown		

6 Specifying a Custom Cord

Send us the items below and we will quote the build. Anything you leave blank we will recommend.

1. Reach, not coil

Measure the working distance the cord has to cover. Divide by five for the retracted length. Size it so the cord reaches with tension to spare, or it will take a set.

2. Electrical load

Voltage, current, and the number of circuits set the conductor count and gauge. Signal and handset cords run 22 to 26 AWG; power cords 18 down to 10 AWG.

3. Environment

PVC for indoor, climate-controlled service. TPE or TPR for cold, oil, or abrasion. Ask about Auta-Prene where coil recovery over a long life is the point of the cord.

Company / contact		Retracted length	
Application		Extended working length	
Number of conductors		Tangent (lead) length, each end	
Wire gauge (AWG)		Termination, end A	
Voltage / amps		Termination, end B	
Insulation material		UL Listed or UL Recognized	
Jacket material and color		Annual quantity	
Shielding (none / braid / foil)		Target date	

Sample cords. If you have a cord you are replacing, send it with the worksheet. We will match the construction and quote from the sample.

Request a quote

Online at **autacusa.com/quote/** or configure a cord step by step at **autacusa.com/build-your-cord/**

(800) 243-3161
sales@autacusa.com