


All routers will have two connections, one to each switch, ISP (Internet Service Provider) will configure HSRP (Hot Standby Router Protocol) so we will have a single gateway address and load balance.



LAN Design Campo Largo

24.04.2013

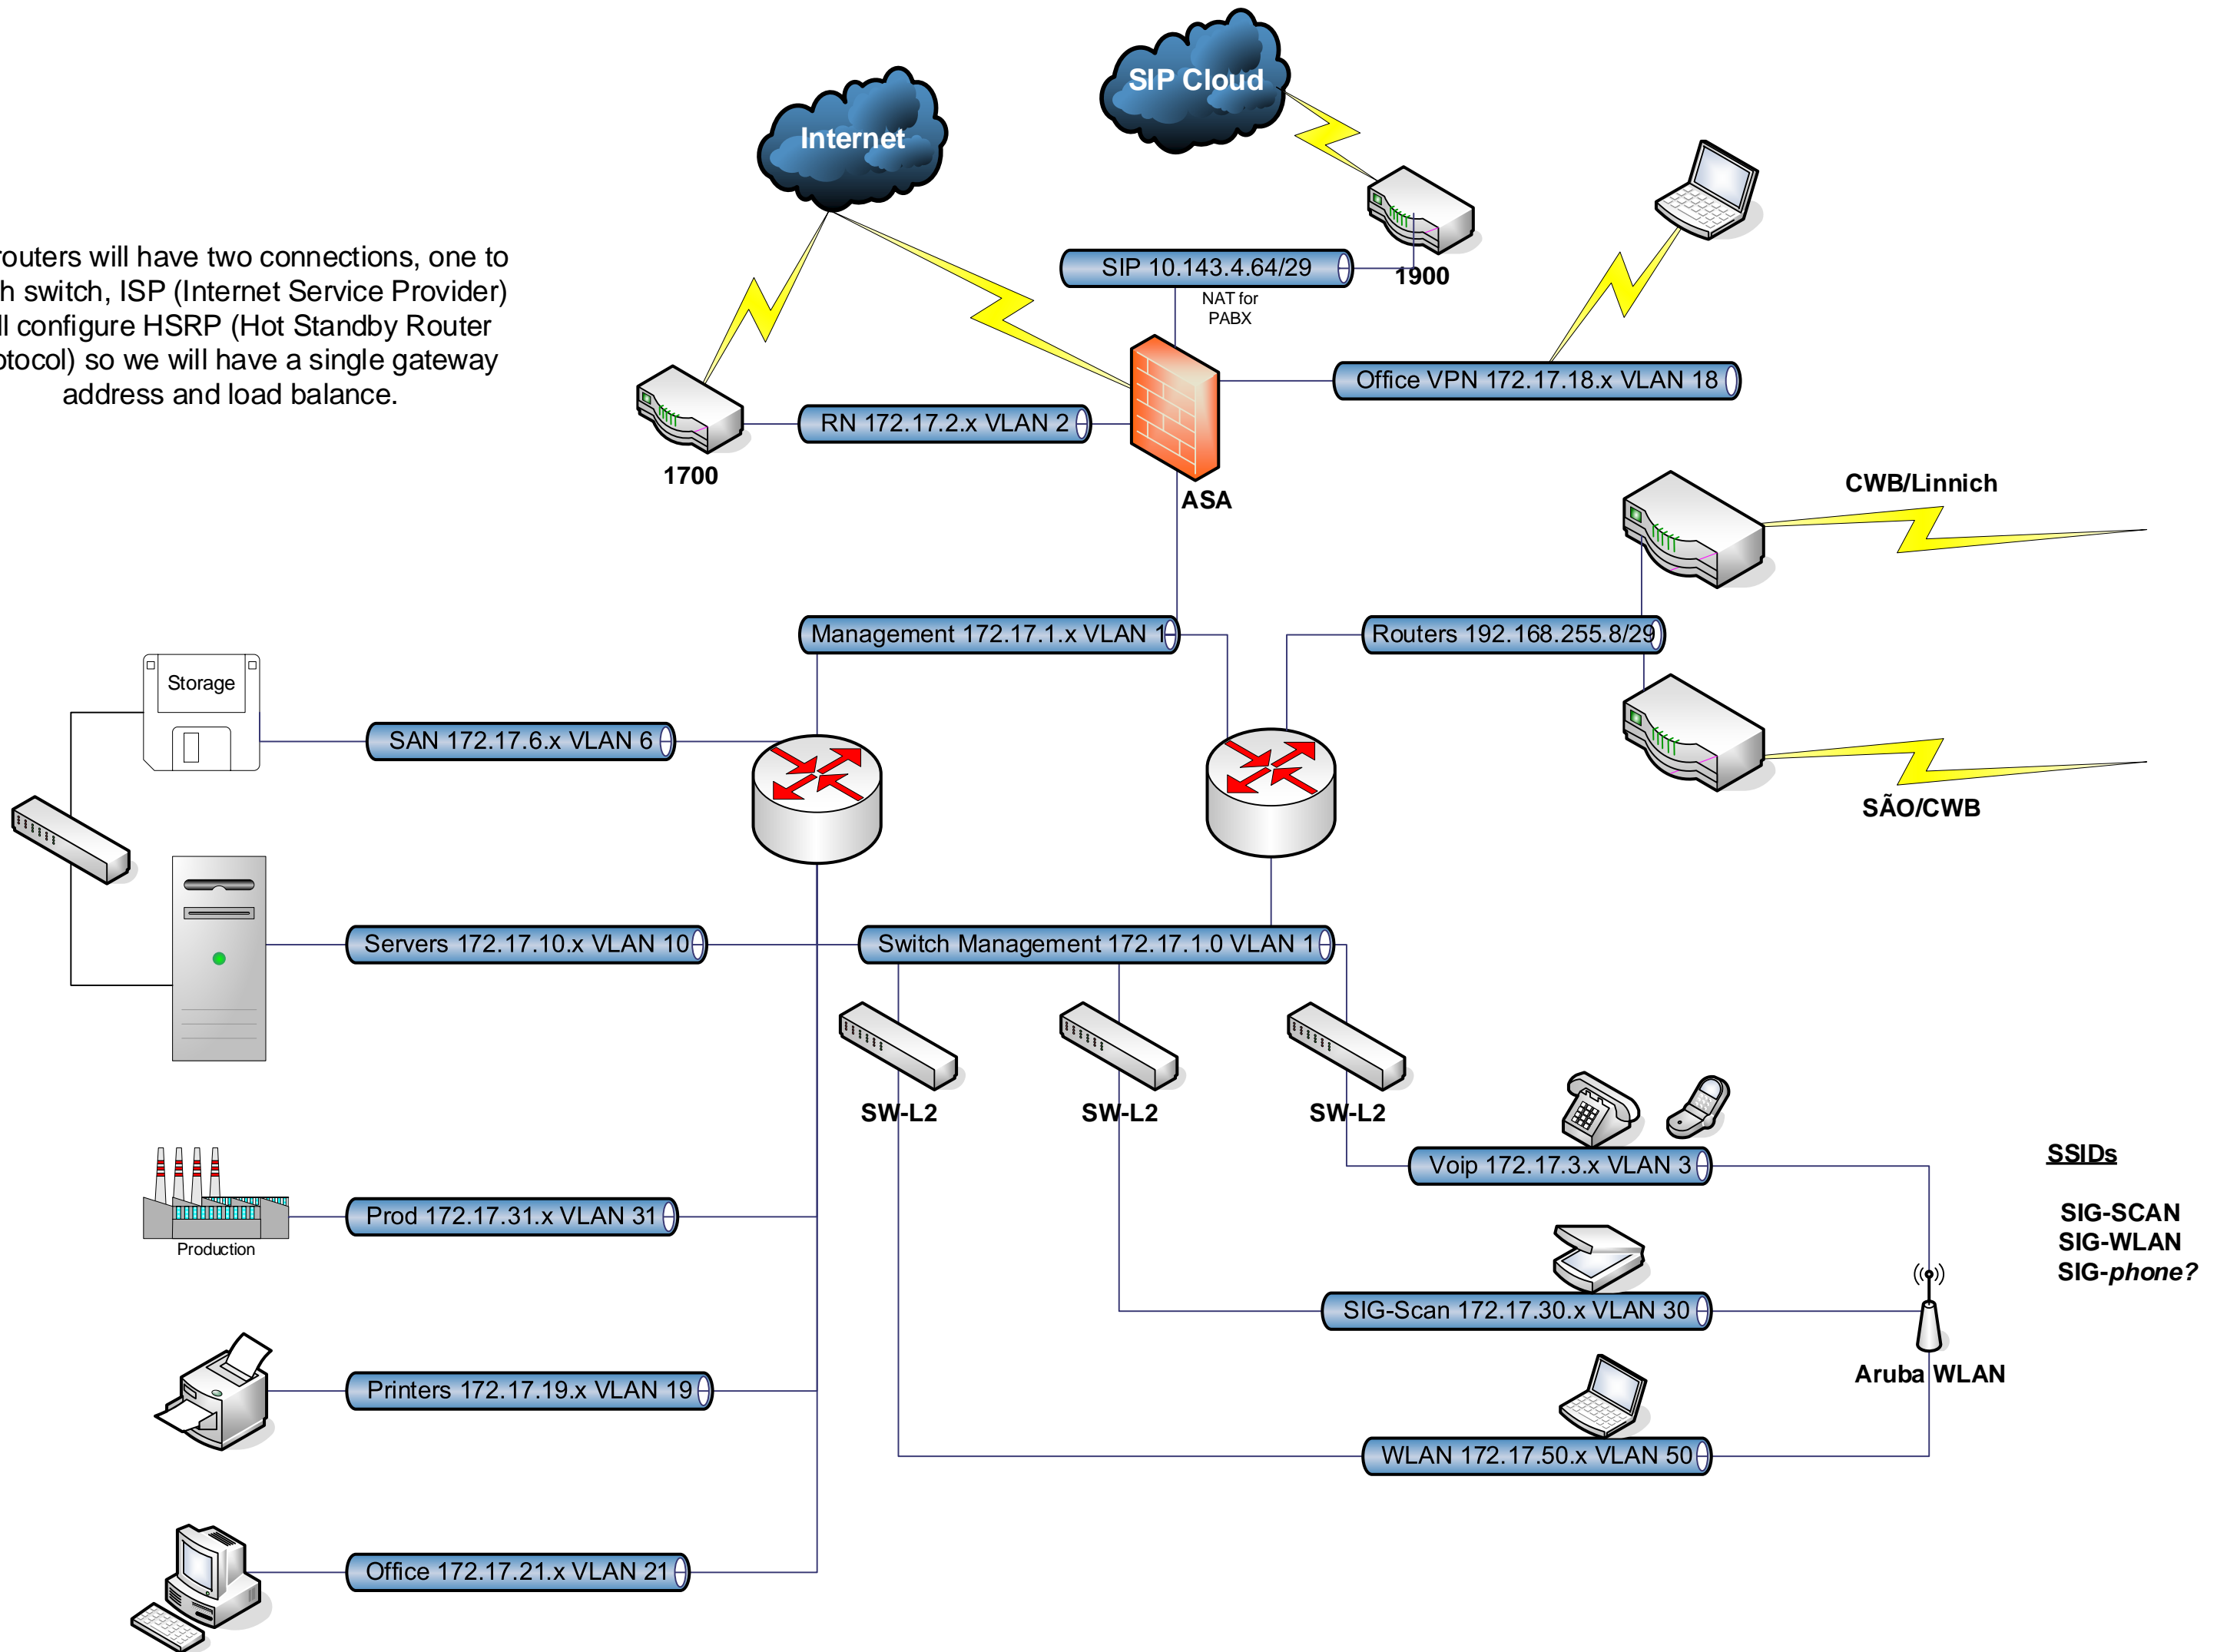