



VIEW A — RADIAL PROFILE (DEPLOYED) SCALE 0.95:1

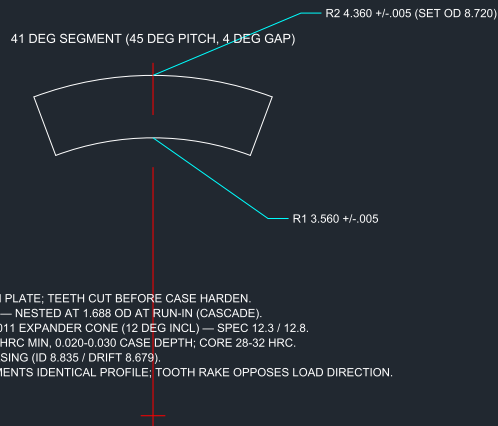

NOTES:

1. WIRE EDM PROFILE FROM PLATE; TEETH CUT BEFORE CASE HARDEN.
2. DEPLOYED RADII SHOWN — NESTED AT 1.688 OD AT RUN-IN (CASCADE).
3. BORE FACE RIDES SHEX-011 EXPANDER CONE (12 DEG INCL) — SPEC 12.3 / 12.8.
4. TEETH: CASE HARDEN 55 HRC MIN, 0.020-0.030 CASE DEPTH; CORE 28-32 HRC.
5. SET AGAINST 9-5/8 40# CASING (ID 8.835 / DRIFT 8.679).
6. UPPER AND LOWER SEGMENTS IDENTICAL PROFILE; TOOTH RAKE OPPOSES LOAD DIRECTION.



UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
.XX +/-0.010 .XXX +/-0.005
ANGLES +/-0.5 DEG
BREAK SHARP EDGES 0.010 MAX

SHEX-BP-UHEX-54 HIGH-EXPANSION BRIDGE PLUG
UPPER SLIP SEGMENT

DWG NO: DWG-008A-SHP REV A
PART NO: SHEX-006 QTY/PLUG: 8
MATL: 17-4 PH H900, TEETH CASE HARDENED 55 HRC MIN
UNITS: INCH PROJECTION: THIRD ANGLE SIZE B
GENERATED FROM cad/release_solids.py PARAMETRIC MODEL