



VIEW A — BODY HALF SECTION SCALE 2:1

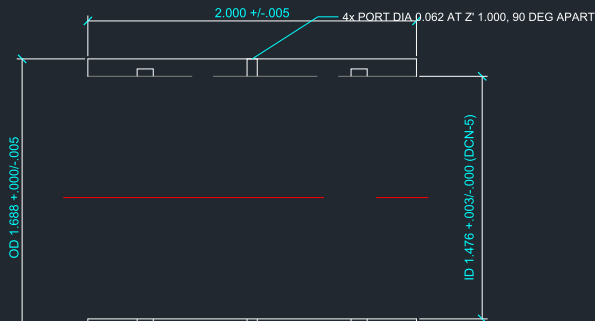

VIEW B — SLIDING SLEEVE SHEX-013S SCALE 2:1

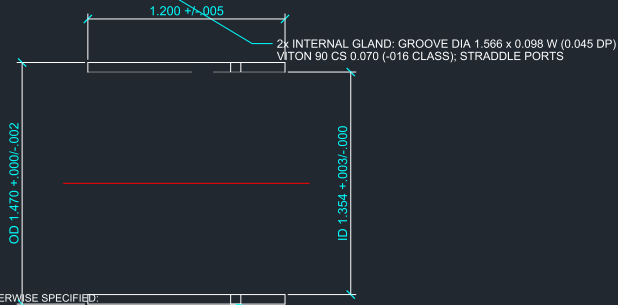

UNLESS OTHERWISE SPECIFIED:

DIMENSIONS ARE IN INCHES

.XX +/-0.010 .XXX +/-0.005

ANGLES +/-0.5 DEG

BREAK SHARP EDGES 0.010 MAX

4x PORT DIA 0.062, ALIGN BODY PORTS WHEN OPEN

NOTES:

1. DCN-5: RADIAL STACK REBUILT — SPEC SLEEVE OD 1.680 COULD NOT ENTER BODY ID 1.562,
2. AND SPEC 0.070-DP GROOVES CUT THROUGH EVERY AVAILABLE WALL.
3. NEW STACK: MANDREL TAIL DIA 1.350 EXTENDED TO Z=5.0; SLEEVE 1.470/1.354;
4. BODY 1.688/1.476 WITH SEALS IN BODY GLANDS RIDING SLEEVE OD.
5. SLEEVE TRAVEL 0.375 MIN WITHOUT BINDING; PORTS ALIGNED = OPEN (RUN-IN).
6. PRESSURE-CONTAINING — 100 PERCENT PT ALL PORTS AFTER MACHINING.
7. ANTI-ROTATION PIN DIA 0.093 x 0.250 DP AT Z' 0.500, RIDES SLEEVE SLOT.
8. FUNCTIONAL TEST: FLOW OPEN (ALIGNED); BLOCKED CLOSED (SHIFTED +0.375).

**SHEX-BP-UHEX-54 HIGH-EXPANSION BRIDGE PLUG
BOTTOM EQUALIZING SUB (BODY + SLEEVE)**

DWG NO: DWG-013-SHP REV C

PART NO: SHEX-013 / SHEX-013S QTY/PLUG: 1 + 1

MATL: 4140 HT (AMS 6415) 28-32 HRC

UNITS: INCH PROJECTION: THIRD ANGLE SIZE B

GENERATED FROM cad/release_solids.py PARAMETRIC MODEL