


VIEW A — HALF SECTION SCALE 1.15:1

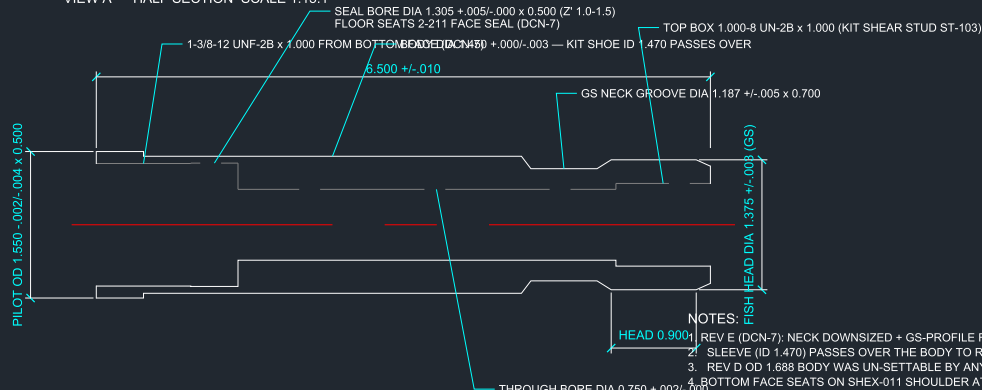

NOTES:

1. REV E (DCN-7); NECK DOWNSIZED + GS-PROFILE FISH HEAD SO THE SETTING-KIT SLEEVE (ID 1.470) PASSES OVER THE BODY TO REACH THE SLIP CARRIER FACE.
2. REV D OD 1.688 BODY WAS UN-SETTABLE BY ANY ADAPTER-KIT TOOL.
3. REV D OD 1.688 BODY WAS UN-SETTABLE BY ANY ADAPTER-KIT TOOL.
4. BOTTOM FACE SEATS ON SHEX-011 SHOULDER AT PLUG Z=50.5; TORQUE 250 FT-LB MIN.
5. DRILL DIA 0.125 ANTIROTATION PIN AT PLUG Z=51.0 AFTER MAKEUP.
6. FISH HEAD: 1.375 GS-CLASS PROFILE — GAUGE WITH GS PULLING TOOL BEFORE SHIP.
7. PLUG OVERALL WITH THIS NECK: 57.0 IN (DCN-4); NECK SPANS PLUG Z 50.5-57.0.
8. PILOT Z' 0-0.5 RIDES THE UPPER SLIP CARRIER BORE DIA 1.562.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
.XX +/-0.010 .XXX +/-0.005
ANGLES +/-0.5 DEG
BREAK SHARP EDGES 0.010 MAX

SHEX-BP-UHEX-54 HIGH-EXPANSION BRIDGE PLUG
FISHING NECK / TOP SUB (GS PROFILE)

DWG NO: DWG-010-SHP REV E
PART NO: SHEX-012 QTY/PLUG: 1
MATL: 4140 HT (AMS 6415) 28-32 HRC
UNITS: INCH PROJECTION: THIRD ANGLE SIZE B
GENERATED FROM cad/release_solids.py PARAMETRIC MODEL