


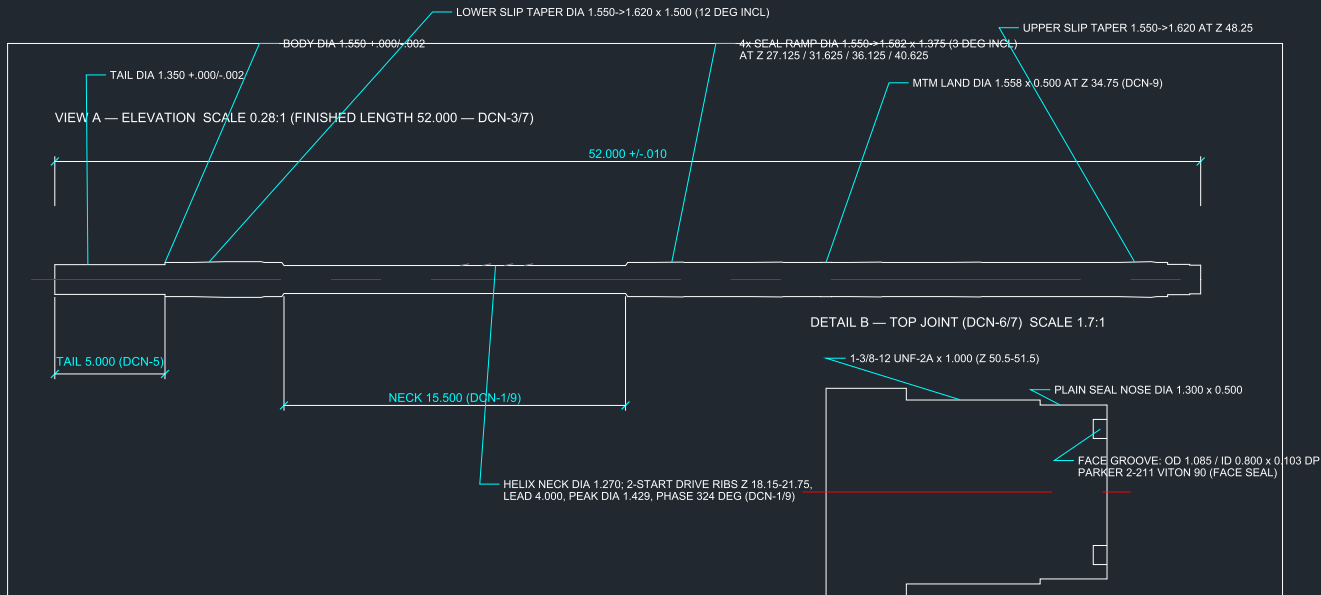

NOTES:

1. FINISHED LENGTH 52.000; BODY TO SHOULDER Z=50.5 + PIN 1.500 (DCN-3/6/7).
2. OD STEP LEDGER PER SPEC SHEX-011 SECT 12.10, AMENDED BY DCN-1/9 NECK 10.4-25.9.
3. STRAIGHTNESS 0.005 PER 12 IN; RA 32 ON ALL MODULE TRAVEL ZONES Z 3-50.5.
4. THREAD 1-3/8-12 UNF-2A x 1.000; RELIEF 0.030 x 45 AT Z 50.5 (DCN-7).
5. DRILL DIA 0.125 CROSS PIN AT Z 51.0 AFTER NECK MAKEUP, TORQUE 250 FT-LB MIN.
6. DRIVE RIBS: ROUND FORM 0.115 W x 0.080 H, 2-START, LEAD 4.000 — MATE SHEX-002.
7. RIB PHASE REFERENCE FLAT AT Z 18.15 START, PHASE 324 DEG TO INSERT (DCN-9).
8. NO THROUGH BORE — SOLID BAR.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
.XX +/-0.010 .XXX +/-0.005
ANGLES +/-0.5 DEG
BREAK SHARP EDGES 0.010 MAX

SHEX-BP-UHEX-54 HIGH-EXPANSION BRIDGE PLUG INNER MANDREL

DWG NO: DWG-011B-SHP REV E.1
PART NO: SHEX-011 QTY/PLUG: 1
MATL: 17-4 PH H900 (H1150M)
UNITS: INCH PROJECTION: THIRD ANGLE SIZE B
GENERATED FROM cadrelease_solids.py PARAMETRIC MODEL