


VIEW A — HALF SECTION SCALE 1.05:1

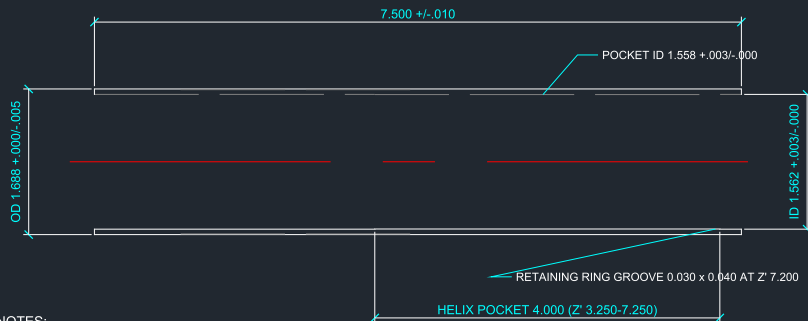


NOTES:

1. MANUFACTURING PART — RUN-IN OD 1.688 MAX (NOT THE 5.750 SET ENVELOPE).
2. FIXED SLEEVE — DOES NOT EXPAND WITH IRIS.
3. BOTTOM/TOP FACES FLAT, RA 32; PILOT Z' 0-0.750 MATES STAGE 2 STENT TOP.
4. SLOT CENTRES AT Z' 2.375 (PLUG Z 20.875); DEBURR — NO BURRS IN HELIX POCKET.
5. TOP LOCK LAND Z' 7.250-7.500; OPTIONAL ID STEP 1.540 FOR RETAINER.
6. MATES: SHEX-002 INSERT IN POCKET; 16x SHEX-001 IN SLOTS; SHEX-011 BORE.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
.XX ± 0.010 .XXX ± 0.005
ANGLES ± 0.5 DEG
BREAK SHARP EDGES 0.010 MAX

VIEW B — SECTION AT Z' 2.375

16x GUIDE SLOT 0.120 ± 0.005 W x 0.055 ± 0.005 DP x 2.750 LG
EQ SPACED 22.5 DEG, SLOT #1 AT 0 DEG DATUM



SHEX-BP-UHEX-54 HIGH-EXPANSION BRIDGE PLUG
STAGE 3 IRIS SUPPORT SLEEVE

DWG NO: DWG-012-SHP REV A

PART NO: SHEX-010 QTY/PLUG: 1

MATL: 17-4 PH H900 (H1150M)

UNITS: INCH PROJECTION: THIRD ANGLE SIZE B

GENERATED FROM cad/release_solids.py PARAMETRIC MODEL