




Eight Decades of Trust & Innovation

LT POWER & CONTROL CABLES



NICCO CABLES LT POWER & CONTROL CABLE CONSTRUCTION

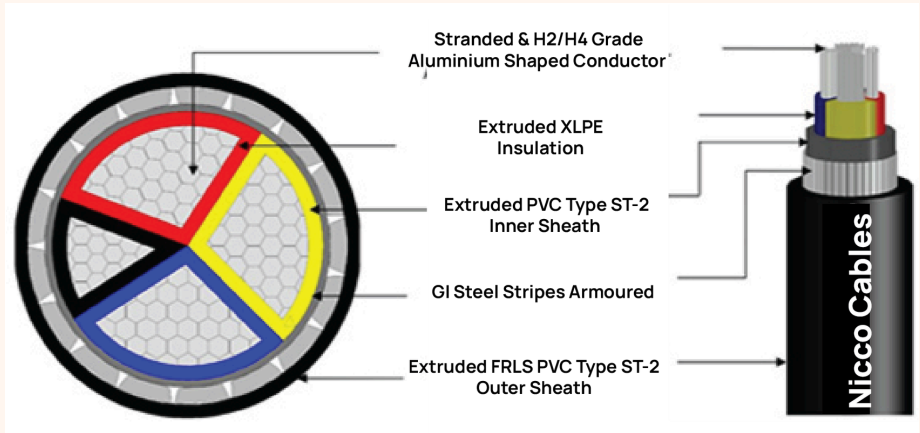



ABOUT US

- Nicco Cables is a 80 year old brand based in India.
- Nicco specializes in manufacturing wide range of Wires and Cables.
- Nicco has an in-house R&D facility.
- Nicco specializes in Compound manufacturing and has a dedicated team for Compounds.
- Nicco is the first Company in India to install a 3 MeV Electron Beam Plant from USA for manufacturing irradiated cables.
- The manufacturing plant covers an area of 450,000 sq.ft.
- National Accreditation Board for Testing and Calibration Laboratories (NABL) accredited Testing laboratory at plant

NICCO PRODUCES A WIDE RANGE OF CABLES

- LT & HT Power & Control Cables (Upto 11 kv)
- Medium Voltage Covered Conductors (MVCC) (Upto 33Kv)
- Overhead transmission Conductors (AAAC, ACSR, AAC, ACAR , AL-59)
- Elastomeric & Silicon Cables (Upto 15 kv) or various application
- Ship Building Cables
- Flexible Trailing Cables - H07-RNF
- Fire Survival Cables (For Nuclear Reactor)
- Hybrid / Composite and Underwater Cables
- Cable Harnessing
- Pressure Tight Cables
- PTFE, ETFE & FEP Cables
- Solar & Windmill Cables
- Rolling Stock Cables
- Automotive Cables
- TREE WIRE / SPACER Cables - 3 layer Track Resistant (upto 35kv)
- Ethernet Polyurethane Cables
- Ethernet Cables (Cat-5e, Cat-6a, Cat-7)

LT POWER, CONTROL & INSTRUMENTATION CABLES

LT PVC & XLPE POWER CABLES 1.1 KV

Sizes: Single core 1.5 - 1000 sq mm; Multi core (up to 5 cores) 1.5 - 630 sq mm

Conductor: Stranded / Solid / Circular / Shaped as per IS: 8130, IEC 60228, BS 6360

Insulation: XLPE/ PVC/ HR PVC/ LSZH

Inner-sheath: PVC/ HR PVC/ HDPE/ FR/FRLS-PVC/ LSZH as per IS 5831, IEC 60502, BS 7655

Armour: Steel/ Aluminium as per IS 3975, IEC 60502 P-1

Outer Sheath: PVC/ HR PVC/ HDPE/ FR/FRLS-PVC/ LSZH as per IS 5831, IEC 60502, BS 7655

Reference Standards:

IS 7098 PART 1

IS 1554 PART 1

IEC 60502-1

BS 5467

AS/NZS 4026 & AS/NZS:5000.1

CONTROL CABLES (PVC & XLPE)

Conductor: 0.5 to 2.5 Sq.mm Copper

Number of cores: Up to 61 Cores

Insulation: XLPE /PVC

Armour: Steel -Round and Flat

Standards:

IS 7098 PART 1

IS 1554 PART 1

IEC 60502-1

BS 5467

AS/NZS 4026 & AS/NZS:5000.1)

INSTRUMENTATION CABLES

Instrumentation cables are specialized cables (core or paired /triad /quad) used for transmitting signals from instruments to control systems. They are designed to carry low voltage signals in various industrial settings.

Voltage: 300V / 500V

Size: 0.35 sq mm - 2.5 sq mm

Core / Pair / Triad /Quad: 2 -37

Conductor: Annealed Tinned / Plain Stranded Copper

Insulation: PVC / HR PVC / XLPE / XLPO

Screening: Individual / Collective – Al-Mylar Tape with Tinned-Copper Drain Wire / ATC Wire Braiding

Inner-Sheath: PVC / HR PVC / LSZH / FR-LSZH

Armouring: Galvanized Steel Round / Strip Armoured

Outer sheath: PVC / HR PVC / LSZH / FR-LSZH

Standards:

BSEN 50288 PART 7

IS 7098 PART 1

IS 1554 PART 1

IEC 60502-1

KEY FEATURES:

1. **Shielding:** To reduce electromagnetic interference (EMI).
2. **Twisted Pairs:** Twisted pair configurations help in improving signal transfer.
3. **Temperature and Chemical Resistance:** Depending on the application, they may need to withstand harsh environmental conditions, including extreme temperatures and chemical exposures.
4. **Low Capacitance:** Important for maintaining long distance signal quality.

EXISTING CERTIFICATIONS

ISO 9001 / 14001 / 45001

Directorate of Quality Assurance (Navy) [DQAN] Registration Certificate

Defense Research and Development Laboratory (DRDL) Registration Certificate

Integrated Headquarters of Ministry of Defence (IHQ/DEE/MOD)

Research Designs and Standards Organization (RDSO)

American Bureau of Shipping (ABS)

Indian Register of Shipping (IRS)

Underwriters Laboratories (UL)

Central Power Research Institute (CPRI)

Bureau of Indian Standards (BIS)

International Railway Industry Standard (IRIS)

National Accreditation Board for Testing and Calibration Laboratories (NABL)

Det Norske Veritas (DNV)





Nicco Cables Pvt. Ltd.

HEAD OFFICE

Suket Building, 2nd Floor, 20 Ballygunge Circular Road, Kolkata - 700019
PH - 7419888220, Email - info@niccocables.com

PLANT

71, East Ghosh para Road, Authpur, Shyamnagar, North 24 Parganas
West Bengal - 743128

REGIONAL OFFICES

Noida, Chennai, Bhubaneswar, Hyderabad, Mumbai

 +91 9836426952  saikat.basu@niccocables.com  www.niccocables.com

