


ecoTrace - Communication Module

Power consumption by device state

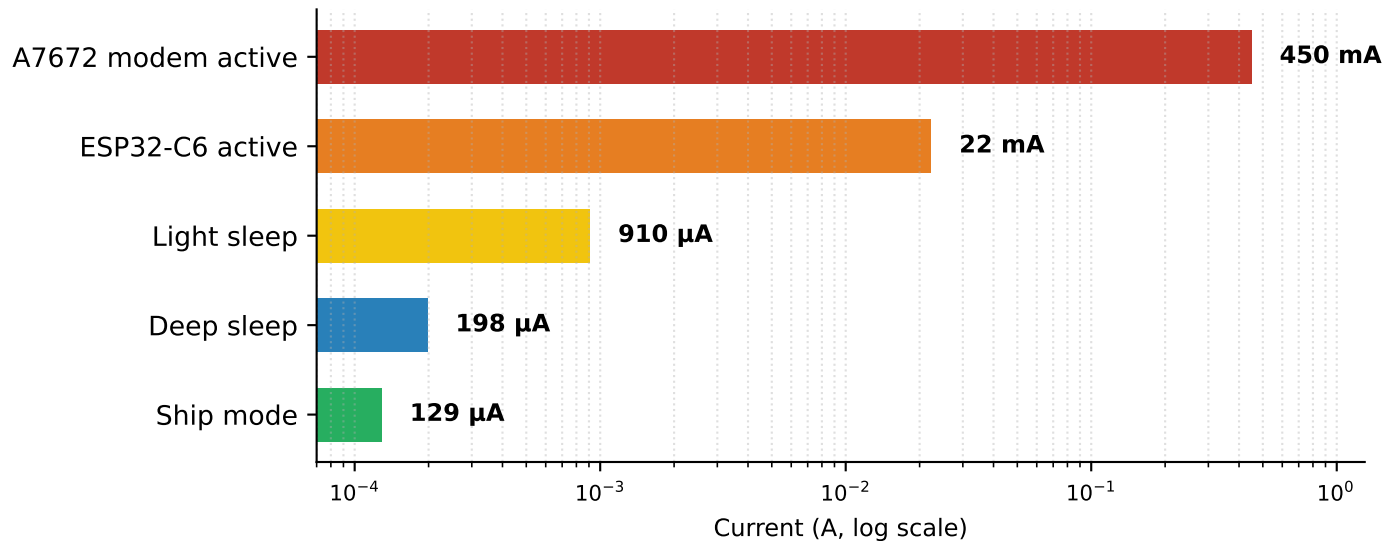

State	Current	Power @4 V	LP I ² C	What the device can do
A7672 modem active	450 mA	1.80 W	✓	Cellular attach + data TX/RX (peaks higher)
ESP32-C6 active	22 mA	89.20 mW	✓	MCU awake: code, sensors, GPIO (WiFi off)
Light sleep	910 μ A	3.64 mW	✓	CPU halted, RAM retained; wakes in μ s
Deep sleep	198 μ A	0.79 mW	✓	RTC timer + LP core alive; RAM not retained
Ship mode	129 μ A	0.52 mW	✗	Battery disconnected; wakes only on solar/USB

LP I²C: the ESP32-C6 LP core can poll the LP_I²C devices in deep sleep, without waking the main core.

Measured with a Joulescope JS220 from a bench PSU at 4.0 V. Board: ESP32-C6-MINI-1.

Figures are WITHOUT external sensors - the switched external-sensor rail is off.