

Mechanically Jointed Rodless Cylinder Basic Type

25A-MY1B Series

ø16, ø20, ø25, ø32, ø40, ø50, ø63

RoHS



How to Order

ø16, ø20, ø50, ø63 **25A-MY1B** **20** **300** **M9BW**

ø25, ø32, ø40 **25A-MY1B** **25** **300** **Z-M9BW**

Series compatible with secondary batteries

Basic type

Bore size

16	16 mm
20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm

Port thread type

Symbol	Type	Bore size
Nil	M5	ø16, ø20
	Rc	
TN	NPT	ø25, ø32, ø40
TF	G	ø50, ø63

Piping

Nil	Standard type
G	Centralized piping type

Cylinder stroke [mm]

Bore size	Standard stroke*	Long stroke	Maximum manufacturable stroke
16	100, 200, 300, 400, 500, 600 700, 800, 900, 1000, 1200 1400, 1600, 1800, 2000	Strokes of 2001 to 3000 mm (1 mm increments) exceeding the standard stroke	3000
20, 25, 32 40, 50, 63	* The stroke can be manufactured in 1 mm increments from 1 mm stroke.	Strokes of 2001 to 5000 mm (1 mm increments) exceeding the standard stroke	5000

Number of auto switches

Nil	2
S	1
n	n

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	--

* Applicable auto switches vary depending on the bore size.
* Refer to the **Web Catalog** for details on applicable auto switch models.

Ordering example

* Long stroke can be ordered the same as the standard stroke. 25A-MY1B20-3000L-M9BW


* Please be advised that with a stroke of 49 mm or less, there are cases where auto switch mounting is not possible, and the performance of the air cushion may decline.

For ø16 to ø40


Stroke adjustment unit symbol

		Right side stroke adjustment unit										
		Without unit	A: With adjustment bolt				L: With low load shock absorber + Adjustment bolt			H: With high load shock absorber + Adjustment bolt		
				With short spacer	With long spacer		With short spacer	With long spacer		With short spacer	With long spacer	
Left side stroke adjustment unit	Without unit	Nil	SA	SA6	SA7	SL	SL6	SL7	SH	SH6	SH7	
	A: With adjustment bolt	AS	A	AA6	AA7	AL	AL6	AL7	AH	AH6	AH7	
		With short spacer	A6S	A6A	A6	A6A7	A6L	A6L6	A6L7	A6H	A6H6	A6H7
		With long spacer	A7S	A7A	A7A6	A7	A7L	A7L6	A7L7	A7H	A7H6	A7H7
	L: With low load shock absorber + Adjustment bolt	LS	LA	LA6	LA7	L	LL6	LL7	LH	LH6	LH7	
		With short spacer	L6S	L6A	L6A6	L6A7	L6L	L6	L6L7	L6H	L6H6	L6H7
		With long spacer	L7S	L7A	L7A6	L7A7	L7L	L7L6	L7	L7H	L7H6	L7H7
	H: With high load shock absorber + Adjustment bolt	HS	HA	HA6	HA7	HL	HL6	HL7	H	HH6	HH7	
		With short spacer	H6S	H6A	H6A6	H6A7	H6L	H6L6	H6L7	H6H	H6	H6H7
		With long spacer	H7S	H7A	H7A6	H7A7	H7L	H7L6	H7L7	H7H	H7H6	H7

Stroke adjustment unit mounting diagram



Example of H6H7 attachment



* Spacers are used to fix the stroke adjustment unit at an intermediate stroke position.

* The 25A-MY1B50 and 63 are not available with the stroke adjustment unit.

* The stroke adjustment unit H unit is not available for the 25A-MY1B16.

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>




Mechanically Jointed Rodless Cylinder

Slide Bearing Guide Type

25A-MY1M Series

ø16, ø20, ø25, ø32, ø40, ø50, ø63

RoHS



How to Order

25A - MY1M 20 G - 300 - M9BW

Series compatible with secondary batteries

Slide bearing guide type

Bore size

16	16 mm
20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm

Port thread type

Symbol	Type	Bore size
Nil	M thread	ø16, ø20
	Rc	ø25, ø32, ø40, ø50, ø63
TN	NPT	
TF	G	

Piping

Nil	Standard type
G	Centralized piping type

Cylinder stroke [mm]

Bore size	Standard stroke*	Long stroke	Maximum manufacturable stroke
16	100, 200, 300, 400, 500, 600, 700, 800, 900, 1000, 1200, 1400, 1600, 1800, 2000	Strokes of 2001 to 3000 mm (1 mm increments) exceeding the standard stroke	3000
20, 25, 32, 40, 50, 63	* The stroke can be manufactured in 1 mm increments from 1 mm stroke.	Strokes of 2001 to 5000 mm (1 mm increments) exceeding the standard stroke	5000

Ordering example

* Long stroke can be ordered the same as the standard stroke.
25A-MY1M20-3000L-M9BW

* Please be advised that with a stroke of 49 mm or less, there are cases where auto switch mounting is not possible, and the performance of the air cushion may decline.

Number of auto switches

Nil	2
S	1
n	n

Auto switch


Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the Web Catalog for details on applicable auto switch models.


Stroke adjustment unit symbol

		Right side stroke adjustment unit									
		Without unit	A: With adjustment bolt		L: With low load shock absorber + Adjustment bolt			H: With high load shock absorber + Adjustment bolt			
Left side stroke adjustment unit	Without unit	Nil	SA	SA6	SA7	SL	SL6	SL7	SH	SH6	SH7
	A: With adjustment bolt	AS	A	AA6	AA7	AL	AL6	AL7	AH	AH6	AH7
	With short spacer	A6S	A6A	A6	A6A7	A6L	A6L6	A6L7	A6H	A6H6	A6H7
	With long spacer	A7S	A7A	A7A6	A7	A7L	A7L6	A7L7	A7H	A7H6	A7H7
	L: With low load shock absorber + Adjustment bolt	LS	LA	LA6	LA7	L	LL6	LL7	LH	LH6	LH7
	With short spacer	L6S	L6A	L6A6	L6A7	L6L	L6	L6L7	L6H	L6H6	L6H7
	With long spacer	L7S	L7A	L7A6	L7A7	L7L	L7L6	L7	L7H	L7H6	L7H7
	H: With high load shock absorber + Adjustment bolt	HS	HA	HA6	HA7	HL	HL6	HL7	H	HH6	HH7
	With short spacer	H6S	H6A	H6A6	H6A7	H6L	H6L6	H6L7	H6H	H6	H6H7
	With long spacer	H7S	H7A	H7A6	H7A7	H7L	H7L6	H7L7	H7H	H7H6	H7

Stroke adjustment unit mounting diagram



Example of H6H7 attachment



* Spacers are used to fix the stroke adjustment unit at an intermediate stroke position.

* Stroke adjustment unit H is not available for 25A-MY1M16.

Refer to the Web Catalog.

• Specifications/Dimensions
* Same as the standard product

Click here for details.



Mechanically Jointed Rodless Cylinder Cam Follower Guide Type

25A-MY1C Series

ø16, ø20, ø25, ø32, ø40, ø50, ø63

RoHS



How to Order

25A-MY1C 25 - 300 - M9BW -

Series compatible
with secondary
batteries

Cam follower guide type

Bore size

16	16 mm
20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm

Port thread type

Symbol	Type	Bore size
Nil	M thread	ø16, ø20
	Rc	ø25, ø32,
TN	NPT	ø40, ø50,
TF	G	ø63

Piping

Nil	Standard type
G	Centralized piping type

Made to order

Symbol	Specifications
-XC56	With knock pin hole

Number of
auto switches

Nil	2
S	1
n	n

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	--

* Refer to the **Web Catalog** for details on applicable auto switch models.

Cylinder stroke [mm]

Bore size	Standard stroke*	Long stroke	Maximum manufacturable stroke
16	100, 200, 300, 400, 500, 600 700, 800, 900, 1000, 1200 1400, 1600, 1800, 2000	Strokes of 2001 to 3000 mm (1 mm increments) exceeding the standard stroke	3000
20, 25, 32 40, 50, 63	* The stroke can be manufactured in 1 mm increments from 1 mm stroke.	Strokes of 2001 to 5000 mm (1 mm increments) exceeding the standard stroke	5000

Ordering example

* Long stroke can be ordered the same as the standard stroke. 25A-MY1C20-3000L-M9BW

* Please be advised that with a stroke of 49 mm or less, there are cases where auto switch mounting is not possible, and the performance of the air cushion may decline.


Stroke adjustment unit symbol

		Right side stroke adjustment unit										
		Without unit	A: With adjustment bolt			L: With low load shock absorber + Adjustment bolt			H: With high load shock absorber + Adjustment bolt			
				With short spacer	With long spacer		With short spacer	With long spacer		With short spacer	With long spacer	
Left side stroke adjustment unit	Without unit	Nil	SA	SA6	SA7	SL	SL6	SL7	SH	SH6	SH7	
	A: With adjustment bolt	AS	A	AA6	AA7	AL	AL6	AL7	AH	AH6	AH7	
		With short spacer	A6S	A6A	A6	A6A7	A6L	A6L6	A6L7	A6H	A6H6	A6H7
		With long spacer	A7S	A7A	A7A6	A7	A7L	A7L6	A7L7	A7H	A7H6	A7H7
	L: With low load shock absorber + Adjustment bolt	LS	LA	LA6	LA7	L	LL6	LL7	LH	LH6	LH7	
		With short spacer	L6S	L6A	L6A6	L6A7	L6L	L6	L6L7	L6H	L6H6	L6H7
		With long spacer	L7S	L7A	L7A6	L7A7	L7L	L7L6	L7	L7H	L7H6	L7H7
	H: With high load shock absorber + Adjustment bolt	HS	HA	HA6	HA7	HL	HL6	HL7	H	HH6	HH7	
		With short spacer	H6S	H6A	H6A6	H6A7	H6L	H6L6	H6L7	H6H	H6	H6H7
		With long spacer	H7S	H7A	H7A6	H7A7	H7L	H7L6	H7L7	H7H	H7H6	H7


* Spacers are used to fix the stroke adjustment unit at an intermediate stroke position.

* Stroke adjustment unit H is not available for 25A-MY1C16.

Stroke adjustment unit
mounting diagram



Example of H6H7 attachment



Refer to the **Web Catalog**.

• Specifications/Dimensions
* Same as the standard product

Click here
for details.



Mechanically Jointed Rodless Cylinder Linear Guide Type

25A-MY1H Series

ø16, ø20, ø25, ø32, ø40

RoHS



How to Order

ø16, ø20 25A-MY1H20-300-M9BW

ø25, ø32, ø40 25A-MY1H25-300Z-M9BW

Series compatible with secondary batteries • Linear guide type • Bore size •

Bore size	Symbol
16 mm	16
20 mm	20
25 mm	25
32 mm	32
40 mm	40

Port thread type •

Symbol	Type	Bore size
Nil	M thread	ø16, ø20
TN	Rc	ø25, ø32, ø40
TF	NPT	ø25, ø32, ø40
	G	ø25, ø32, ø40

Piping •

Piping	Symbol
Standard type	Nil
Centralized piping type	G

Cylinder stroke [mm] •

Bore size	Standard stroke	Intermediate stroke	Long stroke	Maximum manufacturable stroke
16, 20	50, 100, 150 200, 250, 300 350, 400, 450 500, 550, 600	Strokes of 51 to 599 mm (1 mm increments) other than standard strokes	Strokes of 601 to 1000 mm (1 mm increments) exceeding the standard stroke	1000
25, 32, 40			Strokes of 601 to 1500 mm (1 mm increments) exceeding the standard stroke	1500

Auto switch •

Auto switch	Symbol
Without auto switch (Built-in magnet)	Nil

Number of auto switches •

Number of auto switches	Symbol
2	Nil
1	S
n	n

* Refer to the **Web Catalog** for details on applicable auto switch models.

Ordering example


- * Intermediate stroke can be ordered the same as the standard stroke. 25A-MY1H20-60-M9BW
- * Long stroke can be ordered the same as the standard stroke. 25A-MY1H20-800L-M9BW

Stroke adjustment unit symbol •

		Right side stroke adjustment unit										
		Without unit	A: With adjustment bolt			L: With low load shock absorber + Adjustment bolt			H: With high load shock absorber + Adjustment bolt			
				With short spacer	With long spacer		With short spacer	With long spacer		With short spacer	With long spacer	
Left side stroke adjustment unit	Without unit	Nil	SA	SA6	SA7	SL	SL6	SL7	SH	SH6	SH7	
	A: With adjustment bolt	AS	A	AA6	AA7	AL	AL6	AL7	AH	AH6	AH7	
		With short spacer	A6S	A6A	A6	A6A7	A6L	A6L6	A6L7	A6H	A6H6	A6H7
		With long spacer	A7S	A7A	A7A6	A7	A7L	A7L6	A7L7	A7H	A7H6	A7H7
	L: With low load shock absorber + Adjustment bolt	LS	LA	LA6	LA7	L	LL6	LL7	LH	LH6	LH7	
		With short spacer	L6S	L6A	L6A6	L6A7	L6L	L6	L6L7	L6H	L6H6	L6H7
		With long spacer	L7S	L7A	L7A6	L7A7	L7L	L7L6	L7	L7H	L7H6	L7H7
	H: With high load shock absorber + Adjustment bolt	HS	HA	HA6	HA7	HL	HL6	HL7	H	HH6	HH7	
		With short spacer	H6S	H6A	H6A6	H6A7	H6L	H6L6	H6L7	H6H	H6H6	H6H7
		With long spacer	H7S	H7A	H7A6	H7A7	H7L	H7L6	H7L7	H7H	H7H6	H7H7


- * Spacers are used to fix the stroke adjustment unit at an intermediate stroke position.
- * H: With high load shock absorber + Adjustment bolt is not available for 25A-MY1H16.

Stroke adjustment unit mounting diagram



Place the protruding section on the stroke adjusting unit side.

Example of L6L7 attachment



Refer to the **Web Catalog**.

- Specifications/Dimensions
- * Same as the standard product

Click here for details.



Mechanically Jointed Rodless Cylinder Cam Follower Guide Type

25A-MY2C Series

ø16, ø25, ø40

RoHS

How to Order



25A - MY2C 16 G - 300 - M9BW

Series compatible
with secondary
batteries

Cam follower guide type

Bore size

16	16 mm
25	25 mm
40	40 mm

Port thread type

Symbol	Type	Bore size
Nil	M thread	ø16
	Rc	
TN	NPT	ø25, ø40
TF	G	

Piping

G Centralized piping type (Standard)

Cylinder stroke [mm]

Bore size [mm]	Standard stroke [mm]*1	Max. manufacturable stroke [mm]
16	100, 200, 300, 400, 500, 600, 700, 800,	3000
25, 40	900, 1000, 1200, 1400, 1600, 1800, 2000	5000

*1 Strokes are manufacturable in 1 mm increments, up to the maximum stroke.
However, please be advised that with a stroke of 49 mm or less, there are cases where auto switch mounting is not possible, and the performance of the air cushion may decline.

* Long stroke can be ordered the same as the standard stroke.

25A-MY2C25G-3000L-M9BW

Stroke adjustment unit symbol

		Right side stroke adjustment unit						
		Without unit	L: With low load shock absorber		H: With high load shock absorber			
Left side stroke adjustment unit	Without unit	Nil	SL	SL6	SL7	SH	SH6	SH7
	L: With low load shock absorber	LS	L	LL6	LL7	LH	LH6	LH7
	With short spacer	L6S	L6L	L6	L6L7	L6H	L6H6	L6H7
	With long spacer	L7S	L7L	L7L6	L7	L7H	L7H6	L7H7
	H: With high load shock absorber	HS	HL	HL6	HL7	H	HH6	HH7
	With short spacer	H6S	H6L	H6L6	H6L7	H6H	H6H6	H6H7
	With long spacer	H7S	H7L	H7L6	H7L7	H7H	H7H6	H7

* Spacers are used to fix the stroke adjustment unit at an intermediate stroke position.

Number of auto switches

Nil	2
S	1
n	n


Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.


Stroke adjustment unit mounting diagram

Intermediate fixing spacer Stroke adjustment unit



Place the protruding section on the stroke adjusting unit side.

Example of L6L7 attachment

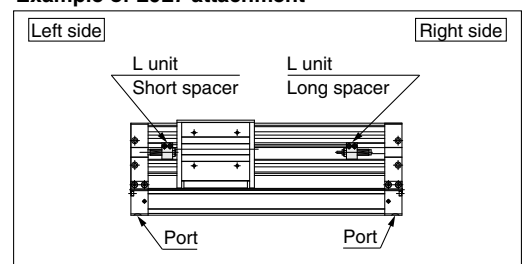

Refer to the **Web Catalog**.

- Specifications/Dimensions
- * Same as the standard product



Click here for details. >>>

Mechanically Jointed Rodless Cylinder Linear Guide Type

25A-MY2H/HT Series

ø16, ø25, ø40

RoHS



How to Order

25A - MY2 H 16 [] G - 300 [] - M9BW []

Series compatible
with secondary
batteries

Guide type

H	Linear guide, Single axis
HT	Linear guide, Double axis

Bore size

16	16 mm
25	25 mm
40	40 mm

Port thread type

Symbol	Type	Bore size
Nil	M thread	ø16
	Rc	
TN	NPT	ø25, ø40
TF	G	

Piping

G	Centralized piping type (Standard)
---	------------------------------------

Cylinder stroke [mm]

Bore size [mm]	Standard stroke [mm]*1	Max. manufacturable stroke [mm]
16	50, 100, 150, 200, 250, 300, 350, 400, 450, 500, 550, 600	1000
25, 40		1500

*1 Strokes are manufacturable in 1 mm increments, up to the maximum stroke.

* Intermediate stroke can be ordered the same as the standard stroke.

25A-MY2H16G-80-M9BW

* Long stroke can be ordered the same as the standard stroke.

25A-MY2H25G-800L-M9BW

Number of auto switches

Nil	2
S	1
n	n

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.


Stroke adjustment unit symbol

		Right side stroke adjustment unit						
		Without unit	L: With low load shock absorber			H: With high load shock absorber		
				With short spacer	With long spacer		With short spacer	With long spacer
Left side stroke adjustment unit	Without unit	Nil	SL	SL6	SL7	SH	SH6	SH7
	L: With low load shock absorber	LS	L	LL6	LL7	LH	LH6	LH7
	With short spacer	L6S	L6L	L6	L6L7	L6H	L6H6	L6H7
	With long spacer	L7S	L7L	L7L6	L7	L7H	L7H6	L7H7
	H: With high load shock absorber	HS	HL	HL6	HL7	H	HH6	HH7
	With short spacer	H6S	H6L	H6L6	H6L7	H6H	H6	H6H7
	With long spacer	H7S	H7L	H7L6	H7L7	H7H	H7H6	H7


* Spacers are used to fix the stroke adjustment unit at an intermediate stroke position.

Stroke adjustment unit mounting diagram

Intermediate fixing spacer Stroke adjustment unit



Example of H6H7 attachment

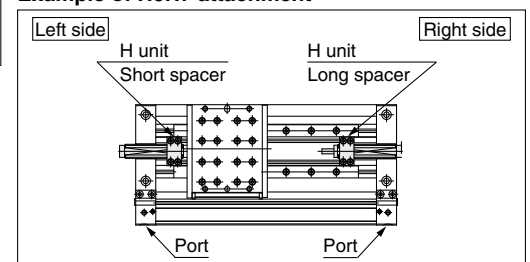

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product



Click here for details. >>>

Mechanically Jointed Rodless Cylinder/Basic Type

25A-MY3A/3B Series

ø16, ø20, ø25, ø32, ø40, ø50, ø63

RoHS

How to Order



MY3A

MY3B

25A - MY3 B 16 - 300 - M9BW

- Series compatible with secondary batteries

Type

A	Short type (Rubber bumper)
B	Standard type (Air cushion)

Cylinder bore size

16	16 mm
20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm

Port thread type

Symbol	Type	Bore size
Nil	M5	ø16, ø20
	Rc	ø25, ø32, ø40
TN	NPT	ø50, ø63
TF	G	ø50, ø63

Number of auto switches

Nil	2
S	1
n	n

Auto switch

Nil Without auto switch (Built-in magnet)

* Refer to the **Web Catalog** for details on applicable auto switch models.

Cylinder stroke [mm]

Bore size	Standard stroke*	Long stroke	Maximum manufacturable stroke
16, 20 25, 32 40, 50 63	100, 200, 300, 400, 500, 600 700, 800, 900, 1000, 1200 1400, 1600, 1800, 2000 * The stroke can be manufactured in 1 mm increments from 1 mm stroke.	Strokes of 2001 to 3000 mm (1 mm increments) exceeding the standard stroke	3000

Ordering example

* Long stroke can be ordered the same as the standard stroke. 25A-MY3A25-3000L-M9BW


* Please be advised that with a stroke of 49 mm or less, there are cases where auto switch mounting is not possible, and the performance of the air cushion may decline.

Stroke adjustment unit symbol


		Right side stroke adjustment unit						
		Without unit	L: With low load shock absorber + Adjustment bolt			H: With high load shock absorber + Adjustment bolt		
				With short spacer	With long spacer		With short spacer	With long spacer
Left side stroke adjustment unit	Without unit	Nil	SL	SL6	SL7	SH	SH6	SH7
	L: With low load shock absorber + Adjustment bolt	LS	L	LL6	LL7	LH	LH6	LH7
	With short spacer	L6S	L6L	L6	L6L7	L6H	L6H6	L6H7
	With long spacer	L7S	L7L	L7L6	L7	L7H	L7H6	L7H7
	H: With high load shock absorber + Adjustment bolt	HS	HL	HL6	HL7	H	HH6	HH7
	With short spacer	H6S	H6L	H6L6	H6L7	H6H	H6	H6H7
	With long spacer	H7S	H7L	H7L6	H7L7	H7H	H7H6	H7

* Spacers are used to fix the stroke adjustment unit at an intermediate stroke position.

Stroke adjustment unit mounting diagram



Example of L7L6 attachment



Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>




Mechanically Jointed Rodless Cylinder Slide Bearing Guide Type

RoHS

25A-MY3M Series

ø16, ø25, ø40, ø63



How to Order

25A-MY3 M 16 - 300 - M9BW

Series compatible
with secondary
batteries

Slide bearing guide type

Cylinder bore size

16	16 mm
25	25 mm
40	40 mm
63	63 mm

Port thread type

Symbol	Type	Bore size
Nil	M5	ø16
	Rc	
TN	NPT	ø25, ø40, ø63
TF	G	

Number of auto switches

Nil	2
S	1
n	n

Auto switch

Nil Without auto switch (Built-in magnet)

* Refer to the **Web Catalog** for details on applicable auto switch models.

Cylinder stroke [mm]

Bore size	Standard stroke*	Long stroke	Maximum manufacturable stroke
16, 25 40, 63	100, 200, 300, 400, 500, 600 700, 800, 900, 1000, 1200 1400, 1600, 1800, 2000 * The stroke can be manufactured in 1 mm increments from 1 mm stroke.	Strokes of 2001 to 3000 mm (1 mm increments) exceeding the standard stroke	3000

Ordering example

* Long stroke can be ordered the same as the standard stroke. 25A-MY3M25-3000L-M9BW


* Please be advised that with a stroke of 49 mm or less, there are cases where auto switch mounting is not possible, and the performance of the air cushion may decline.

Stroke adjustment unit symbol


		Right side stroke adjustment unit						
		Without unit	L: With low load shock absorber + Adjustment bolt		H: With high load shock absorber + Adjustment bolt			
Left side stroke adjustment unit	Without unit	Nil	SL	SL6	SL7	SH	SH6	SH7
	L: With low load shock absorber + Adjustment bolt	LS	L	LL6	LL7	LH	LH6	LH7
	With short spacer	L6S	L6L	L6	L6L7	L6H	L6H6	L6H7
	With long spacer	L7S	L7L	L7L6	L7	L7H	L7H6	L7H7
	H: With high load shock absorber + Adjustment bolt	HS	HL	HL6	HL7	H	HH6	HH7
	With short spacer	H6S	H6L	H6L6	H6L7	H6H	H6	H6H7
		H7S	H7L	H7L6	H7L7	H7H	H7H6	H7

* Spacers are used to fix the stroke adjustment unit at an intermediate stroke position.

Stroke adjustment unit mounting diagram



Example of L7L6 attachment



Refer to the **Web Catalog**.

• Specifications/Dimensions
* Same as the standard product

Click here for details. >>>



Magnetically Coupled Rodless Cylinder/Basic Type

25A-CY3B Series

ø6, ø10, ø15, ø20, ø25, ø32, ø40, ø50, ø63

RoHS

How to Order



25A-CY3B 25 300 Z

Series compatible with secondary batteries

Basic type

Bore size

6	6 mm
10	10 mm
15	15 mm
20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm

Port thread type

Symbol	Type	Bore size
Nil	M thread	6, 10, 15
	Rc	
TN	NPT	20, 25, 32, 40
TF	G	50, 63

Standard stroke [mm]

Bore size	Standard stroke	Manufacturable stroke
6	50, 100, 150, 200	20 to 300
10	50, 100, 150, 200, 250, 300	20 to 500
15	50, 100, 150, 200, 250, 300, 350 400, 450, 500	20 to 1000
20	100, 150, 200, 250, 300, 350 400, 450, 500, 600, 700, 800	25 to 1500
25		25 to 2000
32, 40		
50, 63	100, 150, 200, 250, 300, 350, 400 450, 500, 600, 700, 800, 900, 1000	40 to 2000

- * Please contact SMC if the maximum stroke is exceeded.
- * The longer the stroke, the larger the amount of deflection in a cylinder tube. Pay attention to the mounting bracket and clearance value.
- * Intermediate stroke is available in 1 mm increments.

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>




Magnetically Coupled Rodless Cylinder/Direct Mount Type

25A-CY3R Series

ø6, ø10, ø15, ø20, ø25, ø32, ø40, ø50, ø63

RoHS

How to Order



25A-CY3R [] 25 [] - 300 [] - M9BWL []

Series compatible
with secondary
batteries

Direct mount type

Piping type

Nil	Standard type
G	Centralized piping type

* Type G (centralized piping) is not available for ø6.

Bore size

6	6 mm
10	10 mm
15	15 mm
20	20 mm
25	25 mm
32	32 mm
40	40 mm
50	50 mm
63	63 mm

Port thread type

Symbol	Type	Bore size
Nil	M thread	6, 10, 15
	Rc	20, 25, 32, 40 50, 63
TN	NPT	
TF	G	

Number of auto switches

Nil	2
S	1
n	n

Auto switch

Nil	ø6 to ø15	Without auto switch (Built-in magnet)
	ø25 to ø63	
M	ø20	Without auto switch (Built-in magnet for reed switch)
		Without auto switch (Built-in magnet for solid state switch)

* Refer to the **Web Catalog** for details on applicable auto switch models.

Switch rail

Nil	With switch rail
N	Without switch rail

- * A type with switch rail has built-in auto switch magnets.
- * ø15 has built-in auto switch magnets even without switch rail.
- * Centralized piping type (G) is not available without switch rail (N).

Cylinder stroke [mm]

Bore size	Standard stroke	Max. stroke without switch	Max. stroke with switch
6	50, 100, 150, 200	300	300
10	50, 100, 150, 200, 250, 300	500	500
15	50, 100, 150, 200, 250, 300 350, 400, 450, 500	1000	750
20	100, 150, 200, 250, 300, 350 400, 450, 500, 600, 700, 800	1500	1000
25			1200
32		2000	1500
40, 50, 63	100, 150, 200, 250, 300, 350 400, 450, 500, 600, 700, 800 900, 1000		

* The longer the stroke, the larger the amount of deflection in a cylinder tube. Pay attention to the mounting bracket and clearance value.

* Intermediate stroke is available in 1 mm increments.

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>



Compact Slide

25A-MXH2 Series

ø6, ø10, ø16, ø20

RoHS



How to Order

25A - MXH2 B 10 - 60 - M9BW

Series compatible with
secondary batteries

Compact slide

Bore size

6	6 mm
10	10 mm
16	16 mm
20	20 mm

Number of auto switches

Nil	2 pcs.
S	1 pc.

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.

Standard stroke (mm)

Refer to "Standard Strokes" on the table below.

Refer to the **Web Catalog**.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>



Standard Strokes


Bore size [mm]	Standard stroke [mm]
6	5, 10, 15, 20, 25, 30, 40, 50, 60
10	5, 10, 15, 20, 25, 30, 40, 50, 60, 75, 100
16	5, 10, 15, 20, 25, 30, 40, 50, 60, 75, 100, 125
20	5, 10, 15, 20, 25, 30, 40, 50, 60, 75, 100, 125, 150

Compact Slide

25A-MXH Series

Ø6, Ø10, Ø16, Ø20

RoHS



How to Order

25A - MXH 10 - 60 Z - M9BW

Series compatible with
secondary batteries

Compact slide

Bore size

6	6 mm
10	10 mm
16	16 mm
20	20 mm

Number of auto switches

Nil	2
S	1

Auto switch

Nil Without auto switch (Built-in magnet)

* Refer to the **Web Catalog** for details on applicable auto switch models.

Cylinder stroke [mm]

6, 10, 16, 20	5, 10, 15, 20, 25, 30, 40 50, 60
---------------	-------------------------------------

Refer to the **Web Catalog**.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>



Air Slide Table

25A-MXS Series

ø6, ø8, ø12, ø16, ø20, ø25

RoHS



How to Order

Air slide table **25A-MXS** **16** **-50** **AS** **-M9BW**

Series compatible with secondary batteries

Port thread type

Nil	M thread	ø6 to ø16
	Rc	
TN	NPT	ø20, ø25
TF	G	

Symmetric type

Nil	Standard type
L	Symmetric type

Bore size (Standard stroke [mm])

6	10, 20, 30, 40, 50
8	10, 20, 30, 40, 50, 75
12	10, 20, 30, 40, 50, 75, 100
16	10, 20, 30, 40, 50, 75, 100, 125
20	10, 20, 30, 40, 50, 75, 100, 125, 150
25	10, 20, 30, 40, 50, 75, 100, 125, 150

Made to Order

Nil	None
-X2578	Adjuster side mounting type*1

*1 The type with a shock absorber is only available for bore sizes ø8, ø12, and ø16.

Number of auto switches

Nil	2
S	1
n	n

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.

Adjuster option

Nil	Without adjuster
AS	Adjuster on extension end
AT	Adjuster on retraction end
A	Adjuster on both ends
BS	Absorber on extension end
BT	Absorber on retraction end
B	Absorber on both ends
ASBT	Adjuster on extension end + Absorber on retraction end
BSAT	Absorber on extension end + Adjuster on retraction end

* With shock absorber is not available in the 25A-MXS6 series.
* When the adjuster option with shock absorber is used, metal-to-metal collisions occur, and may generate dust particles.

Corrosion Resistant Air Slide Table

(Made to order: 25A-MXS□-X1949)

The material of the head cap part has been changed to a highly corrosion-resistant material.

Please contact your local sales representative for more details.



	After change	Before change
Head cap	Aluminum	Synthetic resin

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>



Air Slide Table Double-ported Type

RoHS

25A-MXQ□A Series

ø6, ø8, ø12, ø16, ø20, ø25

How to Order

25A-MXQ 12 A - 30 ZA □ - M9BW □

1 2 3 4 5 6 7

Series compatible with secondary batteries



1 Bore size	2 Body option: Double-ported type	3 Standard stroke [mm]
	A	
6	Port Switch mounting groove	10, 20, 30, 40, 50
8	Port Switch mounting groove	10, 20, 30, 40, 50, 75
12	Port Switch mounting groove	10, 20, 30, 40, 50, 75, 100
16	Port Switch mounting groove	10, 20, 30, 40, 50, 75, 100, 125
20	Port Switch mounting groove	10, 20, 30, 40, 50, 75, 100, 125, 150
25	Port Switch mounting groove	10, 20, 30, 40, 50, 75, 100, 125, 150

5 Functional options

Symbol	Functional option
Nil	Without functional option
1	With buffer
2	With end lock
3	Axial piping
4	With buffer, end lock
5	With buffer, axial piping

7 Number of auto switches

Nil	2
S	1
n	n

6 Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------


* Refer to the **Web Catalog** for details on applicable auto switch models.

4 Adjuster options/Functional option combinations

Symbol	Adjuster type*6		Adjuster mounting position*1		Functional option combination					
			Extension stroke end	Retraction stroke end	Nil	1	2	3	4	5
Z	Without adjuster				Without functional option	*2*7				
ZA					With buffer	With end lock				
ZB	Metal stopper with bumper									
ZC										
ZD	Rubber stopper									
ZE										
ZF										
ZG	Shock absorber/RJ									
ZH										
ZJ										
ZK	Metal stopper									
ZL										
ZM										
ZN	Shorter total length type*3	Without adjuster				*4				*4
ZP		Rubber stopper								
ZQ		Shock absorber/RJ								
ZS		Metal stopper with bumper								
ZT		Metal stopper								
ZBF	Retraction stroke end adjuster	Rubber stopper								
ZBJ		Shock absorber/RJ								
ZBM		Metal stopper								
ZEC		Metal stopper with bumper								
ZEJ		Shock absorber/RJ								
ZEM	Extension stroke end adjuster	Metal stopper								
ZHC		Metal stopper with bumper								
ZHF		Rubber stopper								
ZHM		Shock absorber/RJ								
ZLC		Metal stopper								
ZLF	Metal stopper	Rubber stopper								
ZLJ		Shock absorber/RJ								

- *1 ●: Shipped together with the product, but not assembled. Without any symbol for the adjuster mounting position: The adjuster can be mounted afterward.
- *2 For the buffer mechanism, the buffer stroke will be shorter for the stroke that is adjusted by the extension stroke end adjuster.
- *3 Extension stroke end adjuster mounting holes have been removed to reduce the total length of the table.
- *4 The shorter total length type can be used, but a retraction stroke end adjuster cannot be mounted afterward.
- *5 There is no piping port on the side surface of the product.
- *6 The metal stopper with bumper option is not available for ø6.
- *7 As there is no magnet in the buffer mechanism, auto switches cannot be used on the buffer part.

Adjuster Mounting Position

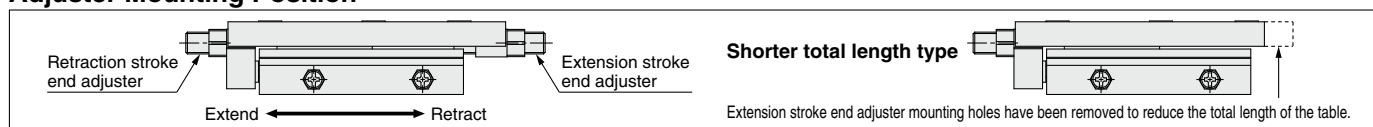

- * When the shock absorber, metal stopper with bumper, or adjuster option with metal stopper is used, metal-to-metal collisions occur, and may generate dust particles.
- * When the buffer mechanism or the end lock mechanism functional options are used, dust particles may be generated by the buffer part as well as the end lock part.

Refer to the Web Catalog.

- Specifications/Dimensions
* Same as the standard product

Click here for details.



Air Slide Table

Low Thrust with High Rigidity Type

RoHS

25A-MXQ□B Series

ø6, ø8, ø12, ø16, ø20

How to Order



25A - MXQ **12** **B** - **30** **ZA** - **M9BW** **□**

• Series compatible with secondary batteries

① Bore size	② Body option		③ Standard stroke [mm]
	Standard type B	Symmetric type BL	
6			10, 20, 30, 40, 50, 75
8			10, 20, 30, 40, 50, 75, 100
12			10, 20, 30, 40, 50, 75, 100, 125
16		—*1	10, 20, 30, 40, 50, 75, 100, 125, 150
20			10, 20, 30, 40, 50, 75, 100, 125, 150

*1 Not available, as the standard model has piping ports and auto switch mounting grooves on both sides. Please use the standard type.

④ Adjuster options

Symbol	Adjuster type*3		Adjuster mounting position*1	
			Extension stroke end	Retraction stroke end
Z	Without adjuster			
ZA	Metal stopper with bumper		●	●
ZB			●	
ZC	Rubber stopper			●
ZD			●	●
ZE	Rubber stopper		●	
ZF				●
ZG	Shock absorber/RJ		●	●
ZH			●	
ZJ	Metal stopper			●
ZK			●	●
ZL	Metal stopper		●	
ZM				●
ZN	Shorter total length type*2	Without adjuster		
ZP		Rubber stopper		●
ZQ		Shock absorber/RJ		●
ZS		Metal stopper with bumper		●
ZT		Metal stopper		●
ZBF	Retraction stroke end adjuster	Rubber stopper	●	●
ZBJ		Shock absorber/RJ	●	●
ZBM		Metal stopper	●	●
ZEC	Retraction stroke end adjuster	Metal stopper with bumper	●	●
ZEJ		Shock absorber/RJ	●	●
ZEM		Metal stopper	●	●
ZHC	Extension stroke end adjuster	Metal stopper with bumper	●	●
ZHF		Rubber stopper	●	●
ZHM		Shock absorber/RJ	●	●
ZLC	Extension stroke end adjuster	Metal stopper	●	●
ZLF		Rubber stopper	●	●
ZLJ		Shock absorber/RJ	●	●

⑤ Auto switch

Nil Without auto switch (Built-in magnet)

* Refer to the **Web Catalog** for details on applicable auto switch models.

⑥ Number of auto switches


Nil	2
S	1
n	n

*1 ●: Shipped together with the product, but not assembled
Without any symbol for the adjuster mounting position: The adjuster can be mounted afterward.

*2 Extension stroke end adjuster mounting holes have been removed to reduce the total length of the table.

*3 The metal stopper with bumper option is not available for ø6.

Adjuster Mounting Position

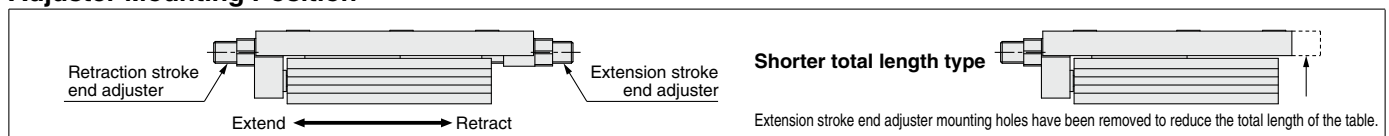

* When the shock absorber, metal stopper with bumper, or adjuster option with metal stopper is used, metal-to-metal collisions occur, and may generate dust particles.

Refer to the Web Catalog.

• Specifications/Dimensions
* Same as the standard product

Click here for details.



Air Slide Table

Single Side-ported Type

25A-MXQ□C Series

ø8, ø12

RoHS

How to Order

25A-MXQ **12** **C** - **30** **ZA** **□** - **M9BW** **□**

1 2 3 4 5 6 7

• Series compatible with secondary batteries



1 Bore size	2 Body option		3 Standard stroke [mm]
	Standard type C	Symmetric type CL	
8	Port Switch mounting groove	Switch mounting groove Port	10, 20, 30, 40, 50, 75
12			10, 20, 30, 40, 50, 75, 100

5 Functional options	
Symbol	Functional option
Nil	Without functional option
1	With buffer
2	With end lock
3	Axial piping
4	With buffer, end lock
5	With buffer, axial piping

6

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.

7 Number of auto switches


Nil	2
S	1
n	n

4 Adjuster options/Functional option combinations

Symbol	Adjuster type		Adjuster mounting position*1		Functional option combination						
			Extension stroke end	Retraction stroke end	Nil Without functional option	1 *2*6 With buffer	2 With end lock	3 *5 Axial piping	4 *2*6 With buffer, end lock	5 *3*5*6 With buffer, axial piping	
Z	Without adjuster				○	○	○	○	○	○	
ZA	Metal stopper with bumper		●	●	○	×	×	○	×	×	
ZB			●		○	×	○	○	×	×	
ZC				●	○	×	×	○	×	×	
ZD	Rubber stopper		●	●	○	×	×	○	×	×	
ZE			●		○	○	○	○	○	○	
ZF				●	○	×	×	○	×	×	
ZG	Shock absorber/RJ		●	●	○	×	×	○	×	×	
ZH			●		○	×	○	○	×	×	
ZJ				●	○	×	×	○	×	×	
ZK	Metal stopper		●	●	○	×	×	○	×	×	
ZL			●		○	○	○	○	○	○	
ZM				●	○	×	×	○	×	×	
ZN	Shorter overall length type*3	Without adjuster			○	○*4	×	○	×	○*4	
ZP				Rubber stopper	●	○	×	×	○	×	×
ZQ				Shock absorber/RJ	●	○	×	×	○	×	×
ZS				Metal stopper with bumper	●	○	×	×	○	×	×
ZT	Extension stroke end adjuster	Retraction stroke end adjuster	Metal stopper	●	●	○	×	×	○	×	×
ZBF			Rubber stopper	●	●	○	×	×	○	×	×
ZBJ			Shock absorber/RJ	●	●	○	×	×	○	×	×
ZBM			Metal stopper	●	●	○	×	×	○	×	×
ZEC			Metal stopper with bumper	●	●	○	×	×	○	×	×
ZEJ			Shock absorber/RJ	●	●	○	×	×	○	×	×
ZEM			Metal stopper	●	●	○	×	×	○	×	×
ZHC			Metal stopper with bumper	●	●	○	×	×	○	×	×
ZHF			Rubber stopper	●	●	○	×	×	○	×	×
ZHM			Metal stopper	●	●	○	×	×	○	×	×
ZLC	Metal stopper	Metal stopper with bumper	●	●	○	×	×	○	×	×	
ZLF		Rubber stopper	●	●	○	×	×	○	×	×	
ZLJ		Shock absorber/RJ	●	●	○	×	×	○	×	×	

- *1 ●: Shipped together with the product, but not assembled Without any symbol for the adjuster mounting position: The adjuster can be mounted afterward.
- *2 For the buffer mechanism, the buffer stroke will be shorter for the stroke that is adjusted by the extension stroke end adjuster.
- *3 Extension stroke end adjuster mounting holes have been removed to reduce the total length of the table.
- *4 The shorter total length type can be used, but a retraction stroke end adjuster cannot be mounted afterward.
- *5 There is no piping port on the side surface of the product.
- *6 As there is no magnet in the buffer mechanism, auto switches cannot be used on the buffer part.

Adjuster Mounting Position

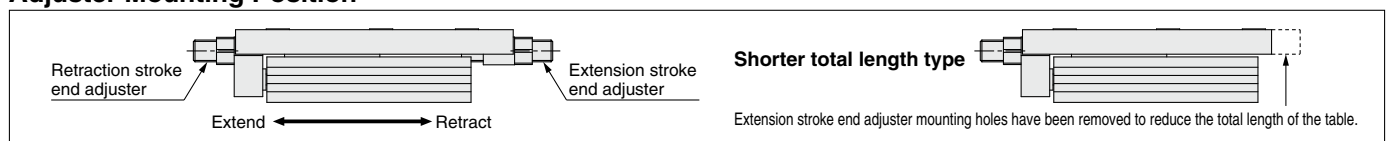

- * When the shock absorber, metal stopper with bumper, or adjuster option with metal stopper is used, metal-to-metal collisions occur, and may generate dust particles.
- * When the buffer mechanism or the end lock mechanism functional options are used, dust particles may be generated by the buffer part as well as the end lock part.

Refer to the Web Catalog.

- Specifications/Dimensions
* Same as the standard product

Click here for details. >>>



Air Slide Table

Height Interchangeable Type

25A-MXQ Series

ø6, ø8, ø12, ø16, ø20, ø25

RoHS

How to Order

25A-MXQ **12** **30** **ZA** **M9BW**

1 2 3 4 5 6 7

Series compatible with secondary batteries



1 Bore size	2 Body option		3 Standard stroke [mm]
	Standard type	Symmetric type	
	Nil	L	
6	Port	Switch mounting groove	10, 20, 30, 40, 50
8	Switch mounting groove	Port	10, 20, 30, 40, 50, 75
12	Switch mounting groove	Port	10, 20, 30, 40, 50, 75, 100
16	Switch mounting groove	Port	10, 20, 30, 40, 50, 75, 100, 125
20	Port	Switch mounting groove	10, 20, 30, 40, 50, 75, 100, 125, 150
25	Port	Switch mounting groove	10, 20, 30, 40, 50, 75, 100, 125, 150

*1 Not available, as the standard model has piping ports and auto switch mounting grooves on both sides. Please use the standard type.

5 Functional options

Symbol	Functional option
Nil	Without functional option
1	With buffer
2	With end lock
3	Axial piping
4	With buffer, end lock
5	With buffer, axial piping

7 Number of auto switches

Symbol	Number of auto switches
Nil	2
S	1
n	n

6 Auto switch

Symbol	Auto switch
Nil	Without auto switch (Built-in magnet)


* Refer to the **Web Catalog** for details on applicable auto switch models.

4 Adjuster options/Functional option combinations

Symbol	Adjuster type*6		Adjuster mounting position*1		Functional option combination				
					Nil	1	2	3	5
			Extension stroke end	Retraction stroke end	Without functional option	*2*7 With buffer	With end lock	Axial piping *5	*2*7 With buffer, end lock
Z	Without adjuster				○	○	○	○	○
ZA			●	●	○	×	×	○	×
ZB	Metal stopper with bumper		●		○	×	○	○	×
ZC				●	○	×	×	○	×
ZD			●	●	○	×	×	○	×
ZE	Rubber stopper		●		○	○	○	○	○
ZF				●	○	×	×	○	×
ZG			●	●	○	×	×	○	×
ZH	Shock absorber/RJ		●		○	×	○	○	×
ZJ				●	○	×	×	○	×
ZK			●	●	○	×	×	○	×
ZL	Metal stopper		●		○	○	○	○	○
ZM				●	○	×	×	○	×
ZN		Without adjuster			○	○*4	×	○	○*4
ZP		Rubber stopper		●	○	×	×	○	×
ZQ		Shock absorber/RJ		●	○	×	×	○	×
ZS		Metal stopper with bumper		●	○	×	×	○	×
ZT		Metal stopper		●	○	×	×	○	×
ZBF	Metal stopper with bumper	Rubber stopper	●	●	○	×	×	○	×
ZBJ		Shock absorber/RJ	●	●	○	×	×	○	×
ZBM	Rubber stopper	Metal stopper	●	●	○	×	×	○	×
ZEC		Metal stopper with bumper	●	●	○	×	×	○	×
ZEJ	Shock absorber/RJ	Shock absorber/RJ	●	●	○	×	×	○	×
ZEM		Metal stopper	●	●	○	×	×	○	×
ZHC	Metal stopper with bumper	Metal stopper with bumper	●	●	○	×	×	○	×
ZHF		Rubber stopper	●	●	○	×	×	○	×
ZHM	Metal stopper	Metal stopper	●	●	○	×	×	○	×
ZLC		Metal stopper with bumper	●	●	○	×	×	○	×
ZLF	Rubber stopper	Rubber stopper	●	●	○	×	×	○	×
ZLJ		Shock absorber/RJ	●	●	○	×	×	○	×

- *1 ●: Shipped together with the product, but not assembled. Without any symbol for the adjuster mounting position: The adjuster can be mounted afterward.
- *2 For the buffer mechanism, the buffer stroke will be shorter for the stroke that is adjusted by the extension stroke end adjuster.
- *3 Extension stroke end adjuster mounting holes have been removed to reduce the total length of the table.
- *4 The shorter total length type can be used, but a retraction stroke end adjuster cannot be mounted afterward.
- *5 There is no piping port on the side surface of the product.
- *6 The metal stopper with bumper option is not available for ø6.
- *7 As there is no magnet in the buffer mechanism, auto switches cannot be used on the buffer part.

Adjuster Mounting Position

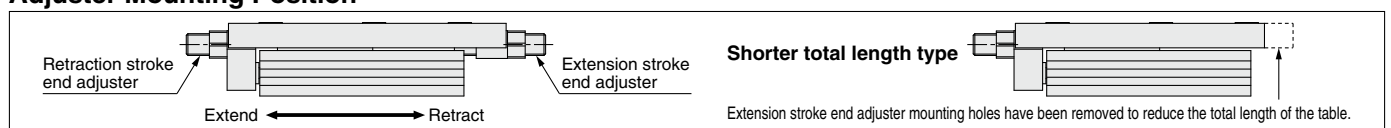

- * When the shock absorber, metal stopper with bumper, or adjuster option with metal stopper is used, metal-to-metal collisions occur, and may generate dust particles.
- * When the buffer mechanism or the end lock mechanism functional options are used, dust particles may be generated by the buffer part as well as the end lock part.

Refer to the Web Catalog.

- Specifications/Dimensions
* Same as the standard product

Click here for details.



Air Slide Table

RoHS

25A-MXQ Series

ø6, ø8, ø12, ø16, ø20, ø25

How to Order



25A-MXQ 16 - 50 AS-M9BW

- Series compatible with secondary batteries

Port thread type

Nil	M thread	ø6 to ø16
TN	Rc	
TF	NPT	ø20, ø25
	G	

Symmetric type

Nil	Standard type
L	Symmetric type

Bore size (Standard stroke [mm])

6	10, 20, 30, 40, 50
8	10, 20, 30, 40, 50, 75
12	10, 20, 30, 40, 50, 75, 100
16	10, 20, 30, 40, 50, 75, 100, 125
20	10, 20, 30, 40, 50, 75, 100, 125, 150
25	10, 20, 30, 40, 50, 75, 100, 125, 150

Made to Order

Nil	None
-X2578	Adjuster side mounting type*1

*1 The type with a shock absorber is only available for bore sizes ø8, ø12, and ø16.

Number of auto switches

Nil	2
S	1
n	n

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.

Adjuster option

Nil	Without adjuster
AS	Extension end rubber stopper
AT	Retraction end rubber stopper
A	Both ends rubber stopper
BS	Extension end absorber
BT	Retraction end absorber
B	Double absorber
CS	Extension end metal stopper
CT	Retraction end metal stopper
C	Double metal stopper
ASBT	Extension end adjuster + Retraction end absorber
ASCT	Extension end adjuster + Retraction end metal stopper
BSAT	Extension end absorber + Retraction end adjuster
BSCT	Extension end absorber + Retraction end metal stopper
CSAT	Extension end metal stopper + Retraction end adjuster
CSBT	Extension end metal stopper + Retraction end absorber

* With shock absorber is not available in the 25A-MXQ6 series.


* When the adjuster option with shock absorber or metal stopper is used, metal-to-metal collisions occur, and may generate dust particles.

Corrosion Resistant Air Slide Table

(Made to order: 25A-MXQ□-X771)

The material of the head cap part has been changed to a highly corrosion-resistant material.

Please contact your local sales representative for more details.

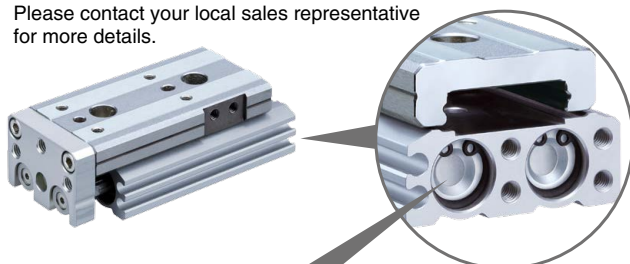

	After change	Before change
Head cap	Aluminum	Synthetic resin

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>




Low Profile Slide Table

25A-MXF Series

ø8, ø12, ø16, ø20

RoHS

How to Order



25A-MXF 12-50-M9BW

Series compatible
with secondary batteries

Bore size/
Stroke (mm)

ø8	10, 20, 30
ø12	20, 30, 50
ø16	30, 50, 75
ø20	30, 50, 75, 100

Number of auto switches

Nil	2
S	1
n	n

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>



Air Slide Table

RoHS

25A-MXW Series

ø8, ø12, ø16, ø20, ø25

How to Order



25A – MXW 16 [] – 100 B – M9BW []

Series compatible with secondary batteries

Port thread type

Nil	M thread	ø8 to ø16
	Rc	
TN	NPT	ø20, ø25
TF	G	

Number of auto switches

Nil	2
S	1
n	n

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.

Bore size (Standard stroke [mm])

8	25, 50, 75, 100, 125, 150
12	50, 75, 100, 125, 150
16	75, 100, 125, 150, 175, 200
20	100, 125, 150, 175, 200, 225, 250
25	100, 125, 150, 175, 200, 225, 250, 275, 300

Option

Nil	Standard (With urethane bumper)
B	With shock absorbers 2 pcs.

* When the adjuster option with shock absorber is used, metal-to-metal collisions occur, and may generate dust particles.

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>




Air Slide Table

25A-MXP Series

ø6, ø8, ø10, ø12, ø16

RoHS

How to Order



25A - MXP 12 - 15 - - M9BW -

Series compatible
with secondary
batteries

Bore size (Standard stroke [mm])

6	5, 10
8	10, 20
10	10, 20
12	15, 25
16	20, 30

Adjuster option

Nil	Rubber stopper
B	Shock absorber
C	Metal stopper

Number of auto switches

Nil	2
S	1
n	n

* In the case of 25A-MXP6-5, with 2 auto switches are available for D-M9□ type and D-M9□V type only. For other switches, no other choice is affordable but with 1 piece attached (symbol: S).

Auto switch

Nil	Without auto switch
-----	---------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.

Magnet/Switch rail

Nil	With magnet and rail
N	Without magnet and rail

* Auto switch cannot be mounted on type N (without magnet and rail).

- * Adjuster for 25A-MXP6 series is available for one side only.
- * Shock absorber is not available in 25A-MXP6 and 25A-MXP8 series.
- * When the adjuster option with shock absorber or metal stopper is used, metal-to-metal collisions occur, and may generate dust particles.

Refer to the Web Catalog.

- Specifications/Dimensions
 - * Same as the standard product

Click here for details. >>>

