



SMC - Experts in the Automotive Industry

Index (Select product according to family Series)

Section 1 - Linear Actuators

		Page
CLKZ1R	Power Clamp Cylinder with One Way Lock.....	7
CKZT	Power Clamp Cylinder.....	7
CK1	Clamp Cylinder.....	7
CKA	Large Bore Clamp Cylinder.....	8
D-P5 / D-P7	Weld Immune Auto Switch & Accessories.....	8
CLK1	Clamp Cylinder with Lock.....	9
CKGV	Clamp Cylinder—Reduced Friction	10
CKQ / CLKQ	Locating Pin Clamp Cylinder / Optional Lock.....	10
CKQR	Pin Shift Cylinder.....	10
MK / MK2	Rotary Clamp & Heavy Duty Option.....	11
MRQ	Linear / Rotary Longer Stroke.....	11
CQ2	Compact Cylinder 12 to 100 Bore.....	11
CQ2	Large Bore 125 to 200 Bore.....	11
CQM	Compact Guide Cylinder.....	12
CM2	Crimp Cylinder.....	12
CM2	R Water Resistant Crimp Cylinder.....	12
CA2	Tie Rod Cylinder 40-100 Bore.....	12
CBA	End Lock cylinders.....	13
CNA	Fine Lock cylinders.....	13
CS1	Large Bore Tie Rod Cylinder 125-300 Bore	13
CLS	Lock Cylinder 125 to 250 Bore.....	14
C85 / C76	ISO Crimp Cylinder 8-40 Bore.....	14
C95 ISO	Tie Rod Cylinder 32-250 Bore.....	15
CP95 ISO	Profile Cylinder 40-100 Bore.....	15
C55	ISO Standard Compact Cylinder.....	16
MY	Rodless Cylinder.....	16
LX	Short Stroke Electric Actuator.....	16
LJ1	Long Stroke Electric Actuator.....	16
E-MY2	E-Rodless Electric Actuator.....	17

Section 2- Guided Actuators / Grippers

		Page
MGP	Compact Guide Cylinder 12-100 Bore.....	17
MGP – RN/HN	End Lock Guide Cylinder.....	18
MGPS	Compact Guide Cylinder 50 & 80 Bore.....	18
MGG	Guide Cylinder with Shock Absorber.....	18
MGF	Guide Table.....	18
MGT	Turntable Cylinder.....	19
RSH	Heavy Duty Stopper Cylinder.....	19
MGZ	Non-Rotating Double Power Cylinder.....	20
MHT2	Toggle Style Gripper.....	20
MHL2	Wide Opening Gripper.....	21
MHS3	3 Finger Parallel Style Gripper.....	21

Index (Select product according to family Series)

Section 3– Manual Valves

	Page
VSH 5	Port Hand Valve 1/4 to 1/2"..... 22
VH	4 Port Hand Valve 1/4" to 1"..... 22
VHA	Residual Pressure Dump Valve..... 22
CB-97	Push-In Indicator..... 22
VHK	Finger Valve 2 & 3 Port..... 23
VM	Mechanical Valves..... 23
VM .. X1	Large Push Buttons..... 23
VR51	Two Hand Control Valve..... 24

Section 4– Flow Controls and Other

	Page
AS	Standard Metal Body Flow Controls..... 24
AS—M	Speed Controller for Low Speed Operation..... 24
AS...1F-T	Tamper Proof Speed Control..... 25
ASS	Soft Start In-Line Flow Control..... 25
ASP	Pilot Check Valve..... 25
ASR / ASQ	Air Saving Valve..... 26
AS...FE	Flow Control c/w Residual Pressure Exhaust Valve..... 26
VR13 **	Double Check Valve..... 26
KE	Residual Pressure 'Tee' Fitting..... 27
25 **	Metal Body Silencer..... 27
AN□00	Silencer Standard Type..... 28
AMC	Exhaust Cleaner—Captivates Oil Emissions..... 28
KR	Spatter Proof Fittings..... 28
KQB	Metal Push-in Fittings..... 29
TRS	Spatter Resistant Tubing..... 29
TRBU	Dual Wall Spatter Resistant Tubing..... 30
TK	Tube Cutters—3 styles..... 30
TKS	Double Layer Tube Stripper..... 31
VMG	Blow Gun..... 31
KN	Spray Nozzles..... 31
KK	Quick Couplings—Rectus type / Stainless Type..... 32

Index (Select product according to family Series)

Section 5 - Airline Equipment

Page

FQ1	Solvent Filter.....	33
FN1	Solvent / Coolant Filter.....	33
AMG	Water Separator - 1/4" to 2".....	34
IDG	Membrane Dryer 1/8" to 2".....	34
ID	Heatless Air Dryer - Dew Point to -30°C.....	34
PDE	Refrigerated Dryer, 30ℓ/min - 60.000ℓ/min.....	34
ARJ	Miniature Regulator.....	35
ARM	Manifold Regulator.....	35
AR10-60	Modular regulator.....	35
ARG	Regulator c/w Gauge in Knob.....	35
AR**5	Large Port Regulator up to 2".....	36
IR	Precision Regulator.....	36
ARX	High Pressure Regulator.....	36
AW	Filter Regulator up to 1".....	37
AV	Soft Start Valve up to 1".....	37
ITV	Electro-Pneumatic Regulator.....	37
VHS	Lockable Shut-Off Valve - 1/8 to 1".....	38
VEX39	Lockable Shut-Off Valve - 2".....	38
XT17-6	Combination Shut-Off Valve/Filter/Pressure.....	38
AD4	Float Type Auto Drain 1/2".....	39
AD6	Float Type Auto Drain 1".....	39
ADH	Heavy Duty Auto Drain 1/2".....	39
LMU	Mist Spray Unit.....	39
LMV	Mixing Valve Nozzle.....	40
ALD	D.P. Lube Unit.....	40

Section 6 - Instrumentation

Page

XT14	Water Check Valve.....	40
IN-24-	3 Port Selector Air/Water.....	40
INV-079-	3 Port Selector Air/Water.....	41
WI	Water Indicator.....	41
IFW	Water Flow Switch.....	41
IL211	Lock up Valve.....	42
PF2W	Digital Flow Switch.....	42
PF2A	Digital Flow Switch.....	42
IS1000	Pressure Switch.....	43
IS3000	Pressure Switch.....	43
ISG	Pressure Switch.....	43
ISE/ZSE	Digital Pressure Swtitch.....	44,45
ISA2	Air catch Sensor.....	45

Index (Select product according to family Series)

Section 7 - Valves

		Page
EX250/500	Serial Transmission Series.....	46
EX245	Serial interface.....	46
VQC	Serial / D-Sub Valves.....	47
VQ4000/5000	Base Mounted Solenoid Valve.....	47
SV	Serial / D-Sub Valves.....	48
VS7- 6/-8	ISO 1 & 2 Metal Spool Valves.....	48
VQ7- 6/-8	ISO 1 & 2 Metal Spool Valves - New Plug Option.....	48
EVS7-6/-8/-10	ISO 1,2 & 3 Metal Spool.....	49
VSR8/VSS8	ISO 1,2 & 3 Plug-in & Device Net - Net Options.....	49
VX	Process Valves - Direct Acting Coils.....	49
VFN	Namur Interface 3 & 5/2 Valve.....	50
ACTBV	Actuated Ball Valve.....	50

Section 8 - Vacuum

		Page
ZF/AMJ	Filter - Main or In-Line.....	50,51
IRV/ITV	Regulator Manual or Electric.....	51
ZU/ZH	Vacuum Ejector.....	52
ZM/ZL	Vacuum Ejector - Pilot or Solenoid Driven.....	52
ZP/ZPT/ZPX	Vacuum Pads 2mm up to 125mm.....	52

Section 9 - Special

		Page
VBA	Booster Regulator.....	53
VBAT38	Booster & Tank Assembly.....	53
MQR	Low Torque Rotary Joint.....	53
VCC	Colour Change Valve.....	54
CCS	Control Cabinets	
	-Pneumatic, Electrical or a Combination.....	55
Training	Pneumatics/PLC Training Courses.....	56
CHDKG	Compact Hydraulic Cylinder with Magnet.....	57
CHDSG	ISO Hydraulic Cylinder with Magnet.....	57

Section 1

Linear Actuators



Series CLKZ1R, CNOMO Std Power Clamp Cylinder

Features

- ➔ Constant clamp pressure is applied even if the thickness of the work piece varies.
- ➔ Aluminium body provides light weight construction.
- ➔ One way lock mechanism ensures work is held.



Series CKZT Slim Line Power Clamp

Features

- ➔ Rounded Cover design reduces weld spatter accumulation.
- ➔ Elliptical piston design achieves narrow body shape.
- ➔ Easy proximity cassette installation and removal.
- ➔ Adjustment bolt for changing arm opening angle.
- ➔ Protective seal design is less effected by poor air quality.



Series CK1 Clamp Cylinder, Bore Sizes: ø40, ø50, ø63

Features

- ➔ Two types of clevis width (16.5 & 19.5mm).
- ➔ Piping entry orientation can be selected as required.
- ➔ Gaiters are unnecessary—heavy duty copper scraper is provided as a countermeasure against weld spatter.
- ➔ Built-in speed controllers.
- ➔ Non-lube type.





Series CKA

Large Bore Clamp Cylinder

Bore Sizes: $\varnothing 80, \varnothing 100$

Features


- ➔ *Clevis width (28mm).*
- ➔ *Piping entry orientation can be selected as required.*
- ➔ *Gaiters are unnecessary—heavy duty copper scraper is provided as a countermeasure against weld spatter.*
- ➔ *Built-in speed controllers.*
- ➔ *Non-lube type.*



Series D-P ☐

Tie Rod Mount Weld Immune Auto Switch

Two colour LED
40ms Response



Series D-P ☐

Tie Rod Mount Weld Immune Auto Switch

High Magnet Field Resistance
1.2 ms Response suit CKP only





Series CLK1




Clamp Cylinder with Lock

Bore Sizes: $\varnothing 32$, $\varnothing 40$, $\varnothing 50$, $\varnothing 63$


Features

- ➔ Extra piping or valving is not required.
- ➔ Lock is controlled from the Directional Control Valve.
- ➔ Compact lock mechanism.
- ➔ Lock engages when residual pressure is exhausted regardless of work piece thickness or end stop position.
- ➔ Multi-porting options like the CK1 Series.


Symbols

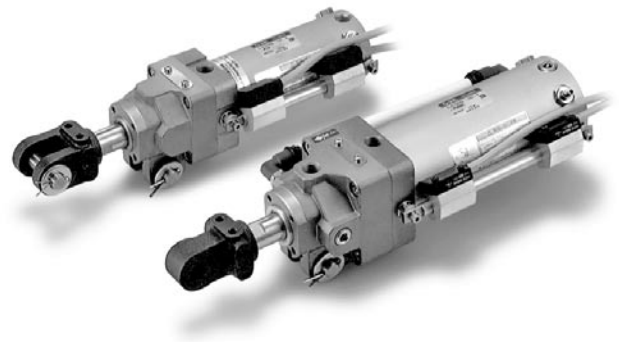

New lock Circuit Design

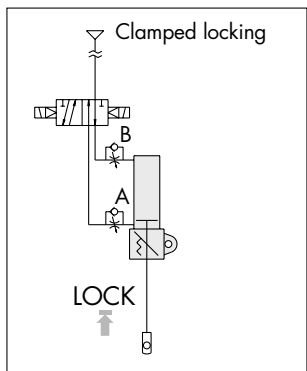


Conventional Lock Circuit

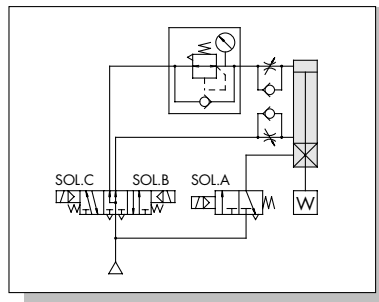


Holding a clamped state

Prevents work piece slippage and dropping due to work piece weight.

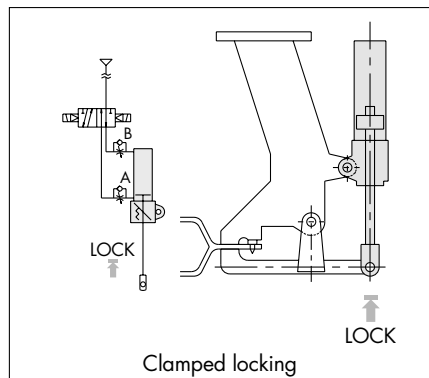

Holding an unclamped state

Prevents dislocation of home position due to weight of clamp arm.

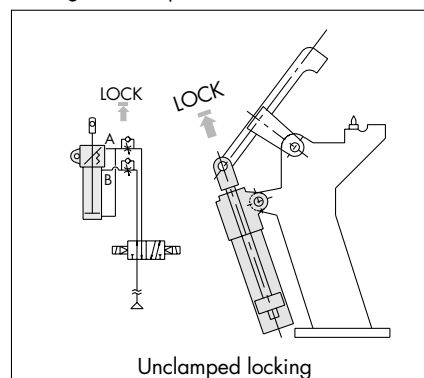




Series CKGV

Clamp Cylinder, Bore Sizes: $\varnothing 50$, $\varnothing 63$

Features

- ➔ Mounting from 2 sides.
- ➔ Three piping directions.
- ➔ 2 piston seals allow for low friction travel until 6 degrees before the clamp closes when the 2nd seal starts to develop its force.
- ➔ Mechanical locking system based on the quadrilateral joint law—can only be released by air in the retraction port or a vertical force applied to rod end.
- ➔ Adjustable stroke on retraction and still maintaining rubber cushion.
- ➔ Optional manual override lever available, left or right side.

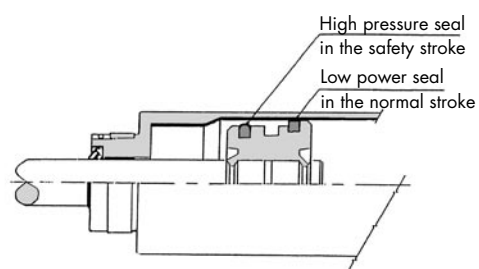

Series CKQ/CLKQ

Locating Pin Clamp Cylinder, Bore Sizes: $\varnothing 50$

Features

- ➔ Clamping position height adjustable from 0.5 to 2mm by addition of shims.
- ➔ Optional lock to hold pin clamp in place in case of air loss.
- ➔ 2 types of guide pin—round or diamond.
- ➔ Variety of body mounting positions.
- ➔ Magnetic field resistant switches are available.



Series CKQR

Pin Shift Cylinder

Features

- ➔ Non rotating mechanism is standard.
- ➔ The cylinder can be mounted on any of the 3 side surfaces or the bottom surface to provide flexibility in mounting.
- ➔ Option in two pin diameters, $\varnothing 25\text{mm}$ and $\varnothing 40\text{mm}$.






Heavy Duty Series MK2 Rotary Clamp

Features

- ➔ Compact rod extends and rotates design.
- ➔ Strong clamping force.
- ➔ Left or right rotation.
- ➔ Auto switch is attachable.
- ➔ Clamp are available as an accessory.



Series MRQ Linear Rotary

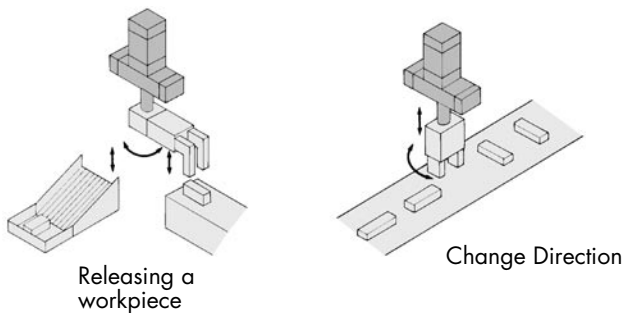

Series CQ2 Compact Cylinder: Standard Type, Single Rod

Bore Sizes: ø12, ø16, ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100, ø125, ø140, ø160, ø180, ø200

Features

- ➔ Unique range of products and sizes.
- ➔ Compact, light weight, space-saving design.
- ➔ Single or double acting.
- ➔ Non-rotating piston rod option (ø12 to 63 only).
- ➔ Bore sizes: ø12 - 200mm.





Series CQM

Compact Cylinder: Guide Rod Type, Double Acting, Single Rod

Bore Sizes: $\varnothing 12$, $\varnothing 16$, $\varnothing 20$, $\varnothing 25$, $\varnothing 30$, $\varnothing 40$, $\varnothing 50$, $\varnothing 63$, $\varnothing 80$, $\varnothing 100$

Features

- 3 to 4 times stronger anti-lateral load (compared to CQ2).
- Loads can be directly mounted.
- Compatible mounting dimensions with CQS/CQ2.
- Autoswitch is mountable/removable even when the plate is retracted.



Series CM2

Air Cylinder: Standard Type, Double Acting, Single Rod

Bore Sizes: $\varnothing 20$, $\varnothing 25$, $\varnothing 30$, $\varnothing 40$

Features

- Longer life.
- Compact and lightweight.
- Excellent dust resistance.
- Reduced piston rod deflection.



Series CA2, Bore Sizes: $\varnothing 40$, $\varnothing 50$, $\varnothing 63$, $\varnothing 80$, $\varnothing 100$

Air Cylinder: Standard Type, Double Acting, Single Rod

Features

- Tie rod construction.
- Air cushion design.
- Easy cushion valve adjustment.
- Piston rod deflection minimised.



Additional Options Upon Request

Series CA2□Q
Low friction



Series CBA2
End lock



Series CA2□H
Air-hydro





Series CBA2

Endlock Series

Bore Sizes: ø40, ø50, ø63, ø80, ø100

Features

- ➔ End lock cylinder either at rod or head end.
- ➔ Dimensions are the same as CA2 Series.
- ➔ Lock can be either by air release or manually.



Series CNA

Cylinder with Lock

Bore Sizes: ø40, ø50, ø63, ø80, ø100

Features

- ➔ Fine Lock Cylinder suits applications for:
 - Intermediate stops.
 - Emergency stops.



Series CS1

Compact Cylinder: Guide Rod Type, Double Acting, Single Rod

Bore Sizes: ø125, ø140, ø160, ø180, ø200, ø250, ø300

Features

- ➔ 3 to 4 times stronger anti-lateral load (compared to CQ2).
- ➔ Loads can be directly mounted.
- ➔ Compatible mounting dimensions with CQS/CQ2.
- ➔ Autoswitch is mountable/removable even when the plate is retracted.



Additional Options Upon Request

Low Friction
Series CS1□Q



Air-hydro version
Series CS1□H





Series CLS

Cylinder with Lock, Double Acting, Single Rod

Bore Sizes: ø125, ø140, ø160, ø180, ø200, ø250

Features

- ➔ Manual unlocking function.
- ➔ Design minimises the influence of unlocking air quality.
- ➔ Compact lock unit weight and saves space.
- ➔ Fail safe construction, spring to lock.



Series C85

ISO Cylinder: Standard/Non rotating Type

Double Acting, Single/Double Rod

Bore Sizes: ø8, ø10, ø12, ø16, ø20, ø25

Features

- ➔ Conforms to CETOP RP52P and ISO 6432 standards.
- ➔ Double acting models.
- ➔ High speed actuation.
- ➔ Auto switch sensing option.
- ➔ Special rod seal gives high resistance to dust ingress.
- ➔ Easy & accurate mounting.
- ➔ Exceptional service life.
- ➔ Non-rotating and double rod options.
- ➔ Air cushioning option.



Series C76

Cylinder: Standard/Non rotating Type, Double Acting, Single/Double Rod

Bore Sizes: ø32, ø40

Features

- ➔ Easy-accurate mounting.
- ➔ Conforms to CETOP RP52P and ISO 6432 standards.
- ➔ High Speed Actuation.
- ➔ Replaceable Rod Seal.
- ➔ Strong, Corrosion-proof Barrel.





Series C95

ISO/VDMA Cylinder: Standard Type

Double Acting, Single/Double Rod

Bore Sizes: $\varnothing 32$, $\varnothing 40$, $\varnothing 50$, $\varnothing 63$, $\varnothing 80$, $\varnothing 100$, $\varnothing 125$, $\varnothing 160$, $\varnothing 200$, $\varnothing 250$

Features

- *Dimensions conform to VDMA, ISO & CETOP Standards.*
- *Piston force to 7500N.*
- *Adjustable stroke end cushioning.*
- *High repeatability regardless of load.*
- *Ultra low friction & long life.*
- *Double & Non-rotating rod types available.*
- *Guide units available.*



Series CP95

Profile Design Air Cylinder

Bore Sizes: $\varnothing 32$, $\varnothing 40$, $\varnothing 50$, $\varnothing 63$, $\varnothing 80$, $\varnothing 100$

Features

- *Conforms to VDMA 24 562 (parts 1 and 2), ISO 6431 and CETOP standards.*
- *Combines lightweight profile barrel design with enclosed tie rods for clean lines.*
- *Unique seal system ensures efficient performance and long life.*
- *Fully adjustable cushioning at end of stroke.*
- *Magnetic proximity sensing.*
- *Superior cushioning performance and Kinetic energy absorption.*





Series C55

ISO Standard [ISO 21287] Compact Cylinder

Bore Sizes: ø20, ø25, ø32, ø40, ø50, ø63

Features

- ➔ Standard ISO compact cylinders with standard outside dimensions according to ISO21287.
- ➔ Full range of brackets available.
- ➔ Tapped body with through holes for easy mounting.
- ➔ Male rod thread is available as an option.



Series MY1

Rodless Cylinder

Bore Sizes: ø16, ø20, ø25, ø32, ø40, ø50, ø63

Features

- ➔ 5 Guide Types Available:

MY1B: Basic Style
 MY1M: Slide bearing
 MY1C: Cam follower
 MY1H: High precision with integrated linear guide.
 MY1HT: High rigidity with twin linear guides suitable.



Series LX/LJ1

Electric Actuator

Features

- ➔ LX: Short Strokes up to 200mm.
- ➔ LJ1: Strokes up to 1500mm.
- ➔ Variety of controls - Servo/Stepper/Optional Brake.
- ➔ Choice of guide types depending on accuracy required.






Series E-MY2

E - Rodless

Features

- ➔ No PLC required - operates off the same signal as a solenoid Valve.
- ➔ One-button stroke learning function
 - 5 intermediate stops possible.
- ➔ Acceleration & maximum velocity can be adjusted.
- ➔ 2 guide types available: E-MY2C / E-MY2H.
- ➔ Some standard strokes ex-stock Australia.

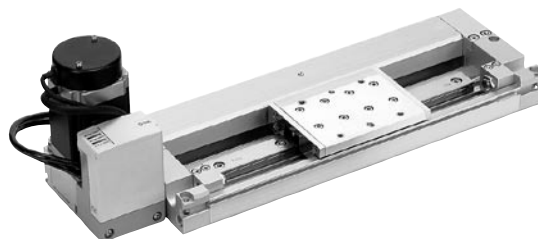

Section 2

Guided Actuators/Grippers

Series MGP

Compact Guide Cylinder


Bore Sizes: ø12, ø16, ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100

Features

- ➔ Compact design incorporates cylinder body as part of guide body.
- ➔ High resistance to side loads.
- ➔ For even higher loads, see MGPS Series.
- ➔ Piping from two directions possible.
- ➔ Optional air cushion & longer stroke available, up to 400mm.
- ➔ Coil scraper for harsh environments.
- ➔ Frost, weld spatter or machining chips from Rod & guide rods.



Application

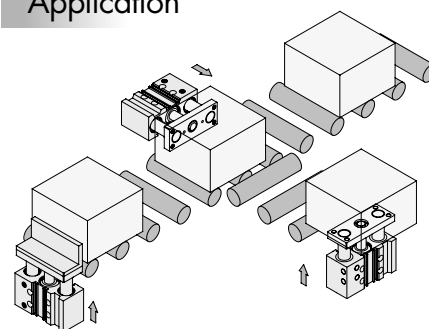



Series MG□□-RN/HN

End Lock Guide Cylinder

Bore Sizes: ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100

- ➔ Optional Rod or rear end lock available.
- ➔ Locking or Non-locking type.
- ➔ Body dimension only increases by 25mm to standard.



Series MGPS

Heavy Duty Compact Guide Cylinder

Bore Sizes: ø50, ø80

- ➔ Compared with the MGPM ø50 standard slide, the MGPS ø50 re-inforced slide bearing provides.

- 10% more lateral load resistance.
- 25% more eccentric lateral load capacity.
- 140% more impact load resistance.



Series MGG

Guide Cylinder with Shock Absorber

Bore Sizes: ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100




Series MGF

Guide Table

Bore Sizes: ø40, ø63, ø100

Changing of transfer direction

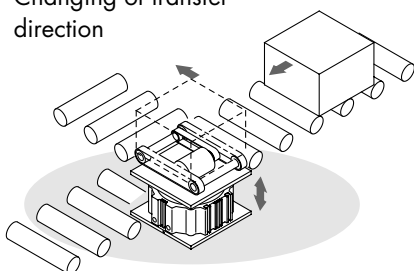




Series MGT

Turntable Cylinder

Bore Sizes: $\phi 63$, $\phi 80$, $\phi 100$

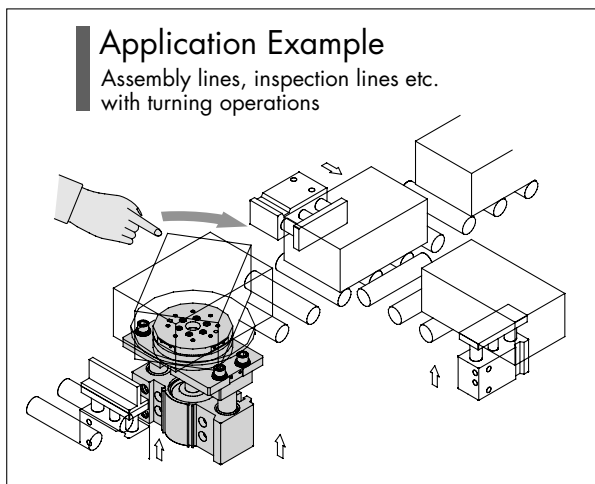


Series RSH/RS1H

Heavy Duty Stopper Cylinder

Bore Sizes RSH: $\phi 20$, $\phi 32$

Bore Sizes RS1H: $\phi 50$, $\phi 63$, $\phi 80$

Option

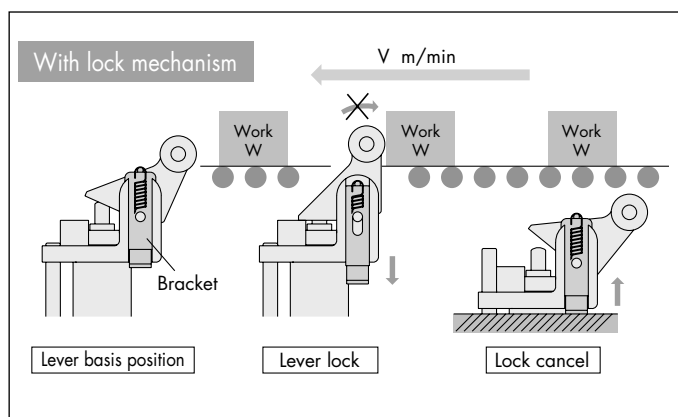



Series MGZ


Non-Rotating Double Power Cylinder

Bore Sizes: $\varnothing 20$, $\varnothing 25$, $\varnothing 32$, $\varnothing 40$, $\varnothing 50$, $\varnothing 63$, $\varnothing 80$


- ➔ Integrated piping from the head cover.
- ➔ Unique construction doubles pressurized area for extension.
- ➔ Ideal for lifting and pressing operations.
- ➔ Up to 40% cross section space saving compared to conventional twin guide rod cylinders.
- ➔ Clean line on external surfaces.




Air pressure supplied from A operates on both surfaces ① and ②. (Extension)

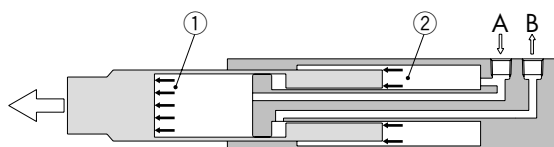

Air pressure supplied from B operates on surface ③. (Retraction)

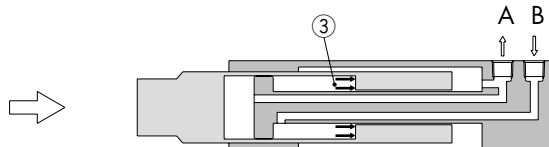

Application examples

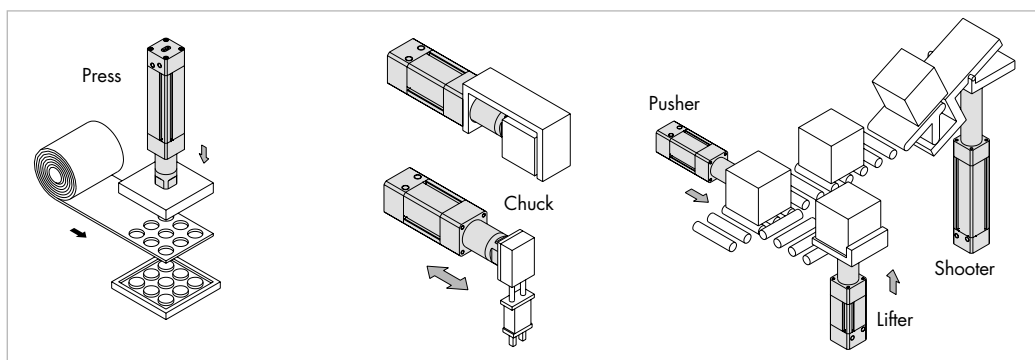


Series MHT2

Toggle Style Gripper

Bore Sizes: $\varnothing 32$, $\varnothing 40$, $\varnothing 50$, $\varnothing 63$

Features

- ➔ The toggle mechanism holds work even when pressure drops.
- ➔ Ideal for holding heavy work.
- ➔ Auto switches available.

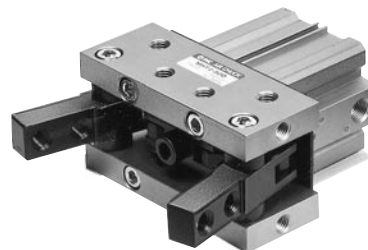




Series MHL2

Wide Opening Gripper

Bore Sizes: $\varnothing$ 10, $\varnothing$ 16, $\varnothing$ 20, $\varnothing$ 25, $\varnothing$ 32, $\varnothing$ 40

Features

- ➔ One unit can handle work pieces with various diameters.
- ➔ A large amount of gripping force is provided through use of double piston mechanism.
- ➔ Compact design, multiple mounting points.
- ➔ Fingers synchronized by rack and pinion mechanism.
- ➔ Built-in dust proofing mechanism.





Series MHS

3 Parallel Style gripper

Bore Sizes: $\varnothing$ 16, $\varnothing$ 20, $\varnothing$ 25, $\varnothing$ 32, $\varnothing$ 40, $\varnothing$ 50, $\varnothing$ 63, $\varnothing$ 80, $\varnothing$ 100, $\varnothing$ 125

Features

- ➔ Holding force from 14N up to 1270N.
- ➔ Variety of options avail:
 - MHSJ: Dust Cover
 - MHSH: Centre Pusher
 - MHSL: Long Stroke Jaws
 - MHSHJ: Combination Cover & Pusher.
- ➔ 2 & 4 fingers are also available.

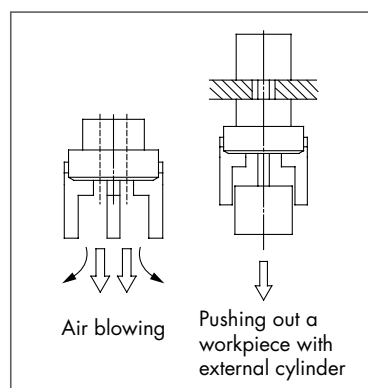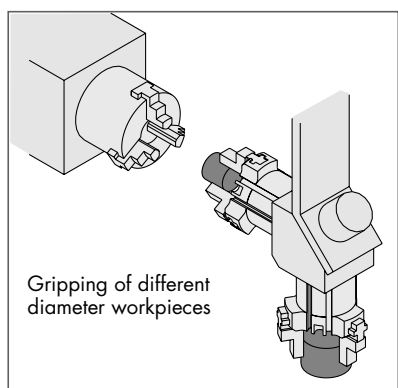



Section 3

Manual Valves

Series VSH

5 Port Hand Valve

Features

- ➔ Hand lever valve - metal spool.
- ➔ Sub-base or manifold mount.
- ➔ 5/2 & 5/3 positions.



Series VH

4 Port Hand Valve

Features

- ➔ Robust handle.
- ➔ 5/2 & 5/3 positions.
- ➔ Panel mount option.
- ➔ Common exhaust port.




Series VHA

Release

Features

- ➔ Residual pressure release valve.
- ➔ Assist maintenance where there is trapped line pressure as a result of using a centre closed valve.
- ➔ 0 to 1MPa pressure range.



Series CB-97XH

Push-in indicator

Features

- ➔ 10mm Push-in pneumatic indicator.
- ➔ Detection for charged lines;
 - Exhaust port of VHA200





Series VHK

2 or 3 Port Finger Valve

Bore Sizes: ø32, ø40, ø50, ø63

Features

- Compact.
- Light duty applications.



Series VM

Mechanical Valves 3/2 and 5/2

Features

- Variety of Valve controls available:
 - Roller.
 - Plunger.
 - Flush mount button.
 - Mushroom button.
 - Twist selector.
 - Key lock.
 - Adjustable lever or roller.
 - Foot Pedal.



Series VM

Large Push Button

Features

- Oversized Buttons for Operators wearing globes.

Available in Red, Green & Black.

VM 130 - 01 - 30* - X105

65mm mushroom button with guard

VM 130 - 01 - 30* - X107

65mm mushroom button

VM 130 - 01 - 30* - X112

40mm mushroom button with medium guard





Series VR51

Two hand control valve

Features

- ➔ An output is available through synchronised, two-handed operation (within 0.5s).
- ➔ Equipment having a safety circuit.



Section 4


Flow Controls and Other

Series AS

Elbow Type (Metal Body)

Features

- ➔ *Speed controller with one-touch fitting.*
- ➔ *Metal body.*

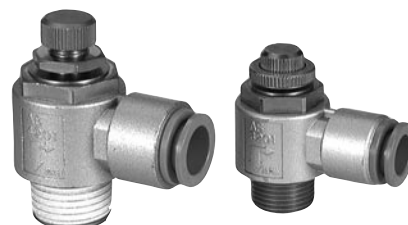

Series AS-M

Speed Controller for Low Speed Operation

Features

- ➔ *Standard type metal body.*
- ➔ *Brass components are nickel plated.*






Series AS □□□ 1F-T

Tamper Proof Speed Controller. Elbow type/Universal type

Features

- ➔ Tamper proof, internal slot for adjustment.
- ➔ Able to adjust flow by a special tool.
- ➔ Prevention of an unnecessary manual operation.
- ➔ Variety of body styles: Metal and plastic elbow, plastic in line.

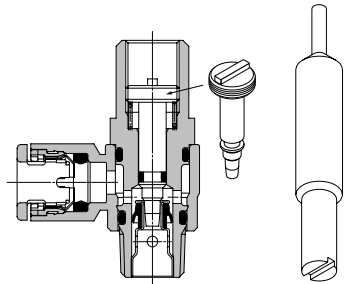

Special tool
Part number: AS-T-1



Special tool
Part number: AS-T-1

Series ASS

Safety Speed Control Valve (SSC Valve)

Features

- ➔ In-line soft start mechanical Valve.
- ➔ Speed control valve fixed throttle with rapid air supply adjustment.
- ➔ Meter-in and meter-out available.
- ➔ Prevent rapid cylinder movement when no back pressure is present.



Series ASP

Speed Controller with Pilot Check Valve

Features

- ➔ Pilot check valve and speed controller are combined.
- ➔ Realizes momentary intermediate stoppage of a cylinder and able to adjust speed control of it.
- ➔ Tubing mount direction is 360° free.
- ➔ Electroless nickel plated is provided as standard.





Series ASR/ASQ

Air Saving Valve

Features

- ➔ Save on air consumption for cylinder return stroke under no load.
- ➔ Fixed or adjustable pressure with std flow control features.
- ➔ Two direction flow control valve with quick exhaust with adjustable pilot pressure.



Series AS□□□□FE

Speed Controller with Residual Pressure Release Valve with One-touch Fitting

Features

- ➔ Residual pressure can be easily released with one push of button.
- ➔ Eye-catching red color release button.



Series VR13**

Double Check Valve

Features

- ➔ Residual pressure outlet - 1/4" port, aluminium cast body.
- ➔ VR1350 is a direct outlet.
- ➔ VR1355 has a flow control attached for controlled exhaust.





Series KEA/KEB/KEC


Residual Pressure Exhaust Valve

Residual pressure inside the cylinder is released to the atmosphere by pressing the button.

Series KE□

Residual Pressure Exhaust

JIS symbol



Without push button guard
With one-touch fitting



Applicable tubing O.D. mm	Model
6	KEA06
8	KEA08
10	KEA10
12	KEA12

With push button guard
With one-touch fitting



Applicable tubing O.D. mm	Model
6	KEB06
8	KEB08
10	KEB10
12	KEB12

With push button guard
Rc screw



Connection thread	Model
Rc1/4	KEC-02
Rc3/8	KEC-03

Series 25**

Metal Silencers

Features

- ➔ Metal casing for harsh environments.
- ➔ 19dB(A) noise reduction.
- ➔ Available from 1/4" up to 1".





Series AN□00

Silencer Standard Type

Features

- ➔ Over 30 dB (A) noise reduction.
- ➔ Low back pressure.
- ➔ Compact and easy mounting.



Series AMC

Exhaust Cleaner

Features

- ➔ Ensures clean plant air and reduces noise pollution;
Over 35 dB (A) noise reduction.
Over 99.9% oil mist removal.
- ➔ Oil emissions can be captured and disposed of responsibly.



Series KR

Flame Resistant Fittings

Features

- ➔ Push-in spatter resistant fittings.
 - 6mm to 12mm





Series KQG


Stainless Steel 316, One Touch-Fittings

Features

- ➔ *Material*
Metal parts: Stainless steel 316.
Seal parts: Special FKM.
- ➔ *Can be used with steam.*
- ➔ *Operating fluid temperature:*
-5 to 150°C
- ➔ *Grease-free.*



All stainless steel 316 except seal parts

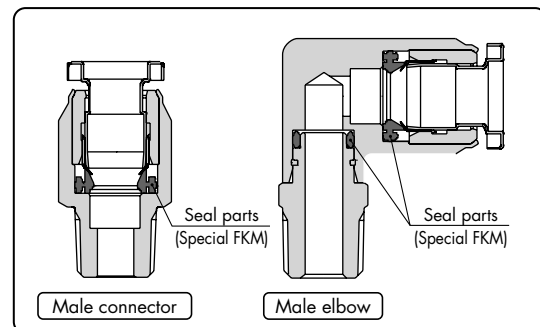

Series TRS

FR Soft Nylon Tubing

Features

- ➔ *Flame Resistance*
(Equivalent to UL-94 Standard V-0).
- ➔ *Applicable for general air pressure and water in a spark atmosphere such as spot welding.*
- ➔ *Variety of colours: Black, Yellow, Blue, Red and Green.*






Series TRBU

Flame Resistant Tubing

Features

- ➔ For general air and water piping in environments with sparks from spot welding, etc.
- ➔ Double layer construction using flame resistant resin (equivalent to UL-94 Standard V-0) in the external layer.
- ➔ *Applicable for general air pressure and water in a spark atmosphere such as spot welding.*
- ➔ *Variety of colours: Black, Yellow, Blue, Red and Green.*

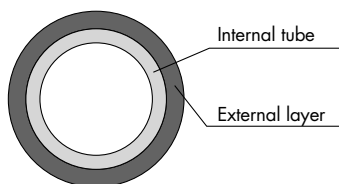


Sectional view of FR double layer polyurethane tube

Series TK

Tube Cutter

Features

- ➔ Tube Cutter: TK-1.
- ➔ Perpendicular cutting.
- ➔ Reduced operating force.
- ➔ Enclosure/safety lock contained.
- ➔ Tube Cutter: TK-2
Possible to cut a tube up to 18mm.
- ➔ Tube Cutter: TK-3 (Useful type)
Safety lock contained.

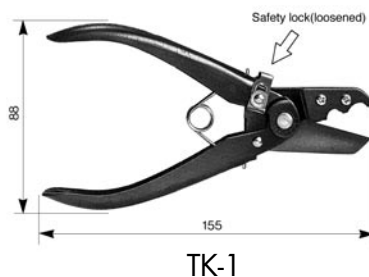

TK-1



TK-2



TK-3




Series TKS

Double Layer Tubing Stripper

Features

- ➔ Allows easy stripping of the outer layer from double layer tubing.
- ➔ Available sizes: 06, 08, 10, 12mm.




Series VMG/KN

Blow Gun/Nozzle

Features

- ➔ Effective sectional area 30mm².
- ➔ Pressure loss is less than 1%.

Effect of Energy Saving Improvement

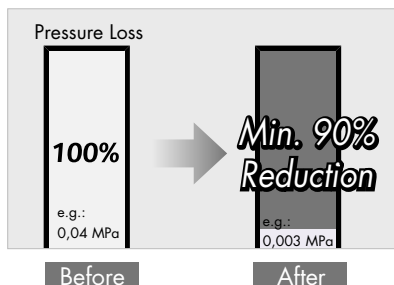

Nozzle type

Male thread nozzle



Low noise nozzle



High efficiency nozzle



Pivoting nozzle with self-align



Needle sensing head





KK/KKH/KKA/KK13

S Couplers

Series KK

- With sleeve lock (Except for KK2)
- Effective area 3.8 to 82 mm²



Series KKH

- Without sleeve lock
- Effective area is equivalent to that of Series KK.



The pulling strength for the plugs and sockets has been improved.
Twice as strong as the conventional models.

Series KKA Stainless steel type

- Body material: Stainless steel 304
- Seal material: Special FKM
- Non-greased specification
- Operating temperature range:
-5 to 150°C



Connection port size
1, 1 1/4, 1 1/2 is newly added.
(Series KKA7/8/9)

Series KK13 Manufactured by RECTUS AG



Section 5

Airline Equipment



Series FQ1

Filter for cleaning Solvent, Quick change filter

Features

- ➔ Element replacement in only 60 seconds.
- ➔ No tools required, easy element replacement.



Series FN1

Low Maintenance Filter

Features

- ➔ A unique element design with back-flush feature generates.
- ➔ Eco-friendly regenerative filter.
- ➔ Cleaning solvent/Coolant.
- ➔ Back flush capacity.



Series AMG Water Separator

Features

- ➔ Removal of 99,99% of all water droplets present in the air line.
- ➔ Should be installed at the peak pressure in the line and as far from the compressor as possible for maximum efficiency.



Series IDG Membrane Air Dryer

Features

- ➔ Power supply not required.
- ➔ No vibration or exhaust heat.
- ➔ Dew point indicator confirms air drying at a glance.
- ➔ Also available with fittings for purge air discharge.
- ➔ Integrated pre-filter.
- ➔ Environmental friendly (non-freon).
- ➔ Compatible with low dew points.



Series ID Heatless Air Dryer

Features

- ➔ Heatless ID series is best when dry air with a low dew point is needed.
- ➔ Supply dry air with a low dew point below -30°C.
- ➔ Compact and lightweight without heater and electric control board.



Series PDE Refrigerated Dryers

- ➔ Refrigerated Dryer.
 - 1/2" to 2 1/2"
360 ℓ/min to 18000 ℓ/min.
 - 80NB to 100NB ANSI
21000 ℓ/min to 60480 ℓ/min.





Series ARJ

Miniature regulator

Features

- ➔ Compact and light weight.
- ➔ Allows smaller mounting pitch.




Series ARM

Compact Manifold regulator

Features

- ➔ Allows high degree of freedom in selection according the installation conditions.
- ➔ Four types of supply blocks (for common supply).
- ➔ Types and sizes of the One-touch fittings can be changed.
- ➔ Mixed manifold.
- ➔ Pressure gauge with limit indicator.

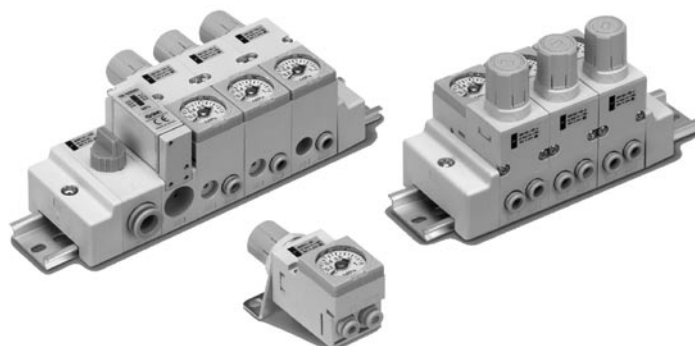

Series AR10 to 60

Regulator/Modular style

Features

- ➔ Can be combined with a modular style air filter and lubricator.
- ➔ A rich variety of models enables precise and stable pressure settings to meet user needs.



Series ARG

Regulator c/w Gauge

Features

- ➔ Space saving.
- ➔ Only one hole to cut - reduced labour.
- ➔ Gauge limit indicator easy to adjust.





Series ARX

Regulator for 2000kPa

Features

- ➔ Primary pressure 2MPa.
- ➔ Regulating range 0.05 to 0.085MPa.
- ➔ 1/8" or 1/4" connection.



Series AR□□5

Pilot Operated Regulator

Features

- ➔ Internal pilot operated relieving style regulator.
- ➔ Flow rates up to 16000 l/min.



Series IR

Precision Regulator

Features

- ➔ Bracket and pressure gauge can be mounted from 2 directions.
- ➔ Expanded regulating pressure range.
- ➔ Compact and light weight.
- ➔ Modular body introduced.
- ➔ Superior relief flow characteristics.





Series AW60

Filter Regulator

Features

- ➔ Body size 60 (port size: 3/4 and 1) has been added to filter Regulator AW Series.
- ➔ Check valve construction is featured (AW60K).
- ➔ External or built-in gauge available.



Series AV

Soft Start-up Valve

Features

- ➔ Large effective area (mm²).
- ➔ Modular with F.R.L. Combinations.
- ➔ Manual supply/exhaust function.
- ➔ Low power consumption.



Series ITV

Electro-Pneumatic Regulator

Features

- ➔ Device-Net compatible option (-X80).
- ➔ Digital signal feedback of output pressure.
- ➔ In case of signal failure, output pressure can be set as "stay-put" or OMPa.
- ➔ Body ported or modular assembly possible for some styles.
- ➔ Manifold mounting available for some styles.





Series VHS

Pressure Relief 3 Port Valve with Locking Holes

Features

- ➔ *Conforming to OSHA Standard.*
- ➔ *Manually operated valve can be used to prevent accidents caused by residual pressure in pneumatic lines.*
- ➔ *Can prevent accidents due to inadvertent air supply.*
- ➔ *Combination with a modular style F.R.L. is possible.*



Series VEX3900-20-X2

Lockable shut-off Valve

Features

- ➔ *Lockable shut-off valve with large flow.*
- ➔ *2" connection port.*




Series XT17-6-12R

Compact Filter Assembly

Features

- ➔ *Compact filter assembly.*
- ➔ *Bayonet coupling for isolated pressure take-off.*
- ➔ *Pressure switch option.*
- ➔ *Built-in lockable shut-off valve.*

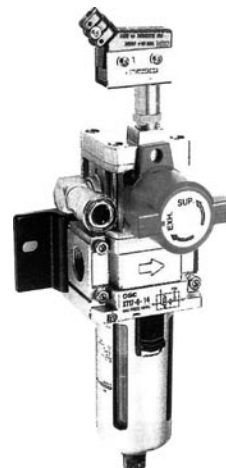



Series AD402/600 Auto Drain Valve

Features

- ➔ Drainage is automatically discharged in a reliable manner, without requiring human operators.
- ➔ Highly resistant to dust and corrosion, operates reliably, and a bowl guard is provided as standard equipment.
- ➔ Mechanical float.
- ➔ 1.0 MPa max. operating pressure.



Series ADH4000 Heavy Duty Auto Drain

Features

- ➔ Mechanical float.
- ➔ Flush button to facilitate daily testing.
- ➔ Easy maintenance.
- ➔ No need for electric power and no waste for air.



Series LMU Mist Spray Unit

Model	Oil tank Set Pressure MPa	Oil tank Capacity	Port	Applicable Maxim Valve	Magnet Holder	Branch Pipe
LMU100	0.05 to 0.2	Full: 3000 Effective: 2500	Sup: 1/4	LMV 110,120	LMH10	LMD1
LMU200	0.05 to 0.2		Out / Air: T0604 Oil: T0425	LMV 210,220	LMH20	LMD2





Series LMV Mixing Valve



Series ALD D.P. Lube Unit



Section 6 Instrumentation

Series XT14-145-W Water Check valve

Features

- ➔ Non return Check valve.
- ➔ For use with water/oil/air.
- ➔ Male thread facilitates mounting.
- ➔ 3/8" BSP Porting.



Series IN-24-8-BC-R-N Hand Operated 3 Port Selector Air/Water

Features

- ➔ Hand operated 3 port selector valve, air or water.
- ➔ Control of cooling water for weld guns.
- ➔ Water/air purge control.
- ➔ Flat mounting surface.
- ➔ Micro switch interface.





Series INV-079-5C-X1

Pilot Operated 3 Port Selector Air/Water

Features

- ➔ Pilot solenoid three port selector valve.
- ➔ Control of cooling water for weld guns.
- ➔ Drains residual water from piping.
- ➔ N.O. and N.C. function.
- ➔ Flat mounting surface.
- ➔ 24VDC or AC100V.
- ➔ Water / air purge control.



Series WI500-06

Water indicator

Features

- ➔ Green indicator shows flow of cooling water.
- ➔ Check mechanism prevents backflow.
- ➔ Indicator not in contact with liquid.
- ➔ 3/4" BSP female porting.



Series IFW510-03-X300

Water flow switch

Features

- ➔ Water flow switch 1-10 l/min.
- ➔ Max flow - 20 l/min -DC24V.
- ➔ N.O. and N.C. available.
- ➔ Variable settings to detect flow rates.
- ➔ Dual polarity facilitates wiring.
- ➔ 3/8", 1/2" or 3/4" BSP porting.





Series IL 211-02 Lock-Up Valve

Features


- ➔ Piloted 3 way lock-up valve.
- ➔ When signal pressure drops to set pressure outlet ports 1 & 2 are isolated.
- ➔ Signal pressure is adjustable.



Series PF2A For Air Digital Flow Switch

Features

- ➔ Bright and easy to read LED display /digital setting.
- ➔ Two independant flow rate settings are possible.

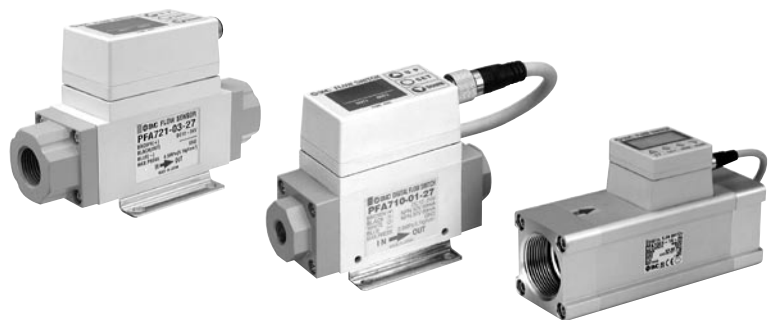

Series PF2W For Water Digital Flow Switch

Features

- ➔ Two types for different applications integrated and remote type displays.
- ➔ Water resistant construction conforming to IP65.
- ➔ Switching from real-time flow rate to accumulate flow is possible.





Series IS1000 Mechanical Style Pressure Switch

Features

- ➔ Compact pressure switch 0.1 to 0.7 MPa.
- ➔ 0.1 to 0.4MPa operating range.
- ➔ Long life, 5 million cycles.



Series IS3000 Pneumatic Pressure Switch

Features

- ➔ Wide calibration range, 0.1 to 0.7MPa.
- ➔ High f 1 cycle/seg frequency operation.
- ➔ Optional indicator light.



Series ISG General Purpose Pressure Switch

Features

- ➔ Variety of pressure ranges.
- ➔ Optional stainless components for wetted parts.
- ➔ 3/8" male port.





Series ZSE30/ISE30

High Precision, 2 Colour Display Digital Pressure Switch

Features

- ➔ 2 Colour display.
- ➔ Positive pressure or vacuum.
- ➔ Analog output 1-5V or 4-20mA.
- ➔ Panel mount available - IP40.



Series ZSE40/ISE40

High Precision, Digital Pressure Switch

Features

- ➔ Positive pressure or vacuum.
- ➔ Analog output 1-5V - NPN/PNP.
- ➔ Panel mount available - IP65.
- ➔ High response 2.5ms



Series ZSE50/ISE50

High Precision, Digital Pressure Switch for fluids

Features

- ➔ Pressure detection for a wide range of fluids.
- ➔ Positive pressure or vacuum.
- ➔ Analog output 1-5V.
- ➔ Panel mount available - IP65.





Series ISE70/75/75H

2 Colour Display Digital Pressure Switch

Features

- ➔ 2 Colour display.
- ➔ IP67.
- ➔ M12 connection - straight or elbow.
- ➔ Air pressure range 0-1 MPa.
- ➔ General fluid pressure range, 0-10MPa and 0-15MPa.



Series ISA2

Air Catch Sensor

Bore Sizes: ø20, ø25, ø32, ø40, ø50, ø63

Features

- ➔ Detection distance: 0.01 to 0.5 mm.
- ➔ Repetition accuracy: 0.01 or less.
- ➔ 2 wiring methods: Individual wiring.
Centralised wiring.
- ➔ 2 Port solenoid valve with Manual Lock.





Section 7

Valves

Series EX250/EX500


Serial transmission system

Applicable protocol

Serial Wiring with Input/Output Unit

Series EX250


- ➔ Device Net
- ➔ PROFIBUS-DP
- ➔ CC-link
- ➔ AS-i

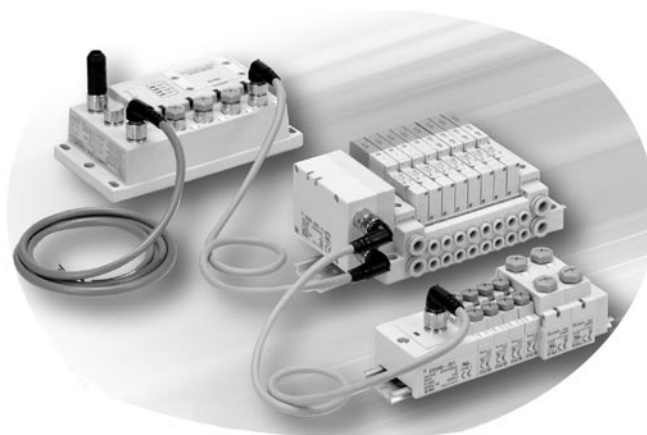

Decentralized Serial wiring

Series EX500


- ➔ Remote I/O
(Rockwell Automation).
- ➔ Device Net
- ➔ PROFIBUS-DP
- ➔ CC-link

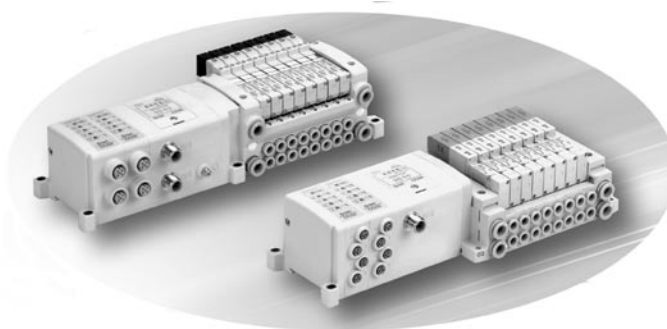

Series EX245

Features

- ➔ IP65 Protection.
- ➔ Standard M12 Bus connector (5 pins, reverse key coding)
- ➔ Up to 32 solenoid valves.
- ➔ Up to 128 digital inputs.
- ➔ Up to 64 digital outputs independent of solenoid valves.
- ➔ Up to 8 modules (Limited by the total current consumption)
- ➔ Integrated diagnostic and protection function.
- ➔ Galvanically isolated power supplies (PROFIBUS DP, US1 for logic/sensors, US2 for valves/loads).
- ➔ Free module configuration.

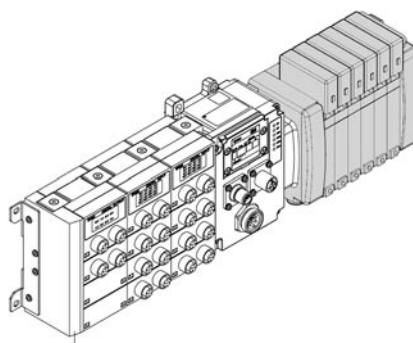



Series VQC (1000,2000,3000) 5-Port Solenoid valve

Features


- ➔ Conforming to IP67 for protection from dust and moisture.
- ➔ M8 or M12 input connections.
- ➔ Input and output options available.
- ➔ Service life - 200million cycles for VQC1000/VQC2000 and 100 million cycles for VQC 4000 based on SMC life test conditions.



Series VQ4000/5000 Base Mounted Solenoid Valve

Features

- ➔ *Larger size, fast response solenoid valves.*
- ➔ *Choice of metal or rubber seal.*
- ➔ *Plug-in or plug-lead (individually wired) electrical connections.*
- ➔ *IP65 splashproof option.*
- ➔ *Manifold or single subbase mounted.*

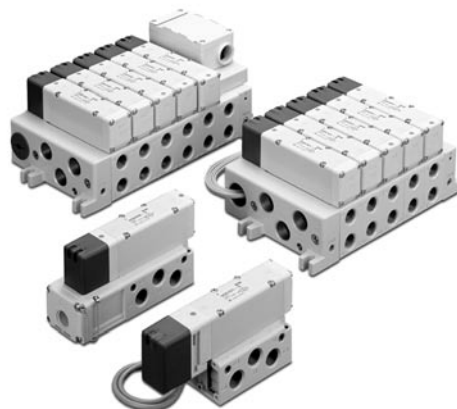




Series SV

5 Port Solenoid Valve, Rubber seal

Serial communication D-sub connector

Features

- ➔ CV 0.18 up to 3.3
- ➔ IP65 Protection, CE compliant.
- ➔ Input and output options available.
- ➔ Service life - 50million cycles based on SMC life test conditions.

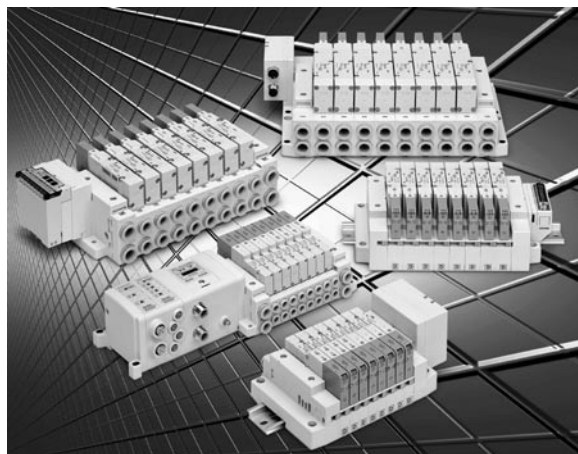

Series VS7-6 /VS7-8

Metal Seal ISO Valve

Features

- ➔ DIN Plug.
- ➔ Conforms to ISO 5599/1
- ➔ CV- 1.5, 3.2
- ➔ IP65 enclosure.
- ➔ 12 or 24VDC, 110VAC, 220VAC.
Other voltages available upon request.
- ➔ Air pilot options available.
- ➔ VP7-*, Rubber spool also available.




Series VQ7-6 / VQ7-8

Metal or Rubber Seal ISO Valve

Features

- ➔ Lighter weight than previous VS7 Series.
- ➔ DIN Plug or M12 pre-wired connector.
- ➔ Conforms to ISO 5599/1,
1 & 2 Series.
- ➔ CV - 1.7, 3.2
- ➔ IP65 enclosure.
- ➔ 12 or 24VDC, 110VAC, 20VAC.

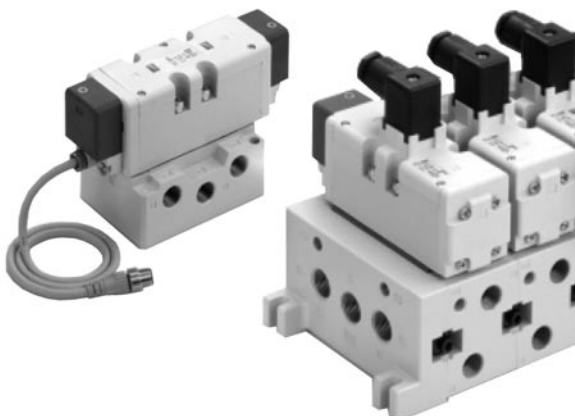




Series EVS7-6/-8/-10

Metal or Rubber Seal ISO Valve

Features

- M12 connection.
- Conforms to ISO 5599/1. 1,2 & 3 Series.
- CV - 1.2, 3 & 5.5
- IP65 enclosure.
- Reduced area of installation - coil size.
- 12/24 VDC - 1.8W

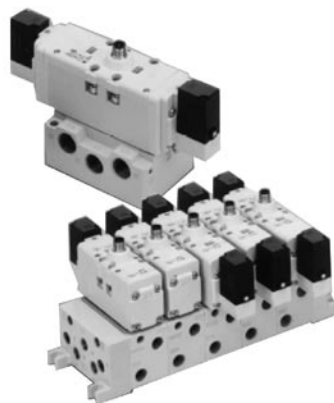


Series VSR8 / VSS8

Lateral Plug-in ISO Manifold, Metal or Rubber seal ISO Valve

Features

- ISO 15407-2 Interface.
- Accommodates enclosure IP65.
- Light weight.
- Large capacity.

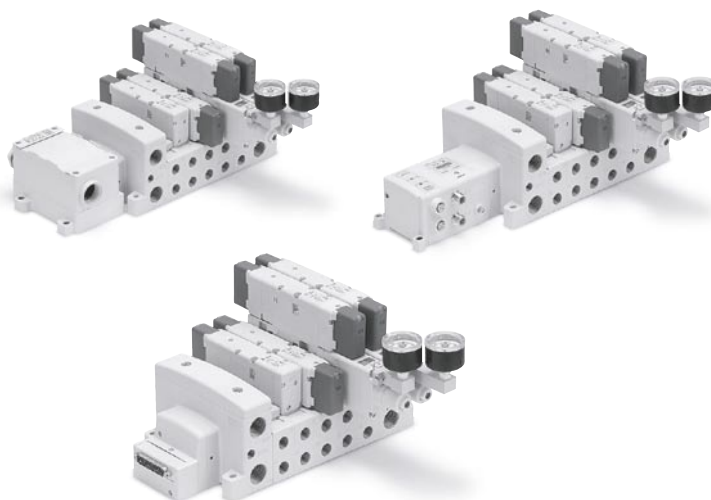

Series VX

Direct Operated 2 Port Solenoid Valve

Features

- Reduction of power consumption.
- Direct operated 2 port solenoid valve.
- For water, oil, steam, air.
- Dust collectors, water hammer etc.





Series ACTBV

Actuated Ball Valve - 1/2" up to 3"

Features

- ➔ Nickel plated ball valves with double acting actuator.
- ➔ Ball valves in other materials available on request subject to medium being used.



Series VFN

NAMUR Interface 3 and 5 Port Solenoid valve

Features

- ➔ Compact design.
- ➔ Large Flow.
- ➔ Low Power consumption - 1.8W DC Solenoid.
- ➔ Voltages: DC12V, 24V
AC24V, 110V, 240V




Section 8 Vacuum

Series ZFA

Air suction filter

Features

- ➔ The collected dust does not remain in the case.
- ➔ Compact and lightweight.
- ➔ Adaptable for a manifold application.
- ➔ Large filter element surface.
- ➔ Easily replaced filter element.
- ➔ Mountable in any direction.

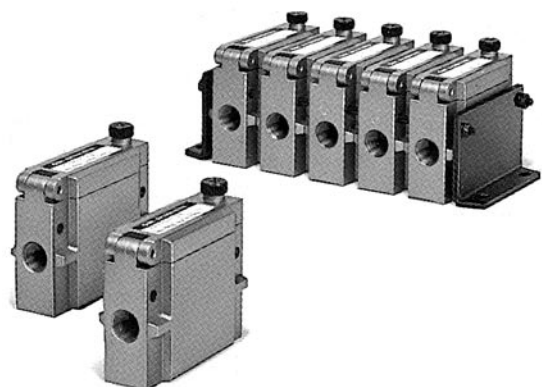



Series ZFB

Air suction filter with one-touch fittings

Features

- ➔ Unrestricted 360° piping tube mounting.
- ➔ Compact and lightweight.
- ➔ Easily replaced filter element.
- ➔ Piping tube can be connected or disconnected with one touch.



Series AMJ

Drain separator for vacuum

Features

- ➔ Removes water droplets from air by simply installing in vacuum equipment connection lines.
- ➔ Effective for removing water droplets from the air sucked into vacuum pumps and ejectors, etc.



Series IRV/ITV

Vacuum Regulator

Features

- ➔ Modular design in manual or electronic control.
- ➔ Electrical input style, manifold stackable.





Series ZU/ZH/ZM/ZL

Vacuum ejector

Features

- ➔ In line box/type compact ejectors.
- ➔ Push-in or threaded connection available.
- ➔ Built-in gauge, mechanical or digital.
- ➔ Solenoid activated and solenoid purge with some models.
- ➔ Suction flow rate from 7ℓ/min up to 200ℓ/min.
- ➔ Manifold stackable for ZM series.



Series ZP/ZPT/ZPX

Vacuum Pad

Features

- ➔ Cups in a variety of materials.
- ➔ Cup sizes from 2mm up to 240mm.
- ➔ Flat/Ribbed/Bellows/Rectangular.
- ➔ Optional Buffers, Check-Valves.



Section 9 Special



Series VBA Booster regulator

Features


- ➔ Pressure increase 2:1 (VBA1111, 4:1).
- ➔ No electrics required.
- ➔ Handle operated or air operated.
- ➔ Optional tank and accessories can be fitted.
- ➔ Flow rates up to 1900 l/min.



Series MQR Low torque metal seal type rotary joint

Features

- ➔ 1, 2, 4, 8, 12 and 16, circuits available.
- ➔ Ideal for turntables and robot arms.
- ➔ Suitable for operating pressures from -100kPa to 1MPa.
- ➔ Spiral porting allows for easy piping.
- ➔ Suitable for temperatures from -10°C to 80°C.

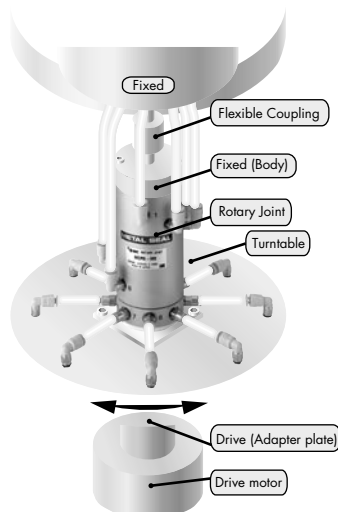




Series VCC

Colour Change Valve (2/3 Port Air Operated)

Features

- ➔ Paint valves, 2 to 5 million cycles, subject to paint type.
- ➔ Air, water, butyl acetate 10 million cycles for (cleaning / blowing).
- ➔ Reduction of paint deposit, dead space of valve element is reduced to 0.01cc or less.
- ➔ Valve can be replaced without touching the piping.
- ➔ Mountable on a robot man.

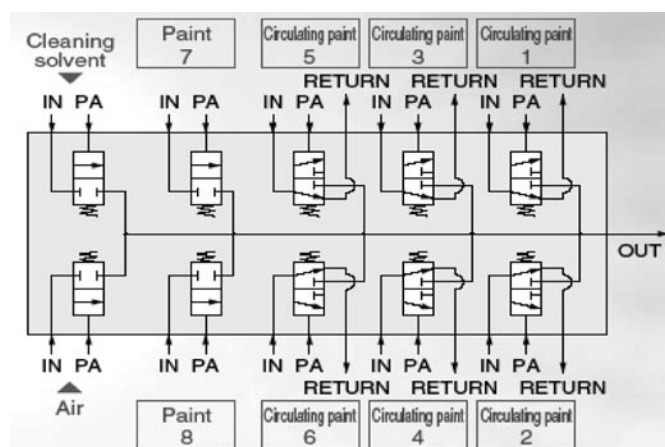





Control Cabinets

Pneumatic/Electro-Pneumatic/Full Electrical

Features

- ➔ *Innovative design concepts in-house with controls.*
- ➔ *Panels or cabinets tailor made to suit customer needs. As a once off or as a repeat item.*
- ➔ *Quality Assurance Accredited to ISO9001:2000.*
- ➔ *Full documentation supplied.*
- ➔ *Constructed to local Standards and regulations.*
- ➔ *Assemblies from the very SMALL to the very LARGE.*

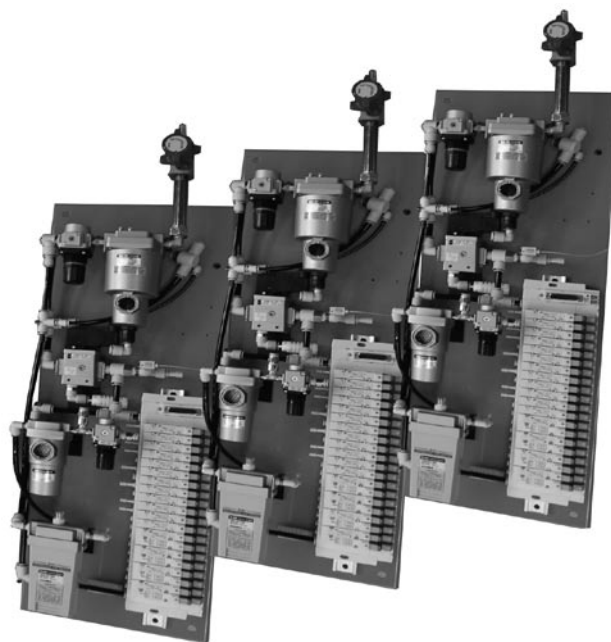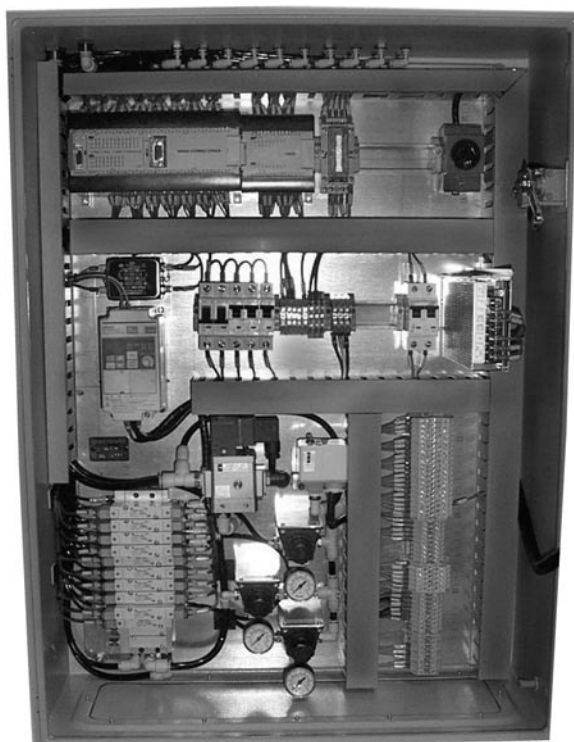



SMC Training

Courses and equipment

SMC
INTERNATIONAL TRAINING

Integral solutions
for the development
of the professional skills
required by industry

skills **technologies**

skills
- Analyzing
- Diagnosing and repair of system failures
- Troubleshooting and electrical
- Power wiring
- Detection-Measuring
- Pneumatic Safety
- Principles of industrial networks
- Interaction with production environments

technologies
- Pneumatics
- Electro-pneumatics
- Vacuum
- Hydraulics
- Proportional Solenoid
- Sensors
- PLCs
- Robotics/Motion Control
- Industrial Communications
- SMC Actuators

The Training Solution

The electric modular IPC-200 system is designed for the development of professional skills:

- Analysis
- Installation/Assembly
- Troubleshooting diagnosis and repair
- Design
- Understanding and drawing up of documentation
- Programming of PLCs

IPC-200 simulates a three-producting plant, and includes the technologies used in automatic processes (sensors, actuators, PLC, sensors, feed control, electrical structure, etc.).

All of the components used are made from materials of maximum quality and robustness.

Its modular elaboration allows the three stations to be used separately or at the same time, making IPC-200 a system adaptable to all kinds of requirements and budgets.

IPC-200

FMS-200
The solution for your company's training needs in the area of automation.

SMC
INTERNATIONAL TRAINING

Training program for the development of professional skills:

- Analysis
- Installation / Assembly
- Troubleshooting diagnosis and repair
- Design
- Understanding and drawing up of documentation
- Integration of automation technology
- Safety Compliance with CE standards
- Reliability
- Robustness: Highest quality industrial materials used.

PNEUTRAINER-200
PNEUMATICS
ELECTROPNEUMATICS

HYDROTRAINER 200
HYDRAULICS
ELECTROHYDRAULICS

MAP-200
HANDLING
AND ROBOTICS

PLC-200
PROGRAMMABLE
PLCs

IPC-200
INSTRUMENTATION
PROCESS CONTROL

FMS-200
FLEXIBLE-MANUFACTURE
INTEGRATED SYSTEMS

COURSE-200
COURSEWARE

TEACH-200
TEACHWARE

ELEC-200
ELECTRICALLY-CONTROLLED
AUTOMATIC SYSTEMS

SENSOTRAINER-200
SENSORS AND
TRANSDUCERS

MOTICON-200
SPEED CONTROL

LAB-200
LABORATORY
EQUIPMENT

SMC
INTERNATIONAL TRAINING

Training in automation for the 21st century

SMC
INTERNATIONAL TRAINING

PNEUTRAINER-200 3



Series CHDKG

16MPa Compact Hydraulic Cylinder

Bore Sizes: ø20, ø25, ø32, ø40, ø50, ø63, ø80, ø100

Features

- Light and compact aluminium body.
- Auto switch can be mounted.
- Wide range of bores and strokes.
- Special options available on request, indent only.



Standard Strokes

Bore size (mm)	Strokes (mm)
ø20, ø25	5, 10, 15, 20, 25, 30, 35, 40, 45, 50mm
ø32	5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 75mm
ø40, ø50, ø63, ø80, ø100	5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 75, 100mm

Series CHDSG

16MPa Hydraulic Cylinder (Conforms to ISO6020-2)

Bore Sizes: ø32, ø40, ø50, ø63, ø80, ø100

Features

- Stainless cylinder barrel & piston.
- Auto switch can be mounted.
- Wide range of bores and strokes.
- Variety of mounting options.
- Cushioning also available.



Standard Strokes

Bore size (mm)	Strokes (mm)
ø32, ø40, ø50, ø63, ø80	25 to 800mm
ø100	25 to 1000mm