

# Plug-in Connector Connecting Base

## D-sub Connector

Type 10  
Side Ported

# 25A-JSY1000/3000 Series



\*1 JSY3000 only

Internal Pilot

### How to Order Manifolds

25A-JJ5SY **3** - 10 **F** **1** - 05 **D** **C6**


1 2 3 4 5 6 7 8 9

Series compatible with secondary batteries

#### 1 Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |


#### 3 Connector type



#### 2 Type

|    |             |
|----|-------------|
| 10 | Side ported |
|----|-------------|

#### 4 Connector entry direction

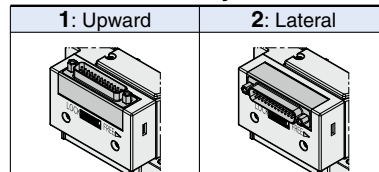

#### 5 Valve stations

F: D-sub connector (25 pins)

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 12     | 12 stations | Specified layout*2<br>(Up to 16 solenoids available) |
| 02     | 2 stations  |                                                      |
| ⋮      | ⋮           |                                                      |
| 16     | 16 stations |                                                      |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

\* This also includes the number of blanking plates.

#### 6 P, E port entry

|   |                               |
|---|-------------------------------|
| U | U side (2 to 10 stations)     |
| D | D side (2 to 10 stations)     |
| B | Both sides (2 to 16 stations) |

#### 7 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |

\* The 3/5(E) port is plugged for the built-in silencer type.

#### 8 A, B port size (Metric/One-touch fitting)

| Symbol                              | A, B port                  | JSY1000 | JSY3000 |
|-------------------------------------|----------------------------|---------|---------|
| C4                                  | ø4                         | ●       | ●       |
| C6                                  | ø6                         | ●       | ●       |
| C8                                  | ø8                         | —       | ●       |
| CM*1                                | Straight port, mixed sizes | ●       | ●       |
| P, E port size (One-touch fittings) |                            | ø8      | ø10     |

\*1 Indicate the sizes on the manifold specification sheet for "CM."

\* The JSY1000 manifold pitch for C4 is 6.5 mm, and 9 mm for C6. When CM is selected, the manifold pitch is different depending on the selected fitting.

#### 9 Mounting and Option

| Symbol | Mounting          |
|--------|-------------------|
| Nil    | Direct mounting   |
| D□     | DIN rail mounting |

##### DIN Rail Option

|     |                                      |
|-----|--------------------------------------|
| Nil | DIN rail mounting (With DIN rail)    |
| 0   | DIN rail mounting (Without DIN rail) |
| 3   | For 3 stations                       |
| ⋮   | ⋮                                    |
| 16  | For 16 stations                      |

\* Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" shown above.)

\* Refer to the **Web Catalog** for details on securing the DIN rail mounting type manifold.

#### Refer to the Web Catalog.


- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Manifold Assembly

### Example (25A-JJ5SY3-10F1-□)

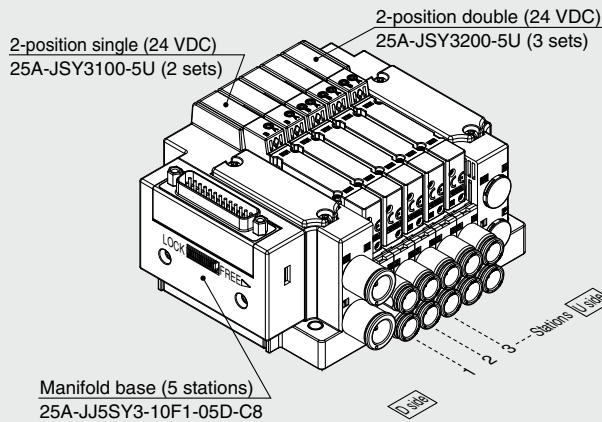

25A-JJ5SY3-10F1-05D-C8 ...1 set (Type 10 5-station manifold base part no.)

\* 25A-JSY3100-5U .....2 sets (2-position single part no.)

\* 25A-JSY3200-5U .....3 sets (2-position double part no.)

→ The asterisk denotes the symbol for the assembly.  
Prefix it to the part numbers of the valve, etc.

· For the valve arrangement, the valve closest to the D side is considered the 1st station.

· Under the manifold part number, state the valves to be mounted in order starting with the 1st station as shown in the figure. If the arrangement becomes too complicated, specify the details on a manifold specification sheet.

### Internal Pilot

## How to Order Valves (With mounting screw)

Refer to the **Web Catalog** for valve specifications.

**25A-JSY** **3** **1** **00** **□** - **5** **□** **□**

①      ②                      ③                      ④      ⑤

• Series compatible with secondary batteries

### ① Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

### ② Type of actuation

|   |                        |                 |
|---|------------------------|-----------------|
| 1 | 2-position             | Single          |
| 2 |                        | Double          |
| 3 | 3-position             | Closed center   |
| 4 |                        | Exhaust center  |
| 5 |                        | Pressure center |
| A | 4-position dual 3-port | N.C./N.C.       |
| B |                        | N.O./N.O.       |
| C |                        | N.C./N.O.       |

### ③ Coil specifications

| Symbol | Coil specifications                              | JSY1000 | JSY3000 |
|--------|--------------------------------------------------|---------|---------|
| Nil    | Standard                                         | —       | ●       |
| T      | With power-saving circuit (Continuous duty type) | ●       | ●       |

\* For the JSY1000 series, only the power-saving circuit specification is available.

\* Be careful of the energizing time when the power-saving circuit is selected.

### ④ Light/surge voltage suppressor and common specification

| Symbol | With light | Surge voltage suppressor | Common specification  | JSY1000 | JSY3000 |
|--------|------------|--------------------------|-----------------------|---------|---------|
| U      | ●          | ●                        | Non-polar             | —       | ●       |
| Z      |            |                          | Polar Positive common | ●       | ●       |
| NZ     |            |                          | Polar Negative common | ●       | ●       |

\* When the non-polar common specification type is selected, take measures to prevent surge voltage. For details, refer to the **Web Catalog**.

\* Only "Z" and "NZ" types are available with a power saving circuit.

### ⚠ Caution

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification.

\* **When ordering a valve individually, the base gasket is not included.**

Since the base gasket is attached to the manifold, please order the base gasket separately if it is needed for maintenance. Refer to the **Web Catalog** for base gasket part numbers. Refer to page 40 for mounting screw part numbers.

### ⑤ Manual override

| Symbol/Specification                     | JSY1000 | JSY3000 |
|------------------------------------------|---------|---------|
| Nil:<br>Non-locking push type<br>        | ●       | ●       |
| D:<br>Push-turn locking slotted type<br> | ●       | ●       |
| E:<br>Push-turn locking lever type<br>   | —       | ●       |

\* Push-turn locking lever type "E" is not available for the JSY1000.

### Refer to the **Web Catalog**.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Plug-in Connector Connecting Base

## Terminal Block Box

Type 10  
Side Ported

# 25A-JSY1000/3000 Series



Internal Pilot

## How to Order Manifolds

25A-JJ5SY **3** - 10 T - **05** **D** **□** - **C6** **□**

1      2   3      4   5   6      7   8

Series compatible with  
secondary batteries

### 1 Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

### 2 Type

|    |             |
|----|-------------|
| 10 | Side ported |
|----|-------------|

### 3 Wiring

|   |                    |
|---|--------------------|
| T | Terminal block box |
|---|--------------------|

### 4 Valve stations

T: Terminal block box

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 10     | 10 stations |                                                      |
| 02     | 2 stations  | Specified layout*2<br>(Up to 16 solenoids available) |
| ⋮      | ⋮           |                                                      |
| 16     | 16 stations |                                                      |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

\*3 This also includes the number of blanking plates.

### 5 P, E port entry

|   |                               |
|---|-------------------------------|
| U | U side (2 to 10 stations)     |
| D | D side (2 to 10 stations)     |
| B | Both sides (2 to 16 stations) |

### 6 SUP/EXH block assembly


|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |

\* The 3/5(E) port is plugged for the built-in silencer type.

\* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

### 7 A, B port size (Metric/One-touch fitting)

| Symbol                              | A, B port                  | JSY1000 | JSY3000 |
|-------------------------------------|----------------------------|---------|---------|
| C4                                  | ⌀4                         | ●       | ●       |
| C6                                  | ⌀6                         | ●       | ●       |
| C8                                  | ⌀8                         | —       | ●       |
| CM*1                                | Straight port, mixed sizes | ●       | ●       |
| P, E port size (One-touch fittings) |                            | ⌀8      | ⌀10     |



\*1 Indicate the sizes on the manifold specification sheet for "CM."

\* The JSY1000 manifold pitch for C4 is 6.5 mm, and 9 mm for C6. When CM is selected, the manifold pitch is different depending on the selected fitting.

### 8 Mounting and Option

| Symbol | Mounting          |
|--------|-------------------|
| Nil    | Direct mounting   |
| D□     | DIN rail mounting |

\* Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" shown below.)

\* Refer to the **Web Catalog** for details on securing the DIN rail mounting type manifold.

#### DIN Rail Option

|     |                                      |
|-----|--------------------------------------|
| Nil | DIN rail mounting (With DIN rail)    |
| 0   | DIN rail mounting (Without DIN rail) |
| 3   | For 3 stations                       |
| ⋮   | ⋮                                    |
| 16  | For 16 stations                      |

Specify a length longer than that of the standard rail.

#### Refer to the Web Catalog.


- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Manifold Assembly

### Example (25A-JJ5SY3-10T-□)

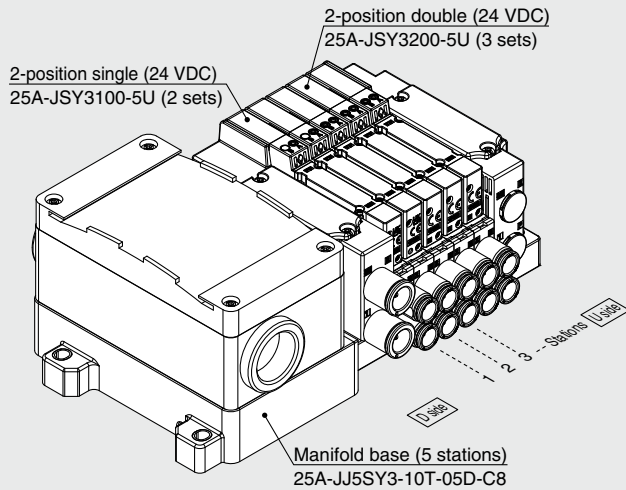

25A-JJ5SY3-10T-05D-C8 ..... 1 set (Type 10 5-station manifold base part no.)

\* 25A-JSY3100-5U ..... 2 sets (2-position single part no.)

\* 25A-JSY3200-5U ..... 3 sets (2-position double part no.)

→ The asterisk denotes the symbol for the assembly.  
Prefix it to the part numbers of the valve, etc.

- For the valve arrangement, the valve closest to the D side is considered the 1st station.
- Under the manifold part number, state the valves to be mounted in order starting with the 1st station as shown in the figure. If the arrangement becomes too complicated, specify the details on a manifold specification sheet.

### Internal Pilot

## How to Order Valves (With mounting screw)

Refer to the **Web Catalog** for valve specifications.

**25A-JSY** **3** **1** **00** **□** - **5** **□** **□**

① ② ③ ④ ⑤

• Series compatible with secondary batteries

### ① Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

### ② Type of actuation

|   |                        |                 |
|---|------------------------|-----------------|
| 1 | 2-position             | Single          |
| 2 |                        | Double          |
| 3 | 3-position             | Closed center   |
| 4 |                        | Exhaust center  |
| 5 |                        | Pressure center |
| A | 4-position dual 3-port | N.C./N.C.       |
| B |                        | N.O./N.O.       |
| C |                        | N.C./N.O.       |

### ③ Coil specifications

| Symbol | Coil specifications                              | JSY1000 | JSY3000 |
|--------|--------------------------------------------------|---------|---------|
| Nil    | Standard                                         | —       | ●       |
| T      | With power-saving circuit (Continuous duty type) | ●       | ●       |

- \* For the JSY1000 series, only the power-saving circuit specification is available.
- \* Be careful of the energizing time when the power-saving circuit is selected.

### ④ Light/surge voltage suppressor and common specification

| Symbol | With light | Surge voltage suppressor | Common specification  | JSY1000 | JSY3000 |
|--------|------------|--------------------------|-----------------------|---------|---------|
| U      |            |                          | Non-polar             | —       | ●       |
| Z      | ●          | ●                        | Polar Positive common | ●       | ●       |
| NZ     |            |                          | Polar Negative common | ●       | ●       |

- \* When the non-polar common specification type is selected, take measures to prevent surge voltage. For details, refer to the **Web Catalog**.
- \* Only "Z" and "NZ" types are available with a power saving circuit.

### ⚠ Caution

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification.

- \* **When ordering a valve individually, the base gasket is not included.** Since the base gasket is attached to the manifold, please order the base gasket separately if it is needed for maintenance. Refer to the **Web Catalog** for base gasket part numbers. Refer to page 40 for mounting screw part numbers.

### Refer to the **Web Catalog**.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



### ⑤ Manual override

| Symbol/Specification                 | JSY1000 | JSY3000 |
|--------------------------------------|---------|---------|
| Nil:<br>Non-locking push type        | ●       | ●       |
| D:<br>Push-turn locking slotted type | ●       | ●       |
| E:<br>Push-turn locking lever type   | —       | ●       |

- \* Push-turn locking lever type "E" is not available for the JSY1000.

# Plug-in Connector Connecting Base Compact Wireless Remote Series

Type 10  
Side Ported

# 25A-JSY1000/3000 Series



Internal Pilot

## How to Order Manifolds

25A-JJ5SY **3** - 10 S **W2** - **05** **D** **□** - **C6** **□**

Series compatible with secondary batteries

### 1 Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

### 2 Type

|    |             |
|----|-------------|
| 10 | Side ported |
|----|-------------|

### 4 Valve stations

| Symbol | Stations    | Note            |
|--------|-------------|-----------------|
| 02     | 2 stations  | Double wiring*1 |
| ⋮      | ⋮           |                 |
| 16     | 16 stations |                 |

- \*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- \*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- \* This also includes the number of blanking plates.

### 3 Compact wireless remote specifications

(Output polarity, with/without wireless adapter, number of outputs, selectable frequency, and applicable country)

| Positive common (NPN)           | Negative common (PNP) | Wireless adapter         | Number of outputs | Number of selectable frequency channels | Applicable countries*3                                                                                        |
|---------------------------------|-----------------------|--------------------------|-------------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Without compact wireless remote |                       |                          |                   |                                         |                                                                                                               |
| 0*1, *2                         |                       |                          |                   |                                         |                                                                                                               |
| W1*3                            | W1N*3                 | Without wireless adapter | 32                | —                                       | —                                                                                                             |
| W2                              | W2N                   | EXW1-A11E                | 32                | Min. 5/<br>Max. 79                      | Radio Law certified countries other than the U.S., Canada, South Korea, Brazil, Taiwan, Argentina, and Mexico |
| W3                              | W3N                   | EXW1-A11N                | 32                | Min. 15/<br>Max. 79                     | Radio Law certified countries including the U.S., Canada, South Korea, Brazil, Taiwan, Argentina, and Mexico  |

- \*1 Confirm that the common specification of the built-in valve matches the output polarity of the selected compact wireless remote. In addition, if the built-in valve has no polarity, either compact wireless remote output polarity type can be connected.
- \*2 "With DIN rail" cannot be selected for the type without a compact wireless remote.
- \*3 Select the wireless adapter according to the country of use.
- \* The applicable countries differ depending on the part number. Before purchasing, refer to the wireless system catalog.

### 5 P, E port entry

|   |                               |
|---|-------------------------------|
| U | U side (2 to 10 stations)     |
| D | D side (2 to 10 stations)     |
| B | Both sides (2 to 16 stations) |


### 6 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |

- \* The 3/5(E) port is plugged for the built-in silencer type.
- \* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

### 7 A, B port size (Metric/One-touch fitting)

| Symbol                              | A, B port |                            | JSY1000 | JSY3000 |
|-------------------------------------|-----------|----------------------------|---------|---------|
| C4                                  | Straight  | ø4                         | ●       | —       |
| C6                                  |           | ø6                         | ●       | ●       |
| C8                                  |           | ø8                         | —       | ●       |
| CM*1                                |           | Straight port, mixed sizes | ●       | ●       |
| P, E port size (One-touch fittings) |           |                            | ø8      | ø10     |



- \*1 Indicate the sizes on the manifold specification sheet for "CM."
- \* The JSY1000 manifold pitch for C4 is 6.5 mm, and 9 mm for C6. When CM is selected, the manifold pitch is different depending on the selected fitting.

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details.



### 8 Mounting and Option

| Symbol | Mounting          |
|--------|-------------------|
| Nil    | Direct mounting   |
| D□     | DIN rail mounting |

- \* Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" shown below.)
- \* Refer to the **Web Catalog** for details on securing the DIN rail mounting type manifold.
- \* DIN rail mounting (D□) is not available for the product without the SI unit (S0).

#### DIN Rail Option


|     |                                      |
|-----|--------------------------------------|
| Nil | DIN rail mounting (With DIN rail)    |
| 0   | DIN rail mounting (Without DIN rail) |
| 3   | For 3 stations                       |
| ⋮   | ⋮                                    |
| 16  | For 16 stations                      |

- \* Specify a length longer than that of the standard rail.
- \* Refer to L3 of the dimensions for the DIN rail length and order separately. (Refer to the **Web Catalog** for the DIN rail part number.)

For details on the compact wireless remote, refer to the EXW1 series catalog or operation manual, and for part numbers of the built-in compact wireless remote, etc., refer to page 23. The operation manual can be downloaded from the SMC website: <https://www.smcworld.com>

## How to Order Manifold Assembly

### Example (25A-JJ5SY3-10SW2-□)

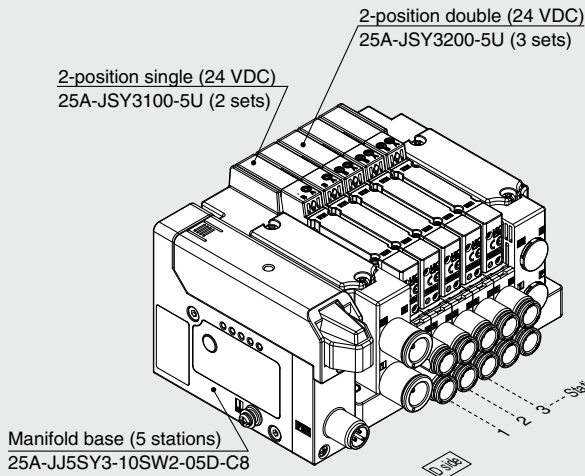

25A-JJ5SY3-10SW2-05D-C8 .....1 set (Type 10 5-station manifold base part no.)

\* 25A-JSY3100-5U .....2 sets (2-position single part no.)

\* 25A-JSY3200-5U .....3 sets (2-position double part no.)

→ The asterisk denotes the symbol for the assembly.  
Prefix it to the part numbers of the valve, etc.

For the valve arrangement, the valve closest to the D side is considered the 1st station.

Under the manifold part number, state the valves to be mounted in order starting with the 1st station as shown in the figure. If the arrangement becomes too complicated, specify the details on a manifold specification sheet.

### Internal Pilot

## How to Order Valves (With mounting screw)

Refer to the **Web Catalog** for valve specifications.

**25A-JSY** 3 1 00 □ - 5 □ □

①      ②      ③      ④      ⑤

• Series compatible with secondary batteries

### ① Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

### ② Type of actuation

|   |                        |                 |
|---|------------------------|-----------------|
| 1 | 2-position             | Single          |
| 2 |                        | Double          |
| 3 | 3-position             | Closed center   |
| 4 |                        | Exhaust center  |
| 5 |                        | Pressure center |
| A | 4-position dual 3-port | N.C./N.C.       |
| B |                        | N.O./N.O.       |
| C |                        | N.C./N.O.       |

### ③ Coil specifications

| Symbol | Coil specifications                              | JSY1000 | JSY3000 |
|--------|--------------------------------------------------|---------|---------|
| Nil    | Standard                                         | —       | ●       |
| T      | With power-saving circuit (Continuous duty type) | ●       | ●       |




\* For the JSY1000 series, only the power-saving circuit specification is available.  
\* Be careful of the energizing time when the power-saving circuit is selected.

### ④ Light/surge voltage suppressor and common specification

| Symbol | With light | Surge voltage suppressor | Common specification  | JSY1000 | JSY3000 |
|--------|------------|--------------------------|-----------------------|---------|---------|
| U      | ●          | ●                        | Non-polar             | —       | ●       |
| Z      |            |                          | Polar Positive common | ●       | ●       |
| NZ     |            |                          | Polar Negative common | ●       | ●       |

\* Select "U" or "Z" for the valve when the compact wireless remote output polarity is positive common.  
Select "U" or "NZ" for the valve when the compact wireless remote output polarity is negative common.  
\* Only "Z" and "NZ" types are available with a power saving circuit.

### ⑤ Manual override

| Symbol/Specification                                                                                                          | JSY1000 | JSY3000 |
|-------------------------------------------------------------------------------------------------------------------------------|---------|---------|
| Nil:<br>Non-locking push type<br>        | ●       | ●       |
| D:<br>Push-turn locking slotted type<br> | ●       | ●       |
| E:<br>Push-turn locking lever type<br>   | —       | ●       |

\* Push-turn locking lever type "E" is not available for the JSY1000.

### ⚠ Caution

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification.

\* **When ordering a valve individually, the base gasket is not included.**  
Since the base gasket is attached to the manifold, please order the base gasket separately if it is needed for maintenance. Refer to the **Web Catalog** for base gasket part numbers.  
Refer to page 24 for mounting screw part numbers.

### Refer to the Web Catalog.

• Specifications/Dimensions  
\* Same as the standard product

Click here for details.



⚠ Protective class class III (Mark: ⚡)

# Plug-in Connector Connecting Base

EX260

Type 10  
Side Ported

## 25A-JSY1000/3000 Series



\*1 JSY3000 only

Internal Pilot

### How to Order Manifolds

25A-JJ5SY 3-10 S QA-05 D - C6

Series compatible with secondary batteries

#### 1 Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |


#### 3 SI unit (Output polarity, Protocol, Number of outputs, Communication connector)

| Symbol (Output polarity) |                       | Protocol        | Number of outputs | Communication connector |
|--------------------------|-----------------------|-----------------|-------------------|-------------------------|
| Positive common (NPN)    | Negative common (PNP) |                 |                   |                         |
| 0*1                      |                       | Without SI unit |                   |                         |
| QA                       | QAN                   | DeviceNet™      | 32                | M12                     |
| QB                       | QBN                   |                 | 16                |                         |
| NA                       | NAN                   | PROFIBUS DP     | 32                | M12                     |
| NB                       | NBN                   |                 | 16                |                         |
| VA                       | VAN                   | CC-Link         | 32                | M12                     |
| VB                       | VBN                   |                 | 16                |                         |
| DA                       | DAN                   | EtherCAT        | 32                | M12                     |
| DB                       | DBN                   |                 | 16                |                         |
| FA                       | FAN                   | PROFINET        | 32                | M12                     |
| FB                       | FBN                   |                 | 16                |                         |
| EA                       | EAN                   | EtherNet/IP™    | 32                | M12                     |
| EB                       | EBN                   |                 | 16                |                         |
| —                        | KAN                   | IO-Link         | 32                | M12                     |

- \*1 Without SI unit, the output polarity is decided by the SI unit used. Ensure a match with the common specification of the valves to be used.
- \* DIN rail cannot be mounted without SI unit.
- \* For IO-Link, only the negative common (PNP) type and the 32 outputs type are available.

#### 7 A, B port size (Metric/One-touch fitting)

| Symbol                              | A, B port |                            | JSY1000 | JSY3000 |
|-------------------------------------|-----------|----------------------------|---------|---------|
| C4                                  | Straight  | ø4                         | ●       | ●       |
| C6                                  |           | ø6                         | ●       | ●       |
| C8                                  |           | ø8                         | —       | ●       |
| CM*1                                |           | Straight port, mixed sizes | ●       | ●       |
| P, E port size (One-touch fittings) |           |                            | ø8      | ø10     |



- \*1 Indicate the sizes on the manifold specification sheet for "CM."
- \* The JSY1000 manifold pitch for C4 is 6.5 mm, and 9 mm for C6. When CM is selected, the manifold pitch is different depending on the selected fitting.

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details.



For details on the EX260 Integrated Type (For Output) Serial Transmission System, refer to the **Web Catalog** and the Operation Manual. For the part numbers of the SI units to be mounted, refer to the **Web Catalog**. Please download the Operation Manual via the SMC website: <https://www.smcworld.com>

#### 2 Type

|    |             |
|----|-------------|
| 10 | Side ported |
|----|-------------|

#### 5 P, E port entry

|   |                               |
|---|-------------------------------|
| U | U side (2 to 10 stations)     |
| D | D side (2 to 10 stations)     |
| B | Both sides (2 to 16 stations) |

#### 6 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |

- \* The 3/5(E) port is plugged for the built-in silencer type.
- \* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

#### 4 Valve stations

In the case of the 32-output SI unit

| Symbol | Stations    | Note            |
|--------|-------------|-----------------|
| 02     | 2 stations  | Double wiring*1 |
| ...    | ...         |                 |
| 16     | 16 stations |                 |

In the case of the 16-output SI unit

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ...    | ...         |                                                      |
| 08     | 8 stations  |                                                      |
| 02     | 2 stations  | Specified layout*2<br>(Up to 16 solenoids available) |
| ...    | ...         |                                                      |
| 16     | 16 stations |                                                      |

- \*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- \*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- \* This also includes the number of blanking plates.
- \* For the product without the SI unit (S0), note the maximum number of solenoids of the SI unit that will be mounted. If the layout is specified, indicate it on the manifold specification sheet.

#### 8 Mounting and Option

| Symbol | Mounting          |
|--------|-------------------|
| Nil    | Direct mounting   |
| D□     | DIN rail mounting |

- \* Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" shown below.)
- \* Refer to the **Web Catalog** for details on securing the DIN rail mounting type manifold.
- \* DIN rail mounting (D□) is not available for the product without the SI unit (S0).


#### DIN Rail Option

|     |                                      |
|-----|--------------------------------------|
| Nil | DIN rail mounting (With DIN rail)    |
| 0   | DIN rail mounting (Without DIN rail) |
| 3   | For 3 stations                       |
| ... | ...                                  |
| 16  | For 16 stations                      |

- \* Specify a length longer than that of the standard rail.
- \* Refer to L3 of the dimensions for the DIN rail length and order separately. (Refer to the **Web Catalog** for the DIN rail part number.)

## How to Order Manifold Assembly

### Example (25A-JJ5SY3-10SNAN-□)

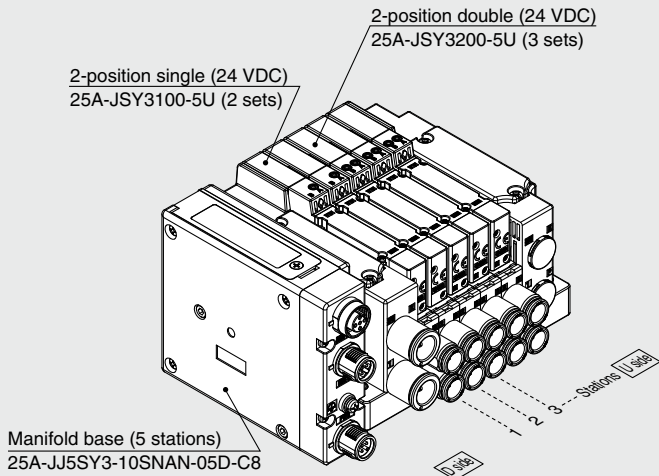

25A-JJ5SY3-10SNAN-05D-C8 ... 1 set (Type 10 5-station manifold base part no.)

\* 25A-JSY3100-5U ..... 2 sets (2-position single part no.)

\* 25A-JSY3200-5U ..... 3 sets (2-position double part no.)

→ The asterisk denotes the symbol for the assembly.  
Prefix it to the part numbers of the valve, etc.

· For the valve arrangement, the valve closest to the D side is considered the 1st station.

· Under the manifold part number, state the valves to be mounted in order starting with the 1st station as shown in the figure. If the arrangement becomes too complicated, specify the details on a manifold specification sheet.

### Internal Pilot

## How to Order Valves (With mounting screw)

Refer to the [Web Catalog](#) for valve specifications.

**25A-JSY** 3 1 00 □ - 5 □ □

①      ②      ③      ④      ⑤

• Series compatible with secondary batteries

### ① Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

### ② Type of actuation

|   |                        |                 |
|---|------------------------|-----------------|
| 1 | 2-position             | Single          |
| 2 |                        | Double          |
| 3 |                        | Closed center   |
| 4 | 3-position             | Exhaust center  |
| 5 |                        | Pressure center |
| A |                        | N.C./N.C.       |
| B | 4-position dual 3-port | N.O./N.O.       |
| C |                        | N.C./N.O.       |

### ③ Coil specifications

| Symbol | Coil specifications                              | JSY1000 | JSY3000 |
|--------|--------------------------------------------------|---------|---------|
| Nil    | Standard                                         | —       | ●       |
| T      | With power-saving circuit (Continuous duty type) | ●       | ●       |

\* For the JSY1000 series, only the power-saving circuit specification is available.  
\* Be careful of the energizing time when the power-saving circuit is selected.

### ④ Light/surge voltage suppressor and common specification

| Symbol | With light | Surge voltage suppressor | Common specification  | JSY1000 | JSY3000 |
|--------|------------|--------------------------|-----------------------|---------|---------|
| U      | ●          | ●                        | Non-polar             | —       | ●       |
| Z      |            |                          | Polar Positive common | ●       | ●       |
| NZ     |            |                          | Polar Negative common | ●       | ●       |




\* Select "U" or "Z" for the valve when the SI unit output polarity is positive common.  
Select "U" or "NZ" for the valve when the SI unit output polarity is negative common.  
\* Only "Z" and "NZ" types are available with a power saving circuit.

### ⚠ Caution

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification.

\* **When ordering a valve individually, the base gasket is not included.**  
Since the base gasket is attached to the manifold, please order the base gasket separately if it is needed for maintenance. Refer to the [Web Catalog](#) for base gasket part numbers.  
Refer to page 40 for mounting screw part numbers.

### ⑤ Manual override

| Symbol/Specification                                                                                                          | JSY1000 | JSY3000 |
|-------------------------------------------------------------------------------------------------------------------------------|---------|---------|
| Nil:<br>Non-locking push type<br>        | ●       | ●       |
| D:<br>Push-turn locking slotted type<br> | ●       | ●       |
| E:<br>Push-turn locking lever type<br>   | —       | ●       |

\* Push-turn locking lever type "E" is not available for the JSY1000.

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details.



# Plug-in Connector Connecting Base

EX120

Type 10  
Side Ported

## 25A-JSY1000/3000 Series



Internal Pilot

### How to Order Manifolds

25A-JJ5SY 3 - 10 S3 Q - 05 D      

1
2
3
4
5
6
7
8

Series compatible with  
secondary batteries

#### 1 Series

|          |         |
|----------|---------|
| <b>1</b> | JSY1000 |
| <b>3</b> | JSY3000 |

#### 2 Type

|           |             |
|-----------|-------------|
| <b>10</b> | Side ported |
|-----------|-------------|

#### 3 SI unit

|          |                                  |
|----------|----------------------------------|
| <b>0</b> | Without SI unit                  |
| <b>Q</b> | DeviceNet™ (Positive common NPN) |
| <b>V</b> | CC-Link (Positive common NPN)    |

\* Ensure a match with the common specification of the valve to be used.

#### 4 Valve stations

| Symbol    | Stations    | Note                                                 |
|-----------|-------------|------------------------------------------------------|
| <b>02</b> | 2 stations  | Double wiring*1                                      |
| ⋮         | ⋮           |                                                      |
| <b>08</b> | 8 stations  | Specified layout*2<br>(Up to 16 solenoids available) |
| <b>02</b> | 2 stations  |                                                      |
| ⋮         | ⋮           |                                                      |
| <b>16</b> | 16 stations |                                                      |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

\* This also includes the number of blanking plates.

#### 5 P, E port entry

|          |                               |
|----------|-------------------------------|
| <b>U</b> | U side (2 to 10 stations)     |
| <b>D</b> | D side (2 to 10 stations)     |
| <b>B</b> | Both sides (2 to 16 stations) |


#### 6 SUP/EXH block

|            |                                   |
|------------|-----------------------------------|
| <b>Nil</b> | Internal pilot                    |
| <b>S</b>   | Internal pilot, Built-in silencer |

\* The 3/5(E) port is plugged for the built-in silencer type.

#### 7 A, B port size (Metric/One-touch fitting)

| Symbol                              | A, B port |                            | JSY1000 | JSY3000 |
|-------------------------------------|-----------|----------------------------|---------|---------|
| C4                                  | Straight  | ø4                         | ●       | ●       |
| C6                                  |           | ø6                         | ●       | ●       |
| C8                                  |           | ø8                         | —       | ●       |
| CM*1                                |           | Straight port, mixed sizes | ●       | ●       |
| P, E port size (One-touch fittings) |           |                            | ø8      | ø10     |



\*1 Indicate the sizes on the manifold specification sheet for "CM."

\* The JSY1000 manifold pitch for C4 is 6.5 mm, and 9 mm for C6. When CM is selected, the manifold pitch is different depending on the selected fitting.

#### 8 Mounting and Option

| Symbol                                                                   | Mounting          |
|--------------------------------------------------------------------------|-------------------|
| <b>Nil</b>                                                               | Direct mounting   |
| <b>D</b> <span style="border: 1px solid black; padding: 0 2px;"> </span> | DIN rail mounting |

\* Enter the number of stations inside   when it is larger than the number of valve stations. (Refer to "DIN Rail Option" shown below.)

\* Refer to the **Web Catalog** for details on securing the DIN rail mounting type manifold.

##### DIN Rail Option

|            |                                      |
|------------|--------------------------------------|
| <b>Nil</b> | DIN rail mounting (With DIN rail)    |
| <b>0</b>   | DIN rail mounting (Without DIN rail) |
| <b>3</b>   | For 3 stations                       |
| ⋮          | ⋮                                    |
| <b>16</b>  | For 16 stations                      |

Specify a length longer than that of the standard rail.

\* If the DIN rail must be mounted without an SI unit, select D0. Refer to L3 of the dimensions for the DIN rail length and order separately. (Refer to the **Web Catalog** for the DIN rail part number.)

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product


Click here for details. >>>



For details on the EX120 Integrated Type (For Output) Serial Transmission System, refer to the **Web Catalog** and the Operation Manual. For the part numbers of the SI units to be mounted, refer to the **Web Catalog**. Please download the Operation Manual via the SMC website: <https://www.smcworld.com>

## How to Order Manifold Assembly

### Example (25A-JJ5SY3-10S3Q-□)

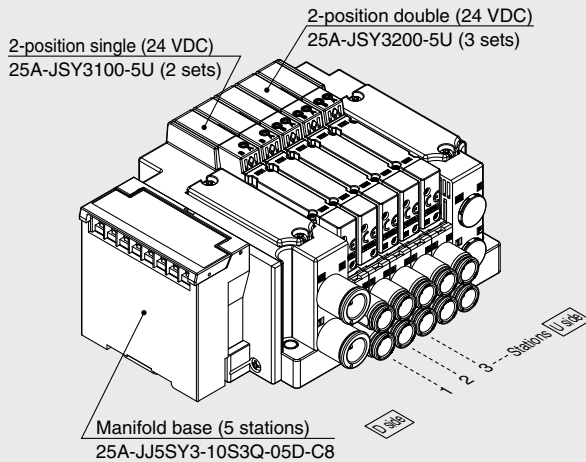

25A-JJ5SY3-10S3Q-05D-C8 --1 set (Type 10 5-station manifold base part no.)

\* 25A-JSY3100-5U .....2 sets (2-position single part no.)

\* 25A-JSY3200-5U .....3 sets (2-position double part no.)

→ The asterisk denotes the symbol for the assembly.  
Prefix it to the part numbers of the valve, etc.

· For the valve arrangement, the valve closest to the D side is considered the 1st station.

· Under the manifold part number, state the valves to be mounted in order starting with the 1st station as shown in the figure. If the arrangement becomes too complicated, specify the details on a manifold specification sheet.

### Internal Pilot

## How to Order Valves (With mounting screw)

Refer to the **Web Catalog** for valve specifications.

**25A-JSY** **3** **1** **00** **□** - **5** **□** **□**

① ② ③ ④ ⑤

• Series compatible with secondary batteries

### ① Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

### ② Type of actuation

|   |             |                 |
|---|-------------|-----------------|
| 1 | 2-position  | Single          |
| 2 |             | Double          |
| 3 | 3-position  | Closed center   |
| 4 |             | Exhaust center  |
| 5 |             | Pressure center |
| A | 4-position  | N.C./N.C.       |
| B | dual 3-port | N.O./N.O.       |
| C |             | N.C./N.O.       |

### ③ Coil specifications

| Symbol | Coil specifications                              | JSY1000 | JSY3000 |
|--------|--------------------------------------------------|---------|---------|
| Nil    | Standard                                         | —       | ●       |
| T      | With power-saving circuit (Continuous duty type) | ●       | ●       |

\* For the JSY1000 series, only the power-saving circuit specification is available.

\* Be careful of the energizing time when the power-saving circuit is selected.

### ⑤ Manual override

| Symbol/Specification                     | JSY1000 | JSY3000 |
|------------------------------------------|---------|---------|
| Nil:<br>Non-locking push type<br>        | ●       | ●       |
| D:<br>Push-turn locking slotted type<br> | ●       | ●       |
| E:<br>Push-turn locking lever type<br>   | —       | ●       |

\* Push-turn locking lever type "E" is not available for the JSY1000.

### ④ Light/surge voltage suppressor and common specification

| Symbol | With light | Surge voltage suppressor | Common specification  | JSY1000 | JSY3000 |
|--------|------------|--------------------------|-----------------------|---------|---------|
| U      | —          | —                        | Non-polar             | —       | ●       |
| Z      | ●          | ●                        | Polar Positive common | ●       | ●       |
| NZ     | —          | —                        | Polar Negative common | ●       | ●       |

\* Only "Z" and "NZ" types are available with a power saving circuit.

### ⚠ Caution

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification.

\* **When ordering a valve individually, the base gasket is not included.**

Since the base gasket is attached to the manifold, please order the base gasket separately if it is needed for maintenance. Refer to the **Web Catalog** for base gasket part numbers. Refer to page 40 for mounting screw part numbers.

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>




# 25A-JSY1000/3000 Series Manifold Options

## Blanking plate assembly

(With two mounting screws)

Used when valve additions are expected or for maintenance. A structure is in place on the blanking plate to prevent the mounting screws from sliding.



## How to Order Blanking Plate Assembly

25A-JSY **3** 1M-26P-1A

• Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

## SI Unit Part Nos.

| Description   | SI unit part no. | Note                                                           |
|---------------|------------------|----------------------------------------------------------------|
| EX260 SI unit | EX260-SPR1-X117  | PROFIBUS DP M12 connector, 32 outputs, Negative common (PNP)   |
|               | EX260-SPR2-X117  | PROFIBUS DP M12 connector, 32 outputs, Positive common (NPN)   |
|               | EX260-SPR3-X117  | PROFIBUS DP M12 connector, 16 outputs, Negative common (PNP)   |
|               | EX260-SPR4-X117  | PROFIBUS DP M12 connector, 16 outputs, Positive common (NPN)   |
|               | EX260-SDN1-X117  | DeviceNet® M12 connector, 32 outputs, Negative common (PNP)    |
|               | EX260-SDN2-X117  | DeviceNet® M12 connector, 32 outputs, Positive common (NPN)    |
|               | EX260-SDN3-X117  | DeviceNet® M12 connector, 16 outputs, Negative common (PNP)    |
|               | EX260-SDN4-X117  | DeviceNet® M12 connector, 16 outputs, Positive common (NPN)    |
|               | EX260-SEC1-X117  | EtherCAT M12 connector, 32 outputs, Negative common (PNP)      |
|               | EX260-SEC2-X117  | EtherCAT M12 connector, 32 outputs, Positive common (NPN)      |
|               | EX260-SEC3-X117  | EtherCAT M12 connector, 16 outputs, Negative common (PNP)      |
|               | EX260-SEC4-X117  | EtherCAT M12 connector, 16 outputs, Positive common (NPN)      |
|               | EX260-SMJ1-X117  | CC-Link M12 connector, 32 outputs, Negative common (PNP)       |
|               | EX260-SMJ2-X117  | CC-Link M12 connector, 32 outputs, Positive common (NPN)       |
|               | EX260-SMJ3-X117  | CC-Link M12 connector, 16 outputs, Negative common (PNP)       |
|               | EX260-SMJ4-X117  | CC-Link M12 connector, 16 outputs, Positive common (NPN)       |
|               | EX260-SPN1-X117  | PROFINET M12 connector, 32 outputs, Negative common (PNP)      |
|               | EX260-SPN2-X117  | PROFINET M12 connector, 32 outputs, Positive common (NPN)      |
|               | EX260-SPN3-X117  | PROFINET M12 connector, 16 outputs, Negative common (PNP)      |
|               | EX260-SPN4-X117  | PROFINET M12 connector, 16 outputs, Positive common (NPN)      |
|               | EX260-SEN1-X117  | EtherNet/IP™ M12 connector, 32 outputs, Negative common (PNP)  |
|               | EX260-SEN2-X117  | EtherNet/IP™ M12 connector, 32 outputs, Positive common (NPN)  |
|               | EX260-SEN3-X117  | EtherNet/IP™ M12 connector, 16 outputs, Negative common (PNP)  |
|               | EX260-SEN4-X117  | EtherNet/IP™ M12 connector, 16 outputs, Positive common (NPN)  |
| EX120 SI unit | EX120-SMJ1-X220  | CC-Link (Terminal block, 16 outputs, Positive common (NPN))    |
|               | EX120-SDN1-X220  | DeviceNet® (Terminal block, 16 outputs, Positive common (NPN)) |

## Compact Wireless Remote Part No.

| Compact wireless remote part no. | Manifold symbol |
|----------------------------------|-----------------|
| EXW1-RDYNM5C                     | W1              |
| EXW1-RDYPM5C                     | W1N             |
| EXW1-RDYNM5C-E                   | W2              |
| EXW1-RDYPM5C-E                   | W2N             |
| EXW1-RDYNM5C-N                   | W3              |
| EXW1-RDYPM5C-N                   | W3N             |

\* Refer to the wireless system catalog for the wireless adapter part numbers.

## One-touch Fittings Part Nos.

| Series    |     | 25A-JSY1000         |                     | 25A-JSY3000          | Note                                                     |
|-----------|-----|---------------------|---------------------|----------------------|----------------------------------------------------------|
|           |     | 6.5 mm pitch        | 9 mm pitch          |                      |                                                          |
| A, B port | ø4  | 25A-KQSY10-C4-X1336 | —                   | 25A-KQSY30-C4        | The part number is for 1 piece.<br>(Sales unit: 10 pcs.) |
|           | ø6  | —                   | 25A-KQSY11-C6-X1336 | 25A-KQSY30-C6        |                                                          |
|           | ø8  | —                   | —                   | 25A-KQSY30-C8-X1336  |                                                          |
| P, E port | ø8  | 25A-KQSY30-C8-X1336 | —                   | —                    |                                                          |
|           | ø10 | —                   | —                   | 25A-KQSY31-C10-X1336 |                                                          |

## How to Order Individual SUP/EXH Spacer Assembly

One-touch fitting  
Straight type

**25A-JSY 3 1M-38 P-1A-C6**

|               |         |
|---------------|---------|
| <b>Series</b> |         |
| 1             | JSY1000 |
| 3             | JSY3000 |

|                    |                       |
|--------------------|-----------------------|
| <b>Spacer type</b> |                       |
| 38                 | Individual SUP spacer |
| 39                 | Individual EXH spacer |

• **Port size (Metric)**

| Symbol | P, E port            | JSY1000 | JSY3000 |
|--------|----------------------|---------|---------|
| C4     | ø4 One-touch fitting | ●       | —       |
| C6     | ø6 One-touch fitting | —       | ●       |

Part numbers of mounting screw  
(2 pcs. of each)

JSY1000: 25A-JSY11V-23-5A  
JSY3000: 25A-JSY31V-23-2A

## Manifold Parts Nos./For the 25A-JJ5SY1-10, 25A-JJ5SY3-10

| Description                                      | 25A-JSY1000                                                                                    |                                  | 25A-JSY3000                         |
|--------------------------------------------------|------------------------------------------------------------------------------------------------|----------------------------------|-------------------------------------|
|                                                  | 6.5 mm pitch                                                                                   | 9 mm pitch                       |                                     |
| Tie-rod for additional stations                  | JSY11M-49P-4-1-A<br>(6.5 mm pitch)                                                             | JSY11M-49P-3-1-A<br>(9 mm pitch) | JSY31M-49P-2-1-A<br>(11.5 mm pitch) |
| Tie-rod                                          | JSY11M-49P-4-□-A<br>(6.5 mm pitch)                                                             | JSY11M-49P-3-□-A<br>(9 mm pitch) | JSY31M-49P-2-□-A<br>(11.5 mm pitch) |
| Valve mounting screw                             | 25A-JSY11V-23-4A<br>(M1.4 x 21.5)                                                              |                                  | 25A-JSY31V-23-1A<br>(M2 x 25)       |
| Clamp bracket<br>(for connector connecting base) | 25A-JSY11M-15P-1A (Refer to the table below.)<br>25A-JSY11M-15P-2A (Refer to the table below.) |                                  | 25A-SY30M-15-1A                     |

Table. 25A-JSY1000 series clamp bracket

| Wiring<br>(JSY1000 series) |                         | 25A-JSY11M-15P-1A | 25A-JSY11M-15P-2A |
|----------------------------|-------------------------|-------------------|-------------------|
| F                          | D-sub connector         | ●                 | —                 |
| T                          | Terminal block box      | —                 | ●                 |
| S□□                        | EX260                   | ●                 | —                 |
| S3                         | EX120                   | ●                 | —                 |
| SW                         | Compact wireless remote | ●                 | —                 |

## Manifold Parts Nos.

### Ⓐ Manifold block assembly

**25A-JSY 3 1M-2P-1 D A-C8**

|               |         |
|---------------|---------|
| <b>Series</b> |         |
| 1             | JSY1000 |
| 3             | JSY3000 |

|                       |                                                   |
|-----------------------|---------------------------------------------------|
| <b>Manifold pitch</b> |                                                   |
| 1                     | JSY1000 (6.5 mm pitch)<br>JSY3000 (11.5 mm pitch) |
| 2                     | JSY1000 (9 mm pitch)                              |

• **A, B port size (One-touch fittings)**

| Symbol | A, B port            | JSY1000      |            | JSY3000 |
|--------|----------------------|--------------|------------|---------|
|        |                      | 6.5 mm pitch | 9 mm pitch |         |
| C4     | ø4 One-touch fitting | ●            | —          | ●       |
| C6     | ø6 One-touch fitting | —            | ●          | ●       |
| C8     | ø8 One-touch fitting | —            | —          | ●       |

• **Wiring type**

|   |               |
|---|---------------|
| S | Single wiring |
| D | Double wiring |

# 25A-JSY1000/3000 Series

## Manifold Parts Nos.

### ⑧ SUP/EXH end block assembly

25A-JSY **3** 1M-3P-1A **C10**

#### Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

#### Pilot, Silencer type

| Symbol | Pilot type | Built-in silencer |
|--------|------------|-------------------|
|        | Internal   |                   |
| Nil    | ●          | —                 |
| S      | ●          | ●                 |

#### P, E port size (One-touch fittings)

| Symbol | P, E port             | JSY1000 | JSY3000 |
|--------|-----------------------|---------|---------|
| C8     | ø8 One-touch fitting  | ●       | —       |
| C10    | ø10 One-touch fitting | —       | ●       |
| 00     | Plug                  | ●       | ●       |

#### Mounting

|       |                                      |
|-------|--------------------------------------|
| Nil   | Direct mounting                      |
| D0    | DIN rail mounting (Without DIN rail) |
| D00*1 | DIN rail mounting (Without DIN rail) |

\*1 Part number only for the 25A-JSY1000  
Part number is different depending on the wiring.  
Refer to Table 1.


Table 1. JSY1000 series DIN rail mounting

| Symbol | Wiring                                                          |
|--------|-----------------------------------------------------------------|
| D0     | D-sub connector (F type)<br>EX260 (S□□ type)<br>EX120 (S3 type) |
| D00    | Terminal block box (T type)                                     |


## Clamp bracket

| Series      | Part no.                                                    |
|-------------|-------------------------------------------------------------|
| 25A-JSY1000 | For D0<br>25A-JSY11M-15P-1A<br>For D00<br>25A-JSY11M-15P-2A |
| 25A-JSY3000 | 25A-SY30M-15-1A                                             |

## ■ Cover, Silencer cover for SUP/EXH (end) block assembly



Cover  
(Internal pilot)



Silencer cover  
(Internal pilot, Built-in silencer)

25A-JSY **3** 1M-4P-1A

25A-JSY **3** 1M-5P-1A

#### Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

## Manifold Parts Nos.

### © SUP/EXH block assembly

For D-sub connector

**25A-JSY** 3 **1M-1P-3A** 1 - **C10**  

#### Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

#### Mounting

|     |                                      |
|-----|--------------------------------------|
| Nil | Direct mounting                      |
| D0  | DIN rail mounting (Without DIN rail) |

#### Pilot, Silencer type

| Symbol | Pilot type | Built-in silencer |
|--------|------------|-------------------|
|        | Internal   |                   |
| Nil    | ●          | —                 |
| S      | ●          | ●                 |

#### P, E port size (One-touch fittings)

| Symbol | P, E port             | JSY1000 | JSY3000 |
|--------|-----------------------|---------|---------|
| C8     | ø8 One-touch fitting  | ●       | —       |
| C10    | ø10 One-touch fitting | —       | ●       |
| 00     | Plug                  | ●       | ●       |

#### Connector entry direction

|   |         |
|---|---------|
| 1 | Upward  |
| 2 | Lateral |

For the terminal block box or EX260

**25A-JSY** 3 **1M-1P-1A**   - **C10**  

#### Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

#### Mounting

| Symbol | Mounting                             | JSY1000        |       | JSY3000 |
|--------|--------------------------------------|----------------|-------|---------|
|        |                                      | Terminal block | EX260 |         |
| Nil    | Mounting                             | ●              | ●     | ●       |
| D00    | Direct mounting                      | ●              | —     | —       |
| D0     | DIN rail mounting (Without DIN rail) | —              | ●     | ●       |

#### Pilot, Silencer type

| Symbol | Pilot type | Built-in silencer |
|--------|------------|-------------------|
|        | Internal   |                   |
| Nil    | ●          | —                 |
| S      | ●          | ●                 |

#### P, E port size (One-touch fittings)

| Symbol | P, E port             | JSY1000 | JSY3000 |
|--------|-----------------------|---------|---------|
| C8     | ø8 One-touch fitting  | ●       | —       |
| C10    | ø10 One-touch fitting | —       | ●       |
| 00     | Plug                  | ●       | ●       |

For EX120

**25A-JSY** 3 **1M-1P-14A**   - **C10**  

#### Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

#### Mounting

|     |                                      |
|-----|--------------------------------------|
| Nil | Direct mounting                      |
| D0  | DIN rail mounting (Without DIN rail) |

#### Pilot, Silencer type

| Symbol | Pilot type | Built-in silencer |
|--------|------------|-------------------|
|        | Internal   |                   |
| Nil    | ●          | —                 |
| S      | ●          | ●                 |


#### P, E port size (One-touch fittings)

| Symbol | P, E port             | JSY1000 | JSY3000 |
|--------|-----------------------|---------|---------|
| C8     | ø8 One-touch fitting  | ●       | —       |
| C10    | ø10 One-touch fitting | —       | ●       |
| 00     | Plug                  | ●       | ●       |

\* Refer to page 41 for clamp bracket part numbers.

# 25A-JSY1000/3000 Series

## How to Order Pilot Valves

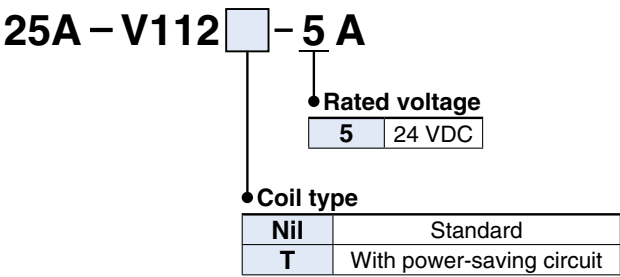

### Pilot cover

**25A – SY30V – 25AS** (For 25A-JSY3000)

\* The pilot valve of the 25A-JSY1000 series cannot be replaced.



Type 40  
Side Ported

Non Plug-in Metal Base

# 25A-JSY1000/3000 Series



Internal Pilot

## How to Order Manifolds

25A-JJ5SY **3** - **40** - **05** **D** - **C6**

1      2      3      4      5      6

Series compatible with  
secondary batteries

### 1 Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

### 2 Type

|    |             |
|----|-------------|
| 40 | Side ported |
|----|-------------|

### 3 Valve stations

| Symbol | Stations    |
|--------|-------------|
| 02     | 2 stations  |
| ⋮      | ⋮           |
| 20     | 20 stations |

### 4 P, E port entry

|   |            |
|---|------------|
| U | U side*1   |
| D | D side*1   |
| B | Both sides |

\*1 Plugs are mounted on the opposite side of the selected ports.

### 5 A, B port size

#### Thread piping


| Symbol | A, B port | JSY1000 | JSY3000 |
|--------|-----------|---------|---------|
| M3     | M3 x 0.5  | ●       | —       |
| M5     | M5 x 0.8  | ●       | ●       |
| 01     | 1/8       | —       | ●       |

### 6 Thread type

|     |    |
|-----|----|
| Nil | Rc |
|-----|----|

### One-touch fitting (Metric)

| Symbol                         | A, B port | JSY1000 | JSY3000 |
|--------------------------------|-----------|---------|---------|
| Fixed                          | C4        | ●       | —       |
|                                | C6        | —       | ●       |
| Replaceable                    | KC4       | ●       | ●       |
|                                | KC6       | ●       | ●       |
|                                | KC8       | —       | ●       |
|                                | M*1       | —       | ●       |
| P, E port size (Thread piping) |           | 1/8     | 1/4     |



\*1 When ports are mixed sizes, indicate the piping specifications on the manifold specification sheet.

### Refer to the Web Catalog.


- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Manifold Assembly

### Example (25A-JJ5SY3-40-□)

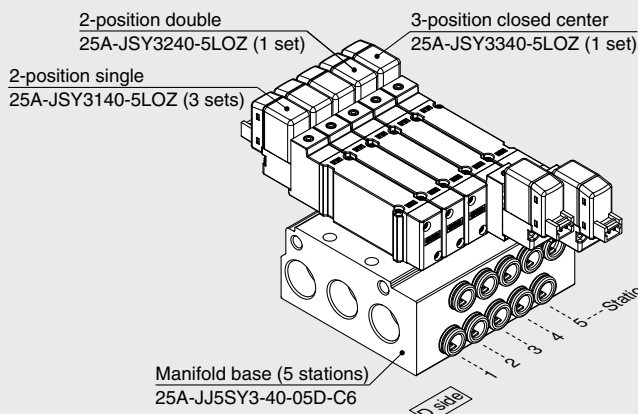

25A-JJ5SY3-40-05D-C6 .. 1 set (Type 40 5-station manifold base part no.)  
 \* 25A-JSY3140-5LOZ ..... 3 sets (2-position single part no.)  
 \* 25A-JSY3240-5LOZ ..... 1 set (2-position double part no.)  
 \* 25A-JSY3340-5LOZ ..... 1 set (3-position closed center part no.)

→ The asterisk denotes the symbol for the assembly.  
 Prefix it to the part numbers of the valve, etc.

- For the valve arrangement, the valve closest to the D side is considered the 1st station.
- Under the manifold part number, state the valves to be mounted in order starting with the 1st station as shown in the figure. If the arrangement becomes too complicated, specify the details on a manifold specification sheet.

## Internal Pilot

## How to Order Valves (With two mounting screws)

**25A-JSY** 3 1 **40**   - **5**   **Z**  

①      ②                      ③                      ④      ⑤      ⑥

• Series compatible with secondary batteries

## ① Series

|          |         |
|----------|---------|
| <b>1</b> | JSY1000 |
| <b>3</b> | JSY3000 |

## ② Type of actuation

|          |             |                 |
|----------|-------------|-----------------|
| <b>1</b> |             | Single          |
| <b>2</b> | 2-position  | Double          |
| <b>3</b> |             | Closed center   |
| <b>4</b> | 3-position  | Exhaust center  |
| <b>5</b> |             | Pressure center |
| <b>A</b> |             | N.C./N.C.       |
| <b>B</b> | 4-position  | N.O./N.O.       |
| <b>C</b> | dual 3-port | N.C./N.O.       |









## ③ Coil specifications

| Symbol     | Coil specifications                                 | JSY1000 | JSY3000 |
|------------|-----------------------------------------------------|---------|---------|
| <b>Nil</b> | Standard                                            | —       | ●       |
| <b>T</b>   | With power-saving circuit<br>(Continuous duty type) | ●       | ●       |

\* For the JSY1000 series, only the power-saving circuit specification is available.

\* Be careful of the energizing time when the power-saving circuit is selected.

## ④ Electrical entry







|                | L plug connector                                                                                                            |                                                                                                                     | M plug connector                                                                                                            |                                                                                                                     |
|----------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
|                | <b>L</b>                                                                                                                    | <b>LO</b>                                                                                                           | <b>M</b>                                                                                                                    | <b>MO</b>                                                                                                           |
| <b>JSY1000</b> | <b>L:</b> With lead wire<br>(300 mm)<br>  | <b>LO:</b> Without connector<br>  | <b>M:</b> With lead wire<br>(300 mm)<br>  | <b>MO:</b> Without connector<br>  |
| <b>JSY3000</b> | <b>L:</b> With lead wire<br>(300 mm)<br> | <b>LO:</b> Without connector<br> | <b>M:</b> With lead wire<br>(300 mm)<br> | <b>MO:</b> Without connector<br> |

\* Refer to the **Web Catalog** for the lead wire length of L and M plug connectors.

## ⑤ Light/surge voltage suppressor

|          |                                     |
|----------|-------------------------------------|
| <b>Z</b> | With light/surge voltage suppressor |
|----------|-------------------------------------|

## ⑥ Manual override

|                |                                                                                                                             |                                                                                                                                    |                                                                                                                                  |
|----------------|-----------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <b>JSY1000</b> | <b>Nil:</b><br>Non-locking push type<br> | <b>D:</b><br>Push-turn locking slotted type<br> | <b>E:</b><br>Push-turn locking lever type<br> |
| <b>JSY3000</b> | <b>Nil:</b><br>Non-locking push type<br> | <b>D:</b><br>Push-turn locking slotted type<br> | <b>E:</b><br>Push-turn locking lever type<br> |

## ⚠ Caution

If the JSY3000 series is to be continuously energized, please be sure to select the power-saving circuit (continuous duty type) specification.

## Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>




# 25A-JSY1000/3000 Series

## Manifold Options

### Blanking plate assembly

(With two mounting screws)

Used when valve additions are expected or for maintenance. A structure is in place on the blanking plate to prevent the mounting screws from sliding.



### How to Order Blanking Plate Assembly

25A-JSY **3** 1M-26-1A

Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

### Valve Mounting Screw Part No.

| Description                  | Part no.         |                  | Note                                                        |
|------------------------------|------------------|------------------|-------------------------------------------------------------|
|                              | 25A-JJ5SY1       | 25A-JJ5SY3       |                                                             |
| Round head combination screw | 25A-JSY11V-23-4A | 25A-JSY31V-23-4A | Part numbers shown on the left are for 10 valves. (20 pcs.) |

### One-touch Fittings Part Nos.

| Port size |                                      | 25A-JSY1000         | 25A-JSY3000         |
|-----------|--------------------------------------|---------------------|---------------------|
| A, B port | Metric size                          |                     |                     |
|           | ø4 One-touch fitting (Straight type) | 25A-KQSY10-C4-X1336 | 25A-KQSY30-C4       |
|           | ø6 One-touch fitting (Straight type) | 25A-KQSY11-C6-X1336 | 25A-KQSY30-C6       |
|           | ø8 One-touch fitting (Straight type) | —                   | 25A-KQSY30-C8-X1336 |

### How to Order Individual SUP/EXH Spacer Assembly

One-touch fitting Straight type 25A-JSY **3** 1M-**38**-1A-**C6**

Series

|   |         |
|---|---------|
| 1 | JSY1000 |
| 3 | JSY3000 |

Spacer type

|    |                       |
|----|-----------------------|
| 38 | Individual SUP spacer |
| 39 | Individual EXH spacer |

Port size (Metric)

| Symbol | P, E port            | JSY1000 | JSY3000 |
|--------|----------------------|---------|---------|
| C4     | ø4 One-touch fitting | ●       | —       |
| C6     | ø6 One-touch fitting | —       | ●       |

Part numbers of mounting screw  
(2 pcs. of each)

JSY1000: 25A-JSY11V-23-5A

JSY3000: 25A-JSY31V-23-5A

### How to Order Pilot Valves

For 25A-JSY3000

25A-V111 **5** **L** **Z**

Coil type

|     |                                           |
|-----|-------------------------------------------|
| Nil | Standard                                  |
| T   | With power-saving circuit (Made to Order) |

Light/surge voltage suppressor

|   |                                     |
|---|-------------------------------------|
| Z | With light/surge voltage suppressor |
|---|-------------------------------------|

Electrical entry

|    |                  |                   |
|----|------------------|-------------------|
| L  | L plug connector | With lead wire    |
| LO |                  | Without connector |
| M  | M plug connector | With lead wire    |
| MO |                  | Without connector |

|               |        |
|---------------|--------|
| Rated voltage |        |
| 5             | 24 VDC |

\* For the 25A-JSY1000, the pilot valve is the same as that of the standard model.



Type 10  
Side Ported

Type 11  
Bottom Ported

# Plug-in Connector Connecting Base

D-sub Connector

## 25A-SY5000/7000 Series



### How to Order Manifolds

25A-SS5Y **5** - **10** **F** **1** - **05** **U** **□** - **C6** **□**

1 2 3 4 5 6 7 8 9

• Series compatible with secondary batteries

#### 1 Series


|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### 2 Type


|    |               |
|----|---------------|
| 10 | Side ported   |
| 11 | Bottom ported |

#### 3 Connector type

F: D-sub connector (25 pins)



#### 4 Connector entry direction

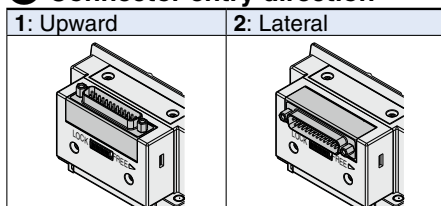

#### 5 Valve stations

F: D-sub connector (25 pins)

| Symbol | Stations    | Note                                              |
|--------|-------------|---------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                   |
| 12     | 12 stations |                                                   |
| 02     | 2 stations  | Specified layout*2 (Up to 24 solenoids available) |
| 24     | 24 stations |                                                   |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

\* The blanking plate assembly is included in this number.

#### 6 P, E port entry

|   |                               |
|---|-------------------------------|
| U | U side (2 to 10 stations)     |
| D | D side (2 to 10 stations)     |
| B | Both sides (2 to 24 stations) |


#### 7 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |
| R   | External pilot                    |

\* The 3/5(E) port is plugged for the built-in silencer type.

#### 8 A, B port size (Metric)

| Symbol                                 | A, B port |                            | Type 10/<br>Side ported |        | Type 11/<br>Bottom ported |        |
|----------------------------------------|-----------|----------------------------|-------------------------|--------|---------------------------|--------|
|                                        |           |                            | SY5000                  | SY7000 | SY5000                    | SY7000 |
| C4                                     | Straight  | ø4                         | ●                       | —      | ●                         | —      |
| C6                                     |           | ø6                         | ●                       | ●      | ●                         | ●      |
| C8                                     |           | ø8                         | ●                       | ●      | ●                         | ●      |
| C10                                    |           | ø10                        | —                       | ●      | —                         | ●      |
| C12                                    |           | ø12                        | —                       | ●      | —                         | ●      |
| CM <sup>-1</sup>                       |           | Straight port, mixed sizes | ●                       | ●      | ●                         | ●      |
| P, E port size<br>(One-touch fittings) |           |                            | ø10                     | ø12    | ø10                       | ø12    |



\*1 Indicate the sizes on the manifold specification sheet for "CM."

\* The direction of P, E port fittings is the same as for the A, B port.

#### 9 Mounting

| Symbol | Mounting          | Option     |                |
|--------|-------------------|------------|----------------|
|        |                   | Name plate | Station number |
| Nil    | Direct mounting   | —          | —              |
| AA     |                   | ●          | ●              |
| BA     |                   | ●          | —              |
| D□     | DIN rail mounting | —          | —              |
| A□     |                   | ●          | ●              |
| B□     |                   | ●          | —              |

#### DIN Rail Option

| Nil | Direct mounting                 |
|-----|---------------------------------|
| 0   | Without DIN rail (with bracket) |
| 3   | For 3 stations                  |
| 24  | For 24 stations                 |

\* Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" above.)

\* Only direct mounting is available for the type 11 bottom ported type.


#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valves (With mounting screw)

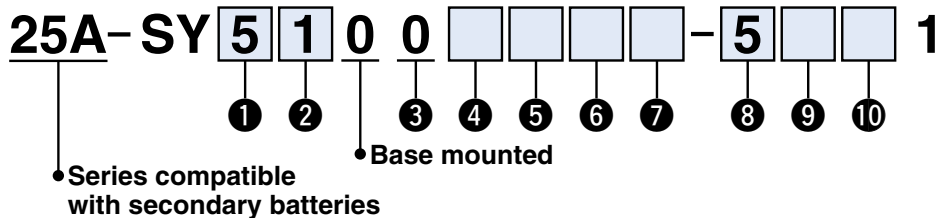

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

\* When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the **Web Catalog**.

### 5 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 6 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 7 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.  
 \* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 8 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

### 9 Light/surge voltage suppressor and common specification

|     |                                                       |
|-----|-------------------------------------------------------|
| Nil | Without light/surge voltage suppressor (Non-polar)    |
| R   | With surge voltage suppressor (Non-polar)             |
| U   | With light/surge voltage suppressor (Non-polar)       |
| S   | With surge voltage suppressor (Positive common)       |
| Z   | With light/surge voltage suppressor (Positive common) |
| NS  | With surge voltage suppressor (Negative common)       |
| NZ  | With light/surge voltage suppressor (Negative common) |

\* Only "Z" and "NZ" types are available with a power-saving circuit.

### 10 Manual override

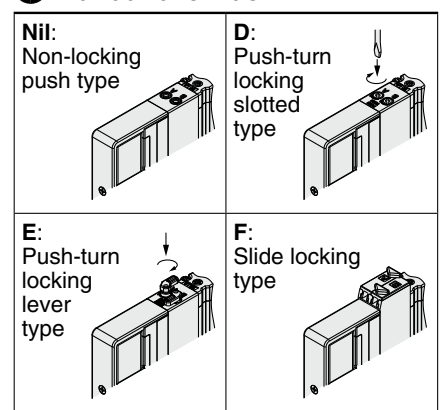

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Plug-in Connector Connecting Base

D-sub Connector



Type 12  
Top Ported

## 25A-SY5000/7000 Series

### How to Order Manifolds

25A-SS5Y **5** -12 F **1** - **05** **U** **□** - **□**

1
2
3
4
5
6
7


• Series compatible with secondary batteries

#### 1 Series


|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### 2 Connector type

F: D-sub connector (25 pins)



#### 3 Connector entry direction

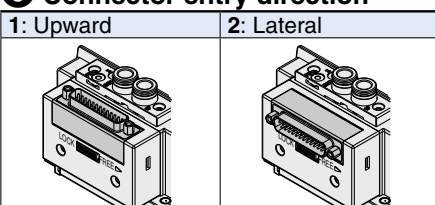

#### 4 Valve stations

F: D-sub connector (25 pins)

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 12     | 12 stations | Specified layout*2<br>(Up to 24 solenoids available) |
| 02     | 2 stations  |                                                      |
| ⋮      | ⋮           |                                                      |
| 24     | 24 stations |                                                      |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not

desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

\* The blanking plate assembly is included in this number.

#### 5 P, E port entry

|     |                               |
|-----|-------------------------------|
| U*1 | U side (2 to 10 stations)     |
| D*1 | D side (2 to 10 stations)     |
| B   | Both sides (2 to 24 stations) |

\*1 For type "S," SUP/EXH block assembly with a built-in silencer, choose "U" or "D" for P port entry.

#### 6 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |

\* The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)

#### 7 Mounting

|     |                                      |                                                         |
|-----|--------------------------------------|---------------------------------------------------------|
| Nil | Direct mounting                      |                                                         |
| D   | DIN rail mounting (With DIN rail)    |                                                         |
| D0  | DIN rail mounting (Without DIN rail) |                                                         |
| D3  | For 3 stations                       | Specify a length longer than that of the standard rail. |
| ⋮   | ⋮                                    |                                                         |
| D24 | For 24 stations                      |                                                         |


#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valves (With mounting screw)

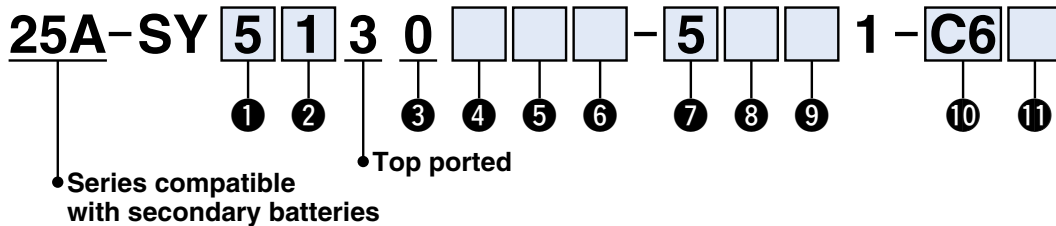

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 5 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 6 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.  
\* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 7 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

### 8 Light/surge voltage suppressor and common specification

|     |                                                       |
|-----|-------------------------------------------------------|
| Nil | Without light/surge voltage suppressor (Non-polar)    |
| R   | With surge voltage suppressor (Non-polar)             |
| U   | With light/surge voltage suppressor (Non-polar)       |
| S   | With surge voltage suppressor (Positive common)       |
| Z   | With light/surge voltage suppressor (Positive common) |
| NS  | With surge voltage suppressor (Negative common)       |
| NZ  | With light/surge voltage suppressor (Negative common) |

\* Only "Z" and "NZ" types are available with a power-saving circuit.

### 9 Manual override

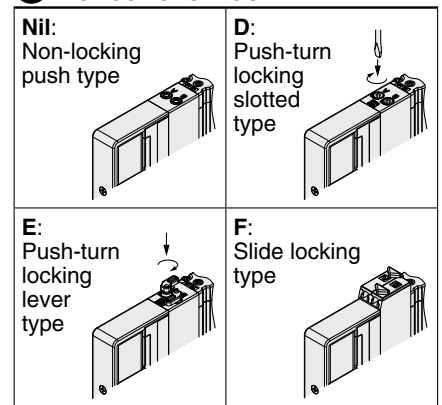

### 10 A, B port size

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 02     | 1/4       | SY7000            |

### One-touch fitting (Metric)

| Symbol | A, B port | SY5000 | SY7000 |
|--------|-----------|--------|--------|
| C4     | ø4        | ●      | —      |
| C6     | ø6        | ●      | ●      |
| C8     | ø8        | ●      | ●      |
| C10    | ø10       | —      | ●      |
| C12    | ø12       | —      | ●      |

### 11 Thread type

|     |      |
|-----|------|
| Nil | Rc   |
| F   | G    |
| N   | NPT  |
| T   | NPTF |

### Refer to the Web Catalog.

• Specifications/Dimensions  
\* Same as the standard product

Click here for details. >>>



Type 10  
Side Ported

Type 11  
Bottom Ported

# Plug-in Connector Connecting Base

Terminal Block Box

# 25A-SY5000/7000 Series



## How to Order Manifolds

25A-SS5Y **5** - **10** T - **05** **U** **□** - **C6** **□**

1      2      3      4      5      6      7

• Series compatible with secondary batteries

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type

|    |               |
|----|---------------|
| 10 | Side ported   |
| 11 | Bottom ported |

### 3 Valve stations

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 10     | 10 stations |                                                      |
| 02     | 2 stations  | Specified layout*2<br>(Up to 20 solenoids available) |
| ⋮      | ⋮           |                                                      |
| 20     | 20 stations |                                                      |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

\* The blanking plate assembly is included in this number.

### 4 P, E port entry

|   |                               |
|---|-------------------------------|
| U | U side (2 to 10 stations)     |
| D | D side (2 to 10 stations)     |
| B | Both sides (2 to 20 stations) |

### 5 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |
| R   | External pilot                    |

\* The 3/5(E) port is plugged for the built-in silencer type.

\* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

### 7 Mounting

| Symbol | Mounting          | Option     |                |
|--------|-------------------|------------|----------------|
|        |                   | Name plate | Station number |
| Nil    | Direct mounting   | —          | —              |
| AA     |                   | ●          | ●              |
| BA     |                   | ●          | —              |
| D□     | DIN rail mounting | —          | —              |
| A□     |                   | ●          | ●              |
| B□     |                   | ●          | —              |

\* Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to “DIN Rail Option” below.)


\* Only direct mounting is available for the type 11 bottom ported type.

#### DIN Rail Option

|     |                                                                                   |
|-----|-----------------------------------------------------------------------------------|
| Nil | Direct mounting                                                                   |
| 0   | Without DIN rail (with bracket)                                                   |
| 3   | For 3 stations Specify a longer rail than the total length of specified stations. |
| ⋮   | ⋮                                                                                 |
| 20  | For 20 stations                                                                   |

### 6 A, B port size (Metric)

| Symbol                              | A, B port                  | Type 10/<br>Side ported |        | Type 11/<br>Bottom ported |        |
|-------------------------------------|----------------------------|-------------------------|--------|---------------------------|--------|
|                                     |                            | SY5000                  | SY7000 | SY5000                    | SY7000 |
| C4                                  | ø4                         | ●                       | —      | ●                         | —      |
| C6                                  | ø6                         | ●                       | ●      | ●                         | ●      |
| C8                                  | ø8                         | ●                       | ●      | ●                         | ●      |
| C10                                 | ø10                        | —                       | ●      | —                         | ●      |
| C12                                 | ø12                        | —                       | ●      | —                         | ●      |
| CM*1                                | Straight port, mixed sizes | ●                       | ●      | ●                         | ●      |
| P, E port size (One-touch fittings) |                            | ø10                     | ø12    | ø10                       | ø12    |



\*1 Indicate the sizes on the manifold specification sheet for “CM.”

\* The direction of P, E port fittings is the same as for the A, B port.


#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valves (With mounting screw)

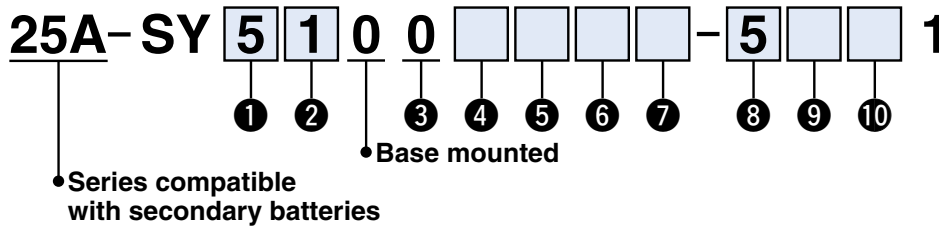

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

\* When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the **Web Catalog**.

### 5 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 6 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 7 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.  
\* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 8 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

### 9 Light/surge voltage suppressor and common specification

|     |                                                       |
|-----|-------------------------------------------------------|
| Nil | Without light/surge voltage suppressor (Non-polar)    |
| R   | With surge voltage suppressor (Non-polar)             |
| U   | With light/surge voltage suppressor (Non-polar)       |
| S   | With surge voltage suppressor (Positive common)       |
| Z   | With light/surge voltage suppressor (Positive common) |
| NS  | With surge voltage suppressor (Negative common)       |
| NZ  | With light/surge voltage suppressor (Negative common) |

\* Only "Z" and "NZ" types are available with a power-saving circuit.

### 10 Manual override

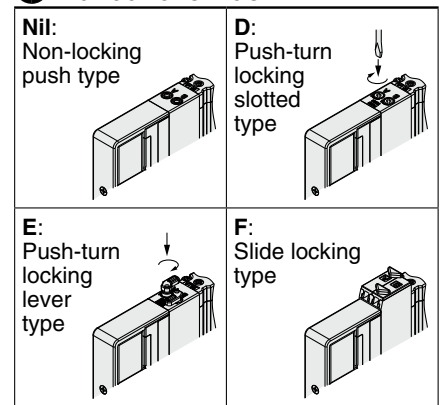

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Plug-in Connector Connecting Base

Terminal Block Box



Type 12  
Top Ported

## 25A-SY5000/7000 Series

### How to Order Manifolds

25A-SS5Y **5** - 12T - **05** **U**   -

1
2
3
4
5

• Series compatible  
with secondary batteries

#### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### 3 P, E port entry

|     |                               |
|-----|-------------------------------|
| U*1 | U side (2 to 10 stations)     |
| D*1 | D side (2 to 10 stations)     |
| B   | Both sides (2 to 20 stations) |

\*1 4 For type "S," SUP/EXH block assembly with a built-in silencer, choose "U" or "D" for P port entry.

#### 2 Valve stations

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 10     | 10 stations | Specified layout*2<br>(Up to 20 solenoids available) |
| 02     | 2 stations  |                                                      |
| ⋮      | ⋮           |                                                      |
| 20     | 20 stations |                                                      |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

\* The blanking plate assembly is included in this number.

#### 4 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |

\* The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)

\* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

#### 5 Mounting

|     |                                         |                                                               |
|-----|-----------------------------------------|---------------------------------------------------------------|
| Nil | Direct mounting                         |                                                               |
| D   | DIN rail mounting<br>(With DIN rail)    |                                                               |
| D0  | DIN rail mounting<br>(Without DIN rail) |                                                               |
| D3  | For 3 stations                          | Specify a length<br>longer than that of<br>the standard rail. |
| :   | :                                       |                                                               |
| D20 | For 20 stations                         |                                                               |


#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valves (With mounting screw)

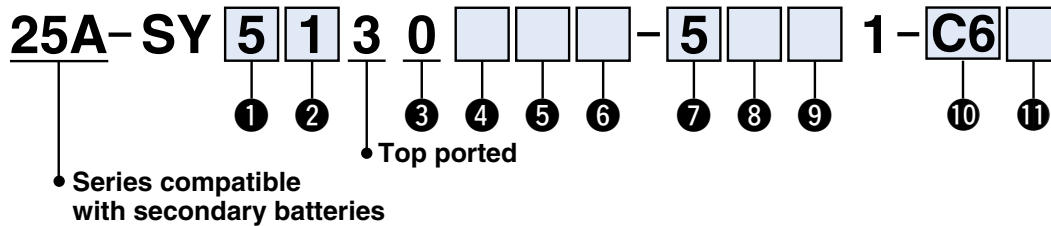

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 5 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 6 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.

\* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 7 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

### 8 Light/surge voltage suppressor and common specification

|     |                                                       |
|-----|-------------------------------------------------------|
| Nil | Without light/surge voltage suppressor (Non-polar)    |
| R   | With surge voltage suppressor (Non-polar)             |
| U   | With light/surge voltage suppressor (Non-polar)       |
| S   | With surge voltage suppressor (Positive common)       |
| Z   | With light/surge voltage suppressor (Positive common) |
| NS  | With surge voltage suppressor (Negative common)       |
| NZ  | With light/surge voltage suppressor (Negative common) |

\* Only "Z" and "NZ" types are available with a power-saving circuit.

### 9 Manual override

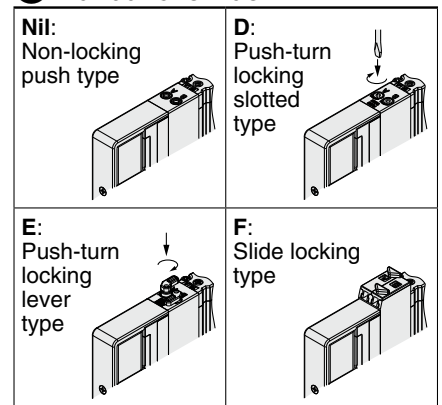

### 10 A, B port size

#### Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 02     | 1/4       | SY7000            |

#### One-touch fitting (Metric)

| Symbol | A, B port | SY5000 | SY7000 |
|--------|-----------|--------|--------|
| C4     | ø4        | ●      | —      |
| C6     | ø6        | ●      | ●      |
| C8     | ø8        | ●      | ●      |
| C10    | ø10       | —      | ●      |
| C12    | ø12       | —      | ●      |

### 11 Thread type

|     |      |
|-----|------|
| Nil | Rc   |
| F   | G    |
| N   | NPT  |
| T   | NPTF |

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



Type 10  
Side Ported

Type 11  
Bottom Ported

# Plug-in Connector Connecting Base

Lead Wire

## 25A-SY5000/7000 Series



RoHS

### How to Order Manifolds

25A-SS5Y 5 - 10 L1 1 - 05 U   - C6  

1      2      3      4      5      6      7      8      9

• Series compatible with secondary batteries

#### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### 2 Type

|    |               |
|----|---------------|
| 10 | Side ported   |
| 11 | Bottom ported |

#### 3 Number of cores (Lead wire)

|    |          |
|----|----------|
| L1 | 34 cores |
| L2 | 17 cores |
| L3 | 9 cores  |

#### 4 Lead wire length

|   |       |
|---|-------|
| 1 | 0.6 m |
| 2 | 1.5 m |
| 3 | 3 m   |

#### 6 P, E port entry

|   |                               |
|---|-------------------------------|
| U | U side (2 to 10 stations)     |
| D | D side (2 to 10 stations)     |
| B | Both sides (2 to 24 stations) |

#### 7 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |
| R   | External pilot                    |

\* The 3/5(E) port is plugged for the built-in silencer type.  
\* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

#### 5 Valve stations

(L1□)

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 16     | 16 stations | Specified layout*2<br>(Up to 32 solenoids available) |
| 02     | 2 stations  |                                                      |
| ⋮      | ⋮           |                                                      |
| 24     | 24 stations |                                                      |

(L3□)

| Symbol | Stations   | Note                                                |
|--------|------------|-----------------------------------------------------|
| 02     | 2 stations | Double wiring*1                                     |
| ⋮      | ⋮          |                                                     |
| 04     | 4 stations | Specified layout*2<br>(Up to 8 solenoids available) |
| 02     | 2 stations |                                                     |
| ⋮      | ⋮          |                                                     |
| 08     | 8 stations |                                                     |


(L2□)

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 08     | 8 stations  | Specified layout*2<br>(Up to 16 solenoids available) |
| 02     | 2 stations  |                                                      |
| ⋮      | ⋮           |                                                      |
| 16     | 16 stations |                                                      |

- \*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- \*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- \* The blanking plate assembly is included in this number.

#### 8 A, B port size (Metric)

| Symbol                              | A, B port                  | Type 10/Side ported |        | Type 11/Bottom ported |        |
|-------------------------------------|----------------------------|---------------------|--------|-----------------------|--------|
|                                     |                            | SY5000              | SY7000 | SY5000                | SY7000 |
| C4<br>C6<br>C8<br>C10<br>C12        | Straight                   | ●                   | —      | ●                     | —      |
|                                     |                            | ●                   | ●      | ●                     | ●      |
|                                     |                            | ●                   | ●      | ●                     | ●      |
|                                     |                            | —                   | ●      | —                     | ●      |
|                                     |                            | —                   | ●      | —                     | ●      |
| CM*1                                | Straight port, mixed sizes | ●                   | ●      | ●                     | ●      |
| P, E port size (One-touch fittings) |                            | ø10                 | ø12    | ø10                   | ø12    |



\*1 Indicate the sizes on the manifold specification sheet for "CM."  
\* The direction of P, E port fittings is the same as for the A, B port.

#### 9 Mounting

| Symbol | Mounting          | Option     |                |
|--------|-------------------|------------|----------------|
|        |                   | Name plate | Station number |
| Nil    | Direct mounting   | —          | —              |
| AA     |                   | ●          | ●              |
| BA     |                   | ●          | —              |
| D□     | DIN rail mounting | —          | —              |
| A□     |                   | ●          | ●              |
| B□     |                   | ●          | —              |

\* Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" below.)  
\* Only direct mounting is available for the type 11 bottom-port type.

#### DIN Rail Option

|     |                                 |                                                                    |
|-----|---------------------------------|--------------------------------------------------------------------|
| Nil | Direct mounting                 |                                                                    |
| 0   | Without DIN rail (with bracket) |                                                                    |
| 3   | For 3 stations                  | Specify a longer rail than the total length of specified stations. |
| ⋮   | ⋮                               |                                                                    |
| 24  | For 24 stations                 |                                                                    |


Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product



Click here for details. >>>

## How to Order Valves (With mounting screw)

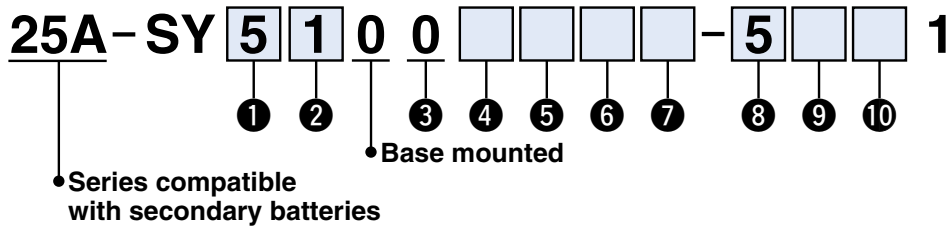

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

\* When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the **Web Catalog**.

### 5 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 6 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 7 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.

\* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 8 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

### 9 Light/surge voltage suppressor and common specification

|     |                                                       |
|-----|-------------------------------------------------------|
| Nil | Without light/surge voltage suppressor (Non-polar)    |
| R   | With surge voltage suppressor (Non-polar)             |
| U   | With light/surge voltage suppressor (Non-polar)       |
| S   | With surge voltage suppressor (Positive common)       |
| Z   | With light/surge voltage suppressor (Positive common) |
| NS  | With surge voltage suppressor (Negative common)       |
| NZ  | With light/surge voltage suppressor (Negative common) |

\* Only "Z" and "NZ" types are available with a power-saving circuit.

### 10 Manual override

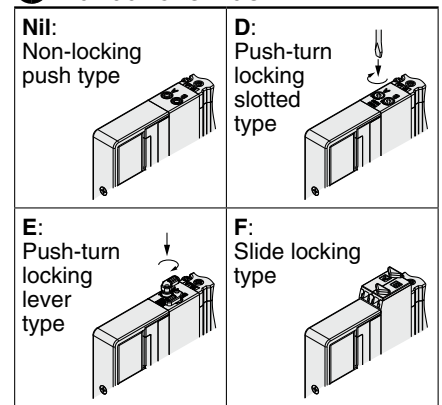

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Plug-in Connector Connecting Base

Lead Wire



Type 12  
Top Ported

## 25A-SY5000/7000 Series

### How to Order Manifolds

25A-SS5Y **5** - 12 **L1** **1** - **05** **U**   -

1
2
3
4
5
6
7

• Series compatible with secondary batteries

#### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### 2 Number of cores (Lead wire)

|    |          |
|----|----------|
| L1 | 34 cores |
| L2 | 17 cores |
| L3 | 9 cores  |

#### 3 Lead wire length

|   |       |
|---|-------|
| 1 | 0.6 m |
| 2 | 1.5 m |
| 3 | 3 m   |

#### 4 Valve stations

(L1□)

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 16     | 16 stations | Specified layout*2<br>(Up to 32 solenoids available) |
| 02     | 2 stations  |                                                      |
| ⋮      | ⋮           |                                                      |
| 24     | 24 stations |                                                      |

(L3□)

| Symbol | Stations   | Note                                                |
|--------|------------|-----------------------------------------------------|
| 02     | 2 stations | Double wiring*1                                     |
| ⋮      | ⋮          |                                                     |
| 04     | 4 stations | Specified layout*2<br>(Up to 8 solenoids available) |
| 02     | 2 stations |                                                     |
| ⋮      | ⋮          |                                                     |
| 08     | 8 stations |                                                     |

(L2□)

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 08     | 8 stations  | Specified layout*2<br>(Up to 16 solenoids available) |
| 02     | 2 stations  |                                                      |
| ⋮      | ⋮           |                                                      |
| 16     | 16 stations |                                                      |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

\* The blanking plate assembly is included in this number.

#### 5 P, E port entry

|     |                               |
|-----|-------------------------------|
| U*1 | U side (2 to 10 stations)     |
| D*1 | D side (2 to 10 stations)     |
| B   | Both sides (2 to 24 stations) |

\*1 For type "S," SUP/EXH block assembly with a built-in silencer, choose "U" or "D" for P port entry.

#### 6 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |

\* The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)

\* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

#### 7 Mounting

|     |                                         |                                                         |
|-----|-----------------------------------------|---------------------------------------------------------|
| Nil | Direct mounting                         |                                                         |
| D   | DIN rail mounting<br>(With DIN rail)    |                                                         |
| D0  | DIN rail mounting<br>(Without DIN rail) |                                                         |
| D3  | For 3 stations                          | Specify a length longer than that of the standard rail. |
| :   | :                                       |                                                         |
| D24 | For 24 stations                         |                                                         |


#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valves (With mounting screw)

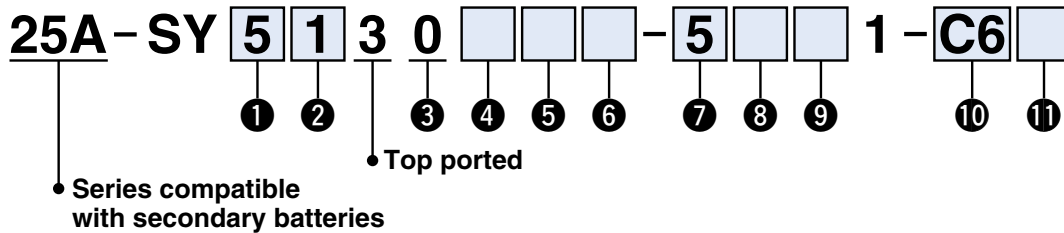

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 5 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 6 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.  
 \* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 7 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

### 8 Light/surge voltage suppressor and common specification

|     |                                                       |
|-----|-------------------------------------------------------|
| Nil | Without light/surge voltage suppressor (Non-polar)    |
| R   | With surge voltage suppressor (Non-polar)             |
| U   | With light/surge voltage suppressor (Non-polar)       |
| S   | With surge voltage suppressor (Positive common)       |
| Z   | With light/surge voltage suppressor (Positive common) |
| NS  | With surge voltage suppressor (Negative common)       |
| NZ  | With light/surge voltage suppressor (Negative common) |

\* Only "Z" and "NZ" types are available with a power-saving circuit.

### 9 Manual override

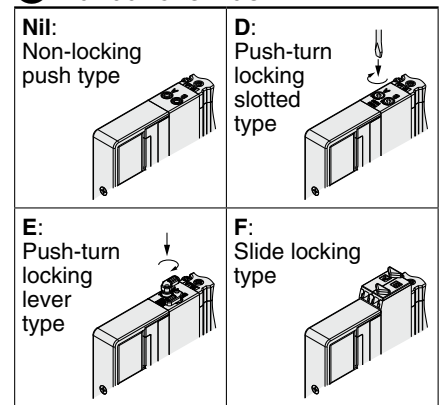

### 10 A, B port size

#### Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 02     | 1/4       | SY7000            |

#### One-touch fitting (Metric)

| Symbol | A, B port | SY5000 | SY7000 |
|--------|-----------|--------|--------|
| C4     | ø4        | ●      | —      |
| C6     | ø6        | ●      | ●      |
| C8     | ø8        | ●      | ●      |
| C10    | ø10       | —      | ●      |
| C12    | ø12       | —      | ●      |

### 11 Thread type

|     |      |
|-----|------|
| Nil | Rc   |
| F   | G    |
| N   | NPT  |
| T   | NPTF |

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



Type 10  
Side Ported

Type 11  
Bottom Ported

# Plug-in Connector Connecting Base Compact Wireless Remote Series

## 25A-SY5000/7000 Series



RoHS

### How to Order Manifolds

25A-SS5Y **5** - **10** S **W2** - **05** **U** **□** - **C6** **□**

1 2 3 4 5 6 7 8

• Series compatible with secondary batteries

#### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### 2 Type

|    |               |
|----|---------------|
| 10 | Side ported   |
| 11 | Bottom ported |

#### 4 Valve stations

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 16     | 16 stations | Specified layout*2<br>(Up to 32 solenoids available) |
| 02     | 2 stations  |                                                      |
| ⋮      | ⋮           |                                                      |
| 24     | 24 stations |                                                      |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations.

The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet.

(Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

\* The blanking plate assembly is included in this number.

#### 3 Compact wireless remote specifications

(Output polarity, with/without wireless adapter, number of outputs, selectable frequency, and applicable country)

| Positive common (NPN)           | Negative common (PNP) | Wireless adapter         | Number of outputs | Number of selectable frequency channels | Applicable countries*3                                                                                        |
|---------------------------------|-----------------------|--------------------------|-------------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| 0*1, *2                         |                       |                          |                   |                                         |                                                                                                               |
| Without compact wireless remote |                       |                          |                   |                                         |                                                                                                               |
| W1*3                            | W1N*3                 | Without wireless adapter | 32                | —                                       | —                                                                                                             |
| W2                              | W2N                   | EXW1-A11E                | 32                | Min. 5/<br>Max. 79                      | Radio Law certified countries other than the U.S., Canada, South Korea, Brazil, Taiwan, Argentina, and Mexico |
| W3                              | W3N                   | EXW1-A11N                | 32                | Min. 15/<br>Max. 79                     | Radio Law certified countries including the U.S., Canada, South Korea, Brazil, Taiwan, Argentina, and Mexico  |

\*1 Confirm that the common specification of the built-in valve matches the output polarity of the selected compact wireless remote.

In addition, if the built-in valve has no polarity, either compact wireless remote output polarity type can be connected.

\*2 "With DIN rail" cannot be selected for the type without a compact wireless remote.

\*3 Select the wireless adapter according to the country of use.

\* The applicable countries differ depending on the part number. Before purchasing, refer to the wireless system catalog.

#### 5 P, E port entry

|   |                               |
|---|-------------------------------|
| U | U side (2 to 10 stations)     |
| D | D side (2 to 10 stations)     |
| B | Both sides (2 to 24 stations) |

#### 6 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |
| R   | External pilot                    |

\* The 3/5(E) port is plugged for the built-in silencer type.

\* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

#### 8 Mounting

| Symbol | Mounting          | Option     |                |
|--------|-------------------|------------|----------------|
|        |                   | Name plate | Station number |
| Nil    | Direct mounting   | —          | —              |
| AA     |                   | ●          | ●              |
| BA     |                   | ●          | —              |
| D□     | DIN rail mounting | —          | —              |
| A□     |                   | ●          | ●              |
| B□     |                   | ●          | —              |

\* Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" below.)


\* Only direct mounting is available for the type 11 bottom-ported type.

#### DIN Rail Option

|     |                                 |                          |
|-----|---------------------------------|--------------------------|
| Nil | Direct mounting                 |                          |
| 0   | Without DIN rail (with bracket) |                          |
| 3   | For 3 stations                  | Specify a longer rail    |
| ⋮   | ⋮                               | than the total length of |
| 24  | For 24 stations                 | specified stations.      |

#### 7 A, B port size (Metric)

| Symbol                              | A, B port                  | Type 10/Side ported |        | Type 11/Bottom ported |        |
|-------------------------------------|----------------------------|---------------------|--------|-----------------------|--------|
|                                     |                            | SY5000              | SY7000 | SY5000                | SY7000 |
| C4                                  | Straight                   | ●                   | —      | ●                     | —      |
| C6                                  |                            | ●                   | ●      | ●                     | ●      |
| C8                                  |                            | ●                   | ●      | ●                     | ●      |
| C10                                 |                            | —                   | ●      | —                     | ●      |
| C12                                 |                            | —                   | ●      | —                     | ●      |
| CM*1                                | Straight port, mixed sizes | ●                   | ●      | ●                     | ●      |
| P, E port size (One-touch fittings) |                            | ø10                 | ø12    | ø10                   | ø12    |



\*1 Indicate the sizes on the manifold specification sheet for "CM."

#### Refer to the Web Catalog.


• Specifications/Dimensions  
\* Same as the standard product

Click here for details.



For details on the compact wireless remote, refer to the EXW1 series catalog or operation manual, and for part numbers of the built-in compact wireless remote, etc., refer to page 53. The operation manual can be downloaded from the SMC website: <https://www.smcworld.com>

## How to Order Valves (With mounting screw)

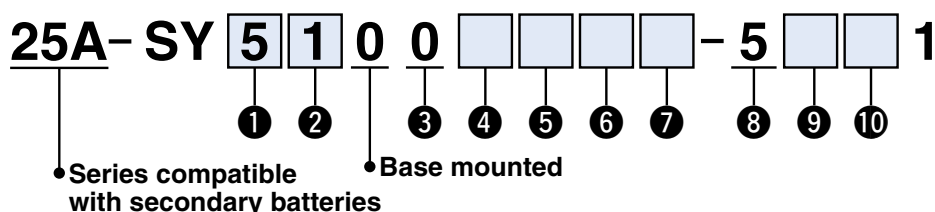

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

\* When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the **Web Catalog**.

### 5 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 6 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 7 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.

\* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 8 Rated voltage

|   |        |
|---|--------|
| 5 | 24 VDC |
|---|--------|


### 9 Light/surge voltage suppressor and common specification

|    |                                                       |
|----|-------------------------------------------------------|
| R  | With surge voltage suppressor (Non-polar)             |
| U  | With light/surge voltage suppressor (Non-polar)       |
| S  | With surge voltage suppressor (Positive common)       |
| Z  | With light/surge voltage suppressor (Positive common) |
| NS | With surge voltage suppressor (Negative common)       |
| NZ | With light/surge voltage suppressor (Negative common) |

\* Select "R," "U," "S," or "Z" for the valve when the compact wireless remote output polarity is positive common. Select "R," "U," "NS," or "NZ" for the valve when the compact wireless remote output polarity is negative common.

\* Only "Z" and "NZ" types are available with a power-saving circuit.

### 10 Manual override

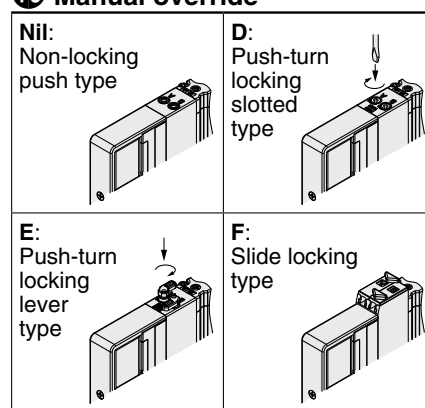

#### Refer to the Web Catalog.


- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



Type 12  
Top Ported

# Plug-in Connector Connecting Base Compact Wireless Remote Series 25A-SY5000/7000 Series



## How to Order Manifolds

25A-SS5Y **5** - 12S **W2** - **05** **U**  -

1                      2                      3                      4                      5                      6

• Series compatible with secondary batteries

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 3 Valve stations

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 16     | 16 stations | Specified layout*2<br>(Up to 32 solenoids available) |
| 02     | 2 stations  |                                                      |
| ⋮      | ⋮           |                                                      |
| 24     | 24 stations |                                                      |

- \*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations.  
The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- \*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet.  
(Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- \* The blanking plate assembly is included in this number.

### 6 Mounting

|     |                                      |
|-----|--------------------------------------|
| Nil | Direct mounting                      |
| D   | DIN rail mounting (With DIN rail)    |
| D0  | DIN rail mounting (Without DIN rail) |
| D3  | For 3 stations                       |
| ⋮   | ⋮                                    |
| D24 | For 24 stations                      |

- \* If the DIN rail must be mounted without an SI unit, select D0. Then, refer to L3 of the dimensions for the DIN rail length and order separately.

### 2 Compact wireless remote specifications

(Output polarity, with/without wireless adapter, number of outputs, selectable frequency, and applicable country)

| Positive common (NPN)           | Negative common (PNP) | Wireless adapter         | Number of outputs | Number of selectable frequency channels | Applicable countries*3                                                                                        |
|---------------------------------|-----------------------|--------------------------|-------------------|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| 0*1, *2                         |                       |                          |                   |                                         |                                                                                                               |
| Without compact wireless remote |                       |                          |                   |                                         |                                                                                                               |
| W1*3                            | W1N*3                 | Without wireless adapter | 32                | —                                       | —                                                                                                             |
| W2                              | W2N                   | EXW1-A11E                | 32                | Min. 5/<br>Max. 79                      | Radio Law certified countries other than the U.S., Canada, South Korea, Brazil, Taiwan, Argentina, and Mexico |
| W3                              | W3N                   | EXW1-A11N                | 32                | Min. 15/<br>Max. 79                     | Radio Law certified countries including the U.S., Canada, South Korea, Brazil, Taiwan, Argentina, and Mexico  |

- \*1 Confirm that the common specification of the built-in valve matches the output polarity of the selected compact wireless remote.  
In addition, if the built-in valve has no polarity, either compact wireless remote output polarity type can be connected.
- \*2 "With DIN rail" cannot be selected for the type without a compact wireless remote.
- \*3 Select the wireless adapter according to the country of use.
- \* The applicable countries differ depending on the part number. Before purchasing, refer to the wireless system catalog.

### 4 P, E port entry

|     |                               |
|-----|-------------------------------|
| U*1 | U side (2 to 10 stations)     |
| D*1 | D side (2 to 10 stations)     |
| B   | Both sides (2 to 24 stations) |

- \*1 5 For type "S," SUP/EXH block assembly with a built-in silencer, choose "U" or "D" for P port entry.

### 5 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |

- \* The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)
- \* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

#### Refer to the Web Catalog.


- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



For details on the compact wireless remote, refer to the EXW1 series catalog or operation manual, and for part numbers of the built-in compact wireless remote, etc., refer to page 53. The operation manual can be downloaded from the SMC website: <https://www.smcworld.com>

## How to Order Valves (With mounting screw)

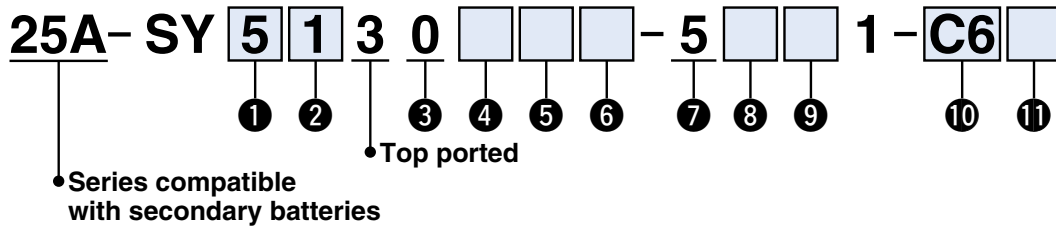

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 5 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 6 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.  
\* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 7 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
|---|--------|

### 8 Light/surge voltage suppressor and common specification

|    |                                                       |
|----|-------------------------------------------------------|
| R  | With surge voltage suppressor (Non-polar)             |
| U  | With light/surge voltage suppressor (Non-polar)       |
| S  | With surge voltage suppressor (Positive common)       |
| Z  | With light/surge voltage suppressor (Positive common) |
| NS | With surge voltage suppressor (Negative common)       |
| NZ | With light/surge voltage suppressor (Negative common) |

\* Select "R," "U," "S," or "Z" for the valve when the compact wireless remote output polarity is positive common. Select "R," "U," "NS," or "NZ" for the valve when the compact wireless remote output polarity is negative common.  
\* Only "Z" and "NZ" types are available with a power-saving circuit.

### 9 Manual override

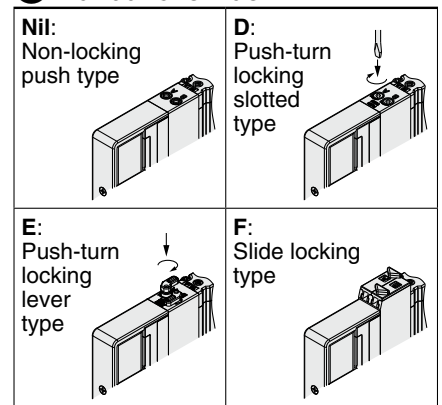

### 10 A, B port size

#### Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 02     | 1/4       | SY7000            |

#### One-touch fitting (Metric)

| Symbol | A, B port | SY5000 | SY7000 |
|--------|-----------|--------|--------|
| C4     | ø4        | ●      | —      |
| C6     | ø6        | ●      | ●      |
| C8     | ø8        | ●      | ●      |
| C10    | ø10       | —      | ●      |
| C12    | ø12       | —      | ●      |

### 11 Thread type

|     |      |
|-----|------|
| Nil | Rc   |
| F   | G    |
| N   | NPT  |
| T   | NPTF |

#### Refer to the Web Catalog.

• Specifications/Dimensions  
\* Same as the standard product

Click here for details. >>>



Type 10  
Side Ported

Type 11  
Bottom Ported

# Plug-in Connector Connecting Base

EX260

# 25A-SY5000/7000 Series



## How to Order Manifolds

25A-SS5Y **5** - **10** S **NAN** - **05** **U** **□** - **C6** **□**

1 2 3 4 5 6 7 8

• Series compatible with secondary batteries

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type

|    |               |
|----|---------------|
| 10 | Side ported   |
| 11 | Bottom ported |

### 3 SI unit specifications


(Output polarity, Protocol, Number of outputs, Communication connector)

| Symbol (Output polarity) |                       | Protocol        | Number of outputs | Communication connector |
|--------------------------|-----------------------|-----------------|-------------------|-------------------------|
| Positive common (NPN)    | Negative common (PNP) |                 |                   |                         |
| 0                        |                       | Without SI unit |                   |                         |
| QA                       | QAN                   | DeviceNet®      | 32                | M12                     |
| QB                       | QBN                   |                 | 16                |                         |
| NA                       | NAN                   | PROFIBUS DP     | 32                | M12                     |
| NB                       | NBN                   |                 | 16                |                         |
| VA                       | VAN                   | CC-Link         | 32                | M12                     |
| VB                       | VBN                   |                 | 16                |                         |
| DA                       | DAN                   | EtherCAT        | 32                | M12                     |
| DB                       | DBN                   |                 | 16                |                         |
| FA                       | FAN                   | PROFINET        | 32                | M12                     |
| FB                       | FBN                   |                 | 16                |                         |
| EA                       | EAN                   | EtherNet/IP™    | 32                | M12                     |
| EB                       | EBN                   |                 | 16                |                         |
| —                        | KAN                   | IO-Link         | 32                | M12                     |

- \* Without SI unit, the output polarity is decided by the SI unit used. Ensure a match with the common specification of the valves to be used.
- \* DIN rail cannot be mounted without SI unit.
- \* For IO-Link, only the negative common (PNP) type and the 32 outputs type are available.

### 7 A, B port size (Metric)

| Symbol                              | A, B port                  | Type 10/Side ported |        | Type 11/Bottom ported |        |
|-------------------------------------|----------------------------|---------------------|--------|-----------------------|--------|
|                                     |                            | SY5000              | SY7000 | SY5000                | SY7000 |
| C4                                  | ø4                         | ●                   | —      | ●                     | —      |
| C6                                  | ø6                         | ●                   | ●      | ●                     | ●      |
| C8                                  | ø8                         | ●                   | ●      | ●                     | ●      |
| C10                                 | ø10                        | —                   | ●      | —                     | ●      |
| C12                                 | ø12                        | —                   | ●      | —                     | ●      |
| CM <sup>1</sup>                     | Straight port, mixed sizes | ●                   | ●      | ●                     | ●      |
| P, E port size (One-touch fittings) |                            | ø10                 | ø12    | ø10                   | ø12    |



\*1 Indicate the sizes on the manifold specification sheet for "CM."

### 4 Valve stations

In the case of the 32-output SI unit

| Symbol | Stations    | Note                                              |
|--------|-------------|---------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                   |
| ⋮      | ⋮           |                                                   |
| 16     | 16 stations | Specified layout*2 (Up to 32 solenoids available) |
| 02     | 2 stations  |                                                   |
| ⋮      | ⋮           |                                                   |
| 24     | 24 stations |                                                   |

In the case of the 16-output SI unit

| Symbol | Stations    | Note                                              |
|--------|-------------|---------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                   |
| ⋮      | ⋮           |                                                   |
| 08     | 8 stations  | Specified layout*2 (Up to 16 solenoids available) |
| 02     | 2 stations  |                                                   |
| ⋮      | ⋮           |                                                   |
| 16     | 16 stations |                                                   |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

- \* The blanking plate assembly is included in this number.
- \* For the model without the SI unit (S0), note the maximum number of solenoids of the SI unit that will be mounted. If the layout is specified, indicate it on the manifold specification sheet.

### 5 P, E port entry

|   |                               |
|---|-------------------------------|
| U | U side (2 to 10 stations)     |
| D | D side (2 to 10 stations)     |
| B | Both sides (2 to 24 stations) |

### 6 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |
| R   | External pilot                    |

- \* The 3/5(E) port is plugged for the built-in silencer type.
- \* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

### 8 Mounting

| Symbol | Mounting          | Option     |                |
|--------|-------------------|------------|----------------|
|        |                   | Name plate | Station number |
| Nil    | Direct mounting   | —          | —              |
| AA     |                   | ●          | ●              |
| BA     |                   | ●          | —              |
| D□     | DIN rail mounting | —          | —              |
| A□     |                   | ●          | ●              |
| B□     |                   | ●          | —              |

- \* Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" below.)
- \* Only direct mounting is available for the type 11 bottom ported type.

#### DIN Rail Option

|     |                                 |                                                                    |
|-----|---------------------------------|--------------------------------------------------------------------|
| Nil | Direct mounting                 |                                                                    |
| 0   | Without DIN rail (with bracket) |                                                                    |
| 3   | For 3 stations                  | Specify a longer rail than the total length of specified stations. |
| ⋮   | ⋮                               |                                                                    |
| 24  | For 24 stations                 |                                                                    |

#### Refer to the Web Catalog.


- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



For details on the EX260 Integrated Type (For Output) Serial Transmission System, refer to the **Web Catalog** and the **Operation Manual**. For the part numbers of the SI units to be mounted, refer to page 69 in this catalog. Please download the **Operation Manual** via the SMC website: <https://www.smcworld.com>

## How to Order Valves (With mounting screw)

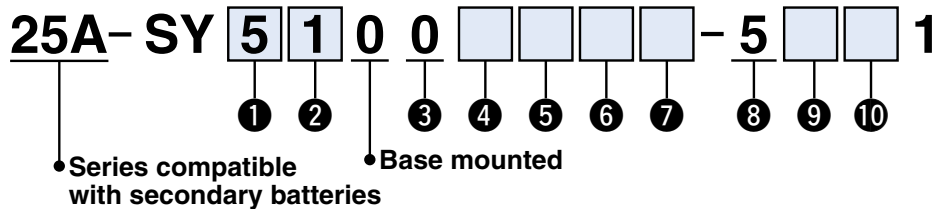

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

\* When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the **Web Catalog**.

### 5 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 6 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 7 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.  
\* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 8 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
|---|--------|

### 9 Light/surge voltage suppressor and common specification

|    |                                                       |
|----|-------------------------------------------------------|
| R  | With surge voltage suppressor (Non-polar)             |
| U  | With light/surge voltage suppressor (Non-polar)       |
| S  | With surge voltage suppressor (Positive common)       |
| Z  | With light/surge voltage suppressor (Positive common) |
| NS | With surge voltage suppressor (Negative common)       |
| NZ | With light/surge voltage suppressor (Negative common) |

\* Select "R," "U," "S," or "Z" for the valve when the SI unit output polarity is positive common. Select "R," "U," "NS," or "NZ" for the valve when the SI unit output polarity is negative common.  
\* Only "Z" and "NZ" types are available with a power-saving circuit.

### 10 Manual override

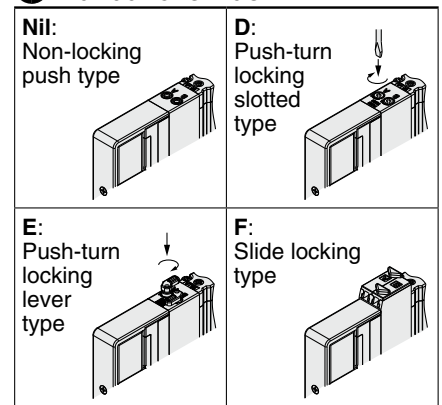

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Plug-in Connector Connecting Base

EX260



RoHS

Type 12  
Top Ported

## 25A-SY5000/7000 Series

### How to Order Manifolds

25A-SS5Y **5** - 12S **NAN** - **05** **U** **□** - **□**

• Series compatible with secondary batteries

#### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### 2 SI unit specifications

(Output polarity, Protocol, Number of outputs, Communication connector)

| Symbol (Output polarity) |                       | Protocol        | Number of outputs | Communication connector |
|--------------------------|-----------------------|-----------------|-------------------|-------------------------|
| Positive common (NPN)    | Negative common (PNP) |                 |                   |                         |
| 0                        |                       | Without SI unit |                   |                         |
| QA                       | QAN                   | DeviceNet®      | 32                | M12                     |
| QB                       | QBN                   |                 | 16                |                         |
| NA                       | NAN                   | PROFIBUS DP     | 32                | M12                     |
| NB                       | NBN                   |                 | 16                |                         |
| VA                       | VAN                   | CC-Link         | 32                | M12                     |
| VB                       | VBN                   |                 | 16                |                         |
| DA                       | DAN                   | EtherCAT        | 32                | M12                     |
| DB                       | DBN                   |                 | 16                |                         |
| FA                       | FAN                   | PROFINET        | 32                | M12                     |
| FB                       | FBN                   |                 | 16                |                         |
| EA                       | EAN                   | EtherNet/IP™    | 32                | M12                     |
| EB                       | EBN                   |                 | 16                |                         |
| —                        | KAN                   | IO-Link         | 32                | M12                     |

- \* Without SI unit, the output polarity is decided by the SI unit used. Ensure a match with the common specification of the valves to be used.
- \* DIN rail cannot be mounted without SI unit.
- \* For IO-Link, only the negative common (PNP) type and the 32 outputs type are available.

#### 3 Valve stations

In the case of the 32-output SI unit

| Symbol | Stations    | Note                                              |
|--------|-------------|---------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                   |
| 16     | 16 stations |                                                   |
| 02     | 2 stations  | Specified layout*2 (Up to 32 solenoids available) |
| 24     | 24 stations |                                                   |

In the case of the 16-output SI unit

| Symbol | Stations    | Note                                              |
|--------|-------------|---------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                   |
| 08     | 8 stations  |                                                   |
| 02     | 2 stations  | Specified layout*2 (Up to 16 solenoids available) |
| 16     | 16 stations |                                                   |

- \*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations. The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- \*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- \* The blanking plate assembly is included in this number.
- \* For the model without the SI unit (S0), note the maximum number of solenoids of the SI unit that will be mounted. If the layout is specified, indicate it on the manifold specification sheet.

#### 4 P, E port entry

|     |                               |
|-----|-------------------------------|
| U*1 | U side (2 to 10 stations)     |
| D*1 | D side (2 to 10 stations)     |
| B   | Both sides (2 to 24 stations) |

- \*1 For type "S," SUP/EXH block assembly with a built-in silencer, choose "U" or "D" for P port entry.

#### 5 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |

- \* The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)
- \* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

#### 6 Mounting

|     |                                      |                                                         |
|-----|--------------------------------------|---------------------------------------------------------|
| Nil | Direct mounting                      |                                                         |
| D   | DIN rail mounting (With DIN rail)    |                                                         |
| D0  | DIN rail mounting (Without DIN rail) |                                                         |
| D3  | For 3 stations                       | Specify a length longer than that of the standard rail. |
| ... | ...                                  |                                                         |
| D24 | For 24 stations                      |                                                         |

- \* If the DIN rail must be mounted without an SI unit, select D0. Then, refer to L3 of the dimensions for the DIN rail length and order separately.

#### Refer to the Web Catalog.


- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



For details on the EX260 Integrated Type (For Output) Serial Transmission System, refer to the **Web Catalog** and the **Operation Manual**. For the part numbers of the SI units to be mounted, refer to page 69 in this catalog. Please download the Operation Manual via the SMC website: <https://www.smcworld.com>

## How to Order Valves (With mounting screw)

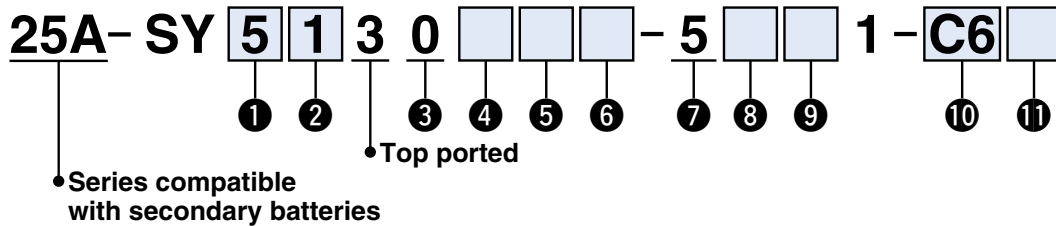

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 5 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 6 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.  
\* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 7 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
|---|--------|

### 8 Light/surge voltage suppressor and common specification

|    |                                                       |
|----|-------------------------------------------------------|
| R  | With surge voltage suppressor (Non-polar)             |
| U  | With light/surge voltage suppressor (Non-polar)       |
| S  | With surge voltage suppressor (Positive common)       |
| Z  | With light/surge voltage suppressor (Positive common) |
| NS | With surge voltage suppressor (Negative common)       |
| NZ | With light/surge voltage suppressor (Negative common) |

\* Select "R," "U," "S," or "Z" for the valve when the SI unit output polarity is positive common. Select "R," "U," "NS," or "NZ" for the valve when the SI unit output polarity is negative common.  
\* Only "Z" and "NZ" types are available with a power-saving circuit.

### 9 Manual override

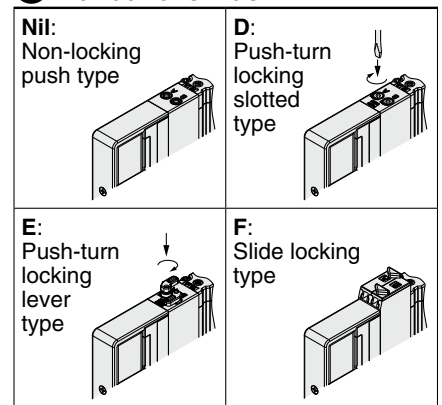

### 10 A, B port size

#### Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 02     | 1/4       | SY7000            |

#### One-touch fitting (Metric)

| Symbol | A, B port | SY5000 | SY7000 |
|--------|-----------|--------|--------|
| C4     | ø4        | ●      | —      |
| C6     | ø6        | ●      | ●      |
| C8     | ø8        | ●      | ●      |
| C10    | ø10       | —      | ●      |
| C12    | ø12       | —      | ●      |

### 11 Thread type

|     |      |
|-----|------|
| Nil | Rc   |
| F   | G    |
| N   | NPT  |
| T   | NPTF |

#### Refer to the Web Catalog.

• Specifications/Dimensions  
\* Same as the standard product

Click here for details. >>>



Type 10  
Side Ported

Type 11  
Bottom Ported

# Plug-in Connector Connecting Base

EX126

# 25A-SY5000/7000 Series



RoHS

## How to Order Manifolds

25A-SS5Y **5** - **10** S4 **V** - **05** **U** **□** - **C6** **□**

1 2 3 4 5 6 7 8

• Series compatible with secondary batteries

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type

|    |               |
|----|---------------|
| 10 | Side ported   |
| 11 | Bottom ported |

### 3 SI unit

|   |                               |
|---|-------------------------------|
| 0 | Without SI unit               |
| V | CC-Link (Positive common NPN) |

\* Only a terminal block plate is mounted for the valve without SI unit.  
For SI unit part numbers, refer to page 69.

### 4 Valve stations

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 08     | 8 stations  | Specified layout*2<br>(Up to 16 solenoids available) |
| 02     | 2 stations  |                                                      |
| ⋮      | ⋮           |                                                      |
| 16     | 16 stations |                                                      |

\*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations.  
The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.

\*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)

\* The blanking plate assembly is included in this number.

### 5 P, E port entry

|   |                               |
|---|-------------------------------|
| U | U side (2 to 10 stations)     |
| D | D side (2 to 10 stations)     |
| B | Both sides (2 to 16 stations) |

### 6 SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |
| R   | External pilot                    |

\* The 3/5(E) port is plugged for the built-in silencer type.  
\* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

### 8 Mounting

| Symbol | Mounting          | Option     |                |
|--------|-------------------|------------|----------------|
|        |                   | Name plate | Station number |
| Nil    | Direct mounting   | —          | —              |
| AA     |                   | ●          | ●              |
| BA     |                   | ●          | —              |
| D□     | DIN rail mounting | —          | —              |
| A□     |                   | ●          | ●              |
| B□     |                   | ●          | —              |


\* Enter the number of stations inside □ when it is larger than the number of valve stations. (Refer to "DIN Rail Option" below.)  
\* Only direct mounting is available for the type 11 bottom-mounted type.

#### DIN Rail Option

|     |                                 |                                                                    |
|-----|---------------------------------|--------------------------------------------------------------------|
| Nil | Direct mounting                 |                                                                    |
| 0   | Without DIN rail (with bracket) |                                                                    |
| 3   | For 3 stations                  | Specify a longer rail than the total length of specified stations. |
| ⋮   | ⋮                               |                                                                    |
| 16  | For 16 stations                 |                                                                    |

### 7 A, B port (Metric)

| Symbol                                 | A, B port                  | Type 10/<br>Side ported |        | Type 11/<br>Bottom ported |        |
|----------------------------------------|----------------------------|-------------------------|--------|---------------------------|--------|
|                                        |                            | SY5000                  | SY7000 | SY5000                    | SY7000 |
| C4                                     | ø4                         | ●                       | —      | ●                         | —      |
| C6                                     | ø6                         | ●                       | ●      | ●                         | ●      |
| C8                                     | ø8                         | ●                       | ●      | ●                         | ●      |
| C10                                    | ø10                        | —                       | ●      | —                         | ●      |
| C12                                    | ø12                        | —                       | ●      | —                         | ●      |
| CM*1                                   | Straight port, mixed sizes | ●                       | ●      | ●                         | ●      |
| P, E port size<br>(One-touch fittings) |                            | ø10                     | ø12    | ø10                       | ø12    |



\*1 Indicate the sizes on the manifold specification sheet for "CM."  
\* The direction of P, E port fittings is the same as for the A, B port.

#### Refer to the Web Catalog.


- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



For details on the EX126 Integrated Type (For Output) Serial Transmission System, refer to the **Web Catalog** and the **Operation Manual**. For the part numbers of the SI units to be mounted, refer to page 69 in this catalog. Please download the Operation Manual via the SMC website: <https://www.smcworld.com>

## How to Order Valves (With mounting screw)

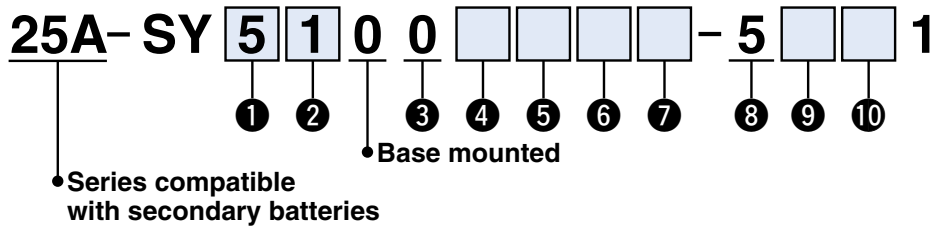

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

\* When selecting the external pilot specification for the 4-position dual 3-port valve, pay attention to the pilot pressure. For details, refer to the valve specifications of the standard SY series product in the **Web Catalog**.

### 5 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 6 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 7 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

\* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.

\* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 8 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
|---|--------|

### 9 Light/surge voltage suppressor and common specification

|   |                                                       |
|---|-------------------------------------------------------|
| R | With surge voltage suppressor (Non-polar)             |
| U | With light/surge voltage suppressor (Non-polar)       |
| S | With surge voltage suppressor (Positive common)       |
| Z | With light/surge voltage suppressor (Positive common) |

\* Only "Z" type is available with a power-saving circuit.

### 10 Manual override

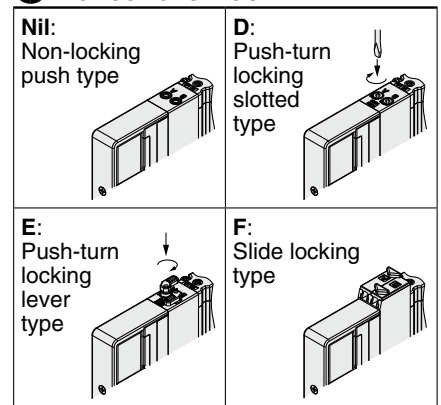

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Plug-in Connector Connecting Base

EX126



Type 12  
Top Ported

## 25A-SY5000/7000 Series



RoHS

### How to Order Manifolds

25A - SS5Y **5** - 12S4 **V** - **05** **U** **□** - **□**

①
②
③
④
⑤
⑥

• Series compatible with secondary batteries

#### ① Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### ② SI unit

|   |                               |
|---|-------------------------------|
| 0 | Without SI unit               |
| V | CC-Link (Positive common NPN) |

\* Only a terminal block plate is mounted for the valve without SI unit.  
For SI unit part numbers, refer to page 69.

#### ③ Valve stations

| Symbol | Stations    | Note                                                 |
|--------|-------------|------------------------------------------------------|
| 02     | 2 stations  | Double wiring*1                                      |
| ⋮      | ⋮           |                                                      |
| 08     | 8 stations  |                                                      |
| 02     | 2 stations  | Specified layout*2<br>(Up to 16 solenoids available) |
| ⋮      | ⋮           |                                                      |
| 16     | 16 stations |                                                      |

- \*1 Double wiring: 2-position single, 2-position double, 3-position, and 4-position valves can be used on all manifold stations.  
The use of a 2-position single solenoid will result in an unused control signal. If this is not desired, order with a specified layout.
- \*2 Specified layout: Indicate the wiring specifications on the manifold specification sheet. (Note that 2-position double, 3-position, and 4-position valves cannot be used where single wiring has been specified.)
- \* The blanking plate assembly is included in this number.

#### ④ P, E port entry

|     |                               |
|-----|-------------------------------|
| U*1 | U side (2 to 10 stations)     |
| D*1 | D side (2 to 10 stations)     |
| B   | Both sides (2 to 16 stations) |

\*1 ⑤ For type "S," SUP/EXH block assembly with a built-in silencer, choose "U" or "D" for P port entry.

#### ⑤ SUP/EXH block assembly

|     |                                   |
|-----|-----------------------------------|
| Nil | Internal pilot                    |
| S   | Internal pilot, Built-in silencer |

- \* The P and E ports are only available on the U and D sides for the built-in silencer type. The 3/5(E) port is plugged. The silencer exhaust port is located on the opposite side of the P and E port entry. (Example: When the P and E port entry is on the D side, the silencer exhaust port is on the U side.)
- \* When the built-in silencer type is used, keep the exhaust port from coming into direct contact with water or other liquids.

#### ⑥ Mounting

|     |                                      |                                                         |
|-----|--------------------------------------|---------------------------------------------------------|
| Nil | Direct mounting                      |                                                         |
| D   | DIN rail mounting (With DIN rail)    |                                                         |
| D0  | DIN rail mounting (Without DIN rail) |                                                         |
| D3  | For 3 stations                       | Specify a length longer than that of the standard rail. |
| ⋮   | ⋮                                    |                                                         |
| D16 | For 16 stations                      |                                                         |

#### Refer to the Web Catalog.


- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



For details on the EX126 Integrated Type (For Output) Serial Transmission System, refer to the **Web Catalog** and the Operation Manual. For the part numbers of the SI units to be mounted, refer to page 69 in this catalog. Please download the Operation Manual via the SMC website: <https://www.smcworld.com>

## How to Order Valves (With mounting screw)

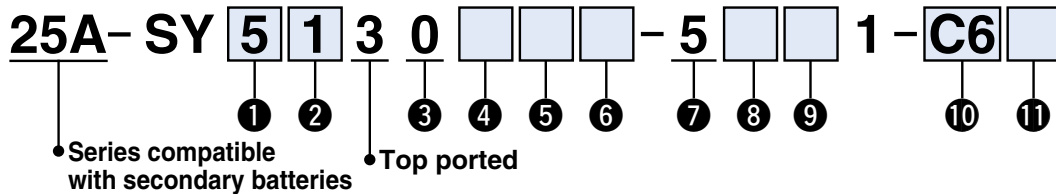

### 1 Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### 2 Type of actuation

|   |                                          |
|---|------------------------------------------|
| 1 | 2-position single                        |
| 2 | 2-position double                        |
| 3 | 3-position closed center                 |
| 4 | 3-position exhaust center                |
| 5 | 3-position pressure center               |
| A | 4-position dual 3-port valve (N.C./N.C.) |
| B | 4-position dual 3-port valve (N.O./N.O.) |
| C | 4-position dual 3-port valve (N.C./N.O.) |

### 3 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

### 4 Back pressure check valve (Built-in valve type)

|     |          |
|-----|----------|
| Nil | None     |
| H   | Built-in |

\* The built-in valve type back pressure check valve is not available for the 3-position type or the SY7000.

### 5 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

### 6 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power-saving circuit (Continuous duty type) |

- \* Be sure to select the power-saving circuit type if the valve is to be continuously energized for long periods of time.
- \* Be careful of the energizing time when the power-saving circuit is selected. For details, refer to the standard product catalog.

### 7 Rated voltage


|   |        |
|---|--------|
| 5 | 24 VDC |
|---|--------|

### 8 Light/surge voltage suppressor and common specification

|   |                                                       |
|---|-------------------------------------------------------|
| R | With surge voltage suppressor (Non-polar)             |
| U | With light/surge voltage suppressor (Non-polar)       |
| S | With surge voltage suppressor (Positive common)       |
| Z | With light/surge voltage suppressor (Positive common) |

\* Only "Z" type is available with a power-saving circuit.

### 9 Manual override

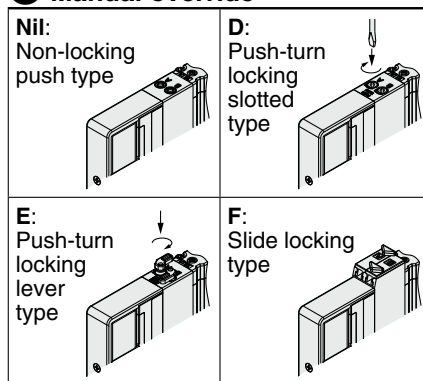

### 10 A, B port size

#### Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 02     | 1/4       | SY7000            |

#### One-touch fitting (Metric)

| Symbol | A, B port | SY5000 | SY7000 |
|--------|-----------|--------|--------|
| C4     | ø4        | ●      | —      |
| C6     | ø6        | ●      | ●      |
| C8     | ø8        | ●      | ●      |
| C10    | ø10       | —      | ●      |
| C12    | ø12       | —      | ●      |

### 11 Thread type

|     |      |
|-----|------|
| Nil | Rc   |
| F   | G    |
| N   | NPT  |
| T   | NPTF |

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



### ⚠ Caution


Tightening torque for mounting screw  
M3: 0.8 N·m

## Manifold Options

### ■ Blanking plate assembly

(With mounting screw)

Used when valve additions are expected or for maintenance. A structure is in place on the blanking plate to prevent the mounting screws from sliding.



25A-SY50M-26-1A

## How to Order Blanking Plate Assembly

**25A-SY** 5 0M-26-1 A

#### Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### Base type

|   |                                       |
|---|---------------------------------------|
| 1 | For plug-in connector connecting base |
|---|---------------------------------------|

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# 25A-SY5000/7000 Series

## SI Unit Part Nos.

| Description   | SI unit part no.        | Note                                                          |
|---------------|-------------------------|---------------------------------------------------------------|
| EX260 SI unit | <b>EX260-SPR1-X117</b>  | PROFIBUS DP M12 connector, 32 outputs, Negative common (PNP)  |
|               | <b>EX260-SPR2-X117</b>  | PROFIBUS DP M12 connector, 32 outputs, Positive common (NPN)  |
|               | <b>EX260-SPR3-X117</b>  | PROFIBUS DP M12 connector, 16 outputs, Negative common (PNP)  |
|               | <b>EX260-SPR4-X117</b>  | PROFIBUS DP M12 connector, 16 outputs, Positive common (NPN)  |
|               | <b>EX260-SDN1-X117</b>  | DeviceNet® M12 connector, 32 outputs, Negative common (PNP)   |
|               | <b>EX260-SDN2-X117</b>  | DeviceNet® M12 connector, 32 outputs, Positive common (NPN)   |
|               | <b>EX260-SDN3-X117</b>  | DeviceNet® M12 connector, 16 outputs, Negative common (PNP)   |
|               | <b>EX260-SDN4-X117</b>  | DeviceNet® M12 connector, 16 outputs, Positive common (NPN)   |
|               | <b>EX260-SEC1-X117</b>  | EtherCAT M12 connector, 32 outputs, Negative common (PNP)     |
|               | <b>EX260-SEC2-X117</b>  | EtherCAT M12 connector, 32 outputs, Positive common (NPN)     |
|               | <b>EX260-SEC3-X117</b>  | EtherCAT M12 connector, 16 outputs, Negative common (PNP)     |
|               | <b>EX260-SEC4-X117</b>  | EtherCAT M12 connector, 16 outputs, Positive common (NPN)     |
|               | <b>EX260-SMJ1-X117</b>  | CC-Link M12 connector, 32 outputs, Negative common (PNP)      |
|               | <b>EX260-SMJ2-X117</b>  | CC-Link M12 connector, 32 outputs, Positive common (NPN)      |
|               | <b>EX260-SMJ3-X117</b>  | CC-Link M12 connector, 16 outputs, Negative common (PNP)      |
|               | <b>EX260-SMJ4-X117</b>  | CC-Link M12 connector, 16 outputs, Positive common (NPN)      |
|               | <b>EX260-SPN1-X117</b>  | PROFINET M12 connector, 32 outputs, Negative common (PNP)     |
|               | <b>EX260-SPN2-X117</b>  | PROFINET M12 connector, 32 outputs, Positive common (NPN)     |
|               | <b>EX260-SPN3-X117</b>  | PROFINET M12 connector, 16 outputs, Negative common (PNP)     |
|               | <b>EX260-SPN4-X117</b>  | PROFINET M12 connector, 16 outputs, Positive common (NPN)     |
|               | <b>EX260-SEN1-X117</b>  | EtherNet/IP™ M12 connector, 32 outputs, Negative common (PNP) |
|               | <b>EX260-SEN2-X117</b>  | EtherNet/IP™ M12 connector, 32 outputs, Positive common (NPN) |
|               | <b>EX260-SEN3-X117</b>  | EtherNet/IP™ M12 connector, 16 outputs, Negative common (PNP) |
|               | <b>EX260-SEN4-X117</b>  | EtherNet/IP™ M12 connector, 16 outputs, Positive common (NPN) |
|               | <b>EX260-SIL1-X117</b>  | IO-Link M12 connector, 32 outputs, Negative common (PNP)      |
| EX126 SI unit | <b>EX126D-SMJ1-X220</b> | CC-Link (Terminal block, 16 outputs, Positive common (NPN))   |

## Compact Wireless Remote Part No.

| Compact wireless remote part no. | Manifold symbol |
|----------------------------------|-----------------|
| EXW1-RDYNM5C                     | W1              |
| EXW1-RDYPM5C                     | W1N             |
| EXW1-RDYNM5C-E                   | W2              |
| EXW1-RDYPM5C-E                   | W2N             |
| EXW1-RDYNM5C-N                   | W3              |
| EXW1-RDYPM5C-N                   | W3N             |

\* Refer to the wireless system catalog for the wireless adapter part numbers.

## Valve Mounting Screw Part No.

| Description                  | Part no.             |                      | Note                                                                                |
|------------------------------|----------------------|----------------------|-------------------------------------------------------------------------------------|
|                              | SY5000               | SY7000               |                                                                                     |
| Round head combination screw | <b>SY5000-223-1A</b> | <b>SY7000-224-1A</b> | Part numbers shown on the left are for 10 valves. (SY5000: 20 pcs./SY7000: 30 pcs.) |

## One-touch Fittings Part Nos.

| Port size |             | 25A-SY5000                            | 25A-SY7000                 |
|-----------|-------------|---------------------------------------|----------------------------|
| A, B port | Metric size | ø4 One-touch fitting (Straight type)  | <b>90-VVQ1000-51A-C4</b>   |
|           |             | ø6 One-touch fitting (Straight type)  | <b>90-VVQ1000-51A-C6</b>   |
|           |             | ø8 One-touch fitting (Straight type)  | <b>90-VVQ1000-51A-C8</b>   |
|           |             | ø10 One-touch fitting (Straight type) | <b>90-VVQ2000-51A-C10</b>  |
|           |             | ø12 One-touch fitting (Straight type) | <b>25A-KQ2H12-17-X1607</b> |
| P, E port | Metric size | ø10 One-touch fitting (Straight type) | <b>90-VVQ2000-51A-C10</b>  |
|           |             | ø12 One-touch fitting (Straight type) | <b>90-VVQ4000-50B-C12</b>  |

## Manifold Options

### How to Order Individual SUP/EXH Spacer Assembly

#### One-touch fitting Straight type

**25A-SY** **5** **0M** - **38** - **1 A** - **C6**

#### Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### Spacer type

|    |                       |
|----|-----------------------|
| 38 | Individual SUP spacer |
| 39 | Individual EXH spacer |

#### Port size (Metric)

| Symbol     | P, E port | SY5000 | SY7000 |
|------------|-----------|--------|--------|
| <b>C4</b>  | ø4        | ●      | —      |
| <b>C6</b>  | ø6        | ●      | ●      |
| <b>C8</b>  | ø8        | ●      | ●      |
| <b>C10</b> | ø10       | —      | ●      |
| <b>C12</b> | ø12       | —      | ●      |

| Part numbers of mounting screw | Valve + Individual SUP (EXH) spacer assembly | Valve + Individual SUP (EXH) spacer assembly + Individual EXH (SUP) spacer assembly | Quantity |
|--------------------------------|----------------------------------------------|-------------------------------------------------------------------------------------|----------|
| <b>SY5000</b>                  | <b>SY5000-223-2A</b>                         | <b>SY5000-221-3A</b>                                                                | (2 pcs.) |
| <b>SY7000</b>                  | <b>SV1000-136-12A</b>                        | <b>SY7000-221-3A</b>                                                                | (3 pcs.) |

## Manifold Options

### How to Order Individual SUP/EXH Block Assembly

One-touch fitting  
Straight type

**25A-SY** **5** **0M** - **78** - **1** **A** - **C6**

Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

Block type

|    |                      |
|----|----------------------|
| 78 | Individual SUP block |
| 79 | Individual EXH block |

Port size (Metric)

| Symbol | P, E port | SY5000 | SY7000 |
|--------|-----------|--------|--------|
| C4     | ø4        | ●      | —      |
| C6     | ø6        | ●      | ●      |
| C8     | ø8        | ●      | ●      |
| C10    | ø10       | —      | ●      |
| C12    | ø12       | —      | ●      |

## Manifold Parts Nos.

### ① Manifold block assembly

**25A-SY** **5** **0M** - **2** - **1** **D** **A** - **C6**

Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

Piping direction

|   |                 |
|---|-----------------|
| 1 | Side/Top ported |
| 2 | Bottom ported   |

Wiring type

|   |               |
|---|---------------|
| S | Single wiring |
| D | Double wiring |

A, B port size (One-touch fittings)

| Symbol | A, B port | SY5000 | SY7000 | Note                              |
|--------|-----------|--------|--------|-----------------------------------|
| C4     | ø4        | ●      | —      | Side/Bottom ported<br>Metric size |
| C6     | ø6        | ●      | ●      |                                   |
| C8     | ø8        | ●      | ●      |                                   |
| C10    | ø10       | —      | ●      |                                   |
| C12    | ø12       | —      | ●      | Top ported                        |
| 00     | Plug      | ●      | ●      |                                   |

### ② SUP/EXH block assembly

#### ① D-sub connector <IP40>

**25A-SY** **5** **0M** - **1** - **11** **A** **1** - **C10** -

Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

SUP/EXH block assembly

|    |                        |
|----|------------------------|
| 11 | D-sub connector <IP40> |
|----|------------------------|

Pilot, Silencer/Piping type

| Symbol | Pilot type |          | Built-in silencer | Piping direction |
|--------|------------|----------|-------------------|------------------|
|        | Internal   | External |                   |                  |
| Nil    | ●          | —        | —                 | Side             |
| S      | ●          | —        | ●                 |                  |
| R      | —          | ●        | —                 |                  |
| V      | ●          | —        | —                 | Top              |
| VP     | ●          | —        | ●*1               |                  |
| B      | ●          | —        | —                 | Bottom           |
| BS     | ●          | —        | ●                 |                  |
| BR     | —          | ●        | —                 |                  |

\*1 For silencer (supply side)  
E port is plugged.

Mounting

|     |                                      |
|-----|--------------------------------------|
| Nil | Direct mounting                      |
| D0  | DIN rail mounting (Without DIN rail) |

\* For the bottom-port type, the symbol is nil.

P, E port size (One-touch fittings)

| Symbol | P, E port | SY5000 | SY7000 | Note                                        |
|--------|-----------|--------|--------|---------------------------------------------|
| C10    | ø10       | ●      | —      | Side/Bottom/Top ported<br>Metric size       |
| C12    | ø12       | —      | ●      |                                             |
| 00*2   | Plug      | ●      | ●      | P/E port entry on one side<br>or Top ported |

\*2 It can be selected only if no symbol or "S" or "V" or "B" is selected for the pilot and the piping.

Connector entry direction

|   |         |
|---|---------|
| 1 | Upward  |
| 2 | Lateral |

Clamp bracket assembly

| Series          | Part no.        |
|-----------------|-----------------|
| 25A-SY5000/7000 | 25A-SY50M-15-3A |

\* Part number is for one assembly.

# 25A-SY5000/7000 Series

## Manifold Parts Nos.

### ② Terminal block box

25A – SY **5** 0M – 1 – 1A  – **C10** – 

Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### Pilot, Silencer/Piping type

| Symbol | Pilot type |          | Built-in silencer | Piping direction |
|--------|------------|----------|-------------------|------------------|
|        | Internal   | External |                   |                  |
| Nil    | ●          | —        | —                 | Side             |
| S      | ●          | —        | ●                 |                  |
| R      | —          | ●        | —                 |                  |
| V      | ●          | —        | —                 | Top              |
| VP     | ●          | —        | ●*3               |                  |
| B      | ●          | —        | —                 | Bottom           |
| BS     | ●          | —        | ●                 |                  |
| BR     | —          | ●        | —                 |                  |

\*3 For silencer (supply side)  
E port is plugged.

#### Mounting

|     |                                      |
|-----|--------------------------------------|
| Nil | Direct mounting                      |
| D0  | DIN rail mounting (Without DIN rail) |

\* For the bottom-ported type, the symbol is nil.

#### P, E port size (One-touch fittings)

| Symbol | P, E port | SY5000 | SY7000 | Note                                        |
|--------|-----------|--------|--------|---------------------------------------------|
| C10    | ø10       | ●      | —      | Side/Bottom/Top ported<br>Metric size       |
| C12    | ø12       | —      | ●      |                                             |
| 00*4   | Plug      | ●      | ●      | P/E port entry on one side<br>or Top ported |

\*4 It can be selected only if no symbol or “S” or “V” or “B” is selected for the pilot and the piping.

### Terminal block box housing assembly

25A – VVQC1000 – T0 – 1

### Clamp bracket assembly for terminal block box

25A – SY30M – 15 – 6A

\* Part number is for one assembly.

### Clamp bracket assembly

| Series          | Part no.        |
|-----------------|-----------------|
| 25A-SY5000/7000 | 25A-SY50M-15-3A |

\* Part number is for one assembly.

### ③ Lead wire

25A – SY **5** 0M – 1 – 1A  – **C10** – 

Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### Pilot, Silencer/Piping type

| Symbol | Pilot type |          | Built-in silencer | Piping direction |
|--------|------------|----------|-------------------|------------------|
|        | Internal   | External |                   |                  |
| Nil    | ●          | —        | —                 | Side             |
| S      | ●          | —        | ●                 |                  |
| R      | —          | ●        | —                 |                  |
| V      | ●          | —        | —                 | Top              |
| VP     | ●          | —        | ●*1               |                  |
| B      | ●          | —        | —                 | Bottom           |
| BS     | ●          | —        | ●                 |                  |
| BR     | —          | ●        | —                 |                  |

\*1 For silencer (supply side) E port is plugged.

#### Mounting

|     |                                      |
|-----|--------------------------------------|
| Nil | Direct mounting                      |
| D0  | DIN rail mounting (Without DIN rail) |

\* For the bottom-ported type, the symbol is nil.

#### P, E port size (One-touch fittings)

| Symbol | P, E port | SY5000 | SY7000 | Note                                        |
|--------|-----------|--------|--------|---------------------------------------------|
| C10    | ø10       | ●      | —      | Side/Bottom/Top ported<br>Metric size       |
| C12    | ø12       | —      | ●      |                                             |
| 00*2   | Plug      | ●      | ●      | P/E port entry on one side<br>or Top ported |

\*2 It can be selected only if no symbol or “S” or “V” or “B” is selected for the pilot and the piping.

### Lead wire connector block assembly

25A – SY30M – 14 – 4A –  – 

#### Number of cores

|   |    |
|---|----|
| 1 | 34 |
| 2 | 17 |
| 3 | 9  |

#### Lead wire length [m]

|   |     |
|---|-----|
| 1 | 0.6 |
| 2 | 1.5 |
| 3 | 3   |

### Clamp bracket assembly

| Series          | Part no.        |
|-----------------|-----------------|
| 25A-SY5000/7000 | 25A-SY50M-15-3A |

\* Part number is for one assembly.

## Manifold Parts Nos.

### ④ EX126

**25A – SY 5 0M – 1 – 1A**   – **C10** –  

**Series**

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### • Mounting

|     |                                      |
|-----|--------------------------------------|
| Nil | Direct mounting                      |
| D0  | DIN rail mounting (Without DIN rail) |

\* For the bottom-ported type, the symbol is nil.

#### • Pilot, Silencer/Piping type

| Symbol | Pilot type |          | Built-in silencer | Piping direction |
|--------|------------|----------|-------------------|------------------|
|        | Internal   | External |                   |                  |
| Nil    | ●          | —        | —                 | Side             |
| S      | ●          | —        | ●                 |                  |
| R      | —          | ●        | —                 |                  |
| V      | ●          | —        | —                 | Top              |
| VP     | ●          | —        | ●*3               |                  |
| B      | ●          | —        | —                 | Bottom           |
| BS     | ●          | —        | ●                 |                  |
| BR     | —          | ●        | —                 |                  |

\*3 For silencer (supply side) E port is plugged.

#### • P, E port size (One-touch fittings)

| Symbol | P, E port | SY5000 | SY7000 | Note                                        |
|--------|-----------|--------|--------|---------------------------------------------|
| C10    | ø10       | ●      | —      | Side/Bottom/Top ported<br>Metric size       |
| C12    | ø12       | —      | ●      |                                             |
| 00*4   | Plug      | ●      | ●      | P/E port entry on one side<br>or Top ported |

\*4 It can be selected only if no symbol or “S” or “V” or “B” is selected for the pilot and the piping.

### Terminal block plate assembly

**25A – VVQC1000 – 74A – 2**

### Clamp bracket assembly for EX126 SI unit

**25A – SY30M – 15 – 6A**

\* Part number is for one assembly.

### Clamp bracket assembly

| Series          | Part no.        |
|-----------------|-----------------|
| 25A-SY5000/7000 | 25A-SY50M-15-3A |

\* Part number is for one assembly.

### ⑤ EX260

**25A – SY 5 0M – 1 – 1A**   – **C10** –  

**Series**

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### • Mounting

|     |                                      |
|-----|--------------------------------------|
| Nil | Direct mounting                      |
| D0  | DIN rail mounting (Without DIN rail) |

\* For the bottom-ported type, the symbol is nil.

#### • Pilot, Silencer/Piping type

| Symbol | Pilot type |          | Built-in silencer | Piping direction |
|--------|------------|----------|-------------------|------------------|
|        | Internal   | External |                   |                  |
| Nil    | ●          | —        | —                 | Side             |
| S      | ●          | —        | ●                 |                  |
| R      | —          | ●        | —                 |                  |
| V      | ●          | —        | —                 | Top              |
| VP     | ●          | —        | ●*5               |                  |
| B      | ●          | —        | —                 | Bottom           |
| BS     | ●          | —        | ●                 |                  |
| BR     | —          | ●        | —                 |                  |

\*5 For silencer (supply side) E port is plugged.

#### • P, E port size (One-touch fittings)

| Symbol | P, E port | SY5000 | SY7000 | Note                                        |
|--------|-----------|--------|--------|---------------------------------------------|
| C10    | ø10       | ●      | —      | Side/Bottom/Top ported<br>Metric size       |
| C12    | ø12       | —      | ●      |                                             |
| 00*6   | Plug      | ●      | ●      | P/E port entry on one side<br>or Top ported |

\*6 It can be selected only if no symbol or “S” or “V” or “B” is selected for the pilot and the piping.

### Clamp bracket assembly

| Series          | Part no.        |
|-----------------|-----------------|
| 25A-SY5000/7000 | 25A-SY50M-15-3A |

\* Part number is for one assembly.

# 25A-SY5000/7000 Series

## Manifold Parts Nos.

### ©SUP/EXH block assembly

25A – SY **5** 0M – 3 – 1A   – C10 –  

#### Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### Pilot, Silencer/Piping type

| Symbol | Pilot type |          | Built-in silencer | Piping direction |
|--------|------------|----------|-------------------|------------------|
|        | Internal   | External |                   |                  |
| Nil    | ●          | —        | —                 | Side             |
| S      | ●          | —        | ●                 |                  |
| R      | —          | ●        | —                 |                  |
| V      | ●          | —        | —                 | Top              |
| VP     | ●          | —        | ●*1               |                  |
| B      | ●          | —        | —                 | Bottom           |
| BS     | ●          | —        | ●                 |                  |
| BR     | —          | ●        | —                 |                  |

\*1 For silencer (supply side)

E port is plugged.

\* "B" for the bottom-ported type can be selected for the SY5000/7000 series.

#### Mounting

|     |                                      |
|-----|--------------------------------------|
| Nil | Direct mounting                      |
| D0  | DIN rail mounting (Without DIN rail) |

\* For the bottom-ported type, the symbol is nil.

#### P, E port size (One-touch fittings)

| Symbol | P, E port | SY5000 | SY7000 | Note                                     |
|--------|-----------|--------|--------|------------------------------------------|
| C10    | ø10       | ●      | —      | Side/Bottom/Top ported<br>Metric size    |
| C12    | ø12       | —      | ●      |                                          |
| 00*2   | Plug      | ●      | ●      | P/E port entry on one side or Top ported |

\*2 It can be selected only if no symbol or "S" or "V" or "B" is selected for the pilot and the piping.

## ■ Cover assembly/Silencer cover assembly/Port block assembly for SUP/EXH (end) block assembly

### Cover assembly (Internal pilot)

25A – SY **5** 0M – 4 – 1 A

### Silencer cover assembly (Internal pilot, Built-in silencer)

25A – SY **5** 0M – 5 – 1 A

### Port block assembly (Side ported, External pilot)

25A – SY **5** 0M – 6 – 1 AR   – 00  

| A, B port<br>One-touch fittings piping direction |                        |
|--------------------------------------------------|------------------------|
| Nil                                              | Straight (Side ported) |

#### X, PE port One-touch fitting type

| Symbol | X, PE port<br>Metric size | SY5000 |    | SY7000 |    |
|--------|---------------------------|--------|----|--------|----|
|        |                           | ø4     | ø6 | ø4     | ø6 |
| Nil    |                           | ●      | —  | —      | ●  |

### Port block assembly (Top ported, Internal pilot, for silencer (supply side))

25A – SY **5** 0M – 6 – 3 AV – C10

### Port block assembly (Top ported, Internal pilot)

25A – SY **5** 0M – 6 – 1 A   V – C10

#### Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
|-----|----------------|

#### P, E port size (One-touch fittings)

| Symbol | P, E port | SY5000 | SY7000 |
|--------|-----------|--------|--------|
| C10    | ø10       | ●      | —      |
| C12    | ø12       | —      | ●      |

## ■ Name plate bracket assembly (For SY5000 only)

25A – SY50M – 85 – 1A

# 25A-SY5000/7000 Series

## Valve Replacement Parts

### How to Order Pilot Valves

Pilot cover  
**25A-SY50V-25A**

**25A-V112**     - **5** **A**

• **Pilot valve option**

|            |                               |
|------------|-------------------------------|
| <b>Nil</b> | Standard (0.7 MPa)            |
| <b>B</b>   | Quick response type (0.7 MPa) |

• **Rated voltage**

|          |        |
|----------|--------|
| <b>5</b> | 24 VDC |
| <b>6</b> | 12 VDC |

• **Coil type**

|            |                                           |
|------------|-------------------------------------------|
| <b>Nil</b> | Standard                                  |
| <b>T</b>   | With power-saving circuit (Made to Order) |

### How to Order Port Block Assembly

**25A-SY**   **0V-6A**   -   -    

• **Series**

|          |      |
|----------|------|
| <b>5</b> | 5000 |
| <b>7</b> | 7000 |

• **Pilot type**

|            |                |
|------------|----------------|
| <b>Nil</b> | Internal pilot |
|------------|----------------|

• **Option for mounting**

|            |                                                         |
|------------|---------------------------------------------------------|
| <b>Nil</b> | Standard (Valve mounting screw without drop prevention) |
| <b>1</b>   | Drop prevention type valve mounting screw               |

• **Thread type**

|            |      |
|------------|------|
| <b>Nil</b> | Rc   |
| <b>F</b>   | G    |
| <b>N</b>   | NPT  |
| <b>T</b>   | NPTF |

• **A, B port size**

**Thread piping**

| Symbol    | Port size | Applicable series |
|-----------|-----------|-------------------|
| <b>02</b> | 1/4       | <b>SY7000</b>     |

**Metric size (One-touch fitting)**

| Symbol     | Port size | Applicable series |               |
|------------|-----------|-------------------|---------------|
|            |           | <b>SY5000</b>     | <b>SY7000</b> |
| <b>C4</b>  | ø4        | ●                 | —             |
| <b>C6</b>  | ø6        | ●                 | ●             |
| <b>C8</b>  | ø8        | ●                 | ●             |
| <b>C10</b> | ø10       | —                 | ●             |
| <b>C12</b> | ø12       | —                 | ●             |

### Body Cover Assembly

\* Used when the top-ported type is changed to the side or bottom-ported type

| Series        |                | Part no.                                                |                                           |
|---------------|----------------|---------------------------------------------------------|-------------------------------------------|
|               |                | Standard (Valve mounting screw without drop prevention) | Drop prevention type valve mounting screw |
| <b>SY5000</b> | Internal pilot | 25A-SY50V-16A                                           | 25A-SY50V-16A-1                           |
|               | External pilot | 25A-SY50V-16AR                                          | 25A-SY50V-16AR-1                          |
| <b>SY7000</b> | Internal pilot | 25A-SY70V-16A                                           | 25A-SY70V-16A-1                           |
|               | External pilot | 25A-SY70V-16AR                                          | 25A-SY70V-16AR-1                          |

\* The part number is not indicated on the product.

# 25A-SY5000/7000 Series

## With Residual Pressure Release Valve



### How to Order (With mounting screw)

25A-SY **5** **3** **0** **0** **1** **2** **3** **4** **5** **6** **1** - **E**

Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

Type of actuation

|   |                            |
|---|----------------------------|
| 3 | 3-position closed center*1 |
|---|----------------------------|

\*1 Only the closed center type is available.

Base mounted

(The top-ported type is not available.)

With residual pressure release valve

|   |                                        |
|---|----------------------------------------|
| E | With residual pressure release valve*2 |
|---|----------------------------------------|

\*2 Mounting screw types, hexagon socket head cap screw B and drop prevention type K, H are not available.

Protective class class III (Mark: )

#### 1 Seal type

|   |             |
|---|-------------|
| 0 | Rubber seal |
|---|-------------|

#### 2 Pilot valve option

|     |                               |
|-----|-------------------------------|
| Nil | Standard (0.7 MPa)            |
| B   | Quick response type (0.7 MPa) |

#### 3 Coil type

|     |                                                  |
|-----|--------------------------------------------------|
| Nil | Standard                                         |
| T   | With power saving circuit (Continuous duty type) |

\* Be sure to select the power saving circuit type if the valve is to be continuously energized for long periods of time.

\* Be careful of the energizing time when the power saving circuit is selected. Refer to the Web Catalog for details.

#### 4 Rated voltage

|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |

\* The applicable rated voltage varies depending on the manifold wiring type. Refer to the "How to Order Manifolds" pages.

#### 5 Light/surge voltage suppressor and common specification

| Symbol | With light | Surge voltage suppressor | Common specification |
|--------|------------|--------------------------|----------------------|
| Nil    | —          | —                        | Non-polar            |
| R      | —          | ●                        |                      |
| U      | ●          |                          |                      |
| S      | —          |                          |                      |
| Z      | ●          |                          |                      |
| NS     | —          |                          |                      |
| NZ     | ●          |                          | Negative common      |

\* Only "Z" and "NZ" types are available with a power saving circuit.

#### 6 Manual override





|                                                                                                                                   |                                                                                                                                    |
|-----------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| <b>Nil:</b><br>Non-locking push type<br>       | <b>D:</b><br>Push-turn locking slotted type<br> |
| <b>E:</b><br>Push-turn locking lever type<br> | <b>F:</b><br>Slide locking type<br>            |

Table 1. Valve mounting screw

| SY5000                    | SY7000                     |
|---------------------------|----------------------------|
| SY5000-221-9A<br>(2 pcs.) | SY7000-221-14A<br>(3 pcs.) |

# 25A-SY5000/7000 Series

## Made to Order

Please contact SMC for detailed dimensions, specifications, and lead times.



### 1 With Safety Slide Locking Manual Override

Symbol

**-X13**

A safety lock is added to the slide locking manual override.

25A-SY  $\frac{5}{7}$   $\frac{00}{3}$   $\square\square\square\square$  -  $\square\square$  G1-X13

- Entry is the same as 25A-standard products. Specifications and performance are the same as standard products.



### 2 2-Position Single Solenoid Valve with Built-in Return Spring

Symbol

**-X350**

A 2-position single solenoid valve with a spring built into the main valve

The main valve returns to origin (the OFF position) via the spring when it is not pressurized.


25A-SY  $\frac{5}{7}$  1  $\frac{0}{3}$  0  $\square\square\square\square$  -  $\square\square$  1-X350

- Entry is the same as 25A-standard products. Specifications and performance are the same as standard products.


\* For the external pilot type, exhaust the external pilot (X) port and the main pressure simultaneously.  
If the main pressure cannot be exhausted due to the system specifications, please contact SMC separately.

\* The manual option is only applicable to the non-locking push type.

Internal pilot type



External pilot type






## How to Order

In the case of **Sub-plate** (Sub-plate single unit part no.)

\* Without valve

**25A-SY** **5** **0M-27-1-W5-** **02**

Series compatible with  
secondary batteries



\* Base gasket is included.  
\* Valve mounting screws are not included.

### 1 Series

|          |        |
|----------|--------|
| <b>5</b> | SY5000 |
| <b>7</b> | SY7000 |

### 2 Wiring specifications

|           |                                    |
|-----------|------------------------------------|
| <b>WO</b> | Without M12 connector cable        |
| <b>W5</b> | With M12 connector cable (3000 mm) |

- \* Refer to the table below for connector cable part numbers.
- \* When ordering a product with M12 connector cable, the connector cable is included.

### 3 Port location (Sub-plate)

|            |                                                   |
|------------|---------------------------------------------------|
| <b>Nil</b> | Side ported                                       |
| <b>B</b>   | Bottom ported                                     |
| <b>V</b>   | Top ported [1(P), 5(EA), 3(EB) port: Side ported] |

### 5 Sub-plate thread type

|            |    |
|------------|----|
| <b>Nil</b> | Rc |
| <b>F</b>   | G  |

### 4 Port size (Sub-plate)

| Symbol    | Port size | Applicable series |
|-----------|-----------|-------------------|
| <b>02</b> | 1/4       | SY5000            |
| <b>03</b> | 3/8       | SY7000            |


How to Order when mounting a special order (including Made-to-Order specification) valve on the sub-plate (Ordering example: X350)

**25A-SY50M-27-1-W5-02** ..... 1 set (Sub-plate single unit part no.)  
\***25A-SY5100-5U1-X350** ..... 1 set (Built-in return spring specification)

Ordering example when mounting a manifold option (spacer, etc.)

**25A-SY50M-27-1-W5-02** ..... 1 set (Sub-plate single unit part no.)  
\***25A-SY5400-5U1** ..... 1 set (3-position exhaust center part no.)  
\***25A-SY50M-39-1A-C6** ..... 1 set (Individual EXH spacer part no.)

## Sub-plate Parts Nos.

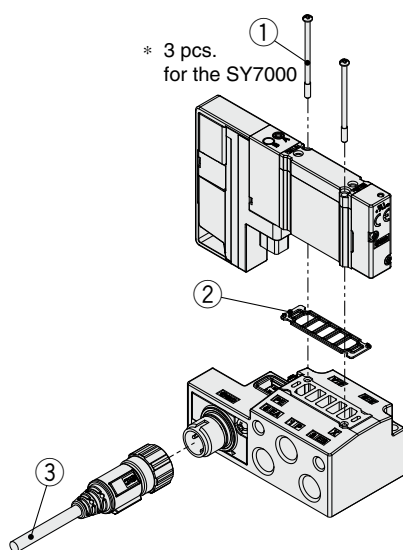

\* 3 pcs.  
for the SY7000

| No. | Description                    | Part no.                            |                                     | Note                                                                                 |
|-----|--------------------------------|-------------------------------------|-------------------------------------|--------------------------------------------------------------------------------------|
|     |                                | SY5000                              | SY7000                              |                                                                                      |
| ①   | Round head combination screw   | <b>SY5000-223-1A</b><br>(M3 x 32.5) | <b>SY7000-224-1A</b><br>(M3 x 36.5) | Part numbers shown on the left are for 10 valves (20 pcs.). (30 pcs. for the SY7000) |
| ②   | Base gasket (for sub-plate)    | <b>SY50M-11-1A</b>                  | <b>SY70M-11-1A</b>                  | Part numbers shown on the left are for 10 valves (10 pcs.).                          |
| ③   | M12 waterproof connector cable | <b>90-ZS-37-A-X258</b>              |                                     | Cable length: 3000 mm                                                                |

# 5-Port Solenoid Valve Body Ported/Single Unit



## 25A-SY5000/7000/9000 Series



### How to Order

25A - SY 5 1 20 - 5 L - 01 - - - -

Series compatible  
with secondary  
batteries

#### Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |
| 9 | SY9000 |

#### Type of actuation

|     |             |                 |
|-----|-------------|-----------------|
| 1   | 2-position  | Single          |
| 2   |             | Double          |
| 3   |             | Closed center   |
| 4   | 3-position  | Exhaust center  |
| 5   |             | Pressure center |
| A*1 | 4-position  | N.C./N.C.       |
| B*1 | dual 3-port | N.O./N.O.       |
| C*1 |             | N.C./N.O.       |

\*1 "A," "B," and "C" are only selectable for the "X701."

#### Coil specifications

|     |                                             |
|-----|---------------------------------------------|
| Nil | Standard                                    |
| T   | With power-saving circuit (24, 12 VDC only) |

\* Power-saving circuit is not available in the case of "D" or "Y" type.

#### For DC

|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC  |
| S | 5 VDC  |
| R | 3 VDC  |

#### Rated voltage

#### For AC ( %Hz)

|   |                   |
|---|-------------------|
| 1 | 100 VAC           |
| 2 | 200 VAC           |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

\* DC specifications of type "D" and "Y" are only available with 12 and 24 VDC.

\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

#### Electrical entry

| 24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC |                                   |                                   |                       | 24, 12 VDC/100, 110, 200, 220 VAC |
|--------------------------------------------|-----------------------------------|-----------------------------------|-----------------------|-----------------------------------|
| Grommet                                    | L plug connector                  | M plug connector                  |                       | DIN terminal                      |
| G: With lead wire (Length 300 mm)          | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | MN: Without lead wire | D, Y: With connector              |
|                                            |                                   |                                   |                       |                                   |
| H: With lead wire (Length 600 mm)          | LN: Without lead wire             | LO: Without connector             | MO: Without connector |                                   |
|                                            |                                   |                                   |                       |                                   |

- \* "LN," "MN" type: with 2 sockets.
- \* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).
- \* Refer to the standard products for the lead wire length of L and M plug connectors and the connector assembly with cover for L and M plug connector.

#### CE/UKCA-compliant

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

#### Made to order

|      |                        |
|------|------------------------|
| Nil  | —                      |
| X701 | 4-position dual 3-port |

\* "X701" is only available for the SY5000/7000.

#### Bracket

|     |                                            |
|-----|--------------------------------------------|
| Nil | Without bracket                            |
| F1  | With foot bracket (2-position single only) |
| F2  | With side bracket                          |

\*2 SY9000 has no bracket.

#### Thread type

|     |    |
|-----|----|
| Nil | Rc |
| F   | G  |

#### A, B port size Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 01     | 1/8       | SY5000            |
| 02     | 1/4       | SY7000<br>SY9000  |
| 03     | 3/8       | SY9000            |

#### One-touch fitting (Metric size)

| Symbol | Port size                 | Applicable series |
|--------|---------------------------|-------------------|
| C4     | One-touch fitting for ø4  | SY5000            |
| C6     | One-touch fitting for ø6  |                   |
| C8     | One-touch fitting for ø8  |                   |
| C8     | One-touch fitting for ø8  | SY7000            |
| C10    | One-touch fitting for ø10 | SY9000            |
| C12    | One-touch fitting for ø12 | SY9000            |

#### Manual override

|                                |                                       |                                     |
|--------------------------------|---------------------------------------|-------------------------------------|
| Nil: Non-locking push type<br> | D: Push-turn locking slotted type<br> | E: Push-turn locking lever type<br> |
|--------------------------------|---------------------------------------|-------------------------------------|

#### Light/surge voltage suppressor

##### Electrical entry for G, H, L, M

|     |                                                      |
|-----|------------------------------------------------------|
| Nil | Without light/surge voltage suppressor               |
| S   | With surge voltage suppressor                        |
| Z   | With light/surge voltage suppressor                  |
| R   | With surge voltage suppressor (Non-polar type)       |
| U   | With light/surge voltage suppressor (Non-polar type) |

- \* There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.
- \* For "R" and "U," DC voltage is only available.
- \* Power-saving circuit is only available in the "Z" type.

##### Electrical entry for D, Y

|     |                                        |
|-----|----------------------------------------|
| Nil | Without light/surge voltage suppressor |
| S   | With surge voltage suppressor          |
| Z   | With light/surge voltage suppressor    |

\* There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.

\* Manifold mounting screws and gaskets are included with the manifold, but they are not included when ordering a body ported solenoid valve as a single unit. Order them separately if necessary. (For details, refer to page 90.)

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# 5-Port Solenoid Valve Base Mounted/Single Unit



## 25A-SY5000/7000/9000 Series

### How to Order



25A - SY 5 2 40 [ ] [ ] - 5 L [ ] [ ] - [ ] [ ] - [ ] [ ]

Series compatible  
with secondary  
batteries

#### Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |
| 9 | SY9000 |

#### Type of actuation

|     |                           |
|-----|---------------------------|
| 1   | Single                    |
| 2   | 2-position Double         |
| 3   | Closed center             |
| 4   | 3-position Exhaust center |
| 5   | Pressure center           |
| A*1 | 4-position N.C./N.C.      |
| B*1 | dual 3-port N.O./N.O.     |
| C*1 | N.C./N.O.                 |

\*1 "A," "B," and "C" are only selectable for the "X701."

#### Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

\* Only the internal pilot type is selectable for the "X701."

#### Coil specifications

|     |                                             |
|-----|---------------------------------------------|
| Nil | Standard                                    |
| T   | With power-saving circuit (24, 12 VDC only) |

\* Power-saving circuit is not available in the case of "D" or "Y" type.

#### Rated voltage

##### For DC

|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC  |
| S | 5 VDC  |
| R | 3 VDC  |

##### For AC (50/60 Hz)

|   |                   |
|---|-------------------|
| 1 | 100 VAC           |
| 2 | 200 VAC           |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

\* DC specifications of type "D" and "Y" are only available with 12 and 24 VDC.  
\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

#### Thread type

|     |    |
|-----|----|
| Nil | Rc |
| F   | G  |

#### Port size

| Symbol | Port size          | Applicable series |
|--------|--------------------|-------------------|
| Nil    | Without sub-plate  |                   |
| 02     | 1/4 With sub-plate | SY5000<br>SY7000  |
| 03     | 3/8 With sub-plate | SY7000<br>SY9000  |
| 04     | 1/2 With sub-plate | SY9000            |

#### CE/UKCA-compliant

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |


\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

#### Made to order

|      |                        |
|------|------------------------|
| Nil  | —                      |
| X701 | 4-position dual 3-port |

\* "X701" is only available for the SY5000/7000.

#### Manual override

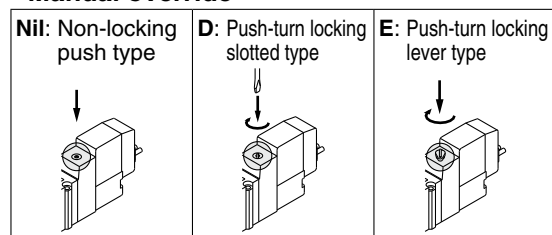

#### Light/surge voltage suppressor

##### Electrical entry for G, H, L, M

|     |                                                      |
|-----|------------------------------------------------------|
| Nil | Without light/surge voltage suppressor               |
| S   | With surge voltage suppressor                        |
| Z   | With light/surge voltage suppressor                  |
| R   | With surge voltage suppressor (Non-polar type)       |
| U   | With light/surge voltage suppressor (Non-polar type) |

\* There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.  
\* For "R" and "U," DC voltage is only available.  
\* Power-saving circuit is only available in the "Z" type.

##### Electrical entry for D, Y

|     |                                                      |
|-----|------------------------------------------------------|
| Nil | Without light/surge voltage suppressor               |
| S   | With surge voltage suppressor (Non-polar type)       |
| Z   | With light/surge voltage suppressor (Non-polar type) |

\* There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.

#### Electrical entry

| 24, 12, 6, 5, 3 VDC / 100, 110, 200, 220 VAC |                                   |                                   |                       | 24, 12 VDC / 100, 110, 200, 220 VAC |
|----------------------------------------------|-----------------------------------|-----------------------------------|-----------------------|-------------------------------------|
| Grommet                                      | L plug connector                  | M plug connector                  |                       | DIN terminal                        |
| G: With lead wire (Length 300 mm)            | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | MN: Without lead wire | D,Y: With connector                 |
|                                              |                                   |                                   |                       |                                     |
| H: With lead wire (Length 600 mm)            | LN: Without lead wire             | LO: Without connector             | MO: Without connector |                                     |
|                                              |                                   |                                   |                       |                                     |

\* "LN," "MN" type: with 2 sockets.

\* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).

\* Refer to the standard products for the lead wire length of L and M plug connectors and the connector assembly with cover for L and M plug connector.

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product



Click here for details. >>>

# 5-Port Solenoid Valve Body Ported Manifold Bar Stock Type/Individual Wiring

## 25A-SY5000/7000 Series



Type **20**

### How to Order Manifolds



25A – SS5Y **5** – 20 – **05** –   –  

- Series compatible with secondary batteries

#### Manifold series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

#### CE/UKCA-compliant

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

#### Thread type

|     |    |
|-----|----|
| Nil | Rc |
| 00F | G  |

#### Stations

|    |             |
|----|-------------|
| 02 | 2 stations  |
| ⋮  | ⋮           |
| 20 | 20 stations |

\* The blanking plate assembly is included in this number.

\* The blanking plate assembly has different dimensions. Refer to page 91.

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valves

**25A – SY 5 1 20 [ ] – 5 L [ ] [ ] – 01 [ ] – [ ]**

• **Series compatible with secondary batteries**

• **Series**

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

• **Type of actuation**

|   |                            |
|---|----------------------------|
| 1 | 2-position single          |
| 2 | 2-position double          |
| 3 | 3-position closed center   |
| 4 | 3-position exhaust center  |
| 5 | 3-position pressure center |

• **Coil specifications**

|     |                                                 |
|-----|-------------------------------------------------|
| Nil | Standard                                        |
| T   | With power-saving circuit (24 VDC, 12 VDC only) |

\* Power-saving circuit is not available in the case of “D” or “Y” type.

• **Rated voltage**

| For DC |        | For AC (50/60Hz) |                   |
|--------|--------|------------------|-------------------|
| 5      | 24 VDC | 1                | 100 VAC           |
| 6      | 12 VDC | 2                | 200 VAC           |
| V      | 6 VDC  | 3                | 110 VAC [115 VAC] |
| S      | 5 VDC  | 4                | 220 VAC [230 VAC] |
| R      | 3 VDC  |                  |                   |

\* DC specifications of type “D” and “Y” are only available with 12 and 24 VDC.  
\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

• **CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

• **Thread type**

|     |    |
|-----|----|
| Nil | Rc |
| F   | G  |

• **A, B port size Thread piping**

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 01     | 1/8       | SY5000            |
| 02     | 1/4       | SY7000            |

• **One-touch fitting (Metric size)**

| Symbol | Port size                 | Applicable series |
|--------|---------------------------|-------------------|
| C4     | One-touch fitting for ø4  | SY5000            |
| C6     | One-touch fitting for ø6  |                   |
| C8     | One-touch fitting for ø8  |                   |
| C8     | One-touch fitting for ø8  | SY7000            |
| C10    | One-touch fitting for ø10 |                   |

• **Manual override**

|     |                                |
|-----|--------------------------------|
| Nil | Non-locking push type          |
| D   | Push-turn locking slotted type |
| E   | Push-turn locking lever type   |

• **Light/surge voltage suppressor**

**Electrical entry for G, H, L, M**

|     |                                                      |
|-----|------------------------------------------------------|
| Nil | Without light/surge voltage suppressor               |
| S   | With surge voltage suppressor                        |
| Z   | With light/surge voltage suppressor                  |
| R   | With surge voltage suppressor (Non-polar type)       |
| U   | With light/surge voltage suppressor (Non-polar type) |

\* There is no “S” type for AC mode, since a rectifier prevents surge voltage generation.  
\* For “R” and “U,” DC voltage is only available.  
\* Power-saving circuit is only available in the “Z” type.

**Electrical entry for D, Y**

|     |                                                      |
|-----|------------------------------------------------------|
| Nil | Without light/surge voltage suppressor               |
| S   | With surge voltage suppressor (Non-polar type)       |
| Z   | With light/surge voltage suppressor (Non-polar type) |

\* There is no “S” type for AC mode, since a rectifier prevents surge voltage generation.

• **Electrical entry**

| 24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC                                   |                                                                                        |                                                                                        | 24, 12 VDC/<br>100, 110, 200,<br>220 VAC |
|------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|------------------------------------------|
| Grommet                                                                      | L plug connector                                                                       | M plug connector                                                                       | DIN terminal                             |
| G: With lead wire<br>(Length 300 mm)<br>H: With lead wire<br>(Length 600 mm) | L: With lead wire<br>(Length 300 mm)<br>LN: Without lead wire<br>LO: Without connector | M: With lead wire<br>(Length 300 mm)<br>MN: Without lead wire<br>MO: Without connector | D: With connector<br>Y: With connector   |

\* “LN,” “MN” type: with 2 sockets.  
\* “Y” type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).  
\* Refer to the standard products for the lead wire length of L and M plug connectors and the connector assembly with cover for L and M plug connector.

**Refer to the Web Catalog.**

• Specifications/Dimensions  
\* Same as the standard product

Click here for details. >>>



Type **23**

# 5-Port Solenoid Valve Body Ported Manifold Stacking Type/Individual Wiring

## 25A-SY9000 Series

CE UK  
CA [Option]

### How to Order Manifold

Type 23/External pilot capable

**25A-SS5Y9-23-05** - [ ] - [ ]

• Series compatible with secondary batteries

| Manifold series |        |
|-----------------|--------|
| 9               | SY9000 |

• Valve stations

| Symbol | Stations    |
|--------|-------------|
| 02     | 2 stations  |
| ⋮      | ⋮           |
| 20     | 20 stations |

\* This also includes the number of blanking plate assemblies.

• Thread type

|     |    |
|-----|----|
| Nil | Rc |
| 00F | G  |


• CE/UKCA-compliant

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

Note) AC-type models that are CE/UKCA-compliant have DIN terminals only.

### How to Order Manifold Assembly (Example)

#### Example

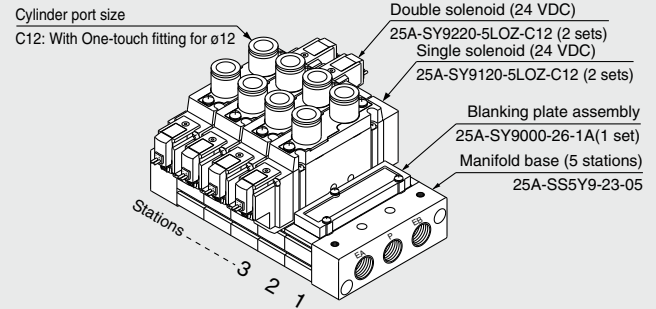

25A-SS5Y9-23-05 ..... 1 set (Type 23, 5-station manifold base part no.)  
 \* 25A-SY9000-26-1A ..... 1 set (Blanking plate assembly part no.)  
 \* 25A-SY9120-5LOZ-C12 ... 2 sets (Single solenoid part no.)  
 \* 25A-SY9220-5LOZ-C12 ... 2 sets (Double solenoid part no.)

→ The asterisk denotes the symbol for assembly.  
 Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valve

Note) AC-type models that are CE/UKCA-compliant have DIN terminals only.

**25A – SY 9 1 20 [ ] [ ] – 5 L [ ] [ ] – 02 [ ] – [ ]**

• **Series compatible with secondary batteries**

• **Series**

|   |        |
|---|--------|
| 9 | SY9000 |
|---|--------|

• **Type of actuation**

|   |                            |
|---|----------------------------|
| 1 | 2 position single          |
| 2 | 2 position double          |
| 3 | 3 position closed center   |
| 4 | 3 position exhaust center  |
| 5 | 3 position pressure center |

• **Pilot specifications**

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

\* In the case of external pilot specifications, it cannot be used as a single unit.

• **Coil specifications**

|     |                                                 |
|-----|-------------------------------------------------|
| Nil | Standard                                        |
| T   | With power saving circuit (24 VDC, 12 VDC only) |

\* Power saving circuit is not available in the case of D or Y type.

• **Rated voltage**

| For DC |        | For AC (50/60 Hz) |                   |
|--------|--------|-------------------|-------------------|
| 5      | 24 VDC | 1                 | 100 VAC           |
| 6      | 12 VDC | 2                 | 200 VAC           |
| V      | 6 VDC  | 3                 | 110 VAC [115 VAC] |
| S      | 5 VDC  | 4                 | 220 VAC [230 VAC] |
| R      | 3 VDC  |                   |                   |

\* DC specifications of type D and Y is only available with 12 and 24 VDC.  
Note) AC-type models that are CE/UKCA-compliant have DIN terminals only.

• **Thread type**

|     |    |
|-----|----|
| Nil | Rc |
| F   | G  |

• **CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

Note) AC-type models that are CE/UKCA-compliant have DIN terminals only.

• **A, B port size Thread piping**

| Symbol | Port size |
|--------|-----------|
| 02     | 1/4       |
| 03     | 3/8       |

• **One-touch fitting (Metric size)**

| Symbol | Port size                 |
|--------|---------------------------|
| C8     | One-touch fitting for ø8  |
| C10    | One-touch fitting for ø10 |
| C12    | One-touch fitting for ø12 |

• **Manual override**

|     |                                |
|-----|--------------------------------|
| Nil | Non-locking push type          |
| D   | Push-turn locking slotted type |
| E   | Push-turn locking lever type   |

• **Light/Surge voltage suppressor**

**Electrical entry for G, H, L, M, W**

|     |                                                      |
|-----|------------------------------------------------------|
| Nil | Without light/surge voltage suppressor               |
| S   | With surge voltage suppressor                        |
| Z   | With light/surge voltage suppressor                  |
| R   | With surge voltage suppressor (Non-polar type)       |
| U   | With light/surge voltage suppressor (Non-polar type) |

\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.  
\* For "R" and "U", DC voltage is only available.  
\* Power saving circuit is only available in the "Z" type.

**Electrical entry for D, Y**

|     |                                        |
|-----|----------------------------------------|
| Nil | Without light/surge voltage suppressor |
| S   | With surge voltage suppressor          |
| Z   | With light/surge voltage suppressor    |

\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

• **Electrical entry**

| 24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC |                                   |                                   | 24, 12 VDC/100, 110, 200, 220 VAC |
|--------------------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Grommet                                    | L plug connector                  | M plug connector                  | DIN terminal                      |
| G: With lead wire (Length 300 mm)          | L: With lead wire (Length 300 mm) | M: With lead wire (Length 300 mm) | D: With connector                 |
| H: With lead wire (Length 600 mm)          | LN: Without lead wire             | MN: Without lead wire             | Y: With connector                 |
|                                            | LO: Without connector             | MO: Without connector             |                                   |

Note) Manifold mounting screws and gaskets are included with the manifold, but they are not included when ordering a body ported solenoid valve as a single unit. Order them separately if necessary. (For details, refer to page 90.)

\* "LN," "MN" type: with 2 sockets.  
\* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).  
\* Refer to the standard products for the lead wire length of L and M plug connectors and the connector assembly with cover for L and M plug connector.

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>




Type **41**  
Type **42**

# 5-Port Solenoid Valve Base Mounted Manifold Bar Stock Type/Individual Wiring **25A-SY5000/7000 Series**



## How to Order Manifolds



### Type 41/Compact type

**25A – SS5Y 5 – 41 – 05 – C8** [ ] [ ]

- Series compatible with secondary batteries

Manifold series

|   |        |
|---|--------|
| 5 | SY5000 |
|---|--------|

Stations

|    |             |
|----|-------------|
| 02 | 2 stations  |
| ⋮  | ⋮           |
| 20 | 20 stations |

\* The blanking plate assembly is included in this number.

Thread type

|     |    |
|-----|----|
| Nil | Rc |
| F   | G  |

A, B port size  
Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 01     | 1/8       | SY5000            |

One-touch fitting (Metric size)

| Symbol | Port size                | Applicable series |
|--------|--------------------------|-------------------|
| C6     | One-touch fitting for ø6 | SY5000            |
| C8     | One-touch fitting for ø8 | SY5000            |

One-touch fitting (Inch size)

| Symbol | Port size                    | Applicable series |
|--------|------------------------------|-------------------|
| N7     | One-touch fitting for ø1/4"  | SY5000            |
| N9     | One-touch fitting for ø5/16" | SY5000            |

CE/UKCA-compliant

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

### Type 42/External pilot capable

**25A – SS5Y 5 – 42 – 05 – C8** [ ] [ ]

- Series compatible with secondary batteries

Manifold series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

Stations

|    |             |
|----|-------------|
| 02 | 2 stations  |
| ⋮  | ⋮           |
| 20 | 20 stations |

\* The blanking plate assembly is included in this number.

Thread type

|     |    |
|-----|----|
| Nil | Rc |
| F   | G  |

A, B port size  
Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 02     | 1/4       | SY5000            |
| 02     | 1/4       | SY7000            |

One-touch fitting (Metric size)

| Symbol | Port size                 | Applicable series |
|--------|---------------------------|-------------------|
| C6     | One-touch fitting for ø6  | SY5000            |
| C8     | One-touch fitting for ø8  | SY5000            |
| C10    | One-touch fitting for ø10 | SY7000            |

One-touch fitting (Inch size)

| Symbol | Port size                    | Applicable series |
|--------|------------------------------|-------------------|
| N7     | One-touch fitting for ø1/4"  | SY5000            |
| N9     | One-touch fitting for ø5/16" | SY5000            |
| N11    | One-touch fitting for ø3/8"  | SY7000            |

CE/UKCA-compliant

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

\* The blanking plate assembly has different dimensions. Refer to page 91.

Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valves

25A – SY 5 2 40 [ ] [ ] – 5 L [ ] [ ] – [ ]

- Series compatible with secondary batteries

### Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### Type of actuation

|   |                            |
|---|----------------------------|
| 1 | 2-position single          |
| 2 | 2-position double          |
| 3 | 3-position closed center   |
| 4 | 3-position exhaust center  |
| 5 | 3-position pressure center |

### Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

### Coil specifications

|     |                                                 |
|-----|-------------------------------------------------|
| Nil | Standard                                        |
| T   | With power-saving circuit (24 VDC, 12 VDC only) |

\* Power-saving circuit is not available in the case of "D" or "Y" type.

### Rated voltage

#### For DC

|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC  |
| S | 5 VDC  |
| R | 3 VDC  |

#### For AC (50/60 Hz)

|   |                   |
|---|-------------------|
| 1 | 100 VAC           |
| 2 | 200 VAC           |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

\* DC specifications of type "D" and "Y" are only available with 12 and 24 VDC.

\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

### CE/UKCA-compliant

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* AC-type models that are CE/UKCA-compliant have DIN terminals only.

### Manual override

|     |                                |
|-----|--------------------------------|
| Nil | Non-locking push type          |
| D   | Push-turn locking slotted type |
| E   | Push-turn locking lever type   |

### Light/surge voltage suppressor

#### Electrical entry for G, H, L, M

|     |                                                      |
|-----|------------------------------------------------------|
| Nil | Without light/surge voltage suppressor               |
| S   | With surge voltage suppressor                        |
| Z   | With light/surge voltage suppressor                  |
| R   | With surge voltage suppressor (Non-polar type)       |
| U   | With light/surge voltage suppressor (Non-polar type) |

\* There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.

\* For "R" and "U," DC voltage is only available.

\* Power-saving circuit is only available in the "Z" type.

#### Electrical entry for D, Y

|     |                                                      |
|-----|------------------------------------------------------|
| Nil | Without light/surge voltage suppressor               |
| S   | With surge voltage suppressor (Non-polar type)       |
| Z   | With light/surge voltage suppressor (Non-polar type) |

\* There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.

### Electrical entry

| 24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC |                                          |                                          | 24, 12 VDC/<br>100, 110, 200,<br>220 VAC |
|--------------------------------------------|------------------------------------------|------------------------------------------|------------------------------------------|
| Grommet                                    | L plug connector                         | M plug connector                         | DIN terminal                             |
| <b>G:</b> With lead wire (Length 300 mm)   | <b>L:</b> With lead wire (Length 300 mm) | <b>M:</b> With lead wire (Length 300 mm) | <b>D:</b> With connector                 |
| <b>H:</b> With lead wire (Length 600 mm)   | <b>LN:</b> Without lead wire             | <b>MN:</b> Without lead wire             | <b>Y:</b> With connector                 |
|                                            | <b>LO:</b> Without connector             | <b>MO:</b> Without connector             |                                          |

\* "LN," "MN" type: with 2 sockets.

\* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).

\* Refer to the standard products for the lead wire length of L and M plug connectors and the connector assembly with cover for L and M plug connector.

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



Type **43**

# 5-Port Solenoid Valve Base Mounted Manifold Stacking Type/Individual Wiring

## 25A-SY9000 Series

[Option]  
Note) AC-type models that are  
CE/UKCA-compliant  
have DIN terminals only.

### How to Order Manifold

**25A-SS5Y9-43-05U-C8**

- Series compatible with secondary batteries
- Manifold series
 

|   |        |
|---|--------|
| 9 | SY9000 |
|---|--------|
- Valve stations
 

| Symbol | Stations    |
|--------|-------------|
| 02     | 2 stations  |
| ⋮      | ⋮           |
| 20     | 20 stations |

\* This also includes the number of blanking plate assemblies.
- P, R port outlets
 

| Symbol | Port outlet | Applicable stations |
|--------|-------------|---------------------|
| U      | U side      | 2 to 10 stations    |
| D      | D side      |                     |
| B      | Both sides  | 2 to 20 stations    |
- SUP/EXH block assembly specifications
 

| Symbol | Specifications                        |
|--------|---------------------------------------|
| Nil    | Standard/Internal pilot specification |
| R      | External pilot specification          |
| S      | Internal pilot/Built-in silencer      |
| RS     | External pilot/Built-in silencer      |
- Thread type
 

|     |    |
|-----|----|
| Nil | Rc |
| F   | G  |

\* When One-touch fittings are selected for "A, B port size", the symbol is nil.
- A, B port size  
Thread piping
 

| Symbol | Port size |
|--------|-----------|
| 02     | 1/4       |
| 03     | 3/8       |
- One-touch fitting (Metric size)
 


| Symbol | Port size                 |
|--------|---------------------------|
| C8     | One-touch fitting for ø8  |
| C10    | One-touch fitting for ø10 |
| C12    | One-touch fitting for ø12 |
| M      | Mixed                     |
- CE/UKCA-compliant
 

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

Note) AC-type models that are CE/UKCA-compliant have DIN terminals only.

### How to Order Manifold Assembly (Example)

#### Example

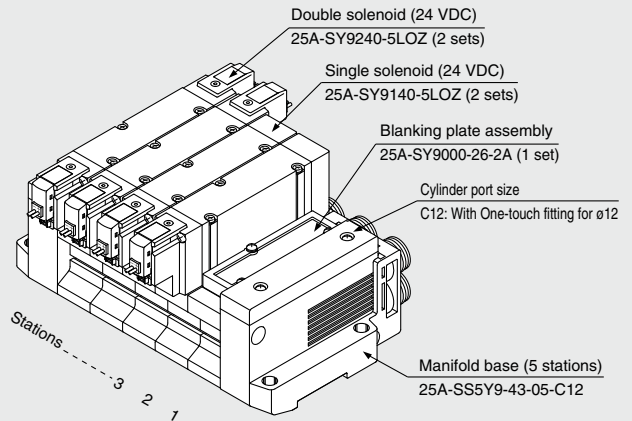

**25A-SS5Y9-43-05B-C12** ... 1 set (Type 43, 5-station manifold base part no.)  
 \* **25A-SY9000-26-2A** ..... 1 set (Blanking plate assembly part no.)  
 \* **25A-SY9140-5LOZ** ..... 2 sets (Single solenoid part no.)  
 \* **25A-SY9240-5LOZ** ..... 2 sets (Double solenoid part no.)

The asterisk denotes the symbol for assembly.  
Prefix it to the part nos. of the solenoid valve, etc.

Add the valve and option part number under the manifold base part number. In the case of complex arrangement, specify them on the manifold specification sheet.

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valve

Note) AC-type models that are CE/UKCA-compliant have DIN terminals only.

**25A-SY 9 2 40** **5 L**

• **Series compatible with secondary batteries**

• **Series**

|   |        |
|---|--------|
| 9 | SY9000 |
|---|--------|

• **Type of actuation**

|   |                            |
|---|----------------------------|
| 1 | 2 position single          |
| 2 | 2 position double          |
| 3 | 3 position closed center   |
| 4 | 3 position exhaust center  |
| 5 | 3 position pressure center |

• **Pilot type**

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

• **Coil specifications**

|     |                                             |
|-----|---------------------------------------------|
| Nil | Standard                                    |
| T   | With power saving circuit (24, 12 VDC only) |

\* Power saving circuit is not available in the case of D or Y type.

• **CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

Note) AC-type models that are CE/UKCA-compliant have DIN terminals only.

• **Manual override**

|     |                                |
|-----|--------------------------------|
| Nil | Non-locking push type          |
| D   | Push-turn locking slotted type |
| E   | Push-turn locking lever type   |

• **Light/Surge voltage suppressor**

**Electrical entry for G, H, L, M, W**

|     |                                                      |
|-----|------------------------------------------------------|
| Nil | Without light/surge voltage suppressor               |
| S   | With surge voltage suppressor                        |
| Z   | With indicator light and surge voltage suppressor    |
| R   | With surge voltage suppressor (Non-polar type)       |
| U   | With light/surge voltage suppressor (Non-polar type) |

\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.  
 \* For "R" and "U", DC voltage is only available.  
 \* Power saving circuit is only available in the "Z" type.

**Electrical entry for D, Y**

|     |                                                      |
|-----|------------------------------------------------------|
| Nil | Without light/surge voltage suppressor               |
| S   | With surge voltage suppressor (Non-polar type)       |
| Z   | With light/surge voltage suppressor (Non-polar type) |

\* For AC voltage valves there is no "S" option. It is already built-in to the rectifier circuit.

• **Rated voltage**

**For DC**

|   |        |
|---|--------|
| 5 | 24 VDC |
| 6 | 12 VDC |
| V | 6 VDC  |
| S | 5 VDC  |
| R | 3 VDC  |

**For AC (50/60 Hz)**

|   |                   |
|---|-------------------|
| 1 | 100 VAC           |
| 2 | 200 VAC           |
| 3 | 110 VAC [115 VAC] |
| 4 | 220 VAC [230 VAC] |

\* DC specifications of Type D and Y is only available with 12 and 24 VDC.  
 Note) AC-type models that are CE/UKCA-compliant have DIN terminals only.

• **Electrical entry**

|                                                                                      |                                                                                                          |                                                                                                          |                                                      |
|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------|
| 24, 12, 6, 5, 3 VDC/100, 110, 200, 220 VAC                                           |                                                                                                          |                                                                                                          | 24, 12 VDC/<br>100, 110, 200,<br>220 VAC             |
| Grommet                                                                              | L plug connector                                                                                         | M plug connector                                                                                         | DIN terminal                                         |
| <b>G:</b> With lead wire (Length 300 mm)<br><b>H:</b> With lead wire (Length 600 mm) | <b>L:</b> With lead wire (Length 300 mm)<br><b>LN:</b> Without lead wire<br><b>LO:</b> Without connector | <b>M:</b> With lead wire (Length 300 mm)<br><b>MN:</b> Without lead wire<br><b>MO:</b> Without connector | <b>D:</b> With connector<br><b>Y:</b> With connector |

\* "LN," "MN" type: with 2 sockets.  
 \* "Y" type is a DIN terminal conforming to EN-175301-803C (former DIN43650C).  
 \* Refer to the standard products for the lead wire length of L and M plug connectors and the connector assembly with cover for L and M plug connector.

Note) When ordering single unit of the base mounted type solenoid valve, the mounting screws and gaskets for the manifold are included.

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# 25A-SY5000/7000 Series

## How to Order Pilot Valve Assembly (With two mounting screws)

25A - V111 - 5 G

### Coil specifications

|     |                                                    |
|-----|----------------------------------------------------|
| Nil | Standard                                           |
| T   | With power-saving circuit<br>(24 VDC, 12 VDC only) |

\* Power-saving circuit is not available in the case of D or Y type.

### Rated voltage

|   |                                            |
|---|--------------------------------------------|
| 5 | 24 VDC                                     |
| 6 | 12 VDC                                     |
| V | 6 VDC                                      |
| S | 5 VDC                                      |
| R | 3 VDC                                      |
| 1 | 100 VAC $50/60$ Hz                         |
| 2 | 200 VAC $50/60$ Hz                         |
| 3 | 110 VAC $50/60$ Hz<br>[115 VAC $50/60$ Hz] |
| 4 | 220 VAC $50/60$ Hz<br>[230 VAC $50/60$ Hz] |

\* CE/UKCA-compliant:  
For DC only.

### Light/Surge voltage suppressor

|     |                                                         |
|-----|---------------------------------------------------------|
| Nil | Without light/surge voltage suppressor                  |
| S   | With surge voltage suppressor                           |
| Z   | With light/surge voltage suppressor                     |
| R   | With surge voltage suppressor<br>(Non-polar type)       |
| U   | With light/surge voltage suppressor<br>(Non-polar type) |

\* For AC voltage valves there is no "S" option.  
It is already built-in to the rectifier circuit.  
\* For "R" and "U", DC voltage is only available.  
\* Power-saving circuit is only available in the "Z" type.

### Electrical entry

|    |                           |
|----|---------------------------|
| G  | Grommet, 300 mm lead wire |
| H  | Grommet, 600 mm lead wire |
| L  | L plug                    |
| LN | connector                 |
| LO | connector                 |
| M  | M plug                    |
| MN | connector                 |
| MO | connector                 |

## DIN terminal type

25A - V115 - 5 D

### Rated voltage

|   |                                            |
|---|--------------------------------------------|
| 5 | 24 VDC                                     |
| 6 | 12 VDC                                     |
| 1 | 100 VAC $50/60$ Hz                         |
| 2 | 200 VAC $50/60$ Hz                         |
| 3 | 110 VAC $50/60$ Hz<br>[115 VAC $50/60$ Hz] |
| 4 | 220 VAC $50/60$ Hz<br>[230 VAC $50/60$ Hz] |

\* DC specifications of type D and Y is only available with 12 and 24 VDC.

### Light/Surge voltage suppressor

|     |                                                         |
|-----|---------------------------------------------------------|
| Nil | Without light/surge voltage suppressor                  |
| S   | With surge voltage suppressor<br>(Non-polar type)       |
| Z   | With light/surge voltage suppressor<br>(Non-polar type) |

\* DOZ and YOZ are not available.  
\* For AC voltage valves there is no "S" option.  
It is already built-in to the rectifier circuit.

### Electrical entry

|    |              |
|----|--------------|
| D  | DIN terminal |
| DO | (Type D)     |
| Y  | DIN terminal |
| YO | (Type Y)     |

\* Do not replace V111 (G, H, L, M) to V115 (DIN terminal) and vice versa when replacing pilot valve assembly only.

\* Since V111 and V115 are CE/UKCA-compliant as standard, the suffix "-Q" is not necessary.

# Bar Stock Type/Individual Wiring **25A-SY5000/7000/9000 Series**

## One-touch Fittings Part Nos. for Body Ported

| Port size     |             | 25A-SY5000                            | 25A-SY7000        | 25A-SY9000         |
|---------------|-------------|---------------------------------------|-------------------|--------------------|
| Cylinder port | Metric size | ø4 One-touch fitting (Straight type)  | 90-VVQ1000-51A-C4 | —                  |
|               |             | ø6 One-touch fitting (Straight type)  | 90-VVQ1000-51A-C6 | —                  |
|               |             | ø8 One-touch fitting (Straight type)  | 90-VVQ1000-51A-C8 | 90-VVQ2000-51A-C8  |
|               |             | ø10 One-touch fitting (Straight type) | —                 | 90-VVQ2000-51A-C10 |
|               |             | ø12 One-touch fitting (Straight type) | —                 | 90-VVQ4000-50B-C12 |

## Gasket Assembly Part Nos.

| Valve model  | Manifold type | 25A-SY5000       | 25A-SY7000       | 25A-SY9000  |
|--------------|---------------|------------------|------------------|-------------|
| Body ported  | Type 20/23    | SY5000-GS-3      | SY7000-GS-3      | SY9000-GS-3 |
| Base mounted | Type 41/42/43 | SY5000-GS-4 (-Q) | SY7000-GS-4 (-Q) | SY9000-GS-4 |

\* The gasket assembly includes 10 sets of a gasket and mounting screws.

## Bracket Assembly Part Nos.

| Description      | Part no.                                            |
|------------------|-----------------------------------------------------|
| Bracket (For F1) | 25A-SX <sup>5</sup> 000-16-2A (With mounting screw) |
| Bracket (For F2) | 25A-SX <sup>5</sup> 000-16-1A (With mounting screw) |

## Port Block Assembly Part Nos.

**25A-SY** **5** **000-6A-** **01** **□**

Series

|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |
| 9 | SY9000 |

Thread type

|     |    |
|-----|----|
| Nil | Rc |
| F   | G  |

A, B port size  
Thread piping

| Symbol | Port size | Applicable series |
|--------|-----------|-------------------|
| 01     | 1/8       | SY5000            |
| 02     | 1/4       | SY7000<br>SY9000  |
| 03     | 3/8       | SY9000            |

### One-touch fitting (Metric size)

| Symbol | Port size                 | Applicable series |
|--------|---------------------------|-------------------|
| C4     | One-touch fitting for ø4  | SY5000            |
| C6     | One-touch fitting for ø6  |                   |
| C8     | One-touch fitting for ø8  |                   |
| C8     | One-touch fitting for ø8  | SY7000            |
| C10    | One-touch fitting for ø10 | SY9000            |
| C12    | One-touch fitting for ø12 | SY9000            |


# 25A-SY5000/7000/9000 Series

## Manifold Options

### ■ Blanking plate assembly (For 25A-SY5000/7000)

(Mounting screw: 2 pcs., with gasket)

It is used by attaching on the manifold block for being prepared for removing a valve for maintenance reasons or planning to mount a spare valve, etc.

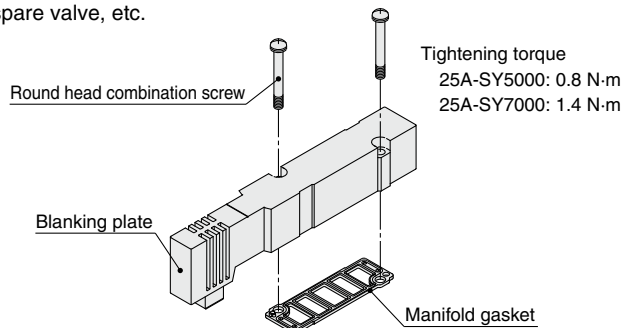

### How to Order (For 25A-SY5000/7000)

25A – SY **5** 000 – 26 – 1A

#### ● Series


|   |        |
|---|--------|
| 5 | SY5000 |
| 7 | SY7000 |

### ⚠ Caution

When mounted on a type 20 manifold, only the P port is plugged. In addition, it cannot be used for the type 20 CE/UKCA-compliant manifold.

### Dimensions (For 25A-SY5000/7000)


#### Manifold type/For type 20

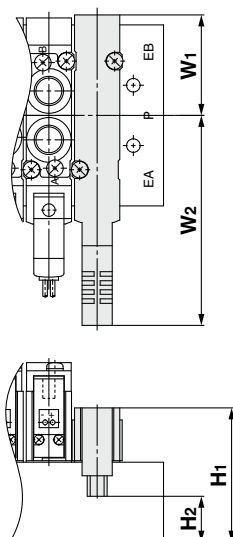

#### Dimensions [mm]

| Series     | Manifold type | W1   | W2   | H1   | H2   |
|------------|---------------|------|------|------|------|
| 25A-SY5000 | Type 20       | 33.3 | 69.6 | 44.5 | 15.2 |
| 25A-SY7000 | Type 20       | 39.4 | 76.4 | 41.1 | 18.3 |

#### Manifold type/For type 41/42

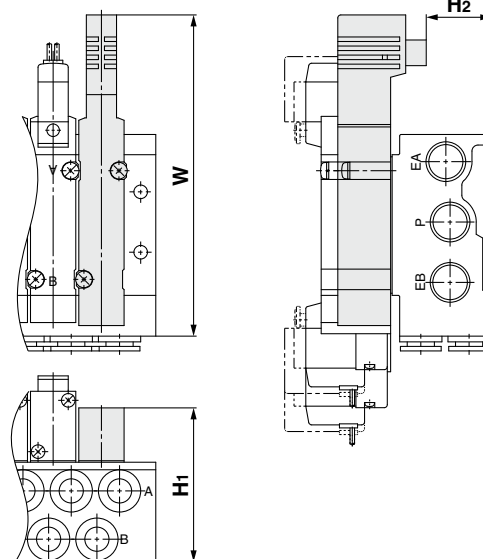

#### Dimensions [mm]

| Series     | Manifold type | W     | H1   | H2   |
|------------|---------------|-------|------|------|
| 25A-SY5000 | Type 41       | 106.4 | 51   | 21.7 |
|            | Type 42       | 107.6 | 56   | 26.7 |
| 25A-SY7000 | Type 42       | 118.1 | 55.6 | 32.8 |

## Manifold Option

### How to Order Blanking Plate Assembly (For 25A-SY9000)

**25A-SY9000-26-1 A(-Q)**

• **Manifold type**

|   |              |
|---|--------------|
| 1 | Body ported  |
| 2 | Base mounted |

\* Dimensions are the same as those of the standard model.

## Replacement Parts

| Description             | Part no.                    | Manifold model no. |
|-------------------------|-----------------------------|--------------------|
| Manifold block assembly | <b>25A-SY9000-50-1A</b>     | Type 23            |
|                         | <b>25A-SY9000-50-2A-C8</b>  | Type 43            |
|                         | <b>25A-SY9000-50-2A-C10</b> |                    |
|                         | <b>25A-SY9000-50-2A-C12</b> |                    |
| Hexagon nut             | <b>SY9000-25-3</b>          | Type 23/43         |

## How to Order SUP/EXH Block Assembly

### D side mounting

**25A-SY9000-70-1 A-1**

• **P, R port**

|            |                           |
|------------|---------------------------|
| <b>C12</b> | One-touch fitting for ø12 |
| <b>00</b>  | Plug                      |

• **Specifications**

|   |                                         |
|---|-----------------------------------------|
| 1 | Internal pilot type                     |
| 3 | External pilot type                     |
| 4 | Internal pilot / Built-in silencer type |
| 5 | External pilot / Built-in silencer type |

### U side mounting

**25A-SY9000-71-1 A-1**

• **P, R port**

|            |                           |
|------------|---------------------------|
| <b>C12</b> | One-touch fitting for ø12 |
| <b>00</b>  | Plug                      |

• **Specifications**

|   |                                         |
|---|-----------------------------------------|
| 1 | Internal pilot type                     |
| 3 | External pilot type                     |
| 4 | Internal pilot / Built-in silencer type |
| 5 | External pilot / Built-in silencer type |

# Plug-in Unit/Base Mounted F Kit (D-sub connector kit) 25A-VQ2000 Series



## How to Order Manifolds

\* For CE/UKCA-compliant models, DC-type only.

[Option]

**25A-VV5Q 2 1-08 C6 F U 1- -**

- Series compatible with secondary batteries**
- Series**  
2 VQ2000
- Manifold**  
1 Plug-in unit
- Stations**  
02 2 stations  
24 24 stations
- Cylinder port**
- Connector entry direction**  
U Top entry  
S Side entry
- Cable (Length)**  
0 Without cable  
1 With cable (1.5 m)  
2 With cable (3 m)  
3 With cable (5 m)

| Symbol | Port size                                  |
|--------|--------------------------------------------|
| C4     | With ø4 One-touch fitting                  |
| C6     | With ø6 One-touch fitting                  |
| C8     | With ø8 One-touch fitting                  |
| L4     | Top ported elbow with ø4 One-touch fitting |
| L6     | Top ported elbow with ø6 One-touch fitting |
| L8     | Top ported elbow with ø8 One-touch fitting |

| Symbol | Option                                               |
|--------|------------------------------------------------------|
| Nil    | None                                                 |
| 2      | 200/220 VAC models                                   |
| B*1    | With back pressure check valve                       |
| D      | DIN rail mounting                                    |
| D0     | With DIN rail bracket (Without DIN rail)             |
| D□*2   | DIN rail length specified (□: Stations 02 to 24)     |
| K*3    | Special wiring specifications (Except double wiring) |
| N      | With name plate                                      |
| R*4    | External pilot                                       |
| S      | Direct EXH outlet with built-in silencer             |

**CE/UKCA-compliant**  
Nil —  
Q CE/UKCA-compliant

\* For CE/UKCA-compliant models, DC-type only.

\*1 Models with a suffix "-B" have check valves for prevention of back pressure at all manifold stations. When a back pressure check valve is desired, and is to be installed only in certain manifold stations, specify the mounting position by means of the manifold specification sheet.

\*2 The number of stations that may be displayed is longer than the manifold number of stations.

\*3 Specify the wiring specifications by means of the manifold specification sheet.

\*4 Indicate "R" for the valve with external pilot.

\* When two or more symbols are specified, indicate them alphabetically. Example) -BRS

## How to Order Valves

\* For CE/UKCA-compliant models, DC-type only.

[Option]

**25A-VQ 2 1 0 1 - 5 - 1 -**

- Series compatible with secondary batteries**
- Series**  
2 VQ2000
- Seal type**  
1 Rubber seal
- Function**
- Type of actuation**
- Light/surge voltage suppressor**
- Coil voltage**

| Symbol | Specifications           | DC         | AC |
|--------|--------------------------|------------|----|
| Nil    | Standard                 | (0.4 W) ○  | ○  |
| B      | High speed response type | (0.95 W) ○ | —  |
| N      | Negative common          | ○          | —  |
| R      | External pilot           | ○          | ○  |

\* When two or more symbols are specified, indicate them alphabetically.

| Symbol | Option            |
|--------|-------------------|
| Nil    | None              |
| Q      | CE/UKCA-compliant |

\* For CE/UKCA-compliant models, DC-type only.

| Symbol | Manual override                       |
|--------|---------------------------------------|
| Nil    | Non-locking push type (Tool required) |
| B      | Locking push type (Tool required)     |
| C      | Locking type (Manual)                 |
| D      | Slide locking type (Manual)           |

| Symbol | Light/surge voltage suppressor |
|--------|--------------------------------|
| Nil    | Yes                            |
| E      | None                           |

| Symbol | Coil voltage       | CE/UKCA-compliant |
|--------|--------------------|-------------------|
| 1      | 100 VAC (50/60 Hz) | —                 |
| 2      | 200 VAC (50/60 Hz) | —                 |
| 3      | 110 VAC (50/60 Hz) | —                 |
| 4      | 220 VAC (50/60 Hz) | —                 |
| 5      | 24 VDC             | ●                 |
| 6      | 12 VDC             | ●                 |

### ⚠ Caution

Use the standard (DC) specification when continuously energizing for long periods of time.

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Plug-in Unit/Base Mounted T Kit (Terminal block box kit) 25A-VQ2000 Series



## How to Order Manifolds

\* For CE/UKCA-compliant models, DC-type only.

**25A-VV5Q 2 1-08 C6 T 0- -**

• **Series compatible with secondary batteries**

• **Series**  
2 VQ2000

• **Manifold**  
1 Plug-in unit

• **Stations**

|    |             |
|----|-------------|
| 02 | 2 stations  |
| ⋮  | ⋮           |
| 20 | 20 stations |

• **Cylinder port**

| Symbol | Port size                                  |
|--------|--------------------------------------------|
| C4     | With ø4 One-touch fitting                  |
| C6     | With ø6 One-touch fitting                  |
| C8     | With ø8 One-touch fitting                  |
| L4     | Top ported elbow with ø4 One-touch fitting |
| L6     | Top ported elbow with ø6 One-touch fitting |
| L8     | Top ported elbow with ø8 One-touch fitting |

• **Option**

| Symbol | Option                                           |
|--------|--------------------------------------------------|
| Nil    | None                                             |
| B*1    | With back pressure check valve                   |
| D      | DIN rail mounting                                |
| D0     | With DIN rail bracket (Without DIN rail)         |
| D□*2   | DIN rail length specified (□: Stations 02 to 20) |
| K*3    | Special wiring spec. (Except double wiring)      |
| N      | With name plate                                  |
| R*4    | External pilot                                   |
| S      | Direct EXH outlet with built-in silencer         |
| W      | Enclosure: Dust-tight, Water-jet-proof (IP65)    |

• **CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* For CE/UKCA-compliant models, DC-type only.

\*1 Models with a suffix "B" have check valves for prevention of back pressure at all manifold stations. When a back pressure check valve is desired, and is to be installed only in certain manifold stations, specify the mounting position by means of the manifold specification sheet.

\*2 The number of stations that may be displayed is longer than the manifold number of stations.

\*3 Specify the wiring specifications by means of the manifold specification sheet.

\*4 Indicate "R" for the valve with external pilot.

\* When two or more symbols are specified, indicate them alphabetically.  
Example) -BRS

\* Specify the mounting position by means of the manifold specification sheet.

## How to Order Valves

\* For CE/UKCA-compliant models, DC-type only.



**25A-VQ 2 1 0 1 - 5 - - - 1 -**

• **Series compatible with secondary batteries**

• **Series**  
2 VQ2000

• **Type of actuation**

|   |                                  |
|---|----------------------------------|
| 1 | 2-position single                |
| 2 | 2-position double                |
| 3 | 3-position closed center         |
| 4 | 3-position exhaust center        |
| 5 | 3-position pressure center       |
| A | 4-position dual port (N.C./N.C.) |
| B | 4-position dual port (N.O./N.O.) |
| C | 4-position dual port (N.C./N.O.) |

• **Seal type**

|   |             |
|---|-------------|
| 1 | Rubber seal |
|---|-------------|

• **Function**

| Symbol | Specifications           | DC         | AC |
|--------|--------------------------|------------|----|
| Nil    | Standard                 | (0.4 W) ○  | ○  |
| B      | High speed response type | (0.95 W) ○ | —  |
| N      | Negative common          | ○          | —  |
| R      | External pilot           | ○          | ○  |

• **CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* For CE/UKCA-compliant models, DC-type only.

• **Enclosure**

|     |                                        |
|-----|----------------------------------------|
| Nil | Dustproof                              |
| W   | Dust-tight/Water-jet-proof type (IP65) |

• **Manual override**

|     |                                       |
|-----|---------------------------------------|
| Nil | Non-locking push type (Tool required) |
| B   | Locking type (Tool required)          |
| C   | Locking type (Manual)                 |
| D   | Slide locking type (Manual)           |

• **Light/surge voltage suppressor**

|     |      |
|-----|------|
| Nil | Yes  |
| E   | None |

• **Coil voltage**

|                      | CE/UKCA-compliant |
|----------------------|-------------------|
| 1 100 VAC (50/60 Hz) | —                 |
| 3 110 VAC (50/60 Hz) | —                 |
| 5 24 VDC             | ●                 |
| 6 12 VDC             | ●                 |

**⚠ Caution**  
Use the standard (DC) specification when continuously energizing for long periods of time.

\* When two or more symbols are specified, indicate them alphabetically. Combination of "B" and "K" is not possible.

**Refer to the Web Catalog.**

• Specifications/Dimensions  
\* Same as the standard product

Click here for details.



# Plug-in Unit/Base Mounted L Kit (Lead wire) 25A-VQ2000 Series



\* For CE/UKCA-compliant models, DC-type only.

[Option]

## How to Order Manifolds

**25A-VV5Q 2 1-06 C6 L 1 - -**

- Series compatible with secondary batteries**  
Series: 2 VQ2000
- Manifold**  
1 Plug-in unit
- Stations**

|    |            |
|----|------------|
| 01 | 1 station  |
| :  | :          |
| 08 | 8 stations |
- Cylinder port**

| Symbol | Port size                                  |
|--------|--------------------------------------------|
| C4     | With ø4 One-touch fitting                  |
| C6     | With ø6 One-touch fitting                  |
| C8     | With ø8 One-touch fitting                  |
| L4     | Top ported elbow with ø4 One-touch fitting |
| L6     | Top ported elbow with ø6 One-touch fitting |
| L8     | Top ported elbow with ø8 One-touch fitting |
- Cable (Length)**

|   |                    |
|---|--------------------|
| 0 | Cable length 0.6 m |
| 1 | Cable length 1.5 m |
| 2 | Cable length 3 m   |
- CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* For CE/UKCA-compliant models, DC-type only.
- Option**

| Symbol | Option                                           |
|--------|--------------------------------------------------|
| Nil    | None                                             |
| 2      | 200/220 VAC models                               |
| B*1    | With back pressure check valve                   |
| D      | DIN rail mounting                                |
| D0     | With DIN rail bracket (Without DIN rail)         |
| D□*2   | DIN rail length specified (□: Stations 02 to 08) |
| N      | With name plate                                  |
| R*3    | External pilot                                   |
| S      | Direct EXH outlet with built-in silencer         |
| W      | Enclosure: Dust-tight, Water-jet-proof (IP65)    |

\*1 Models with a suffix "B" have check valves for prevention of back pressure at all manifold stations. When a back pressure check valve is desired, and is to be installed only in certain manifold stations, specify the mounting position by means of the manifold specification sheet.  
\*2 The number of stations that may be displayed is longer than the manifold a number of stations.  
\*3 Indicate "R" for the valve with external pilot.  
\* When two or more symbols are specified, indicate them alphabetically.  
Example) -BRS

## How to Order Valves

\* For CE/UKCA-compliant models, DC-type only.

[Option]

**25A-VQ 2 1 0 1 - 5 - - - 1 -**

- Series compatible with secondary batteries**  
Series: 2 VQ2000
- Type of actuation**

|   |                                  |
|---|----------------------------------|
| 1 | 2-position single                |
| 2 | 2-position double                |
| 3 | 3-position closed center         |
| 4 | 3-position exhaust center        |
| 5 | 3-position pressure center       |
| A | 4-position dual port (N.C./N.C.) |
| B | 4-position dual port (N.O./N.O.) |
| C | 4-position dual port (N.C./N.O.) |
- Seal type**  
1 Rubber seal
- Function**

| Symbol | Specifications           | DC            | AC |
|--------|--------------------------|---------------|----|
| Nil    | Standard                 | (0.4 W)<br>○  | ○  |
| B      | High speed response type | (0.95 W)<br>○ | —  |
| N      | Negative common          | ○             | —  |
| R      | External pilot           | ○             | ○  |

\* When two or more symbols are specified, indicate them alphabetically.
- CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* For CE/UKCA-compliant models, DC-type only.
- Enclosure**

|     |                                        |
|-----|----------------------------------------|
| Nil | Dustproof                              |
| W   | Dust-tight/Water-jet-proof type (IP65) |
- Manual override**

|     |                                       |
|-----|---------------------------------------|
| Nil | Non-locking push type (Tool required) |
| B   | Locking type (Tool required)          |
| C   | Locking type (Manual)                 |
| D   | Slide locking type (Manual)           |
- Light/surge voltage suppressor**

|     |      |
|-----|------|
| Nil | Yes  |
| E   | None |
- Coil voltage**

|   | CE/UKCA-compliant  |
|---|--------------------|
| 1 | 100 VAC (50/60 Hz) |
| 2 | 200 VAC (50/60 Hz) |
| 3 | 110 VAC (50/60 Hz) |
| 4 | 220 VAC (50/60 Hz) |
| 5 | 24 VDC             |
| 6 | 12 VDC             |

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product




Click here for details. >>>

# Plug-in Unit/Base Mounted S Kit (Serial transmission) 25A-VQ2000 Series

\* Refer to "SI Unit Part Nos." when ordering the CE/UKCA-compliant SI unit.



## How to Order Manifolds

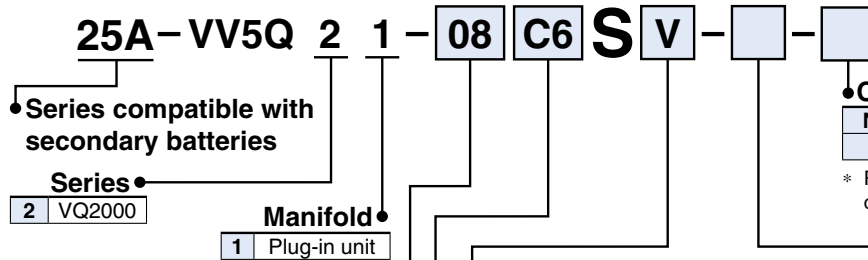

| Symbol | Option                                               |
|--------|------------------------------------------------------|
| Nil    | None                                                 |
| B*1    | With back pressure check valve                       |
| D      | DIN rail mounting                                    |
| D□*2   | DIN rail length specified (□: Stations 02 to 16)     |
| K*3    | Special wiring specifications (Except double wiring) |
| N      | With name plate                                      |
| R*4    | With external pilot                                  |
| S      | Direct EXH outlet with built-in silencer             |
| W*5    | Enclosure: Dust-tight, Water-jet-proof (IP65)        |

- \*1 Models with a suffix "-B" have check valves for prevention of back pressure at all manifold stations. When a back pressure check valve is desired, and is to be installed only in certain manifold stations, specify the mounting position by means of the manifold specification sheet.
- \*2 The number of stations that may be displayed is longer than the manifold number of stations.
- \*3 Specify the wiring specifications by means of the manifold specification sheet.
- \*4 Indicate "R" for the valve with external pilot.
- \*5 Refer to "Dimensions" of the standard products for SI unit and valve, in case of "W" (Dust-tight, Water-jet-proof).
- \* When two or more symbols are specified, indicate them alphabetically.  
Example) -BRS.


### SI Unit Part Nos.

| Symbol | Protocol   | SI unit part no. |
|--------|------------|------------------|
| Q      | DeviceNet® | EX120-SDN1-X220  |
| V      | CC-Link    | EX120-SMJ1-X220  |

### SI Unit Part Nos. (With option W)

| Symbol | Protocol   | SI unit part no. |
|--------|------------|------------------|
| Q      | DeviceNet® | EX124D-SDN1-X220 |
| V      | CC-Link    | EX124D-SMJ1-X220 |

## How to Order Valves

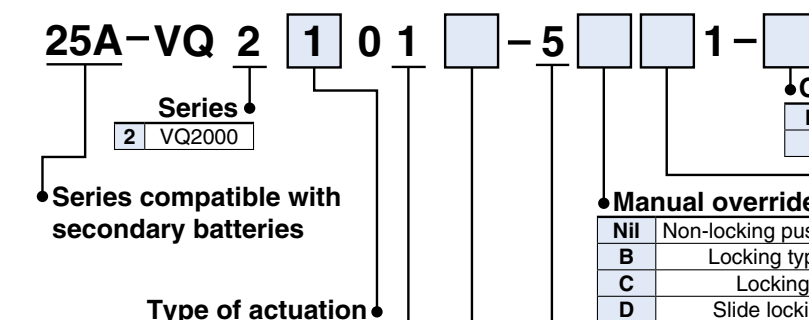

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Sub-plate Single Unit

# 25A-VQ2000 Series

## How to Order

\* For CE/UKCA-compliant models, DC-type only.



In the case of **Valve** + **Sub-plate**

25A-VQ2 **1** **0** **1**-**5** **W** 1-02 -

Series compatible with secondary batteries

The entry is the same as that of the standard model.

Enclosure

|     |                                        |
|-----|----------------------------------------|
| Nil | Dustproof                              |
| W*1 | Dust-tight/Water-jet-proof type (IP65) |

\*1 Valves are IP65 specifications.

\* When the valve is a standard (dust-protected) specification, it is not compatible with 200 or 220 VAC.

CE/UKCA-compliant

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* For CE/UKCA-compliant models, DC-type only.

Thread type

|     |      |
|-----|------|
| Nil | Rc   |
| N   | NPT  |
| T   | NPTF |
| F   | G    |

Port size

|    |     |
|----|-----|
| 02 | 1/4 |
|----|-----|

In the case of **Sub-plate** alone

25A-VQ2000-PW-02

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>




## Manifold Options

### Blanking plate assembly

#### 25A-VVQ2000V-10A-1

It is used by attaching on the manifold block for being prepared for removing a valve for maintenance reasons or planning to mount a spare valve, etc.



#### Refer to the Web Catalog.

- Specifications/Dimensions  
\* Same as the standard product



Click here for details. >>>

### SI Unit Part Nos.

| Description   | SI unit part no.        | Note                                   |
|---------------|-------------------------|----------------------------------------|
| EX124 SI unit | <b>EX124D-SMJ1-X220</b> | CC-Link                                |
|               | <b>EX124D-SDN1-X220</b> | DeviceNet®                             |
| EX120 SI unit | <b>EX120-SMJ1-X220</b>  | CC-Link (VQ2000/Without option "W")    |
|               | <b>EX120-SDN1-X220</b>  | DeviceNet® (VQ2000/Without option "W") |

### One-touch Fittings Part Nos.

| Port size         |             | One-touch fitting part no.                                      |
|-------------------|-------------|-----------------------------------------------------------------|
| Cylinder port     | Metric size | ø4 One-touch fitting (Straight type) <b>90-VVQ1000-51A-C4</b>   |
|                   |             | ø6 One-touch fitting (Straight type) <b>90-VVQ1000-51A-C6</b>   |
|                   |             | ø8 One-touch fitting (Straight type) <b>90-VVQ1000-51A-C8</b>   |
| 1 (P), 3 (R) port | Metric size | ø10 One-touch fitting (Straight type) <b>90-VVQ2000-51A-C10</b> |

# Plug-in/Plug Lead: Single Unit Base Mounted 25A-VQ4000 Series



## How to Order Valves

**Body**

0: Plug-in sub-plate

**Porting specifications**

|     |               |
|-----|---------------|
| Nil | Side ported   |
| B   | Bottom ported |

**Port size**

|     |                                  |
|-----|----------------------------------|
| Nil | Without sub-plate (For manifold) |
| 02  | Rc 1/4                           |
| 03  | Rc 3/8                           |

\* Thread standard is the same as standard products.

**Plug-in** 25A-VQ4 1 0 1 - - - - - 1 - - - - -

**Plug lead** 25A-VQ4 2 5 1 - - - - - 1 - - - - -

**Series compatible with secondary batteries**

**Type of actuation**

|     |                            |
|-----|----------------------------|
| 1   | 2-position single          |
| 2   | Rubber/2-position double   |
| 3   | 3-position closed center   |
| 4   | 3-position exhaust center  |
| 5   | 3-position pressure center |
| 6*1 | 3-position double check    |

\*1 For double check type, refer to the Web Catalog.

**Body**

5: Plug lead sub-plate

**Seal type**

|   |             |
|---|-------------|
| 1 | Rubber seal |
|---|-------------|

**Function**

|       |                          |
|-------|--------------------------|
| Nil*1 | Standard type (0.95 W)   |
| Y*2   | Low wattage type (0.4 W) |
| R*3   | External pilot           |

\*1 When the unit is energized continuously, refer to "Specific Product Precautions 1" in the Web Catalog (VQ4000 series).  
\*2 Only DC is available with Y.  
\*3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible.  
\* When two or more symbols are specified, indicate them alphabetically.

**Enclosure**

|     |                                        |
|-----|----------------------------------------|
| Nil | Dustproof                              |
| W   | Dust-tight/Water-jet-proof type (IP65) |

**CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* CE/UKCA-compliant: For DC only.

**Manual override**

Nil: Non-locking push type (Tool required)

B: Slotted locking type (Tool required)

C: Locking type (Manual)

**Light/Surge voltage suppressor**

|     |                                              |
|-----|----------------------------------------------|
| Nil | Yes                                          |
| E   | Without light, with surge voltage suppressor |

**Electrical entry**

|   |                        |
|---|------------------------|
| G | Lead wire length 0.6 m |
| H | Lead wire length 1.5 m |

**Coil voltage**

|   |                    |
|---|--------------------|
| 1 | 100 VAC (50/60 Hz) |
| 2 | 200 VAC (50/60 Hz) |
| 3 | 110 VAC (50/60 Hz) |
| 4 | 220 VAC (50/60 Hz) |
| 5 | 24 VDC             |
| 6 | 12 VDC             |

## How to Order Sub-plates



**25A-VQ4000** - - - - -

**Series compatible with secondary batteries**

**Electrical entry**

|   |                          |
|---|--------------------------|
| P | Plug-in conduit terminal |
| S | Plug lead                |

**Enclosure**

|     |                                 |
|-----|---------------------------------|
| Nil | Dustproof                       |
| W*1 | Dust-tight/Water-jet-proof type |

\*1 It is not necessary for plug lead type.

**CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

**Porting specifications**

|     |                 |
|-----|-----------------|
| Nil | Side ported     |
| B   | Bottom ported*1 |

\*1 For bottom ported port size is Rc 1/4 only.  
\* Thread standard is the same as standard products.

**Port size**

|    |       |
|----|-------|
| 02 | Rc1/4 |
| 03 | Rc3/8 |

**Refer to the Web Catalog.**

• Specifications/Dimensions  
\* Same as the standard product

Click here for details. >>>

# Plug-in Unit/Base Mounted F Kit (D-sub connector kit) 25A-VQ4000 Series



## How to Order Manifolds

**25A – VV5Q 4 1 – 08 C8 F U 1 – –**

- Series compatible with secondary batteries**
- Series**  
4 VQ4000
- Manifold**  
1 Plug-in unit
- Stations**  
01 1 station  
: :  
18 18 stations
- Cylinder port**

|     |                                |
|-----|--------------------------------|
| C6  | With One-touch fitting for ø6  |
| C8  | With One-touch fitting for ø8  |
| C10 | With One-touch fitting for ø10 |
| C12 | With One-touch fitting for ø12 |
| 02  | Rc 1/4                         |
| 03  | Rc 3/8                         |
| B   | Bottom ported Rc 1/4           |
| CM  | Mixed                          |

\* As a semi-standard specification, the maximum number of stations can be increased by special wiring specifications.
- CE/UKCA-compliant**  
Nil —  
Q CE/UKCA-compliant
- Option**

| Symbol | Option                                               |
|--------|------------------------------------------------------|
| Nil    | None                                                 |
| K*1    | Special wiring specifications (Except double wiring) |

\*1 Specify the wiring specifications on the manifold specification sheet.
- Cable (Length)**

|   |                    |
|---|--------------------|
| 0 | Without cable      |
| 1 | Cable length 1.5 m |
| 2 | Cable length 3 m   |
| 3 | Cable length 5 m   |
- Connector entry direction**

|   |              |
|---|--------------|
| D | D side entry |
| U | U side entry |



## How to Order Valves

**25A – VQ 4 1 0 1 – 5 – 1 –**

- Series compatible with secondary batteries**
- Series**  
4 VQ4000
- Type of actuation**

|   |                            |
|---|----------------------------|
| 1 | 2-position single          |
| 2 | 2-position double          |
| 3 | 3-position closed center   |
| 4 | 3-position exhaust center  |
| 5 | 3-position pressure center |
| 6 | 3-position double check    |
- Seal type**  
1 Rubber seal
- Function**

|       |                          |
|-------|--------------------------|
| Nil*1 | Standard (0.95 W)        |
| Y*2   | Low wattage type (0.4 W) |
| R*3   | External pilot           |

\*1 When the unit is energized continuously, refer to "Specific Product Precautions 1" in the **Web Catalog** (VQ4000 series).  
\*2 Only DC is available with Y.  
\*3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible.  
\* When two or more symbols are specified, indicate them alphabetically.
- CE/UKCA-compliant**  
Nil —  
Q CE/UKCA-compliant  
\* CE/UKCA-compliant: For DC only.
- Manual override**

|     |                                       |
|-----|---------------------------------------|
| Nil | Non-locking push type (Tool required) |
| B   | Locking type (Tool required)          |
| C   | Locking type (Manual)                 |
- Light/Surge voltage suppressor**

|     |                                              |
|-----|----------------------------------------------|
| Nil | Yes                                          |
| E   | Without light, with surge voltage suppressor |
- Coil voltage**

|   |                    |
|---|--------------------|
| 1 | 100 VAC (50/60 Hz) |
| 2 | 200 VAC (50/60 Hz) |
| 3 | 110 VAC (50/60 Hz) |
| 4 | 220 VAC (50/60 Hz) |
| 5 | 24 VDC             |
| 6 | 12 VDC             |

### Refer to the Web Catalog.

- Specifications/Dimensions  
\* Same as the standard product

Click here for details. >>>



# Plug-in Unit/Base Mounted T Kit (Terminal block box kit) 25A-VQ4000 Series



## How to Order Manifolds

**25A – VV5Q 4 1 – 08 C8 T O –**

- Series compatible with secondary batteries**
- Series**  
4 VQ4000
- Manifold**  
1 Plug-in unit
- Stations**

|    |             |
|----|-------------|
| 03 | 3 stations  |
| :  | :           |
| 18 | 18 stations |

\* 2 stations are used for mounting the terminal block box. The number of stations is the number of manifold valves plus 2 stations for the terminal block box. For 13 stations or more, specify the wiring specifications by means of the manifold specification sheet.
- Cylinder port**

|     |                                |
|-----|--------------------------------|
| C6  | With One-touch fitting for ø6  |
| C8  | With One-touch fitting for ø8  |
| C10 | With One-touch fitting for ø10 |
| C12 | With One-touch fitting for ø12 |
| 02  | Rc 1/4                         |
| 03  | Rc 3/8                         |
| B   | Bottom ported Rc 1/4           |
| CM  | Mixed                          |

\* As a semi-standard specification, the maximum number of stations can be increased by special wiring specifications.
- Box mounting position**

|   |                 |
|---|-----------------|
| O | U side mounting |
| D | D side mounting |
- CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |
- Option**

| Symbol | Option                                                                        |
|--------|-------------------------------------------------------------------------------|
| Nil    | None                                                                          |
| K*1    | Special wiring specifications (Except double wiring, for 13 stations or more) |
| N*2    | Name plate                                                                    |
| W      | IP65 enclosure                                                                |

\*1 Specify the wiring specifications on the manifold specification sheet.  
\*2 Name plate is inlaid in the terminal block cover.  
\* When two or more symbols are specified, indicate them alphabetically. Example) -KM



## How to Order Valves

**25A – VQ 4 1 0 1 – 5 – 1 –**

- Series compatible with secondary batteries**
- Series**  
4 VQ4000
- Type of actuation**

|   |                            |
|---|----------------------------|
| 1 | 2-position single          |
| 2 | 2-position double          |
| 3 | 3-position closed center   |
| 4 | 3-position exhaust center  |
| 5 | 3-position pressure center |
| 6 | 3-position double check    |
- Seal type**  
1 Rubber seal
- Function**

|       |                          |
|-------|--------------------------|
| Nil*1 | Standard (0.95 W)        |
| Y*2   | Low wattage type (0.4 W) |
| R*3   | External pilot           |

\*1 When the unit is energized continuously, refer to "Specific Product Precautions 1" in the **Web Catalog** (VQ4000 series).  
\*2 Only DC is available with Y.  
\*3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible.
- CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* CE/UKCA-compliant: For DC only.
- Enclosure**

|     |                                        |
|-----|----------------------------------------|
| Nil | Dustproof                              |
| W   | Dust-tight/Water-jet-proof type (IP65) |
- Manual override**

|     |                                       |
|-----|---------------------------------------|
| Nil | Non-locking push type (Tool required) |
| B   | Locking type (Tool required)          |
| C   | Locking type (Manual)                 |
- Light/Surge voltage suppressor**

|     |                                              |
|-----|----------------------------------------------|
| Nil | Yes                                          |
| E   | Without light, with surge voltage suppressor |
- Coil voltage**

|   |                    |
|---|--------------------|
| 1 | 100 VAC (50/60 Hz) |
| 2 | 200 VAC (50/60 Hz) |
| 3 | 110 VAC (50/60 Hz) |
| 4 | 220 VAC (50/60 Hz) |
| 5 | 24 VDC             |
| 6 | 12 VDC             |

**Refer to the Web Catalog.**  
 • Specifications/Dimensions  
 \* Same as the standard product

Click here for details. >>>

# Plug-in Unit/Base Mounted L Kit (Lead wire cable) **25A-VQ4000 Series**



## How to Order Manifolds

**25A – VV5Q 4 1 – 08 C8 L D – –**

- Series compatible with secondary batteries**
- Series**

|   |        |
|---|--------|
| 4 | VQ4000 |
|---|--------|
- Manifold**

|   |              |
|---|--------------|
| 1 | Plug-in unit |
|---|--------------|
- Stations**

|    |             |
|----|-------------|
| 01 | 1 station   |
| ⋮  | ⋮           |
| 16 | 16 stations |
- Cylinder port**

|     |                                |
|-----|--------------------------------|
| C6  | With One-touch fitting for ø6  |
| C8  | With One-touch fitting for ø8  |
| C10 | With One-touch fitting for ø10 |
| C12 | With One-touch fitting for ø12 |
| 02  | Rc 1/4                         |
| 03  | Rc 3/8                         |
| B   | Bottom ported Rc 1/4           |
| CM  | Mixed                          |
- CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |
- Option**

| Symbol | Option         |
|--------|----------------|
| Nil    | None           |
| W      | IP65 enclosure |
- Cable (Length)**

|   |                    |
|---|--------------------|
| 0 | Cable length 0.6 m |
| 1 | Cable length 1.5 m |
| 2 | Cable length 3 m   |
- Connector locations**

|   |              |
|---|--------------|
| D | D side entry |
| U | U side entry |



## How to Order Valves

**25A – VQ 4 1 0 1 – 5 – – – 1 –**

- Series compatible with secondary batteries**
- Series**

|   |        |
|---|--------|
| 4 | VQ4000 |
|---|--------|
- Type of actuation**

|   |                            |
|---|----------------------------|
| 1 | 2-position single          |
| 2 | 2-position double          |
| 3 | 3-position closed center   |
| 4 | 3-position exhaust center  |
| 5 | 3-position pressure center |
| 6 | 3-position double check    |
- Seal type**

|   |             |
|---|-------------|
| 1 | Rubber seal |
|---|-------------|
- Function**

|       |                          |
|-------|--------------------------|
| Nil*1 | Standard (0.95 W)        |
| Y*2   | Low wattage type (0.4 W) |
| R*3   | External pilot           |
- CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* CE/UKCA-compliant: For DC only.
- Enclosure**

|     |                                        |
|-----|----------------------------------------|
| Nil | Dustproof                              |
| W   | Dust-tight/Water-jet-proof type (IP65) |
- Manual override**

|     |                                       |
|-----|---------------------------------------|
| Nil | Non-locking push type (Tool required) |
| B   | Locking type (Tool required)          |
| C   | Locking type (Manual)                 |
- Light /Surge voltage suppressor**

|     |                                              |
|-----|----------------------------------------------|
| Nil | Yes                                          |
| E   | Without light, with surge voltage suppressor |
- Coil voltage**

|   |                    |
|---|--------------------|
| 1 | 100 VAC (50/60 Hz) |
| 2 | 200 VAC (50/60 Hz) |
| 3 | 110 VAC (50/60 Hz) |
| 4 | 220 VAC (50/60 Hz) |
| 5 | 24 VDC             |
| 6 | 12 VDC             |

- \*1 When the unit is energized continuously, refer to "Specific Product Precautions 1" in the **Web Catalog** (VQ4000 series).  
 \*2 Only DC is available with Y.  
 \*3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible.  
 \* When two or more symbols are specified, indicate them alphabetically.

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details.



# Plug-in Unit/Base Mounted S Kit (Serial transmission unit) 25A-VQ4000 Series

\* Refer to "SI Unit Part Nos."  
when ordering the CE/  
UKCA-compliant SI unit.



## How to Order Manifolds

**25A – VV5Q 4 1 – 08 C8 S D V –**

• **Series compatible with secondary batteries**

• **Series**  
4 VQ4000

• **Manifold**  
1 Plug-in unit

• **Stations**

|     |             |
|-----|-------------|
| 03  | 3 stations  |
| ... | ...         |
| 18  | 18 stations |

\* 2 stations are used for mounting SI unit. The number of stations is the number of manifold valves plus 2 stations for SI unit. For 11 stations or more, specify the wiring specifications by means of the manifold specification sheet.

• **Cylinder ports**

|     |                                |
|-----|--------------------------------|
| C6  | With One-touch fitting for ø6  |
| C8  | With One-touch fitting for ø8  |
| C10 | With One-touch fitting for ø10 |
| C12 | With One-touch fitting for ø12 |
| 02  | Rc 1/4                         |
| 03  | Rc 3/8                         |
| B   | Bottom ported Rc 1/4           |
| CM  | Mixed                          |

• **Option**

| Symbol | Option                                                                        |
|--------|-------------------------------------------------------------------------------|
| Nil    | None                                                                          |
| K*1    | Special wiring specifications (Except double wiring, for 11 stations or more) |
| W      | IP65 enclosure                                                                |

\*1 Specify the wiring specifications on the manifold specification sheet.  
\* When two or more symbols are specified, indicate them alphabetically. Example) -KW

• **SI unit**

|   |                 |
|---|-----------------|
| 0 | Without SI unit |
| Q | DeviceNet®      |
| V | CC-Link         |

• **SI unit mounting position**

|     |                 |
|-----|-----------------|
| Nil | U side mounting |
| D   | D side mounting |

• **CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

## How to Order Valves

**25A – VQ 4 1 0 1 – 5**

• **Series compatible with secondary batteries**

• **Series**  
4 VQ4000

• **Type of actuation**

|   |                            |
|---|----------------------------|
| 1 | 2-position single          |
| 2 | 2-position double          |
| 3 | 3-position closed center   |
| 4 | 3-position exhaust center  |
| 5 | 3-position pressure center |
| 6 | 3-position double check    |

• **Seal type**  
1 Rubber seal

• **Function**

|       |                          |
|-------|--------------------------|
| Nil*1 | Standard (0.95 W)        |
| Y*2   | Low wattage type (0.4 W) |
| R*3   | External pilot           |

\*1 When the unit is energized continuously, refer to "Specific Product Precautions 1" in the **Web Catalog** (VQ4000 series).  
\*2 Only DC is available with Y.  
\*3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible.  
\* When two or more symbols are specified, indicate them alphabetically.

• **CE/UKCA-compliant**

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* CE/UKCA-compliant: For DC only.

• **Enclosure**

|     |                                        |
|-----|----------------------------------------|
| Nil | Dustproof                              |
| W   | Dust-tight/Water-jet-proof type (IP65) |

• **Manual override**

|     |                                       |
|-----|---------------------------------------|
| Nil | Non-locking push type (Tool required) |
| B   | Locking type (Tool required)          |
| C   | Locking type (Manual)                 |

• **Light /Surge voltage suppressor**

|     |                                              |
|-----|----------------------------------------------|
| Nil | Yes                                          |
| E   | Without light, with surge voltage suppressor |

• **Coil voltage**  
5 24 VDC

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Plug Lead Unit/Base Mounted C Kit (Connector kit)



## 25A-VQ4000 Series

### How to Order Manifolds

**25A – VV5Q 4 5 – 08 C8 C – W –**

- Series compatible with secondary batteries**
- Series**  
4 VQ4000
- Manifold**  
5 Plug lead unit
- Stations**  
01 1 station  
: :  
16 16 stations
- Cylinder port**  
C6 With One-touch fitting for ø6  
C8 With One-touch fitting for ø8  
C10 With One-touch fitting for ø10  
C12 With One-touch fitting for ø12  
02 Rc 1/4  
03 Rc 3/8  
B Bottom ported Rc 1/4  
CM Mixed
- Kit type**  
**C** kit (Connector)
- CE/UKCA-compliant**  
Nil —  
Q CE/UKCA-compliant
- Option**  
Symbol Option  
Nil None  
W IP65 enclosure

**C** Connector kit Max. 16 stations

Refer to the **Web Catalog** for wiring specifications.

### How to Order Valves

**25A – VQ 4 1 5 1 – 5 G – 1 –**

- Series compatible with secondary batteries**
- Series**  
4 VQ4000
- Type of actuation**  
1 2-position single  
2 2-position double  
3 3-position closed center  
4 3-position exhaust center  
5 3-position pressure center  
6 3-position double check
- Seal type**  
1 Rubber seal
- Function**  
Nil\*1 Standard (0.95 W)  
Y\*2 Low wattage type (0.4 W)  
R\*3 External pilot
- CE/UKCA-compliant**  
Nil —  
Q CE/UKCA-compliant
- Enclosure**  
Nil Dustproof  
W Dust-tight/Water-jet-proof type (IP65)
- Light/Surge voltage suppressor**  
Nil Yes  
E Without light, with surge voltage suppressor
- Manual override**  
Nil: Non-locking push type (Tool required)  
B: Locking type (Tool required)  
C: Locking type (Manual)
- Electrical entry**  
Grommet  
G Lead wire length 0.6 m  
H Lead wire length 1.5 m
- Coil voltage**  
1 100 VAC (50/60 Hz)  
2 200 VAC (50/60 Hz)  
3 110 VAC (50/60 Hz)  
4 220 VAC (50/60 Hz)  
5 24 VDC  
6 12 VDC

\*1 When the unit is energized continuously, refer to "Specific Product Precautions 1" in the **Web Catalog** (VQ4000 series).  
\*2 Only DC is available with Y.  
\*3 External pilot specifications are the same as standard products. Combination of external pilot and perfect interface is not possible.  
\* When two or more symbols are specified, indicate them alphabetically.

Refer to the **Web Catalog**.  
• Specifications/Dimensions  
\* Same as the standard product  
Click here for details. >>>

# 25A-VQ4000 Series


## Manifold Options

### Blanking plate assembly

**25A-VVQ4000-10A-1 (Plug-in type)**

**25A-VVQ4000-10A-5 (Plug lead type)**

It is used by attaching on the manifold block for being prepared for removing a valve for maintenance reasons or planning to mount a spare valve, etc.

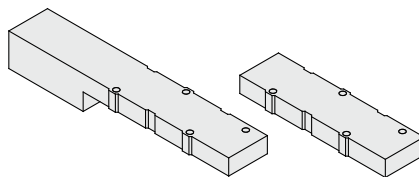

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

[Click here for details. >>>](#)



### SI Unit Part Nos.

| Description   | SI unit part no.        | Note                       |
|---------------|-------------------------|----------------------------|
| EX124 SI unit | <b>EX124D-SMJ1-X220</b> | CC-Link/D side mounting    |
|               | <b>EX124D-SDN1-X220</b> | DeviceNet®/D side mounting |
|               | <b>EX124U-SMJ1-X220</b> | CC-Link/U side mounting    |
|               | <b>EX124U-SDN1-X220</b> | DeviceNet®/U side mounting |

### One-touch Fittings Part Nos.

| Port size     |             | One-touch fittings part no.           |
|---------------|-------------|---------------------------------------|
| Cylinder port | Metric size | ø6 One-touch fitting (Straight type)  |
|               |             | ø8 One-touch fitting (Straight type)  |
|               |             | ø10 One-touch fitting (Straight type) |
|               |             | ø12 One-touch fitting (Straight type) |
|               |             |                                       |



# Plug-in Unit

# 25A-SQ2000 Series

## How to Order Manifolds

25A-SS5Q23-08 FD2-D- - -

• Series compatible with secondary batteries

### Stations

|      |             |
|------|-------------|
| 01   | 1 station   |
| ⋮    | ⋮           |
| 16*1 | 16 stations |

\*1 The maximum number of stations depends on the type of electrical entries.

### Manifold mounting

|   |                   |
|---|-------------------|
| D | DIN rail mounting |
| E | Direct mounting   |

### Option

|            |                                                      |
|------------|------------------------------------------------------|
| Nil        | None                                                 |
| 02 to 16*1 | DIN rail length specified                            |
| B*2        | Back pressure check valve                            |
| K*3        | Special wiring specifications (Except double wiring) |
| N          | With name plate (Side ported only)                   |
| R          | External pilot specifications                        |
| S          | Built-in silencer, direct exhaust                    |

\*1 Specify DIN rail length with "D□" at the end. (Enter the number of stations inside □.) The number of stations that may be displayed is longer than the manifold number of stations. Example: -D09

\*2 When "B" is selected, a back pressure check valve is included in all stations of the manifold. If the back pressure check valve is used only for the station that need it, then specify the station location in the manifold specification. ("B" is not necessary)

\*3 Specify "K" for wiring specification for cases below. (Except L kit)  
- All single wiring - Single and double mixed wiring  
- When there are stations which do not require wiring (e.g. single SUP spacer)

Specify the wiring specification in the manifold specification so that the number of solenoids is the maximum number of solenoids or less. (Standard wiring specification is double wiring)

\* For specifying two or more options, enter them alphabetically. Example: -BKN

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

### 1(P), 3(R) port size

|     |                                                 |
|-----|-------------------------------------------------|
| Nil | 1(P), 3(R) port<br>One-touch fittings for ø10   |
| 00T | 1(P), 3(R) port<br>One-touch fittings for ø3/8" |

### Electrical entry

| Kit type                                                                                                                                                                                                                        | Lead wire connector location | Cable specifications                        | Station          | Max. number of stations for special wiring specifications | *1 Max. number of solenoids |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|---------------------------------------------|------------------|-----------------------------------------------------------|-----------------------------|
| <b>F kit</b><br>The electric parts are made of copper.<br>D-sub connector kit<br>Mounting screw: Stainless steel<br>One-touch fitting Body: Stainless steel                                                                     | FD0                          | D side                                      | 1 to 12 stations | 16 stations                                               | 24                          |
|                                                                                                                                                                                                                                 | FD1                          | D-sub connector (25P) kit, without cable    |                  |                                                           |                             |
|                                                                                                                                                                                                                                 | FD2                          | D-sub connector (25P) kit, with 1.5 m cable |                  |                                                           |                             |
|                                                                                                                                                                                                                                 | FD3                          | D-sub connector (25P) kit, with 3.0 m cable |                  |                                                           |                             |
| <b>T kit</b><br>Terminal block box kit                                                                                                                                                                                          | TD0                          | D side                                      | 1 to 10 stations | 16 stations                                               | 16                          |
| <b>L kit</b><br>Mounting screw: Stainless steel<br>Lead wire kit<br>One-touch fitting Body: Stainless steel                                                                                                                     | LD0                          | D side                                      | 1 to 12 stations | —                                                         | —                           |
|                                                                                                                                                                                                                                 | LU0                          | U side                                      |                  |                                                           |                             |
|                                                                                                                                                                                                                                 | LD1                          | D side                                      |                  |                                                           |                             |
|                                                                                                                                                                                                                                 | LU1                          | U side                                      |                  |                                                           |                             |
|                                                                                                                                                                                                                                 | LD2                          | D side                                      |                  |                                                           |                             |
| <b>S kit</b><br>The electric parts are made of copper.<br>Serial transmission kit EX140 integrated-type (for output) serial transmission system*2<br>Mounting screw: Stainless steel<br>One-touch fitting Body: Stainless steel | LD2                          | D side                                      |                  |                                                           |                             |
|                                                                                                                                                                                                                                 | LU2                          | U side                                      |                  |                                                           |                             |
| <b>S kit</b><br>The electric parts are made of copper.<br>Serial transmission kit EX140 integrated-type (for output) serial transmission system*2<br>Mounting screw: Stainless steel<br>One-touch fitting Body: Stainless steel | SDQ                          | D side                                      | 1 to 8 stations  | 16 stations                                               | 16                          |
|                                                                                                                                                                                                                                 | SDV                          | D side                                      | 1 to 8 stations  | 16 stations                                               | 16                          |

\*1 The maximum number of stations should not be more than the maximum number of solenoids. (The number of solenoids are counted as: 1 for single solenoids and 2 for type 3P and 4P double solenoids.)

\*2 Refer to the **Web Catalog** for the details of EX140 integrated-type (for output) serial transmission system. Refer to "SI unit part nos." below when ordering the CE/UKCA-compliant SI unit.

### SI unit part nos.

| Symbol | Protocol type | SI unit part no. | Page |
|--------|---------------|------------------|------|
| SDQ    | DeviceNet®    | EX140-SDN1-X220  | 108  |
| SDV    | CC-Link       | EX140-SMJ1-X220  |      |

### Blanking plate assembly

25A-SSQ2000-10A-3

107

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valves

**25A-SQ2** **1** **3** **1** **5** **1** **C6** **1** **1** **1**

• **Series compatible with secondary batteries**

### Type of actuation

|          |                                          |
|----------|------------------------------------------|
| <b>1</b> | 2-position single                        |
| <b>2</b> | 2-position double (Double solenoid)*1    |
| <b>3</b> | 3-position closed center                 |
| <b>4</b> | 3-position exhaust center                |
| <b>5</b> | 3-position pressure center               |
| <b>A</b> | 4-position dual 3-port valve (N.C./N.C.) |
| <b>B</b> | 4-position dual 3-port valve (N.O./N.O.) |
| <b>C</b> | 4-position dual 3-port valve (N.C./N.O.) |

\*1 For double solenoid specification, the function symbol below is "D."

### Seal type

|          |             |
|----------|-------------|
| <b>1</b> | Rubber seal |
|----------|-------------|

### Function

|             |                                                    |
|-------------|----------------------------------------------------|
| <b>Nil</b>  | Standard (0.4 W DC)                                |
| <b>B</b>    | Quick response type (0.95 W)                       |
| <b>D</b> *1 | 2-position double (Double solenoid specifications) |
| <b>N</b> *2 | Negative common                                    |
| <b>R</b> *3 | External pilot specifications                      |

\*1 "D" is specified for 2-position double.

\*2 For L kit, when the manifold specifies negative common, the valve common should also be negative.

\*3 Except dual 3-port valves.

\* When two or more symbols are specified, indicate them alphabetically.

### Coil voltage

|          |        |
|----------|--------|
| <b>5</b> | 24 VDC |
| <b>6</b> | 12 VDC |




\* Light/Surge voltage suppressor is built-in.

\* S kit: 24 VDC only

### CE/UKCA-compliant

|            |                   |
|------------|-------------------|
| <b>Nil</b> | —                 |
| <b>Q</b>   | CE/UKCA-compliant |



### With/Without manifold block

| <b>Nil</b>                                                                         | <b>M</b>                                                                            | <b>MB</b>                                                                           |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Without manifold block                                                             | With manifold block                                                                 | With manifold block, built-in back pressure check valve                             |
|  |  |  |
|                                                                                    | * Lead wire is not included.                                                        | * Lead wire is not included.                                                        |
| • When ordering with manifolds<br>• When only valves are required.                 | For adding stations                                                                 |                                                                                     |

### Port plug mounting port




|            |           |
|------------|-----------|
| <b>Nil</b> | None      |
| <b>A</b>   | Port 4(A) |
| <b>B</b>   | Port 2(B) |

### Cylinder port

|           |                           |             |                                                                                       |
|-----------|---------------------------|-------------|---------------------------------------------------------------------------------------|
| <b>C4</b> | One-touch fittings for ø4 | Side ported |  |
| <b>C6</b> | One-touch fittings for ø6 |             |                                                                                       |
| <b>C8</b> | One-touch fittings for ø8 |             |                                                                                       |
| <b>L4</b> | One-touch fittings for ø4 | Top ported  |  |
| <b>L6</b> | One-touch fittings for ø6 |             |                                                                                       |
| <b>L8</b> | One-touch fittings for ø8 |             |                                                                                       |

\*1 Can be changed to side ported configuration.

### Manual override

| <b>Nil</b>                                                                          | <b>B</b>                                                                             | <b>D</b>                                                                              |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Non-locking push type (Tool required)                                               | Locking type (Tool required)                                                         | Slide locking type (Manual type)<br>* Only side ported type applicable                |
|  |  |  |

### SI Unit Part Nos.

| Description   | SI unit part no.       | Note       |
|---------------|------------------------|------------|
| EX140 SI unit | <b>EX140-SMJ1-X220</b> | CC-Link    |
|               | <b>EX140-SDN1-X220</b> | DeviceNet® |

### One-touch Fittings Part Nos.

| Port size         |             | One-touch fittings part no.                                     |
|-------------------|-------------|-----------------------------------------------------------------|
| Cylinder port     | Metric size | ø4 One-touch fitting (Straight type) <b>90-VVQ1000-51A-C4</b>   |
|                   |             | ø6 One-touch fitting (Straight type) <b>90-VVQ1000-51A-C6</b>   |
|                   |             | ø8 One-touch fitting (Straight type) <b>90-VVQ1000-51A-C8</b>   |
| 1 (P), 3 (R) port | Metric size | ø10 One-touch fitting (Straight type) <b>90-VVQ2000-51A-C10</b> |

### Refer to the Web Catalog.

• Specifications/Dimensions  
\* Same as the standard product

Click here for details. >>>



# Plug Lead Unit

## 25A-SQ2000 Series

### How to Order Manifolds

25A – SS5Q24 – 08 FD2 – D – – –

• Series compatible with secondary batteries

#### Stations

|      |             |
|------|-------------|
| 01   | 1 station   |
| ⋮    | ⋮           |
| 16*1 | 16 stations |

\*1 The maximum number of stations depends on the type of electrical entries.

#### Manifold mounting

|     |                   |
|-----|-------------------|
| D   | DIN rail mounting |
| E*1 | Direct mounting   |

\*1 Type "E" is only available with a C kit.

#### CE/UKCA-compliant

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

#### 1(P), 3(R) port size

|     |                                               |
|-----|-----------------------------------------------|
| Nil | 1(P), 3(R) port, One-touch fittings for ø10   |
| 00T | 1(P), 3(R) port, One-touch fittings for ø3/8" |

#### Option

|            |                                                      |
|------------|------------------------------------------------------|
| Nil        | None                                                 |
| 02 to 16*1 | DIN rail length specified                            |
| B*2        | Back pressure check valve                            |
| K*3        | Special wiring specifications (Except double wiring) |
| N          | With name plate (Side ported only)                   |
| R          | External pilot specifications                        |
| S          | Built-in silencer, direct exhaust                    |

\*1 Specify DIN rail length with "D□" at the end. (Enter the number of stations inside □.)

The number of stations that may be displayed is longer than the manifold number of stations. Example: -D09



\*2 When "-B" is selected, a back pressure check valve is included in all stations of the manifold. If the back pressure check valve is used only for the station that need it, then specify the station location in the manifold specification. ("-B" is not necessary)

\*3 Specify "-K" for wiring specification for cases below. (Except C kit)

- All single wiring - Single and double mixed wiring  
Specify the wiring specification in the manifold specification so that the number of solenoids is the maximum number of solenoids or less. (Standard wiring specification is double wiring)

\* For specifying two or more options, enter them alphabetically. Example: -BKN

#### Electrical entry

| Kit type                                                                                                                                                             | Lead wire connector location | Cable specifications | Stations         | Max. number of stations for special wiring specifications | *1 Max. number of solenoids |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|----------------------|------------------|-----------------------------------------------------------|-----------------------------|
| <b>F kit</b><br>The electric parts are made of copper.<br>D-sub connector kit<br> | D side                       | FD0                  | 1 to 12 stations | 16 stations                                               | 24                          |
|                                                                                                                                                                      |                              | FD1                  |                  |                                                           |                             |
|                                                                                                                                                                      |                              | FD2                  |                  |                                                           |                             |
|                                                                                                                                                                      |                              | FD3                  |                  |                                                           |                             |
| <b>C kit</b><br>Connector kit<br>                                                 | C                            | —                    | 1 to 16 stations | —                                                         | —                           |

\*1 The maximum number of stations should not be more than the maximum number of solenoids. (The number of solenoids are counted as: 1 for single solenoids and 2 for type 3P and 4P double solenoids.)

\* Refer to the **Web Catalog** for manifold spare parts.

#### Blanking plate assembly

25A-SSQ2000-10A-4

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## How to Order Valves

**25A-SQ2** **1** **4** **1** **5** **L** **1** **C6**

• **Series compatible with secondary batteries**

### Type of actuation

|          |                                          |
|----------|------------------------------------------|
| <b>1</b> | 2-position single                        |
| <b>2</b> | 2-position double (Double solenoid)*1    |
| <b>3</b> | 3-position closed center                 |
| <b>4</b> | 3-position exhaust center                |
| <b>5</b> | 3-position pressure center               |
| <b>A</b> | 4-position dual 3-port valve (N.C./N.C.) |
| <b>B</b> | 4-position dual 3-port valve (N.O./N.O.) |
| <b>C</b> | 4-position dual 3-port valve (N.C./N.O.) |

\*1 For double solenoid specification, the function symbol below is "D."

### Seal type

|          |             |
|----------|-------------|
| <b>1</b> | Rubber seal |
|----------|-------------|

### Function

|             |                                                    |
|-------------|----------------------------------------------------|
| <b>Nil</b>  | Standard (0.4 W DC)                                |
| <b>B</b>    | Quick response type (0.95 W)                       |
| <b>D</b> *1 | 2-position double (Double solenoid specifications) |
| <b>N</b>    | Negative COM                                       |
| <b>R</b> *2 | External pilot specifications                      |

\*1 "D" is specified for 2-position double.

\*2 Except dual 3-port valves.



\* When two or more symbols are specified, indicate them alphabetically.

### Coil voltage

|          |        |
|----------|--------|
| <b>5</b> | 24 VDC |
| <b>6</b> | 12 VDC |

\* Light/Surge voltage suppressor is built-in.

### Electrical entry




| <b>L</b>                                                                            | <b>LO</b>                                                                           |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Plug connector type with 300 mm lead wire                                           | Plug connector type without connector                                               |
|  |  |
|                                                                                     | For F, P, J kit manifolds*1                                                         |

\*1 Indicate "LO" when ordering centralized wiring type manifolds, F, P, and J kits, since the lead wire will be attached to the manifold side.

### CE/UKCA-compliant

|            |                   |
|------------|-------------------|
| <b>Nil</b> | —                 |
| <b>Q</b>   | CE/UKCA-compliant |



### With/Without manifold block

| <b>Nil</b>                                                                         | <b>M</b>                                                                            | <b>MB</b>                                                                           |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Without manifold block                                                             | With manifold block                                                                 | With manifold block, built-in back pressure check valve                             |
|  |  |  |
|                                                                                    | * Lead wire is not included.                                                        | * Lead wire is not included.                                                        |
| • When ordering with manifolds<br>• When only valves are required.                 | For adding stations                                                                 |                                                                                     |

### Port plug mounting port




|            |           |
|------------|-----------|
| <b>Nil</b> | None      |
| <b>A</b>   | Port 4(A) |
| <b>B</b>   | Port 2(B) |

### Cylinder port

|           |                          |               |                                                                                       |
|-----------|--------------------------|---------------|---------------------------------------------------------------------------------------|
| <b>C4</b> | One-touch fitting for ø4 | Side ported   |  |
| <b>C6</b> | One-touch fitting for ø6 |               |                                                                                       |
| <b>C8</b> | One-touch fitting for ø8 |               |                                                                                       |
| <b>L4</b> | One-touch fitting for ø4 | Top ported *1 |  |
| <b>L6</b> | One-touch fitting for ø6 |               |                                                                                       |
| <b>L8</b> | One-touch fitting for ø8 |               |                                                                                       |

\*1 Can be changed to side ported configuration.

### Manual override

| <b>Nil</b>                                                                          | <b>B</b>                                                                             | <b>D</b>                                                                              |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Non-locking push type (Tool required)                                               | Locking type (Tool required)                                                         | Slide locking type (Manual type)<br>* Only side ported type applicable                |
|  |  |  |

## One-touch Fittings Part Nos.

| Port size         |             |                                       | One-touch fittings part no. |
|-------------------|-------------|---------------------------------------|-----------------------------|
| Cylinder port     | Metric size | ø4 One-touch fitting (Straight type)  | <b>90-VVQ1000-51A-C4</b>    |
|                   |             | ø6 One-touch fitting (Straight type)  | <b>90-VVQ1000-51A-C6</b>    |
|                   |             | ø8 One-touch fitting (Straight type)  | <b>90-VVQ1000-51A-C8</b>    |
| 1 (P), 3 (R) port | Metric size | ø10 One-touch fitting (Straight type) | <b>90-VVQ2000-51A-C10</b>   |

### Refer to the Web Catalog.

• Specifications/Dimensions  
\* Same as the standard product

Click here for details. >>>



# 5-Port Solenoid Valve

## 25A-VQZ1000 Series

### Single Unit



#### How to Order Valves

**25A-VQZ 1 1 5 1 [ ] - 5 M [ ] 1- 01 - [ ]**

• Series compatible with secondary batteries

Series

1 VQZ1000 body width 10 mm

Type of actuation

|   |                                  |
|---|----------------------------------|
| 1 | 2-position single                |
| 2 | 2-position double                |
| 3 | 3-position closed center         |
| 4 | 3-position exhaust center        |
| 5 | 3-position pressure center       |
| 8 | 3-port for mixture mounting N.C. |
| 9 | 3-port for mixture mounting N.O. |

Body type

5 Base mounted

Seal type

1 Rubber seal

Function

| Symbol | Specifications                          | DC            | AC |
|--------|-----------------------------------------|---------------|----|
| Nil    | Standard                                | (0.35 W)<br>○ | ○  |
| B      | High speed response type                | (0.9 W)<br>○  | —  |
| R      | External pilot type                     | ○             | ○  |
| BR     | High speed response/External pilot type | (0.9 W)<br>○  | —  |

• CE/UKCA-compliant


|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* CE/UKCA-compliant: For DC only.

• Port size

| Symbol | Port size         |
|--------|-------------------|
| Nil    | Without sub-plate |
| 01     | Rc1/8             |

• Manual override



• Electrical entry

| G: Grommet (DC specification) | L: L-type plug connector with lead wire | LO: L-type plug connector without connector | M: M-type plug connector with lead wire | MO: M-type plug connector without connector |
|-------------------------------|-----------------------------------------|---------------------------------------------|-----------------------------------------|---------------------------------------------|
|                               | With light/surge voltage suppressor     | With light/surge voltage suppressor         | With light/surge voltage suppressor     | With light/surge voltage suppressor         |
|                               |                                         |                                             |                                         |                                             |

• Coil voltage

|   |                              |
|---|------------------------------|
| 1 | 100 VAC (50/60 Hz)           |
| 2 | 200 VAC (50/60 Hz)           |
| 3 | 110 VAC [115 VAC] (50/60 Hz) |
| 4 | 220 VAC [230 VAC] (50/60 Hz) |
| 5 | 24 VDC                       |
| 6 | 12 VDC                       |

#### ⚠ Caution

Use standard (DC) specification for continuous duty.

Refer to the Web Catalog.

• Specifications/Dimensions  
\* Same as the standard product

Click here for details. >>>



Base Mounted  
Plug Lead Unit

# 5-Port Solenoid Valve

## 25A-VQZ1000 Series

### Manifold Connector Kit



#### How to Order Manifolds

**25A-VV5QZ 1 5-08 C6 C-R-**

- Series compatible with secondary batteries**
- Series**  
1 VQZ1000
- Manifold type**  
5 Base mounted
- Stations**  
02 2 stations  
: :  
20 20 stations
- Port size [4(A), 2(B) port]**  

| Symbol | Port size             |
|--------|-----------------------|
| C4     | ø4 One-touch fitting  |
| C6     | ø6 One-touch fitting  |
| M5     | M5 thread             |
| CM*1   | Mixture of port sizes |
- CE/UKCA-compliant**  

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |
- Option**  

|     |                     |
|-----|---------------------|
| Nil | None                |
| R   | External pilot type |
- Kit type**  
C Connector

\*1 Specify port mixture/with port plug by the manifold specification sheet.  
Port mixture and port plug are available only for One-touch fitting type.

#### How to Order Valves

**25A-VQZ 1 1 5 1 -5 M 1-**

- Series compatible with secondary batteries**
- Series**  
1 VQZ1000 body width 10 mm
- Type of actuation**  

|   |                                  |
|---|----------------------------------|
| 1 | 2-position single                |
| 2 | 2-position double                |
| 3 | 3-position closed center         |
| 4 | 3-position exhaust center        |
| 5 | 3-position pressure center       |
| 8 | 3-port for mixture mounting N.C. |
| 9 | 3-port for mixture mounting N.O. |
- Body type**  
5 Base mounted
- Seal type**  
1 Rubber seal
- Function**  

| Symbol | Specifications                           | DC         | AC |
|--------|------------------------------------------|------------|----|
| Nil    | Standard                                 | (0.35 W) ○ | ○  |
| B      | High speed response type                 | (0.9 W) ○  | —  |
| R      | External pilot type                      | ○          | ○  |
| BR     | High speed response/ External pilot type | (0.9 W) ○  | —  |
- CE/UKCA-compliant**  

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

\* CE/UKCA-compliant: For DC only.
- Manual override**  

|     |                                       |
|-----|---------------------------------------|
| Nil | Non-locking push type (Tool required) |
| B   | Locking type (Tool required)          |
- Electrical entry**  

| Symbol | Electrical entry                        | Light/surge voltage suppressor |
|--------|-----------------------------------------|--------------------------------|
| G      | Grommet (DC specification)              | None                           |
| L      | L-type plug connector with lead wire    | Yes                            |
| LO     | L-type plug connector without connector |                                |
| M      | M-type plug connector with lead wire    |                                |
| MO     | M-type plug connector without connector |                                |
- Coil voltage**  

|   |                              |
|---|------------------------------|
| 1 | 100 VAC (50/60 Hz)           |
| 2 | 200 VAC (50/60 Hz)           |
| 3 | 110 VAC [115 VAC] (50/60 Hz) |
| 4 | 220 VAC [230 VAC] (50/60 Hz) |
| 5 | 24 VDC                       |
| 6 | 12 VDC                       |



**Caution**  
Use standard (DC) specification for continuous duty.

Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



Body Ported  
Plug Lead Unit

# 5-Port Solenoid Valve

## 25A-VQZ1000 Series

### Single Unit



#### How to Order Valves

**25A-VQZ 1 1 2 1**    **-5 M**    **1-C6-**      

• **Series compatible with secondary batteries**

• **Series**

**1** VQZ1000 body width 10 mm

• **Type of actuation**

|          |                                  |
|----------|----------------------------------|
| <b>1</b> | 2-position single                |
| <b>2</b> | 2-position double                |
| <b>3</b> | 3-position closed center         |
| <b>4</b> | 3-position exhaust center        |
| <b>5</b> | 3-position pressure center       |
| <b>8</b> | 3-port for mixture mounting N.C. |
| <b>9</b> | 3-port for mixture mounting N.O. |

\* 3-port for mixture mounting is only available for port size C4 or C6.

• **CE/UKCA-compliant**


|            |                   |
|------------|-------------------|
| <b>Nil</b> | —                 |
| <b>Q</b>   | CE/UKCA-compliant |

\* CE/UKCA-compliant: For DC only.

• **Option**

**Nil:** None

**F:** With bracket  
(2-position single type only)



• **Port size [4(A), 2(B) port]**


| Symbol    | Port size            |
|-----------|----------------------|
| <b>C4</b> | ø4 One-touch fitting |
| <b>C6</b> | ø6 One-touch fitting |
| <b>M5</b> | M5 thread            |

• **Manual override**

**Nil:** Non-locking push type  
(Tool required)



**B:** Locking type  
(Tool required)



• **Electrical entry**

| <b>G:</b> Grommet<br>(DC specification) | <b>L:</b> L-type<br>plug connector<br>with lead wire | <b>LO:</b> L-type<br>plug connector<br>without connector | <b>M:</b> M-type<br>plug connector<br>with lead wire | <b>MO:</b> M-type<br>plug connector<br>without connector |
|-----------------------------------------|------------------------------------------------------|----------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------|
|                                         | With light/<br>surge voltage<br>suppressor           | With light/<br>surge voltage<br>suppressor               | With light/<br>surge voltage<br>suppressor           | With light/<br>surge voltage<br>suppressor               |
|                                         |                                                      |                                                          |                                                      |                                                          |

• **Body type**

**2** Body ported

• **Seal type**

**1** Rubber seal

• **Function**

| Symbol     | Specifications           | DC            | AC |
|------------|--------------------------|---------------|----|
| <b>Nil</b> | Standard                 | (0.35 W)<br>○ | ○  |
| <b>B</b>   | High speed response type | (0.9 W)<br>○  | —  |

• **Coil voltage**

|          |                              |
|----------|------------------------------|
| <b>1</b> | 100 VAC (50/60 Hz)           |
| <b>2</b> | 200 VAC (50/60 Hz)           |
| <b>3</b> | 110 VAC [115 VAC] (50/60 Hz) |
| <b>4</b> | 220 VAC [230 VAC] (50/60 Hz) |
| <b>5</b> | 24 VDC                       |
| <b>6</b> | 12 VDC                       |



**Caution**

Use standard (DC) specification for continuous duty.

**Refer to the Web Catalog.**

• Specifications/Dimensions  
\* Same as the standard product

Click here for details. >>>



Body Ported  
Plug Lead Unit

# 5-Port Solenoid Valve

## 25A-VQZ1000 Series

### Manifold Connector Kit



#### How to Order Manifolds

**25A-VV5QZ 1 2-08 C-**

- Series compatible with secondary batteries**
- Series**  
1 VQZ1000
- Manifold type**  
2 Body ported
- Stations**  
02 2 stations  
: :  
20 20 stations
- CE/UKCA-compliant**  
Nil —  
Q CE/UKCA-compliant
- Kit type**  
C Connector

#### How to Order Valves

**25A-VQZ 1 1 2 1 - 5 M 1-C6-**

- Series compatible with secondary batteries**
- Series**  
1 VQZ1000 body width 10 mm
- Type of actuation**

|     |                                  |
|-----|----------------------------------|
| 1   | 2-position single                |
| 2   | 2-position double                |
| 3   | 3-position closed center         |
| 4   | 3-position exhaust center        |
| 5*1 | 3-position pressure center       |
| 8*1 | 3-port for mixture mounting N.C. |
| 9*1 | 3-port for mixture mounting N.O. |

\*1 3-port for mixture mounting is only available for port size C4 or C6.
- Body type**  
2 Body ported
- Seal type**  
1 Rubber seal
- Function**

| Symbol | Specifications           | DC         | AC |
|--------|--------------------------|------------|----|
| Nil    | Standard                 | (0.35 W) ○ | ○  |
| B      | High speed response type | (0.9 W) ○  | —  |
- CE/UKCA-compliant**  
Nil —  
Q CE/UKCA-compliant  
\* CE/UKCA-compliant: For DC only.
- Port size [4(A), 2(B) port]**

| Symbol | Port size            |
|--------|----------------------|
| C4     | ø4 One-touch fitting |
| C6     | ø6 One-touch fitting |
| M5     | M5 thread            |
- Manual override**

|     |                                       |
|-----|---------------------------------------|
| Nil | Non-locking push type (Tool required) |
| B   | Locking type (Tool required)          |
- Electrical entry**

| Symbol | Electrical entry                        | Light/surge voltage suppressor |
|--------|-----------------------------------------|--------------------------------|
| G      | Grommet (DC specification)              | None                           |
| L      | L-type plug connector with lead wire    | Yes                            |
| LO     | L-type plug connector without connector |                                |
| M      | M-type plug connector with lead wire    |                                |
| MO     | M-type plug connector without connector |                                |
- Coil voltage**

|   |                              |
|---|------------------------------|
| 1 | 100 VAC (50/60 Hz)           |
| 2 | 200 VAC (50/60 Hz)           |
| 3 | 110 VAC [115 VAC] (50/60 Hz) |
| 4 | 220 VAC [230 VAC] (50/60 Hz) |
| 5 | 24 VDC                       |
| 6 | 12 VDC                       |



#### Caution

Use standard (DC) specification for continuous duty.

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Plug-in Unit Base Mounted

## 25A-VQ1000/2000 Series Double check block (Separated)

### How to Order

Double check block

**25A-VQ1000-FPG-C4M5-F**

- Series compatible with secondary batteries

IN side port size

|    |                        |
|----|------------------------|
| M5 | M5 thread              |
| C3 | ø3.2 One-touch fitting |
| C4 | ø4 One-touch fitting   |
| C6 | ø6 One-touch fitting   |

OUT side port size

|    |                        |
|----|------------------------|
| M5 | M5 thread              |
| C3 | ø3.2 One-touch fitting |
| C4 | ø4 One-touch fitting   |
| C6 | ø6 One-touch fitting   |

Option

|     |                                  |
|-----|----------------------------------|
| Nil | None                             |
| F   | With bracket                     |
| D   | DIN rail mounting (For manifold) |
| N   | Name plate                       |

\* When two or more symbols are specified, indicate them alphabetically.  
Example) -DN

Manifold (DIN rail mounting)

**25A-VVQ1000-FPG-06**

- Series compatible with secondary batteries

When ordering a double check block, order the DIN rail mounting [-D].

<Ordering example>

25A-VVQ1000-FPG-06...6-station manifold

- \* 25A-VQ1000-FPG-C4M5-D; 3 sets
  - \* 25A-VQ1000-FPG-C6M5-D; 3 sets
- Double check block

Bracket Assembly

| Part no.          | Tightening torque |
|-------------------|-------------------|
| 25A-VQ1000-FPG-FB | 0.22 to 0.25 N·m  |

Double check block

**25A-VQ2000-FPG-0101-F**

- Series compatible with secondary batteries

IN side port size

|    |                      |
|----|----------------------|
| 01 | Rc 1/8               |
| 02 | Rc 1/4               |
| C6 | ø6 One-touch fitting |
| C8 | ø8 One-touch fitting |

OUT side port size

|    |                      |
|----|----------------------|
| 01 | Rc 1/8               |
| 02 | Rc 1/4               |
| C6 | ø6 One-touch fitting |
| C8 | ø8 One-touch fitting |

Option

|     |                                  |
|-----|----------------------------------|
| Nil | None                             |
| D   | DIN rail mounting (For manifold) |
| F   | With bracket                     |
| N   | Name plate                       |

\* When two or more symbols are specified, indicate them alphabetically.  
Example) -DN

Manifold (DIN rail mounting)

**25A-VVQ2000-FPG-06**

- Series compatible with secondary batteries

When ordering a double check block, order the DIN rail mounting [-D].

<Ordering Example>

25A-VVQ2000-FPG-06...6-station manifold

- \* 25A-VQ2000-FPG-C6C6-D; 3 sets
  - \* 25A-VQ2000-FPG-C8C8-D; 3 sets
- Double check block

Bracket Assembly

| Part no.          | Tightening torque |
|-------------------|-------------------|
| 25A-VQ2000-FPG-FB | 0.8 to 1.0 N·m    |

Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Rubber Seal

## 3-Port/Pilot Poppet Type

# 25A-VP342/542/742 Series



### How to Order



\* Only DIN and conduit terminal types are available for AC mode. Refer to the electrical entry for details.

Body ported **25A-VP** **3** **4** **2** **5** **D** **1-01** **A**

Series compatible with secondary batteries

#### Series

|   |       |
|---|-------|
| 3 | VP300 |
| 5 | VP500 |
| 7 | VP700 |

#### Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

#### Pressure specification

|     |                              |
|-----|------------------------------|
| Nil | Standard (0.7 MPa)           |
| K   | High pressure type (1.0 MPa) |

#### Coil specification

|     |                                     |
|-----|-------------------------------------|
| Nil | Standard                            |
| T   | With power-saving circuit (DC only) |

\* Be sure to select the power-saving circuit type if it is to be continuously energized for long periods of time.  
\* "T" type is only available for DC mode. When "T" is selected, only "Z" type of light/surge voltage suppressor is available.

#### Rated voltage

| DC |        | AC (50/60 Hz) |                   |
|----|--------|---------------|-------------------|
| 5  | 24 VDC | 1             | 100 VAC           |
| 6  | 12 VDC | 2             | 200 VAC           |
|    |        | 3             | 110 VAC [115 VAC] |
|    |        | 4             | 220 VAC [230 VAC] |
|    |        | 7             | 240 VAC           |
|    |        | B             | 24 VAC            |

#### Electrical entry

|                   | DIN terminal      | DIN (EN175301-803) terminal | Conduit terminal    |
|-------------------|-------------------|-----------------------------|---------------------|
|                   | [IP65 compatible] | [IP65 compatible]           | [IP65 compatible]   |
|                   |                   |                             |                     |
|                   | D: With connector | Y: With connector           | T: Conduit terminal |
| CE/UKCA-compliant | DC                |                             |                     |
|                   | AC                |                             |                     |

#### Thread type

|     |      |
|-----|------|
| Nil | Rc   |
| F   | G    |
| N   | NPT  |
| T   | NPTF |

#### Type of actuation

|   |                        |
|---|------------------------|
| A | N.C. (Normally closed) |
| B | N.O. (Normally open)   |

#### Bracket

|     |                 |
|-----|-----------------|
| Nil | Without bracket |
| F   | With bracket    |

#### Port size

| Symbol | Port size | VP300 | VP500 | VP700 |
|--------|-----------|-------|-------|-------|
| 01     | 1/8       | ○     | —     | —     |
| 02     | 1/4       | ○     | ○     | —     |
| 03     | 3/8       | —     | ○     | ○     |
| 04     | 1/2       | —     | —     | ○     |

#### Manual override

| Nil: Non-locking push type | D: Push-turn locking slotted type | E: Push-turn locking lever type |
|----------------------------|-----------------------------------|---------------------------------|
|                            |                                   |                                 |

#### Light/surge voltage suppressor

|     |                                                 | DC | AC |
|-----|-------------------------------------------------|----|----|
| Nil | Without light/surge voltage suppressor          | ○  | ○  |
| S   | With surge voltage suppressor                   | ○  | *1 |
| Z   | With light/surge voltage suppressor             | ○  | ○  |
| R   | With surge voltage suppressor (Non-polar)       | ○  | —  |
| U   | With light/surge voltage suppressor (Non-polar) | ○  | —  |

\*1 There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Rubber Seal

## 3-Port/Pilot Poppet Type

# 25A-VP344/544/744 Series

### How to Order



\* Only DIN and conduit terminal types are available for AC mode. Refer to the electrical entry for details.

Base mounted **25A-VP 3 4 4** **5 D** **1-01** **A**

Series compatible with secondary batteries

#### Series

|   |       |
|---|-------|
| 3 | VP300 |
| 5 | VP500 |
| 7 | VP700 |

#### Pilot type

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

#### Pressure specifications

|     |                              |
|-----|------------------------------|
| Nil | Standard (0.7 MPa)           |
| K   | High pressure type (1.0 MPa) |

#### Coil specifications




|     |                                     |
|-----|-------------------------------------|
| Nil | Standard                            |
| T   | With power-saving circuit (DC only) |

\* Be sure to select the power-saving circuit type if it is to be continuously energized for long periods of time.  
\* "T" type is only available for DC mode. When "T" is selected, only "Z" type of light/surge voltage suppressor is available.

#### Rated voltage

| DC |        | AC (50/60 Hz) |                   |
|----|--------|---------------|-------------------|
| 5  | 24 VDC | 1             | 100 VAC           |
| 6  | 12 VDC | 2             | 200 VAC           |
|    |        | 3             | 110 VAC [115 VAC] |
|    |        | 4             | 220 VAC [230 VAC] |
|    |        | 7             | 240 VAC           |
|    |        | B             | 24 VAC            |

#### Electrical entry

|                   | DIN terminal                                                                                                                                                                                                                                                   | DIN (EN175301-803) terminal                                                                                                                                                                                                                                    | Conduit terminal                                                                                                                                                                                                                                               |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | [IP65 compatible]                                                                                                                                                                                                                                              | [IP65 compatible]                                                                                                                                                                                                                                              | [IP65 compatible]                                                                                                                                                                                                                                              |
|                   |                                                                                                                                                                             |                                                                                                                                                                             |                                                                                                                                                                             |
|                   | D: With connector                                                                                                                                                                                                                                              | Y: With connector                                                                                                                                                                                                                                              | T: Conduit terminal                                                                                                                                                                                                                                            |
| CE/UKCA-compliant | DC    | DC    | DC    |
|                   | AC    | AC    | AC    |

#### Thread type

|     |      |
|-----|------|
| Nil | Rc   |
| F   | G    |
| N   | NPT  |
| T   | NPTF |

#### Type of actuation




|   |                        |
|---|------------------------|
| A | N.C. (Normally closed) |
| B | N.O. (Normally open)   |

#### Port size (Sub-plate)

| Symbol | Port size           | VP300 | VP500 | VP700 |
|--------|---------------------|-------|-------|-------|
| Nil    | Without sub-plate*1 |       |       |       |
| 01     | 1/8                 | ○     | —     | —     |
| 02     | 1/4                 | ○     | ○     | —     |
| 03     | 3/8                 | —     | ○     | ○     |
| 04     | 1/2                 | —     | —     | ○     |

\*1 With a gasket and two mounting bolts.

#### Manual override

| Nil: Non-locking push type                                                           | D: Push-turn locking slotted type                                                     | E: Push-turn locking lever type                                                       |
|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |

#### Light/surge voltage suppressor

|     |                                                 | DC | AC  |
|-----|-------------------------------------------------|----|-----|
| Nil | Without light/surge voltage suppressor          | ○  | ○   |
| S   | With surge voltage suppressor                   | ○  | —*1 |
| Z   | With light/surge voltage suppressor             | ○  | ○   |
| R   | With surge voltage suppressor (Non-polar)       | ○  | —   |
| U   | With light/surge voltage suppressor (Non-polar) | ○  | —   |

\*1 There is no "S" type for AC mode, since a rectifier prevents surge voltage generation.

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# 3-Port Solenoid Valve Modular Type/Residual Pressure Release Valve

## 25A-VP346E/546E/746E/946E Series



\* Excludes the high-pressure (K) type

### How to Order

**Modular Type** **25A-VP** **5** **46E** **-5** **DZ** **1-R**

**Series compatible with secondary batteries**

**Symbol**  
Residual pressure relief 3-port solenoid valve

1(P) 2(A) 3(R)

With soft start-up function

1(P) 2(A) 3(R)

**Series**

|   |       |
|---|-------|
| 3 | VP300 |
| 5 | VP500 |
| 7 | VP700 |
| 9 | VP900 |

**Solenoid valve type**

|   |                                                |
|---|------------------------------------------------|
| E | Residual pressure relief 3-port solenoid valve |
|---|------------------------------------------------|

**Pressure specifications**

|     | Series                  | VP300 | VP500 | VP700 | VP900 |
|-----|-------------------------|-------|-------|-------|-------|
| Nil | Standard (0.7 MPa)      | ●     | ●     | ●     | ●     |
| K   | High pressure (1.0 MPa) | -     | ●     | ●     | -     |

**Rated voltage**

|    |          |
|----|----------|
| DC | 5 24 VDC |
|----|----------|

**Electrical entry**

| DIN terminal                                                                       | DIN (EN 175301-803C) terminal                                                      | M12 connector             |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|---------------------------|
|                                                                                    |                                                                                    |                           |
| D: With connector<br>DZ: With connector/<br>With light/surge<br>voltage suppressor | Y: With connector<br>YZ: With connector/<br>With light/surge<br>voltage suppressor | KOZ: Without<br>connector |

**Soft start-up function**

|     |                             |
|-----|-----------------------------|
| Nil | None                        |
| S   | With soft start-up function |

**Flow direction**

|     |               |
|-----|---------------|
| Nil | Left to right |
| R   | Right to left |

**Manual override**

|     |                                       |  | Series |       |       |       |
|-----|---------------------------------------|--|--------|-------|-------|-------|
|     |                                       |  | VP300  | VP500 | VP700 | VP900 |
| Nil | Non-locking<br>push type              |  | ●      | ●     | ●     | ●     |
| A   | Non-locking<br>push type<br>(Manual)  |  | -      | ●     | ●     | -     |
| E   | Push-turn<br>locking type<br>(Manual) |  | ●      | ●     | ●     | ●     |

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# Safety Exhaust Valve/

# Modular Connection Type



## How to Order

**25A-VPX406**    **T** - **5** KO NZ - D - A4   

Series compatible with secondary batteries

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

### ① Pressure specifications

|            |                                 |
|------------|---------------------------------|
| <b>Nil</b> | Standard (0.25 to 0.7 MPa)      |
| <b>K</b>   | High pressure (0.25 to 1.0 MPa) |

### ② Coil specifications

|          |                           |
|----------|---------------------------|
| <b>T</b> | With power-saving circuit |
|----------|---------------------------|

### ③ Rated voltage

|          |        |
|----------|--------|
| <b>5</b> | 24 VDC |
|----------|--------|

### ④ Electrical entry

|           |                                           |
|-----------|-------------------------------------------|
| <b>KO</b> | M12 connector, Without connector cable    |
| <b>K</b>  | With M12 connector, Cable length: 3000 mm |

\* When option "K" (With M12 connector cable) is selected, 2 cables are included.

### ⑤ Light/surge voltage suppressor and common specification

| Symbol     | Specifications                                                      | Compatible CAT. |
|------------|---------------------------------------------------------------------|-----------------|
| <b>NZ</b>  | With light/surge voltage suppressor<br>Negative common              | 4               |
| <b>D1Z</b> | With light/surge voltage suppressor<br>Double common, Wiring type 1 | 3               |
| <b>D2Z</b> | With light/surge voltage suppressor<br>Double common, Wiring type 2 | 3               |

### ⑥ Pressure sensor wiring specifications

|           |                                |
|-----------|--------------------------------|
| <b>D</b>  | Double common                  |
| <b>N1</b> | Negative common, Wiring type 1 |
| <b>N2</b> | Negative common, Wiring type 2 |

### ⑦ Connected AC size

| Symbol    | Connected AC size<br>1/2 port | Flow rate characteristics<br>(2 ⇒ 3) |      | Port size<br>3 port |
|-----------|-------------------------------|--------------------------------------|------|---------------------|
|           |                               | C [dm <sup>3</sup> /(s·bar)]         | b    |                     |
| <b>A3</b> | AC30                          | 25.0                                 | 0.20 | G1"                 |
| <b>A4</b> | AC40                          | 31.0                                 | 0.15 |                     |
| <b>A6</b> | AC50/60                       | 35.8                                 | 0.10 |                     |



### ⑧ Thread type

[Pressure gauge connection thread (1/8")]

| Symbol     | Thread type |
|------------|-------------|
| <b>Nil</b> | Rc          |
| <b>N</b>   | NPT         |
| <b>F</b>   | G           |

\* Port (exhaust port) is only G thread regardless of thread type.

## M12 Connector Cable

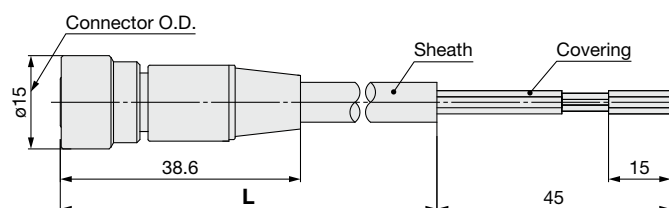

| Part no.             | Lead wire length (L) |
|----------------------|----------------------|
| <b>V100-200-6-10</b> | 1000 mm              |
| <b>V100-200-6-30</b> | 3000 mm              |
| <b>V100-200-6-50</b> | 5000 mm              |

|                         |                     |
|-------------------------|---------------------|
| Sheath O.D.             | ø6.5 mm             |
| Cover diameter          | ø1.8 mm             |
| Conductor cross section | 0.5 mm <sup>2</sup> |

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# 3-Port Solenoid Valve/Residual Pressure Release Valve with Detection of Main Valve Position

## 25A-VP500/700-X536, X538, X555



### How to Order

Residual pressure release valve

25A-VP **5** **4** **2** **R** - **5** **D** **Z** **1** - **03** **□** - **M** **□** - X536

Dual residual pressure release valve

25A-VP **5** **4** **4** **R** - **5** **D** **Z** **1** - **03** **□** - **M** **A** - X538

Dual residual pressure release valve with soft start-up function

25A-VP **5** **4** **4** **□** - **5** **D** **Z** **1** - **03** **□** - **M** **□** **□** - X555

#### Series

|   |       |
|---|-------|
| 5 | VP500 |
| 7 | VP700 |

#### Body

|   |              |
|---|--------------|
| 2 | Body ported  |
| 4 | Base mounted |

#### Pilot

|     |                |
|-----|----------------|
| Nil | Internal pilot |
| R   | External pilot |

#### Voltage

|   |        |
|---|--------|
| 5 | 24 VDC |
|---|--------|

#### Electrical entry

|   |              |
|---|--------------|
| D | DIN terminal |
|---|--------------|

#### Light/surge voltage suppressor

|   |                                     |
|---|-------------------------------------|
| Z | With light/surge voltage suppressor |
|---|-------------------------------------|

#### Internal Pilot Type

#### Caution

Valve may not operate properly when air supply to P port is not adequate and the supply pressure to the valve is lower than 0.25 MPa, the minimum operating pressure. Be careful with insufficient supply pressure.

#### Piping for External Pilot Type

#### Caution

The product may not operate when the external pilot pressure is insufficient due to simultaneous operation or restricted air piping. In this case, use the check valve (AKH series) with the external pilot port, change the piping size or adjust the set pressure to provide a constant pressure of 0.25 MPa or more.

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product



Click here for details. >>>

#### Port size

|    | Port size | VP500 | VP700 |
|----|-----------|-------|-------|
| 03 | 3/8"      | ●     | —     |
| 04 | 1/2"      | —     | ●     |

#### Thread

|     |     |
|-----|-----|
| Nil | Rc  |
| F   | G   |
| N   | NPT |

#### Safety limit switch/Wiring

|     |                                             |
|-----|---------------------------------------------|
| Nil | G1/2 (Made by OMRON)                        |
| M   | M12 connector (Made by OMRON)               |
| S1  | M12 connector (Made by Rockwell Automation) |

#### With check valve (Only external pilot)

|     | Check valve | Applicable tube O.D. | Thread |   |     |
|-----|-------------|----------------------|--------|---|-----|
|     |             |                      | Rc     | G | NPT |
| Nil | None        | —                    | ●      | ● | ●   |
| A   | Yes         | ø6                   | ●      | — | —   |
| B   |             | ø1/4"                | —      | — | ●   |

\* For the internal pilot, the symbol is nil.

#### Throttle

|      |                    |
|------|--------------------|
| Nil  | Variable throttle  |
| 10   | ø1 fixed orifice   |
| 15   | ø1.5 fixed orifice |
| 20*1 | ø2 fixed orifice   |

\*1 VP700 only

# 3-Port Solenoid Valve Direct Operated Poppet Type **25A-VT317 Series** Rubber Seal



[Option]

\* CE/UKCA-compliant:  
For DIN terminal type.

## How to Order

**25A-V T 317 - 1 G - 02 -**

- Body type**

|   |             |
|---|-------------|
| T | Body ported |
| O | Manifold    |
- Series compatible with secondary batteries**
- Valve option**

|     |                      |
|-----|----------------------|
| Nil | Standard             |
| E*1 | Continuous duty type |
| V*1 | For vacuum           |

\*1 Semi-standard
- Rated voltage**

|     |                    |
|-----|--------------------|
| 1   | 100 VAC (50/60 Hz) |
| 2   | 200 VAC (50/60 Hz) |
| 3*1 | 110 VAC (50/60 Hz) |
| 4*1 | 220 VAC (50/60 Hz) |
| 5   | 24 VDC             |
| 6*1 | 12 VDC             |
| 7*1 | 240 VAC (50/60 Hz) |

\*1 Semi-standard  
\* Applicable only for DIN terminal type.
- Thread type**

|     |      |
|-----|------|
| Nil | Rc   |
| F   | G    |
| N   | NPT  |
| T   | NPTF |
- CE/UKCA-compliant**


|     |                     |
|-----|---------------------|
| Nil | —                   |
| Q   | CE/UKCA-compliant*1 |

\*1 Applicable only for DIN terminal type.
- Port size**

|     |                             |
|-----|-----------------------------|
| Nil | Without port (For manifold) |
| 02  | 1/4 (8A)                    |
- Electrical entry**

|   |                           | CE/UKCA-compliant |
|---|---------------------------|-------------------|
| G | Grommet, 300 mm lead wire | —                 |
| H | Grommet, 600 mm lead wire | —                 |
| C | Conduit                   | —                 |
| D | DIN terminal              | ●                 |
- Light/Surge voltage suppressor**

| Electrical entry | G   | H   | C   | D | D Only |
|------------------|-----|-----|-----|---|--------|
| Symbol           |     |     |     |   |        |
| Nil              | ●   | ●   | ●   | ● | ●      |
| S                | ●*1 | ●*1 | ●*1 | ● | ●      |
| Z                | —   | —   | —   | ● | ●      |

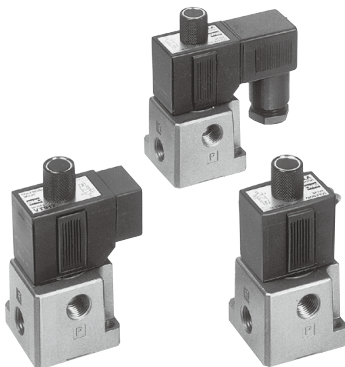


S: With surge voltage suppressor

\*1 Refer to the figure below.

Z: With light/surge voltage suppressor

**Surge voltage suppressor mounting part (For "G")**

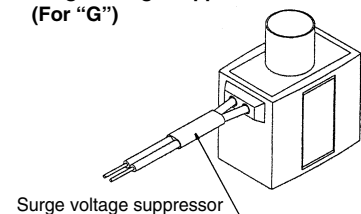

## Accessory

| Model     | Applicable manifold type     | Description (Part no.)                                |
|-----------|------------------------------|-------------------------------------------------------|
| 25A-VO317 | Common or individual exhaust | O-ring (KA00066, 4 pcs.)*1<br>Bolts (CA01161, 2 pcs.) |

\*1 It is not applied to "Continuous duty type." Refer to the accessories in the **Web Catalog**.

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product



Click here for details. >>>

## How to Order Manifold

**25A-VV317-02-051-02-A-**

### Valve stations

|    |             |
|----|-------------|
| 02 | 2 stations  |
| ⋮  | ⋮           |
| 20 | 20 stations |

Max. 20 stations

### CE/UKCA-compliant

|     |                   |
|-----|-------------------|
| Nil | —                 |
| Q   | CE/UKCA-compliant |

### Option

|     |                          |
|-----|--------------------------|
| Nil | Without mounting bracket |
| A   | With mounting bracket*1  |

\*1 Common exhaust type only

### Symbol

| Symbol | Passage |            | Porting specifications |
|--------|---------|------------|------------------------|
|        | P       | R          | A                      |
| 1      | Common  | Common     | Side                   |
| 3      | Common  | Individual | Side                   |

## How to Order Valve

**25A-VO317-1D-**

### Valve option

|     |                      |
|-----|----------------------|
| Nil | Standard             |
| E   | Continuous duty type |
| V   | For vacuum           |

### CE/UKCA-compliant

|     |                     |
|-----|---------------------|
| Nil | —                   |
| Q   | CE/UKCA-compliant*2 |

\*2 Applicable only for DIN terminal type.

### Rated voltage

|   |         |          |
|---|---------|----------|
| 1 | 100 VAC | 50/60 Hz |
| 2 | 200 VAC | 50/60 Hz |
| 3 | 110 VAC | 50/60 Hz |
| 4 | 220 VAC | 50/60 Hz |
| 5 | 24 VDC  |          |
| 6 | 12 VDC  |          |
| 7 | 240 VAC | 50/60 Hz |

### Light/Surge voltage suppressor


| Electrical entry<br>Symbol | CE/UKCA-compliant |      |      |   |
|----------------------------|-------------------|------|------|---|
|                            | G                 | H    | C    | D |
| Nil                        | ●                 | ●    | ●    | ● |
| S                          | *1 ●              | *1 ● | *1 ● | ● |
| Z                          | —                 | —    | —    | ● |

S: With surge voltage suppressor

\*1 Refer to the figure below.

Z: With light/surge voltage suppressor

Surge voltage suppressor mounting part (For "G")

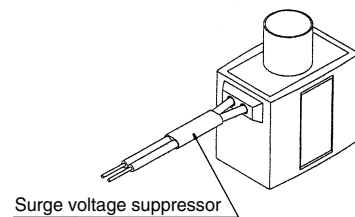

### Electrical entry

|   |                           | CE/UKCA-compliant |
|---|---------------------------|-------------------|
| G | Grommet, 300 mm lead wire | —                 |
| H | Grommet, 600 mm lead wire | —                 |
| C | Conduit                   | —                 |
| D | DIN terminal              | ●                 |

Blanking plate assembly part no.: **PVT317-53-3A** (With bolt, O-ring)

# 3-Port Solenoid Valve Direct Operated Poppet Type **25A-VG342 Series** Rubber Seal

## Low power consumption

4.8 W DC (Standard type)  
2 W DC (Energy-saving type)

## No lubrication required

## Possible to use in vacuum or under low pressures

External pilot  
Vacuum: Up to -101.2 kPa  
Low pressure: 0 to 0.2 MPa

## Changeable actuation:

N.C., N.O., or external pilot

Can be used as a selector or divider valve (External pilot)



## How to Order

**25A-VG342**   **-5** **D**   **-04**   **A**  

• Series compatible with secondary batteries

### Valve option

|            |                |
|------------|----------------|
| <b>Nil</b> | Internal pilot |
| <b>R</b>   | External pilot |

### Rated voltage

|            |        |
|------------|--------|
| <b>5</b>   | 24 VDC |
| <b>6*1</b> | 12 VDC |

\*1 Semi-standard

### Electrical entry

|          |              |
|----------|--------------|
| <b>D</b> | DIN terminal |
|----------|--------------|

### Light/Surge voltage suppressor

|            |                                                           |
|------------|-----------------------------------------------------------|
| <b>Nil</b> | None                                                      |
| <b>z</b>   | With light/surge voltage suppressor (Except grommet type) |

### Pilot valve option

|            |                              |
|------------|------------------------------|
| <b>Nil</b> | Standard type                |
| <b>Y*1</b> | Energy-saving type (DC only) |
| <b>E*1</b> | Continuous duty type         |

\*1 Semi-standard

### Passage symbol

|            |                        |
|------------|------------------------|
| <b>Nil</b> | External pilot         |
| <b>A</b>   | N.C. (Normally closed) |
| <b>B</b>   | N.O. (Normally open)   |

### Thread type

|            |    |
|------------|----|
| <b>Nil</b> | Rc |
|------------|----|

### Port size

|           |     |
|-----------|-----|
| <b>04</b> | 1/2 |
| <b>06</b> | 3/4 |
| <b>10</b> | 1   |

## Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product


Click here for details. >>>



# 5-Port Air Operated Valve

## 25A-SYA5000/7000 Series

### How to Order

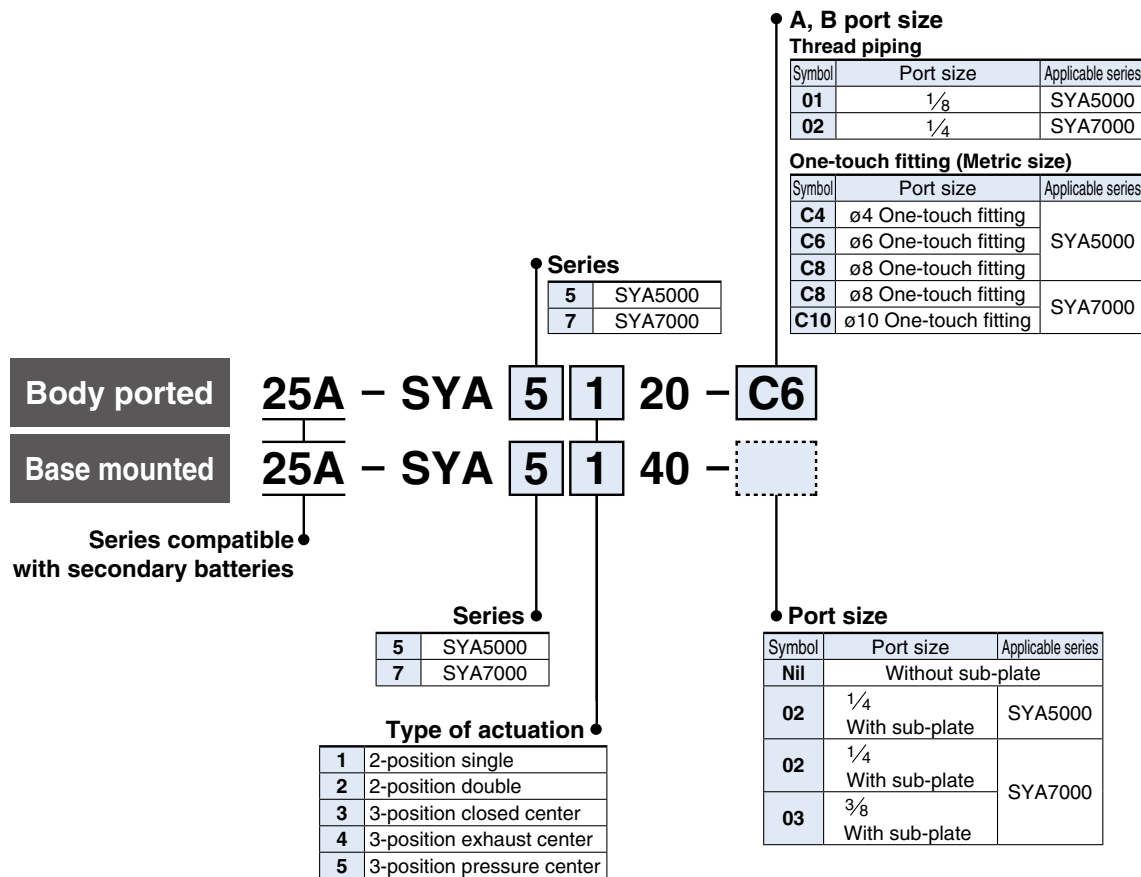

### How to Order Manifold Base

Same manifolds as the SY series (Non plug-in type) are prepared.  
(For 20, 41 and 42 Types)

25A-SS5YA<sup>5</sup><sub>7</sub>-

Fill the same as 25A-SS5Y<sup>5</sup><sub>7</sub>.

(Refer to pages 81 and 85.)

\* Specify the part numbers for valves and options together beneath the manifold base part number.

<Example>

25A-SS5YA5-42-03-02.... 1 set (Type 42, 3-station manifold base part no.)

\* 25A-SYA5140 ..... 1 set (Single air operated valve part no.)

\* 25A-SYA5240 ..... 1 set (Double air operated valve part no.)

\* 25A-SY5000-26-1A ..... 1 set (Blanking plate the assembly part no.)

↳ The asterisk denotes the symbol for the assembly.

Prefix it to the part nos. of the solenoid valve, etc.

\* Manifold mounting screws and gaskets are included with the manifold (type 20), but they are not included when ordering a body ported air operated valve as a single unit. Order them separately if necessary. (For details, refer to page 90.)

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>




# 3-Port Air Operated Valve

## 25A-SYJA500/700 Series



### How to Order

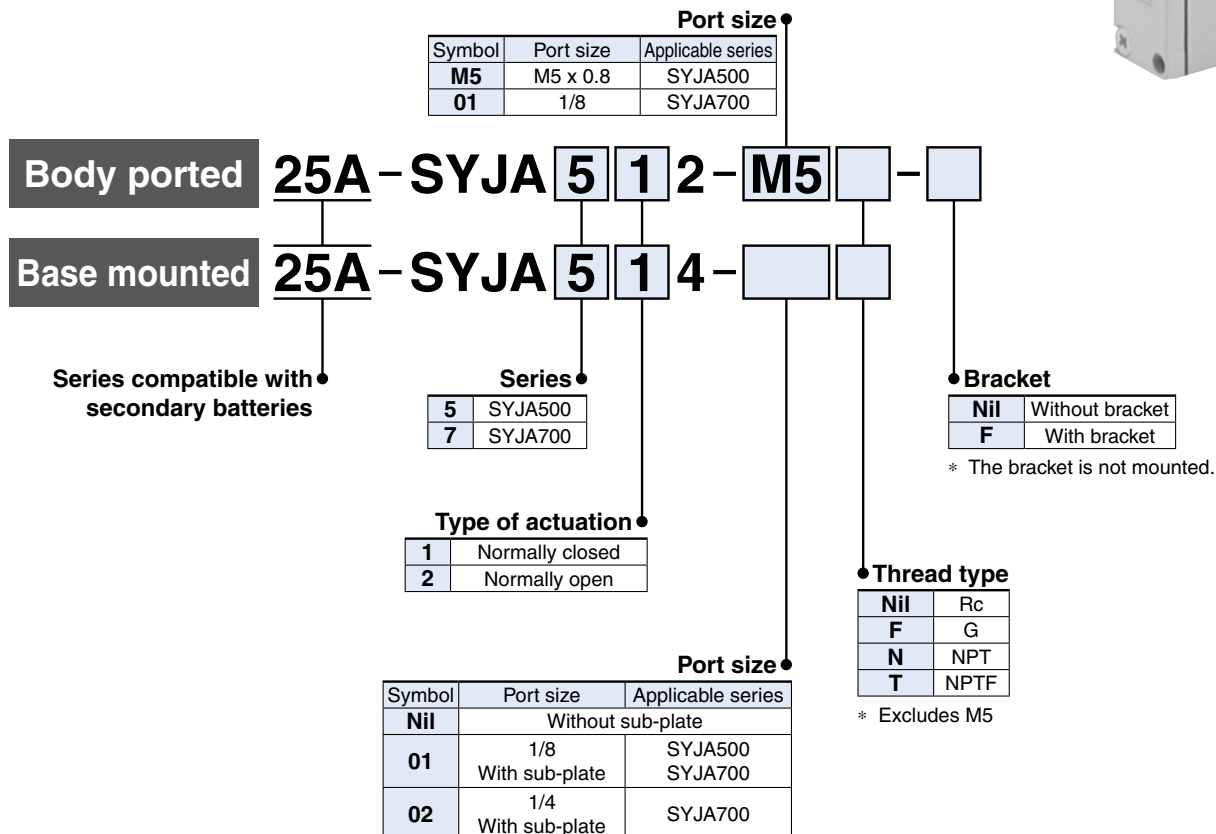

#### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



## Manifold Type for the SYJA500

### Type 20

How to Order

**25A - SS3YJA5 - 20 - 05**

Stations

|    |             |
|----|-------------|
| 02 | 2 stations  |
| :  | :           |
| 20 | 20 stations |

Applicable valve  
25A-SYJA5□2

Applicable blanking  
plate assembly  
25A-SYJ500-10-1A

\* For more than 6 stations, supply air to both sides of P port and exhaust air from both sides of R port.

### Type 40

How to Order

**25A - SS3YJA5 - 40 - 05 M5**

Stations

|    |             |
|----|-------------|
| 02 | 2 stations  |
| :  | :           |
| 20 | 20 stations |

A port size

|    |          |
|----|----------|
| M5 | M5 x 0.8 |
| 01 | 1/8      |

Applicable valve  
25A-SYJA5□4

Applicable blanking  
plate assembly  
25A-SYJ500-10-3A

\* For more than 9 stations, supply air to both sides of P port and exhaust air from both sides of R port.

### Type 41

How to Order

**25A - SS3YJA5 - 41 - 05 - C6**

Stations

|    |             |
|----|-------------|
| 02 | 2 stations  |
| :  | :           |
| 20 | 20 stations |

A port size

|    |                      |
|----|----------------------|
| M5 | M5 x 0.8             |
| 01 | 1/8                  |
| C4 | ø4 One-touch fitting |
| C6 | ø6 One-touch fitting |

Applicable valve  
25A-SYJA5□4

Applicable blanking  
plate assembly  
25A-SYJ500-10-3A

\* For more than 9 stations, supply air to both sides of P port and exhaust air from both sides of R port.

## Manifold Type for the SYJA700

### Type 20/21

How to Order

**25A - SS3YJA7 - 20 - 05**

Manifold type

|    |         |
|----|---------|
| 20 | Type 20 |
| 21 | Type 21 |

Stations

|    |             |
|----|-------------|
| 02 | 2 stations  |
| :  | :           |
| 20 | 20 stations |

Applicable valve  
25A-SYJA7□2

Applicable blanking  
plate assembly  
25A-SYJ700-10-1A

\* If there are more than 6 stations for type 20, or more than 9 stations for type 21, supply air to both sides of P port and exhaust air from both sides of R port.

### Type 40/41

How to Order

**25A - SS3YJA7 - 40 - 05 - 01**

Manifold type

|    |         |
|----|---------|
| 40 | Type 40 |
| 41 | Type 41 |

A port size

|    |     |
|----|-----|
| 01 | 1/8 |
|----|-----|

Stations

|    |             |
|----|-------------|
| 02 | 2 stations  |
| :  | :           |
| 20 | 20 stations |

Applicable valve  
25A-SYJA7□4

Applicable blanking  
plate assembly  
25A-SYJ700-10-2A

\* If there are more than 6 stations for type 40, or more than 9 stations for type 41, supply air to both sides of P port and exhaust air from both sides of R port.

### Type 42

How to Order

**25A - SS3YJA7 - 42 - 05 - C6**

Stations

|    |             |
|----|-------------|
| 02 | 2 stations  |
| :  | :           |
| 20 | 20 stations |

A port size

|    |                      |
|----|----------------------|
| 01 | 1/8                  |
| C6 | ø6 One-touch fitting |
| C8 | ø8 One-touch fitting |

Applicable valve  
25A-SYJA7□4

Applicable blanking  
plate assembly  
25A-SYJ700-10-2A

\* For more than 9 stations, supply air to both sides of P port and exhaust air from both sides of R port.

# Finger Valve

RoHS

# 25A-VHK□A Series

## How to Order

Series compatible with secondary batteries

25A-VHK 2 A - 04F - 04F □ □

### Valve model

|   |              |
|---|--------------|
| 2 | 2-port valve |
| 3 | 3-port valve |

### 1(P) port size

|     |       |
|-----|-------|
| 04F | ø4    |
| 06F | ø6    |
| 08F | ø8    |
| 01S | R 1/8 |
| 02S | R 1/4 |
| 03S | R 3/8 |

### Bracket

|     |                |
|-----|----------------|
| Nil | None           |
| L   | With L-bracket |

\* Bracket and screws are attached.


### Knob color

|                   |              |      |
|-------------------|--------------|------|
| Nil<br>(Standard) | 2-port valve | Gray |
|                   | 3-port valve | Blue |
| R<br>(Option)     | 2-port valve | Red  |
|                   | 3-port valve |      |

### 2(A) port size


|     |       |
|-----|-------|
| 04F | ø4    |
| 06F | ø6    |
| 08F | ø8    |
| 01S | R 1/8 |
| 02S | R 1/4 |
| 03S | R 3/8 |

## Standard Type




1(P): One-touch fitting  
2(A): One-touch fitting

|                             |    | 2(A) Applicable tubing O.D. [mm] |    |    |
|-----------------------------|----|----------------------------------|----|----|
|                             |    | ø4                               | ø6 | ø8 |
| Applicable tubing O.D. [mm] | ø4 | ●                                |    |    |
|                             | ø6 | ●                                | ●  |    |
|                             | ø8 |                                  | ●  | ●  |



1(P): Male thread  
2(A): One-touch fitting

|             |     | 2(A) Applicable tubing O.D. [mm] |    |    |
|-------------|-----|----------------------------------|----|----|
|             |     | ø4                               | ø6 | ø8 |
| Port size R | 1/8 | ●                                | ●  | ●  |
|             | 1/4 |                                  | ●  | ●  |
|             | 3/8 |                                  | ●  | ●  |



1(P): One-touch fitting  
2(A): Male thread

|                             |    | 2(A) Port size R |     |     |
|-----------------------------|----|------------------|-----|-----|
|                             |    | 1/8              | 1/4 | 3/8 |
| Applicable tubing O.D. [mm] | ø4 | ●                |     |     |
|                             | ø6 | ●                | ●   | ●   |
|                             | ø8 | ●                | ●   | ●   |

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>



# OSHA Standard Compliant Pressure Relief 3-Port Valve with Locking Holes

Single Action


## 25A-VHS20/30/40/50-D Series

Double Action

## 25A-VHS20W/30W/40W/50W-D Series

RoHS

Symbol



### How to Order

**25A-VHS** **30** **03** **D**

① ② ③ ④ ⑤ ⑥

• Series compatible with secondary batteries

• Option/Semi-standard: Select one each for a to f.

• Option/Semi-standard symbol:

When more than one specification is required, indicate in alphanumeric order.

Example) 25A-VHS30-N03-BS-RZ-D

|   | Symbol           | Description     | ①         |                                       |     |     |
|---|------------------|-----------------|-----------|---------------------------------------|-----|-----|
|   |                  |                 | Body size |                                       |     |     |
|   |                  |                 | 20        | 30                                    | 40  | 50  |
| ② | Handle operation | Nil             | ●         | ●                                     | ●   | ●   |
|   |                  | W               | ●         | ●                                     | ●   | ●   |
| ③ | Pipe thread type | Nil             | ●         | ●                                     | ●   | ●   |
|   |                  | N               | ●         | ●                                     | ●   | ●   |
|   |                  | F               | ●         | ●                                     | ●   | ●   |
| ④ | Port size        | 01              | ●         | —                                     | —   | —   |
|   |                  | 02              | ●         | ●                                     | ●   | —   |
|   |                  | 03              | —         | ●                                     | ●   | —   |
|   |                  | 04              | —         | —                                     | ●   | —   |
|   |                  | 06              | —         | —                                     | ●   | ●   |
|   |                  | 10              | —         | —                                     | —   | ●   |
| ⑤ | a                | Mounting        | Nil       | Without mounting option               | ●   | ●   |
|   |                  | B               | ●         | With bracket                          | ●   | ●   |
|   | b                | Silencer        | Nil       | Without silencer                      | ●   | ●   |
|   |                  | S               | ●         | With built-in silencer (for EXH port) | ●   | ●   |
| ⑥ | c                | Handle color    | Nil       | Red                                   | ●   | ●   |
|   |                  | K               | ●         | Black                                 | ●   | ●   |
|   | d                | Handle material | Nil       | Resin                                 | ●   | ●   |
|   |                  | M               | ●         | Metal                                 | ●   | ●   |
|   | e                | Flow direction  | Nil       | Flow direction: Left to right         | ●   | ●   |
|   |                  | R               | ●         | Flow direction: Right to left         | ●   | ●   |
|   | f                | Pressure unit   | Nil       | Product label in SI units: MPa        | ●   | ●   |
|   |                  | Z*2             | ○*3       | Product label in imperial units: psi  | ○*3 | ○*3 |

\*1 The pipe thread type for the EXH port is G.

\*2 For the pipe thread type: NPT only. This product is for overseas use only according to the New Measurement Act. (The SI unit type is provided for use in Japan.)

\*3 ○: For the pipe thread type: NPT only

### Option/Part Nos.

| Optional specifications | Model            |                  |                  |                  |                  |
|-------------------------|------------------|------------------|------------------|------------------|------------------|
|                         | 25A-VHS20-D      | 25A-VHS30-D      | 25A-VHS40-D      | 25A-VHS40-06-D   | 25A-VHS50-D      |
| Bracket assembly*1      | 25A-VHS24P-180AS | 25A-VHS34P-180AS | 25A-VHS44P-180AS | 25A-VHS44P-180AS | 25A-VHS54P-180AS |
| Silencer assembly*2     | VHS24P-190AS     | VHS34P-190AS     | VHS44P-190AS     | VHS54P-190AS     | VHS54P-190AS     |

\*1 The assembly consists of a bracket A/B and 2 mounting screws.

\*2 The assembly consists of the element assembly and an O-ring.

### Refer to the Web Catalog.

- Specifications/Dimensions
- \* Same as the standard product

Click here for details. >>>

