


Direct Air Operated 2-Port Valve **VXA21/22 Series**

For Air, Water, Oil




Single Unit

Normally closed
(N.C.)



Normally open
(N.O.)



Valve

Pilot port (Free take off direction)

Port size ——— Rc 1/8

Pilot pressure ——— 0.25 to 0.7 MPa


Material

Body ——— Brass (C37), Stainless steel
Seal ——— NBR, FKM, EPDM

When the valve is closed, flow is blocked from port 1 to port 2. However, if the pressure in port 2 is higher than port 1, the valve will not be able to block the fluid.

Model

Model	Port size Rc	Orifice dia. (mmø)
VXA212 $\frac{3}{8}$	1/8, 1/4	3
VXA213 $\frac{3}{8}$	1/8, 1/4	4.5
VXA223 $\frac{3}{8}$	1/4, 3/8	4.5
VXA224 $\frac{3}{8}$	1/4, 3/8	6
VXA225 $\frac{3}{8}$	1/4, 3/8	8
VXA226 $\frac{3}{8}$	1/4, 3/8, 1/2	10




Manifold

Valve

Material

Base ——— AL
Body ——— Zn
Seal ——— NBR, FKM, EPDM

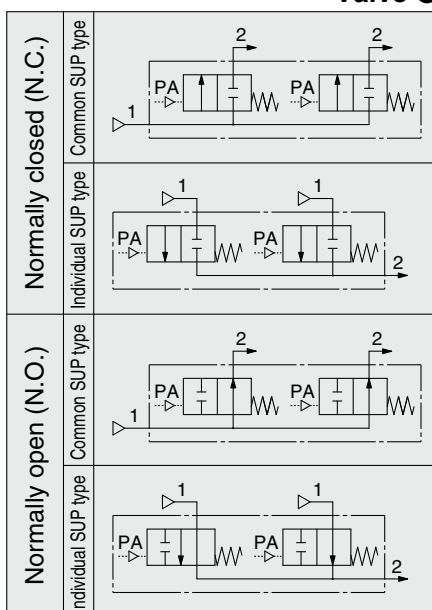

Manifold

Manifold system ——— B mount
Manifold station ——— 2 to 10 station

When the valve is closed, flow is blocked from port 1 to port 2. However, if the pressure in port 2 is higher than port 1, the valve will not be able to block the fluid.

Model

Manifold base	Individual port Rc	Common port Rc
VVXA211-station	1/8	3/8
VVXA212-station	1/4	
VVXA221-station	1/8	
VVXA222-station	1/4	

VXA21/22 Series

Common Specifications

Standard Specifications

Valve specifications	Type		Single Unit	Manifold
	Valve construction		Pilot operated poppet	
	Withstand pressure	MPa	1.5	
	Body material		Brass (C37), Stainless steel	Zn
	Seal material		NBR, FKM, EPDM	NBR, FKM, EPDM

Contents

For Air /Single Unit	P.537
For Air /Manifold	P.539
For Water /Single Unit	P.541
For Oil /Single Unit	P.543
For Oil /Manifold	P.545
Construction: Single Unit	P.547
Construction: Manifold	P.548
Dimensions: Single Unit	P.549
Dimensions: Manifold	P.550

Direct Air Operated 2-Port Valve

VXA21/22 Series

Applicable Fluid Check List

All Options (Single Unit) Refer to page 537 for specifications and models.

VXA2 ⁰/₂ - - 1 -

• Option symbol

Fluid and application	Option symbol	Seal material	Body material	Holder material (drive part)
Air	Nil	NBR	Brass (C37)	PPS
	G		Stainless steel	
Medium vacuum (0.1 Pa-abs), Non-leak ^{Note 1)}	V ^{Note 2)}	FKM	Brass (C37)	
	M ^{Note 2)}		Stainless steel	
Water	Nil	NBR	Brass (C37)	
	G		Stainless steel	
Oil ^{Note 3)}	A	FKM	Brass (C37)	
	H		Stainless steel	
Other combination	B	EPDM	Brass (C37)	
	J		Stainless steel	




All Options (Manifold) Refer to page 539 for specifications and models.

VXA2 ¹/₃ - 00 - 1

• Option symbol

Fluid and application	Option symbol	Seal material	Body material	Base material	Holder material (drive part)
Air	Nil	NBR	Zn	Al	PPS
Medium vacuum, Non-leak Note 1)	V Note 2)	FKM	Al		
Oil Note 3)	A	FKM	Zn		
Other combination	B	EPDM			

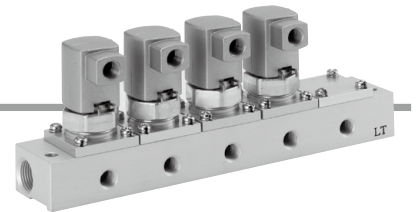

Note 1) The leakage amount (10⁻⁶ Pa·m³/s) of "V" options are values when differential pressure is 0.1 MPa.

Note 2) Use grease for vacuums on sliding parts. Use silicon grease elsewhere.

Note 3) The dynamic viscosity of the fluid must not exceed 50 mm²/s or less.

* Oil-free specification: Oil-free specification cannot be manufactured since the sliding parts in contact with fluid have a seal construction.

VXA21/22 Series

For Air/Single Unit


(Non-leak, Medium vacuum)

Model/Valve Specifications



N.C.

N.O.

Symbol



Symbol



When the valve is closed, flow is blocked from port 1 to port 2. However, if the pressure in port 2 is higher than port 1, the valve will not be able to block the fluid.

Model/Valve

Port size	Orifice diameter (mmø)	Model	Max. Note 2) operating pressure differential (MPa)	Pilot pressure (MPa)	Flow rate characteristics Note 1)			Max. system pressure (MPa) Note 2)	Proof pressure (MPa)	Weight (g)	
					Air						
					C[dm³/(s·bar)]	b	Cv				
1/8 (6A)	3	VXA212½	1.0	0.25 to 0.7	1.3	0.50	0.38	1.0	1.5	170	
	4.5	VXA213½	0.5		2.3	0.45	0.70				
1/4 (8A)	3	VXA212½	1.0		1.3	0.50	0.38				0.4
	4.5	VXA213½	0.5		2.5	0.45	0.75				
		VXA223½	1.0								
	6	VXA224½	0.6		3.3	0.50	1.1	340			
	8	VXA225½	0.2		6.4	0.40	1.8				
	10	VXA226½	0.1		8.8	0.40	2.3				
3/8 (10A)	4.5	VXA223½	1.0		2.5	0.45	0.75	1.0		250	
	6	VXA224½	0.6		3.3	0.50	1.1				
	8	VXA225½	0.2		6.4	0.40	1.8	0.4			340
	10	VXA226½	0.1		11.0	0.38	2.8				
1/2 (15A)	10	VXA226½	0.1		11.0	0.38	2.8			420	

Note 1) The flow rate characteristics of this product have variations.

When the highly precise flow control is required according to the system to be used, select an orifice diameter 1.3 times larger than that shown above and install a restrictor on the downstream side of the solenoid valve to make the adjustment.

Note 2) Refer to "Glossary of Terms" on page 486 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)		Ambient temperature (°C)
Valve option symbol		
Nil, Others	V, M	
-5 ^{Note)} to 60	-5 ^{Note)} to 40	-5 to 40

Note) Dew point temperature: -5°C or less

Valve Leakage Rate

Internal Leakage

Seal material	Leakage rate	
	Air	Non-leak, Note) Medium vacuum
NBR, EPDM, FKM	1 cm ³ /min or less	10 ⁻⁶ Pa·m ³ /sec or less

External Leakage

Seal material	Leakage rate	
	Air	Non-leak, Note) Medium vacuum
NBR, EPDM, FKM	1 cm ³ /min or less	10 ⁻⁶ Pa·m ³ /sec or less

Note) Value for option "V", "M" (Non-leak, Medium vacuum)

How to Order (Single Unit)

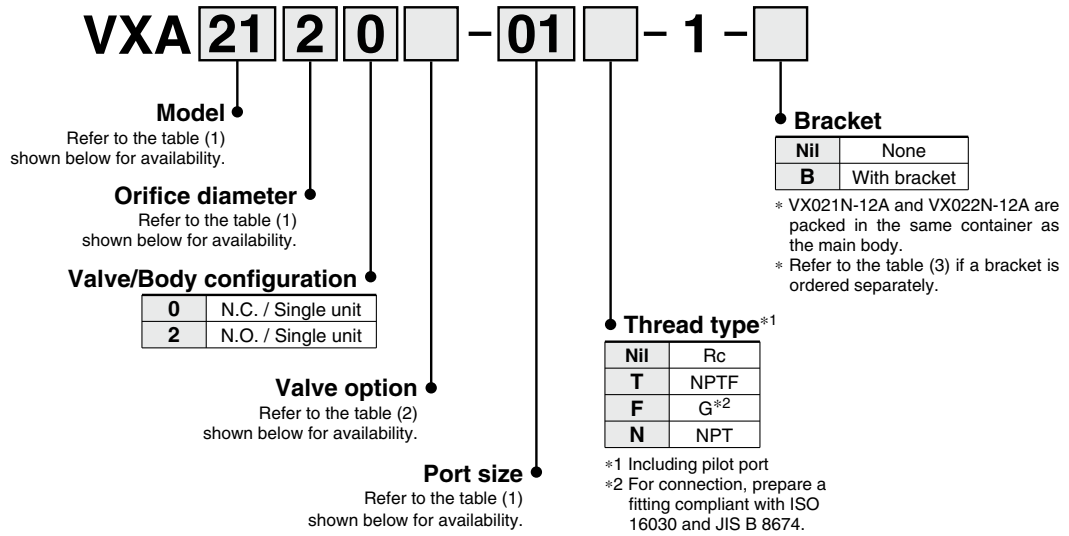


Table (1) Model/Orifice Diameter/Port Size

Solenoid valve (Port size)		Orifice symbol (Diameter)					
Model	VXA21	VXA22	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)	5 (8 mmø)	6 (10 mmø)
Port no. (Port size)	01 (1/8)	—	●	●	—	—	—
	02 (1/4)	—	●	●	—	—	—
	—	02 (1/4)	—	●	●	●	●
	—	03 (3/8)	—	●	●	●	●
	—	04 (1/2)	—	—	—	—	●

Table (3) Bracket Part No.

Model	Part no.
VXA21 ²⁰ ₃₂	VX021N-12A
VXA22 ³⁰ ₄₂	VX022N-12A
VXA22 ⁵⁰ ₆₂	VX023N-12A-L

Table (2) Valve Option

Option symbol	Seal material	Body material	Holder material	Note
Nil	NBR	Brass (C37)	PPS	—
G		Stainless steel		
V (Note)	FKM	Brass (C37)		Non-leak (10 ⁻⁶ Pam ³ /sec), Medium vacuum (0.1 Pa.abs)
M (Note)		Stainless steel		

Note) Use grease for vacuums on sliding parts. Use silicon grease elsewhere.

VVXA21/22 Series


For Air/Manifold

(Non-leak, Medium vacuum)


Model for Manifold/Valve Specifications

N.C.

Symbol




Common SUP type




Individual SUP type

N.O.


Symbol



Common SUP type



Individual SUP type



When the valve is closed, flow is blocked from port 1 to port 2. However, if the pressure in port 2 is higher than port 1, the valve will not be able to block the fluid.

Model for Manifold/Valve Specifications

Orifice diameter (mmø)	Model	Max. operating pressure differential (MPa) Note 2)	Pilot pressure (MPa)	Flow rate characteristics Note 1)			Max. system pressure (MPa) Note 2)	Proof pressure (MPa)	Weight (g)
				Air					
				C[dm³/(s·bar)]	b	Cv			
3	VXA212 ¹ / ₃ -00	1.0	0.25 to 0.7	1.3	0.50	0.38	1.0	1.5	120
4.5	VXA213 ¹ / ₃ -00	0.5		2.3	0.45	0.70			
	VXA223 ¹ / ₃ -00	1.0		3.3	0.50	1.1			160
6	VXA224 ¹ / ₃ -00	0.6							

Note 1) The flow rate characteristics of this product have variations.
When the highly precise flow control is required according to the system to be used, select an orifice diameter 1.3 times larger than that shown above and install a restrictor on the downstream side of the solenoid valve to make the adjustment.

Note 2) Refer to "Glossary of Terms" on page 486 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)		Ambient temperature (°C)
Solenoid valve option symbol		
Nil, A, B	V	
−5 ^{Note)} to 60	−5 ^{Note)} to 40	−5 to 40

Note) Dew point temperature: -5°C or less

Valve Leakage Rate

Seal material	Leakage rate	
	Air	Non-leak, Note) Medium vacuum
NBR, EPDM, FKM	1 cm³/min or less	10 ⁻⁶ Pa·m³/sec or less

Seal material	Leakage rate	
	Air	Non-leak, Note) Medium vacuum
NBR, EPDM, FKM	1 cm³/min or less	10 ⁻⁶ Pa·m³/sec or less

Note) Value for option "V" (Non-leak, Medium vacuum)

How to Order (Valve for Manifold)

VXA **21** **2** **1** **□** - 00 - 1

Model
Refer to the table (1) shown below for availability.

Orifice diameter
Refer to the table (1) shown below for availability.

Valve option
Refer to the table (2) shown below for availability.

Valve/Body configuration

1	N.C. (For manifold)
3	N.O. (For manifold)

How to Order Manifold Bases

VVXA21
VVXA22 **1** **□** - **07** - 1

Port size (Individual port)

1	Rc 1/8
2	Rc 1/4

* All IN ports are Rc 3/8.

Base

Nil	Common SUP type
V	Individual SUP type

Number of manifolds

02	2 stations
⋮	⋮
10	10 stations

Manifold base

Blanking plate part no.

For VXA21: VX011-001 **□**
For VXA22: VX011-006 **□**

Seal material

N	NBR
F	FKM
E	EPDM

Table (1) Model/Orifice Diameter

Solenoid valve	Orifice symbol (Diameter)		
	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)
VXA21	●	●	—
VXA22	—	●	●

Table (2) Valve Option

Option symbol	Body material	Base material	Seal material	Holder material	Note
Nil	Zn	AL	NBR	PPS	—
A			FKM		
B			EPDM		
V ^{Note)}			FKM		Non-leak (10 ⁻⁶ Pam ³ /sec), Medium vacuum (0.1 Pa.abs)

Note) Use grease for vacuums on sliding parts. Use silicon grease elsewhere.

How to Order Manifold


■ Write both the base part number and the solenoid valve to be mounted or blanking plate part number.

(Example) 7 stations of VXA21 common pressure, individual port Rc 1/8.

(Base) VVXA211-07-1.....1 pc.
(Valve) * VXA2121-00-1.....6 pcs.
(Blanking plate) * VX011-001N.....1 pc.

* is the symbol for mounting. When shipping mounted on a base, add an "*" in front of the valve and blanking plate model.

■ Arrangement of solenoid valves



The standard arrangement of manifolds should be placed on an individual port on this side, each solenoid valve from the left side and a blank plate in the right side. The right side of the common port provides plug.


VXA21/22 Series

For Water /Single Unit

Model/Valve Specifications


N.C.

Symbol



N.O.

Symbol



When the valve is closed, flow is blocked from port 1 to port 2. However, if the pressure in port 2 is higher than port 1, the valve will not be able to block the fluid.



Model/Valve Specifications

Port size	Orifice diameter (mmø)	Model	Pilot pressure (MPa)	Max. operating pressure differential (MPa)	Flow rate characteristics ^{Note 1)}		Max. system pressure (MPa) ^{Note 2)}	Proof pressure (MPa)	Weight (g)	
					Water					
					Kv	Cv converted				
1/8 (6A)	3	VXA212 ⁰ ₂	0.25 to 0.7	1.0	0.28	0.33	1.0	1.5	170	
	4.5	VXA213 ⁰ ₂		0.5	0.54	0.61				
1/4 (8A)	3	VXA212 ⁰ ₂		1.0	0.28	0.33			0.4	250
	4.5	VXA213 ⁰ ₂		0.5	0.54	0.61				
		VXA223 ⁰ ₂		1.0						
	6	VXA224 ⁰ ₂		0.6	0.93	1.1				
	8	VXA225 ⁰ ₂		0.2	1.46	1.7				
	10	VXA226 ⁰ ₂		0.1	1.64	1.9				
3/8 (10A)	4.5	VXA223 ⁰ ₂		1.0	0.54	0.61	1.0		250	
	6	VXA224 ⁰ ₂		0.6	0.93	1.1				
	8	VXA225 ⁰ ₂		0.2	1.46	1.7	0.4			340
	10	VXA226 ⁰ ₂		0.1	2.07	2.4				
1/2 (15A)	10	VXA226 ⁰ ₂		0.1	2.07	2.4			420	

Note 1) The flow rate characteristics of this product have variations.
When the highly precise flow control is required according to the system to be used, select an orifice diameter 1.3 times larger than that shown above and install a restrictor on the downstream side of the solenoid valve to make the adjustment.
Note 2) Refer to "Glossary of Terms" on page 486 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Valve option symbol	
Nil, G, B, J	
1 to 40	-5 to 40

Note) With no freezing

Valve Leakage Rate

Internal Leakage	
Seal material	Leakage rate (Water)
NBR, EPDM	0.1 cm³/min or less
External Leakage	
Seal material	Leakage rate (Water)
NBR, EPDM	0.1 cm³/min or less

How to Order (Single Unit)

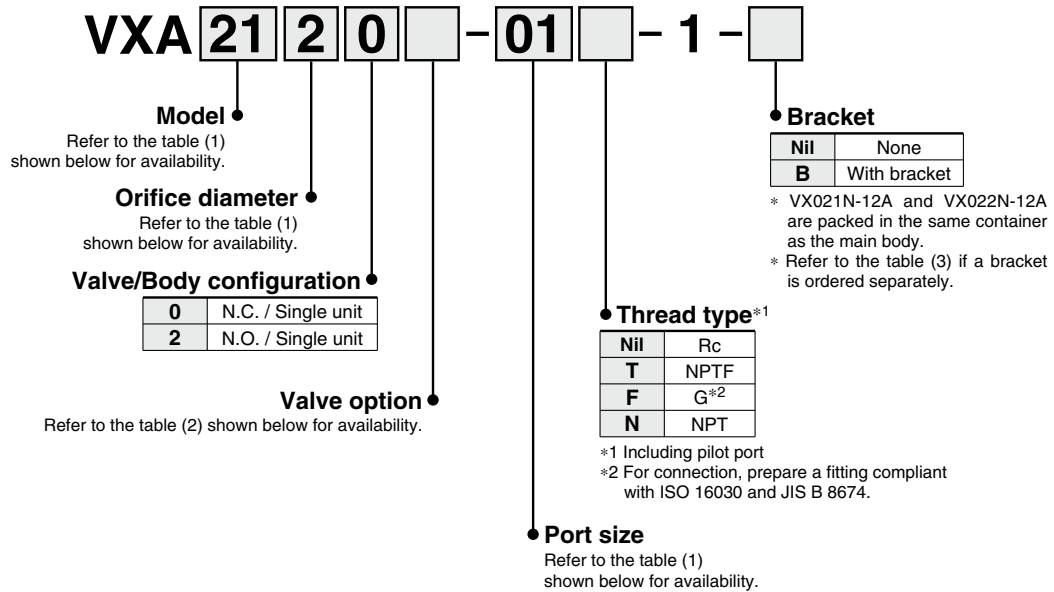


Table (1) Model/Orifice Diameter/Port Size

Model	Valve (Port size)		Orifice symbol (Diameter)				
	VX21	VX22	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)	5 (8 mmø)	6 (10 mmø)
Port no. (Port size)	01 (1/8)	—	●	●	—	—	—
	02 (1/4)	—	●	●	—	—	—
	—	02 (1/4)	—	●	●	●	●
	—	03 (3/8)	—	●	●	●	●
	—	04 (1/2)	—	—	—	—	●

Table (2) Valve Option

Option symbol	Seal material	Body material	Holder material	Note
Nil	NBR	Brass (C37)	PPS	—
G		Stainless steel		
B	EPDM	Brass (C37)		
J		Stainless steel		

Table (3) Bracket Part No.

Model	Part no.
VX21 ²⁰ ₃₂	VX021N-12A
VX22 ³⁰ ₄₂	VX022N-12A
VX22 ⁵⁰ ₆₂	VX023N-12A-L


VXA21/22 Series

For Oil /Single Unit

Model/Valve Specifications


N.C.

Symbol



N.O.

Symbol



When the valve is closed, flow is blocked from port 1 to port 2. However, if the pressure in port 2 is higher than port 1, the valve will not be able to block the fluid.



Model/Valve Specifications

Port size	Orifice diameter (mmø)	Model	Max. operating pressure differential (MPa) Note 2)	Pilot pressure (MPa)	Flow rate characteristics Note 1)		Max. system pressure (MPa) Note 2)	Proof pressure (MPa)	Weight (g)		
					Oil						
					Av x 10 ⁻⁶ m ²	Cv converted					
1/8 (6A)	3	VXA212 ⁰ / ₂	1.0	0.25 to 0.7	7.9	0.33	1.0	1.5	170		
	4.5	VXA213 ⁰ / ₂	0.5		15	0.61					
1/4 (8A)	3	VXA212 ⁰ / ₂	1.0		7.9	0.33				0.4	250
	4.5	VXA213 ⁰ / ₂	0.5		15	0.61					
	6	VXA224 ⁰ / ₂	0.6		26	1.1					
	8	VXA225 ⁰ / ₂	0.2		41	1.7					
	10	VXA226 ⁰ / ₂	0.1		46	1.9	1.0		340		
	4.5	VXA223 ⁰ / ₂	1.0		15	0.61					
3/8 (10A)	6	VXA224 ⁰ / ₂	0.6		26	1.1	0.4		250		
	8	VXA225 ⁰ / ₂	0.2		41	1.7					
	10	VXA226 ⁰ / ₂	0.1		58	2.4					
1/2 (15A)	10	VXA226 ⁰ / ₂	0.1		58	2.4			420		

Note 1) The flow rate characteristics of this product have variations.
When the highly precise flow control is required according to the system to be used, select an orifice diameter 1.3 times larger than that shown above and install a restrictor on the downstream side of the solenoid valve to make the adjustment.
Note 2) Refer to "Glossary of Terms" on page 486 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Valve option symbol	
A, H	
-5 Note) to 40	-5 to 40

Note) Dynamic viscosity: 500 mm²/s or less

⚠ When the fluid is oil.
The dynamic viscosity of the fluid must not exceed 500 mm²/s.

Valve Leakage Rate

Internal Leakage	
Seal material	Leakage rate (Oil)
FKM	0.1 cm ³ /min or less
External Leakage	
Seal material	Leakage rate (Oil)
FKM	0.1 cm ³ /min or less

How to Order (Single Unit)

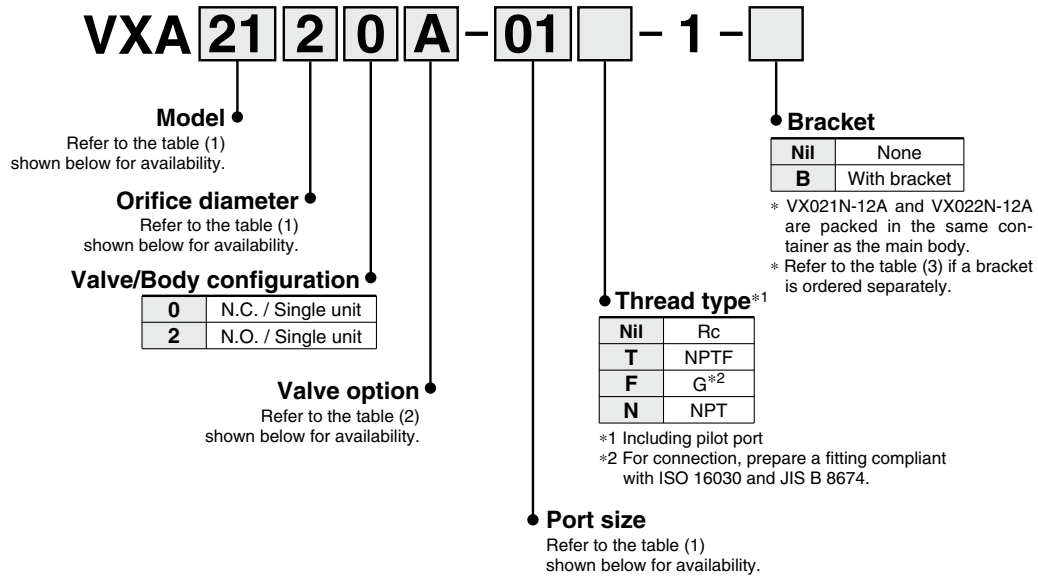


Table (1) Model/Orifice Diameter/Port Size

Solenoid valve (Port size)			Orifice symbol (Diameter)				
Model	VX21	VX22	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)	5 (8 mmø)	6 (10 mmø)
Port no. (Port size)	01 (1/8)	—	●	●	—	—	—
	02 (1/4)	—	●	●	—	—	—
	—	02 (1/4)	—	●	●	●	●
	—	03 (3/8)	—	●	●	●	●
	—	04 (1/2)	—	—	—	—	●

Table (2) Valve Option

Option symbol	Seal material	Body material	Holder material
A	FKM	Brass (C37)	PPS
H		Stainless steel	

Table (3) Bracket Part No.

Model	Part no.
VX21 ²⁰ ₃₂	VX021N-12A
VX22 ³⁰ ₄₂	VX022N-12A
VX22 ³⁰ ₆₂	VX023N-12A-L


VVXA21/22 Series

For Oil/Manifold


Valve for Manifold/Valve Specifications

N.C.

Symbol




Common SUP type




Individual SUP type

N.O.


Symbol



Common SUP type



Individual SUP type



When the valve is closed, flow is blocked from port 1 to port 2. However, if the pressure in port 2 is higher than port 1, the valve will not be able to block the fluid.

Valve for Manifold/Valve Specifications

Orifice diameter (mmø)	Model	Max. operating pressure differential (MPa) Note 2)	Pilot pressure (MPa)	Flow rate characteristics Note 1)		Max. system pressure (MPa) Note 2)	Proof pressure (MPa)	Weight (g) Note)
				Air				
				Av x 10 ⁻⁶ m ²	Cv converted			
3	VXA212 ¹ / ₃ -00	1.0	0.25 to 0.7	7.9	0.33	1.0	1.5	120
4.5	VXA213 ¹ / ₃ -00	0.5		15	0.61			
	VXA223 ¹ / ₃ -00	1.0						
6	VXA224 ¹ / ₃ -00	0.6		26	1.1			

Note 1) The flow rate characteristics of this product have variations.
When the highly precise flow control is required according to the system to be used, select an orifice diameter 1.3 times larger than that shown above and install a restrictor on the downstream side of the solenoid valve to make the adjustment.

Note 2) Refer to "Glossary of Terms" on page 486 for details on the max. operating pressure differential and the max. system pressure.

Fluid and Ambient Temperature

Fluid temperature (°C)	Ambient temperature (°C)
Valve option symbol	
A	
-5 Note) to 40	-5 to 40

Note) Dynamic viscosity: 500 mm²/s or less

Valve Leakage Rate

Internal Leakage

Seal material	Leakage rate
FKM	0.1 cm³/min or less

External Leakage

Seal material	Leakage rate
FKM	0.1 cm³/min or less

How to Order (Valve for Manifold)

VXA **21** **2** **1** **A** - 00 - 1

Model
Refer to the table (1) shown below for availability.

Orifice diameter
Refer to the table (1) shown below for availability.

Valve option
Refer to the table (2) shown below for availability.

Valve/Body configuration	
1	N.C. (For manifold)
3	N.O. (For manifold)

How to Order Manifold Bases

VVXA21
VVXA22 **1** **07** - 1

**Port size
(Individual port)**

1	Rc 1/8
2	Rc 1/4

* All IN ports are Rc 3/8.

**Number of
manifolds**

02	2 stations
...	...
10	10 stations

Base

Nil	Common SUP type
V	Individual SUP type

Manifold base

Blanking plate part no.

For VXA21: VX011-001 **F**
For VXA22: VX011-006 **F**

Seal material

F	FKM
---	-----

Table (1) Model/Orifice Diameter

Solenoid valve	Orifice symbol (Diameter)		
	2 (3 mmø)	3 (4.5 mmø)	4 (6 mmø)
VXA21	●	●	—
VXA22	—	●	●

Table (2) Valve Option

Option symbol	Body, Base material	Seal material	Holder material	Note
A	Aluminum	FKM	PPS	—

How to Order Manifold


■ Write both the base part number and the solenoid valve to be mounted or blanking plate part number.

(Example) 7 stations of VXA21 common pressure, individual port Rc 1/8.

(Base) VVXA211-07-1.....1 pc.
(Valve) * VXA2121A-00-1.....6 pcs.
(Blanking plate) * VX011-001F.....1 pc.

" is the symbol for mounting. When shipping mounted on a base, add an "" in front of the valve and blanking plate model.

■ Arrangement of solenoid valves



The standard arrangement of manifolds should be placed on an individual port on this side, each solenoid valve from the left side and a blank plate in the right side. The right side of the common port provides plug.


VXA21/22 Series

For Air, Water, Oil

Construction: Single Unit

Normally closed (N.C.)

Body material: Brass (C37), Stainless steel

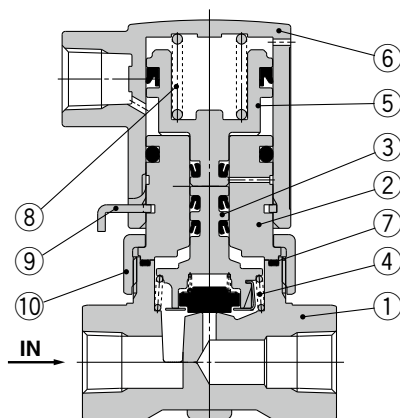


Component Parts

No.	Description	Material	
		Body material Brass (C37) specification	Body material stainless steel specification
1	Body	Brass (C37)	Stainless steel
2	Adapter	C36	Stainless steel
3	Holder assembly	(NBR, FKM, EPDM), Stainless steel, PPS	
4	Return spring	Stainless steel	
5	Piston assembly	(NBR), Polyacetal	
6	Pilot cover	ADC12	
7	O-ring	(NBR, FKM, EPDM)	
8	Piston spring	Stainless steel	
9	Retainer	Stainless steel	
10	Nut	Brass (C37)	Brass (C37), Ni plated

The materials in parentheses are the seal materials.

Normally open (N.O.)

Body material: Brass (C37), Stainless steel

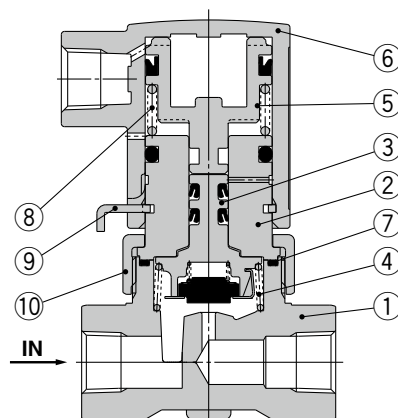

Component Parts

No.	Description	Material	
		Body material Brass (C37) specification	Body material stainless steel specification
1	Body	Brass (C37)	Stainless steel
2	Adapter	C36	Stainless steel
3	Holder assembly	(NBR, FKM, EPDM), Stainless steel, PPS	
4	Return spring	Stainless steel	
5	Piston assembly	(NBR), Polyacetal	
6	Pilot cover	ADC12	
7	O-ring	(NBR, FKM, EPDM)	
8	Piston spring	Stainless steel	
9	Retainer	Stainless steel	
10	Nut	Brass (C37)	Brass (C37), Ni plated

The materials in parentheses are the seal materials.

Construction: Manifold


Normally closed (N.C.)

Body material: Zn

Base material: AL

Common SUP type

Individual SUP type

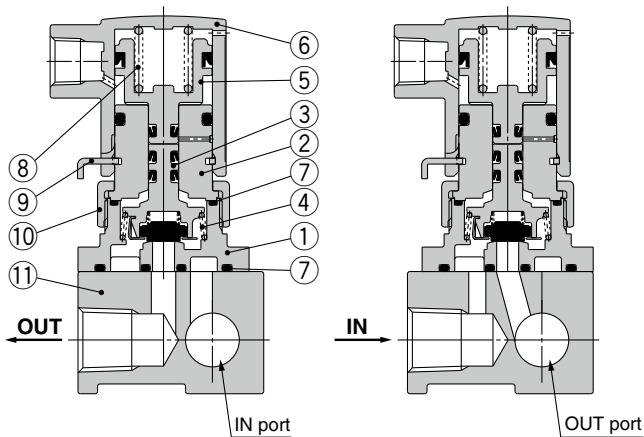

Component Parts

No.	Description	Material
1	Body	Zn (AL)
2	Adapter	C36
3	Holder assembly	(NBR, FKM, EPDM), Stainless steel, PPS
4	Return spring	Stainless steel
5	Piston assembly	NBR, Polyacetal
6	Pilot cover	ADC12
7	O-ring	(NBR, FKM, EPDM)
8	Piston spring	Stainless steel
9	Retainer	Stainless steel
10	Nut	Brass (C37)
11	Base	Aluminum

The materials in parentheses are the seal materials.


Normally open (N.O.)

Body material: Zn

Base material: AL

Common SUP type

Individual SUP type

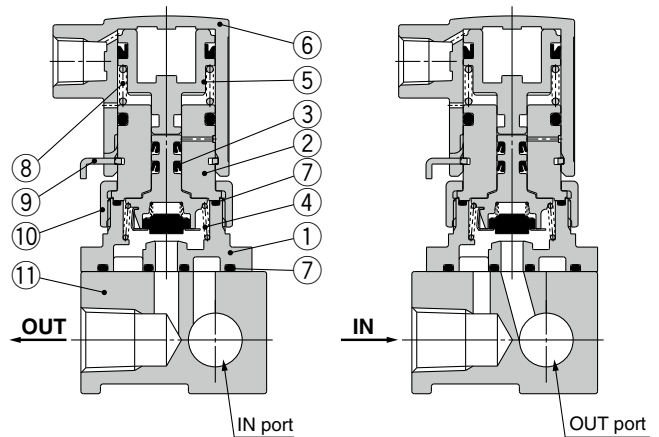

Component Parts


No.	Description	Material
1	Body	Zn (AL)
2	Adapter	C36
3	Holder assembly	(NBR, FKM, EPDM), Stainless steel, PPS
4	Return spring	Stainless steel
5	Piston assembly	NBR, Polyacetal
6	Pilot cover	ADC12
7	O-ring	(NBR, FKM, EPDM)
8	Piston spring	Stainless steel
9	Retainer	Stainless steel
10	Nut	Brass (C37)
11	Base	Aluminum

The materials in parentheses are the seal materials.

For Air, Vacuum, Water, Oil

Dimensions: Single Unit/Body Material: Brass (C37), Stainless Steel

Normally open (N.O.): VXA21□2/VXA22□2

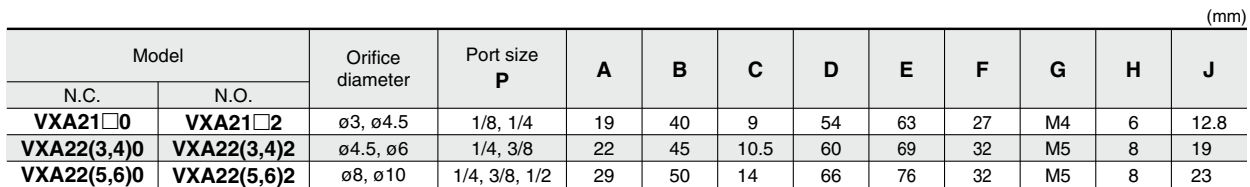


Orifice $\varnothing 3$, $\varnothing 4.5$, $\varnothing 6$

[illegible]549

Dimensions: Manifold/Body Material: Zn

Normally closed (N.C.): VVXA21/VVXA22
 Normally open (N.O.)

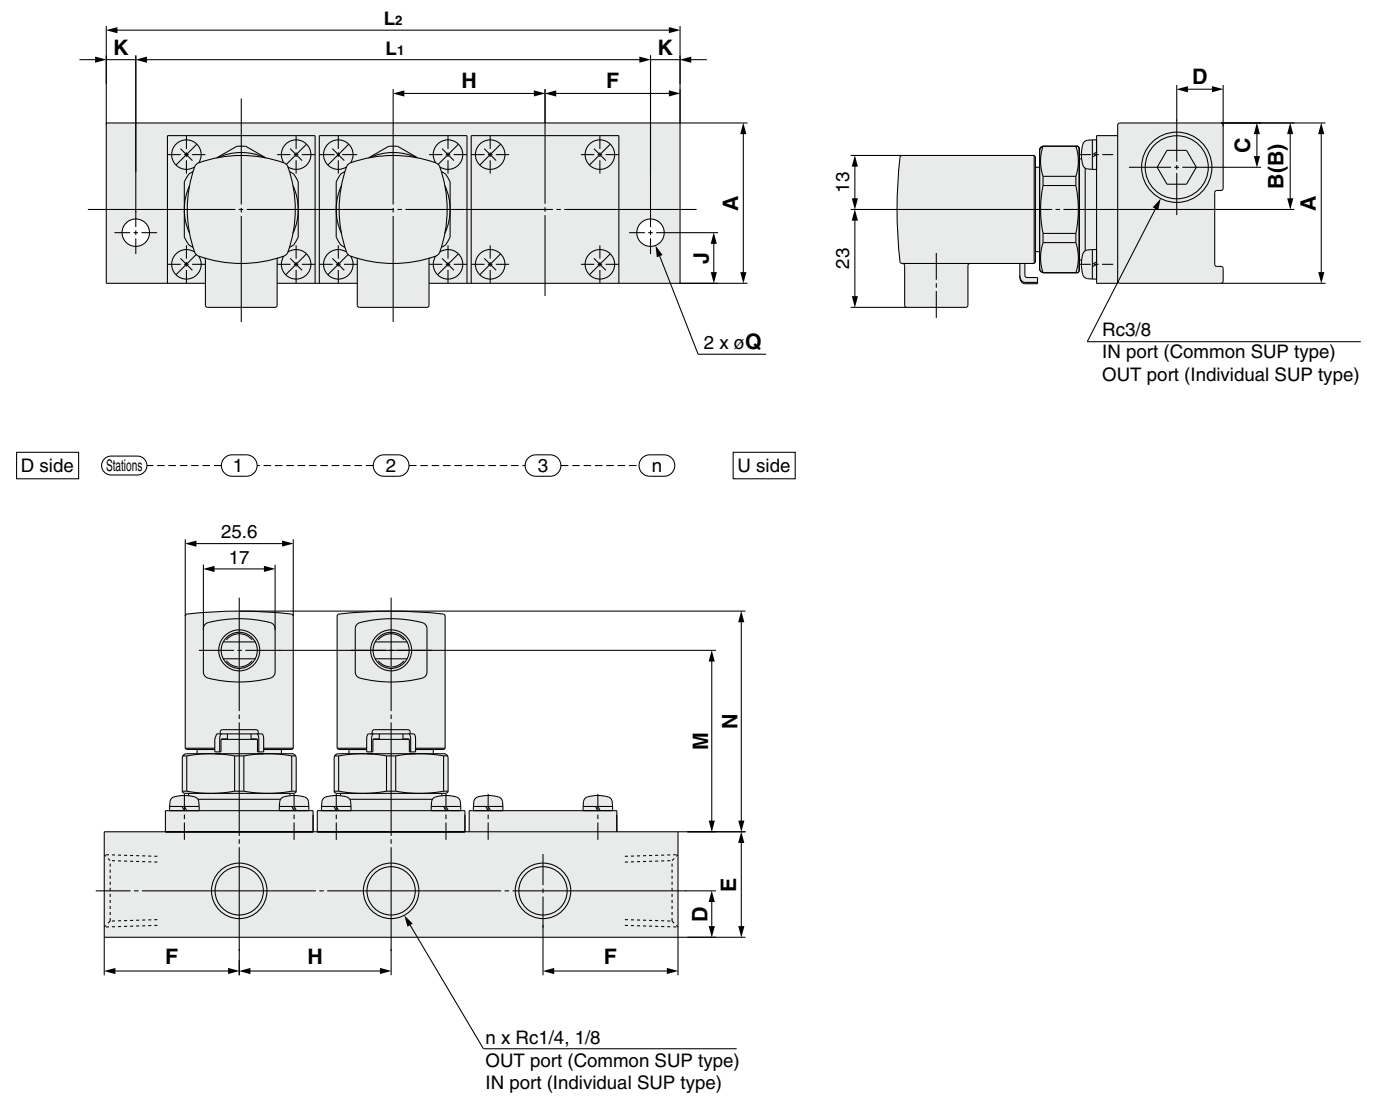

(mm)

Model	Dimension	n (Stations)								
		2	3	4	5	6	7	8	9	10
VVXA21	L ₁	86	122	158	194	230	266	302	338	374
	L ₂	100	136	172	208	244	280	316	352	388
VVXA22	L ₁	108	154	200	246	292	338	384	430	476
	L ₂	126	172	218	264	310	356	402	448	494

(mm)

Model	A	B	(B) Individual SUP type	C	D	E	F	H	J	K	M	N	Q
VVXA21	38	20.5	17.5	10.5	11	25	32	36	12	7	43	52	6.5
VVXA22	49	26.5	22.5	13	13	30	40	46	15	9	48	57	8.5