

Rotary Table: Vane Type

25A-MSUB Series

Size: 1, 3, 7, 20

RoHS

How to Order



Without auto switch 25A-M SUB 20-90 S

With auto switch 25A-M D SUB 20-90 S-T79 L

Series compatible with secondary batteries

With auto switch (Built-in magnet)

Nominal size (Torque)

1	MSUB 1
3	MSUB 3
7	MSUB 7
20	MSUB20

Rotating angle

Application	Symbol	Rotating angle
Single vane	90	90°
	180	180°
Double vane	90	90°

Rotation adjustment range
Single vane: Both ends $\pm 5^\circ$ each
Double vane: Both ends $\pm 2.5^\circ$ each

Connection port location

Nil	Side ported
E	Axial ported

Available with side ported only, when equipped with auto switch unit.

Vane type

S	Single vane
D	Double vane

Number of auto switches

S	1*1
Nil	2*2

*1 S (1 auto switch) is shipped with a right-hand auto switch.
*2 Nil (2 auto switches) is shipped with a right-hand and a left-hand switch.

Electrical entry/Lead wire length

Nil	Grommet/Lead wire: 0.5 m
L	Grommet/Lead wire: 3 m

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.

* Zinc is used in part of deep groove ball bearing.

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>



Rotary Table/Rack & Pinion Type

25A-MSQ Series

Size: 10, 20, 30, 50

RoHS

How to Order



Basic type

25A-MSQ 10 A T - M9BW - - -

High-precision type

25A-MSQ G 10 A T - M9BW - - -

Series compatible with secondary batteries •

1 Size

10
20
30
50

2 Cushion type

A	Cushion pad
D	Bumper
R	Internal shock absorber

3 Table

Nil	Without table
T	With table

* Workpiece mounting compatible with existing products
For details, refer to the **Web Catalog**.

4 Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.

5 Number of auto switches

Nil	2
S	1
n	n

6 Port type

End port type	Size
Nil	M5
Nil	Rc1/8
-XF	G1/8
-XN	NPT1/8
-XT	NPTF1/8

* Side ports are all M5.

7 Made to order (p. 208)

Nil	None
A	Interchangeable mounting type

* Some parts have dimensions and shapes that are different from those of the standard type.
Refer to page 207 for details.

Refer to the Web Catalog.

- Other specifications
- * Same as the standard type

Click here for details. >>>



* Zinc is used in part of bearing and seal washer.

Basic type

25A-MSQ 10 A T - M9BW - - - X251

High-precision type

25A-MSQ G 10 A T - M9BW - - - X251

Series compatible with secondary batteries •

1 Size

10
20
30
50

2 Cushion type

A	Cushion pad
D	Bumper
R	Internal shock absorber

3 Table

Nil	Without table
T	With table

* Workpiece mounting compatible with existing products
For details, refer to the **Web Catalog**.

4 Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

* Refer to the **Web Catalog** for details on applicable auto switch models.

5 Number of auto switches

Nil	2
S	1
n	n

6 Port type

End port type	Size
Nil	M5
Nil	Rc1/8
-XF	G1/8
-XN	NPT1/8
-XT	NPTF1/8

* Side ports are all M5.

* Some parts have dimensions and shapes that are different from those of the standard type.
Refer to page 207 for details.

Refer to the Web Catalog.

- Other specifications
- * Same as the standard type

Click here for details. >>>



* Zinc is used in part of bearing and seal washer.

Internal Shock Absorber Part No. for the 25A- Series

Size	Part no.
10	25A-RBA0805-X692
20	25A-RBA1006-X692
30	25A-RBA1411-X692
50	25A-RBA1411-X692

* The part number is the same for the 25A-MSQ-X251.


25A-MSQ Series

Dimensions

Basic type/High-precision type

With cushion pad

25A-MSQ□□A□

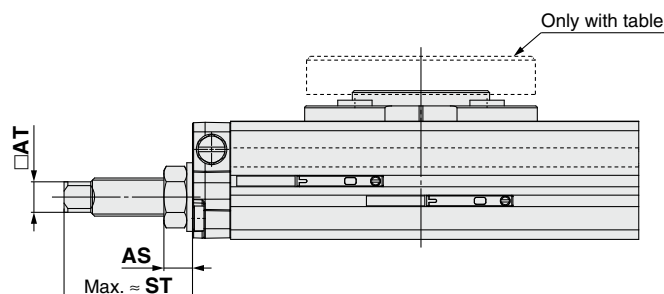

Size	AS	AT	FU	ST*1	SU*1
10	6.5	6	32	24	18
20	7.5	8	36	34	26
30	7.5	8	34	32	24
50	10	10	54	45.5	34

*1 The FU, ST, and SU dimensions are not the dimensions at the time of shipment, as they are dimensions for adjustment parts.

* Dimensions other than those shown above are identical to the standard type.

Refer to the Web Catalog.

• Other specifications


* Same as the standard type

[Click here for details.](#) >>>




With bumper

25A-MSQ□□D□



With internal shock absorber


25A-MSQ□□R□



With vacuum port

With cushion pad

25A-MSQ□□A□-X251

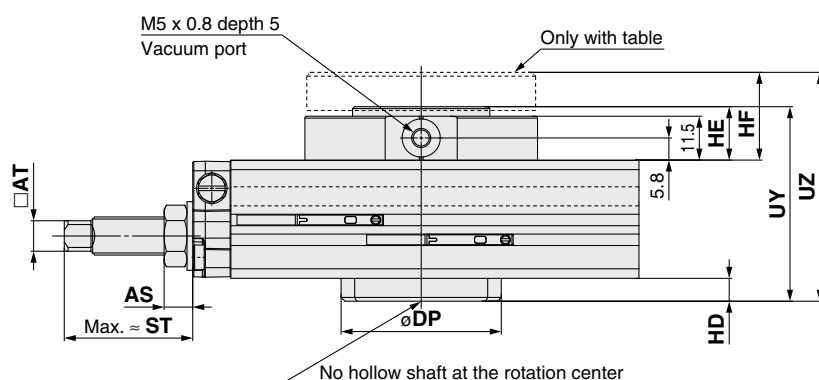

Size	AS	AT	DP	FU	HD	HE	HF	ST*1	SU*1	UY	UZ
10	6.5	6	35h9	32	5	14.2	21.2	24	18	48.7	55.7
20	7.5	8	42h9	36	6	14	23	34	26	51	60
30	7.5	8	48h9	34	6	14	23	32	24	58	67
50	10	10	54h9	54	7	14	25.5	45.5	34	64	75.5

*1 The FU, ST, and SU dimensions are not the dimensions at the time of shipment, as they are dimensions for adjustment parts.

* Dimensions other than those shown above are identical to the standard type.

* The product with the vacuum port has no hollow shaft at its rotation center.

Refer to the Web Catalog.

• Other specifications


* Same as the standard type

[Click here for details.](#) >>>




With bumper

25A-MSQ□□D□-X251



With internal shock absorber

25A-MSQ□□R□-X251



25A-MSQ Series

Made to Order

Please contact SMC for detailed dimensions, specifications, and delivery times.



1 Interchangeable Mounting Type

Symbol

-A

Interchangeable mounting with the existing MSQA/MSQB series
Cannot be combined with the 25A-MSQ□□□□-X251 with a vacuum port or the 25-MSQ□□□□T with a table

How to Order

Standard model no.

- A

• Made to order

A Interchangeable mounting type

- * The table and plate are assembled before shipment.
 - * The table and plate can be ordered separately.
- For details, refer to the tables below.

Basic type/25A-MSQ



High-precision type/25A-MSQG



Part No. of Interchangeable Parts

Table Unit for the Basic Type

Size	Part no.	Contents
		Description (Qty.)
10	P891010-51	• Table (1)
20	P891020-51	• Parallel pin (1)
30	P891030-51	• Hexagon socket head cap screw (4)
50	P891040-51	

* The table of the high-precision type is press-fitted into the product body and therefore cannot be ordered separately.

Plate Unit

Size	Part no.	Contents
		Description (Qty.)
10	P891010-52	• Plate (1)
20	P891020-52	• Cross recessed head machine screw for precision instruments (2)
30	P891030-52	
50	P891040-52	

Caution

- To position the product, use the knock pin holes on the body instead of the through holes that are empty in the plate.

Refer to the Web Catalog.

- Other specifications
 - * Same as the standard type

Click here for details. >>>



Rotary Table/Rack & Pinion Type

25A-MSQ Series

Size: 10, 20, 30, 50, 70, 100, 200

RoHS

How to Order



Size

10
20
30
50

High precision type 25A-MSQ A 10 A-M9BW

Basic type 25A-MSQ B 10 A-M9BW

Series compatible with secondary batteries

Size

10
20
30
50
70
100
200*1

Port type

End port type	Size
Nil	M5
Nil	Rc1/8
-XF	G1/8
-XN	NPT1/8
-XT	NPTF1/8

Number of auto switches

Nil	2
S	1
n	n

Auto switch

A	With adjustment bolt
Nil	Without auto switch (Built-in magnet)

* Refer to the Web Catalog for details on applicable auto switch models.

- *1 Size 200 is produced upon receipt of order.
- * Zinc is used in part of deep groove ball bearing and seal washer.
- * Side port cannot be used.

* Some parts have dimensions and shapes that are different from those of the standard model. Refer to page 210 for details.

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>



With Vacuum Port

Size

10
20
30
50

High precision type 25A-MSQ A 10 A X-M9BW -X251

Basic type 25A-MSQ B 10 A X-M9BW -X251

Series compatible with secondary batteries

Size

10
20
30
50
70
100
200*1

Number of auto switches

Nil	2
S	1
n	n

Auto switch

A	With adjustment bolt
Nil	Without auto switch (Built-in magnet)

* Refer to the Web Catalog for details on applicable auto switch models.

- *1 Size 200 is produced upon receipt of order.
- * Zinc is used in part of deep groove ball bearing and seal washer.
- * Side port cannot be used.

* Some parts have dimensions and shapes that are different from those of the standard model. Refer to page 210 for details.

Refer to the Web Catalog.


- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>



Dimensions

25A-MSQB□A

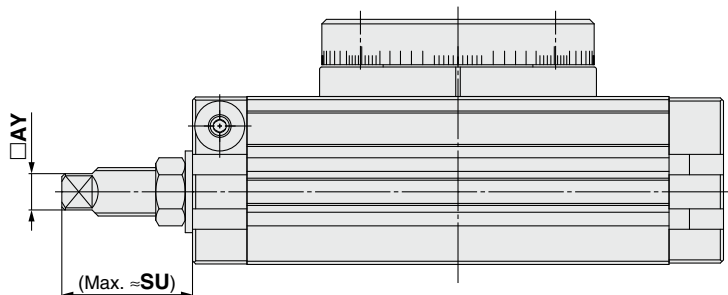

[mm]		
Size	AY	SU
10	6	23.7
20	8	33
30	8	33
50	10	42.9
70	16	44.2
100	16	44.3
200	21	52.2

* Dimensions other than those shown above are identical to the standard products.


Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>



25A-MSQB□AX-X251

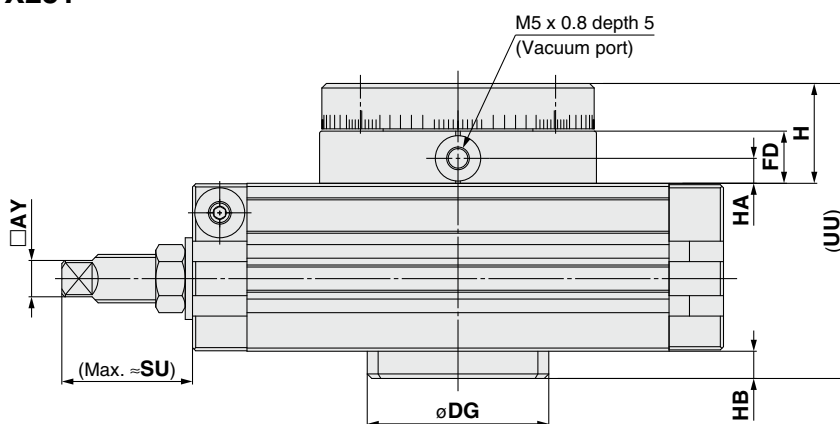

[mm]								
Size	AY	DG	FD	H	HA	HB	SU	UU
10	6	35h9	11.5	20	5.5	5	23.7	59
20	8	40h9	11.5	22	5.5	6	33	65
30	8	48h9	11.5	22	5.5	6	33	68
50	10	54h9	11.5	24	5.5	7	42.9	77
70	16	50h9	12	25	6	7	44.2	85
100	16	52h9	12	27	6	7	44.3	93
200	21	64h9	15	32	7.5	8	52.2	114

* The product with the vacuum port has no hollow shaft at its rotation center.
 * Dimensions other than those shown above are identical to the standard products.

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>



3-Position Rotary Table

25A-MSZ Series

Size: 10, 20, 30, 50

RoHS

How to Order



High precision type 25A-MSZA 10 A-M9BW

Basic type 25A-MSZB 10 A-M9BW

Series compatible with secondary batteries

Size

10
20
30
50

Number of auto switches

Nil	2
n	n

Auto switch

Nil	Without auto switch (Built-in magnet)
-----	---------------------------------------

A With adjustment bolt

* Zinc is used in part of deep groove ball bearing and seal washer.

* Refer to the **Web Catalog** for details on applicable auto switch models.

Refer to the Web Catalog.

- Specifications/Dimensions
- * Same as the standard product

Click here for details. >>>

