


| GENERAL TOLERANCE UNIT | | | | | | |
|------------------------|-------|------|------|--|--|--|
| DIM GRD | Α | В | С | | | |
| 1~10 | ±0.05 | ±0.1 | ±0.2 | | | |
| 10~100 | ±0.1 | ±0.2 | ±0.3 | | | |
| 100~500 | ±0.2 | ±0.3 | ±0.5 | | | |
| 500~1000 | ±0.3 | ±0.5 | ±1.5 | | | |

◈MTQ550-RB5L_MTQ550-RB7L(2단 1열)

| REV | DATE | REASON OF MODIFY | MODIFIER |
|----------|------|------------------|----------|
| <u>A</u> | | | |
| Δ | | | |
| Æ | | | |

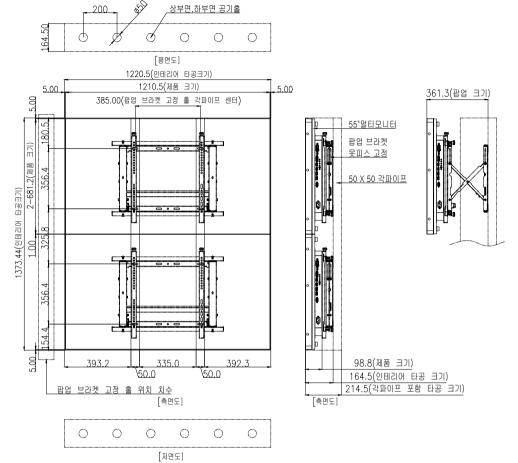



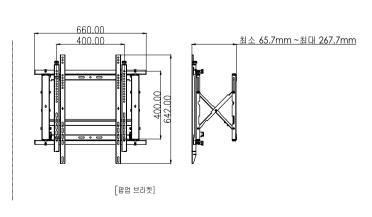

1.55"멀티모니터

2.멀티 BRK

| | 품 명 | 규격 | | | | |
|--|------------|--|--|--|--|--|
| | 모델명 | MTQ550-RB5L MTQ550-RB7L | | | | |
| | 사이즈(WxHxD) | 1210.5 x 681.2 x 98.8 | | | | |
| | 무게(kg) | 17.2kg | | | | |
| | 소비전력(W) | MTQ550-RB5L:209.0(W) MTQ550-RB7L:219.0(W) | | | | |

| 품 명 | 규격 | | | | |
|------------|---------------------------|--|--|--|--|
| 모델명 | MV-70 | | | | |
| 사이즈(WxHxD) | 660(W) x 642(H) x 65.7(D) | | | | |
| 무게(kg) | 8kg | | | | |

- <u>NOTE.</u> 1. 타공사이즈: 1220.5(W) x 1373.44(H) x 214.5(D)mm(테두리 마감 사이즈 포함)
- 2. 모니터 + 브라켓 무게 : 25.2(kg) x 2(EA) = 50.4(kg) 3. 소비전력 : MTQ550-RB5L=209.0(W) X 2(EA) = 약 418W

| MTQ550-RB7L=219.0(W) X 2(EA) = \$\frac{1}{2}\$ 438W | | | | | | | | | |
|---|---------|---------------------|------------------------|-----|-----------|-------------------------|--|-------|---|
| DESIGNED | CHECKED | APPROVED | PROVED SCALE 1:1 MODEL | | EL | MTQ550-RB5L_MTQ550-RB7L | | | |
| | | ANGLE ⊕ ☐ PART NAME | | AME | 2단 1열 설치도 | | | | |
| W EDS SAMULHINE | | | UNIT | mm | DAT | E | | ISSUE | Ø |
| | | | CODE NO |). | | DWG | | | |